


# **MUSIC MICRO PLEASE!**









FOR FURTHER INFORMATION AND ADDRESS OF NEAREST DEALER, TELEPHONE 0602 394000



The highly acclaimed



musical synthesizer

For the BBC Model B & Commodore 64 microcomputers

A musical package for users of all ages

For the beginner or the accomplished musician, the superb touch sensitive Echo keyboard will soon have you exploring the musical possibilities of your micro.

Complete with Software

Supplied complete with Organmaster in disk or cassette form. A powerful, yet easy to use software allowing you to imitate various instruments such as piano, flute, violin and piccolo, as well as providing a wide range of percussion effects, and a synthesizer mode allowing you complete control of the voice envelopes, so you can design your own sounds.

Optional speaker/amplifier Echosound, a speaker/

Echosound, a speaker/ amplifier combination capable of delivering more than 5 watts to its 6" double cone speaker, is available



speaker, is available for the BBC micro. At the tweak of a knob, you can switch from the whisper of a sobbing violin to the roar of a fairground engine.

The Future. Designed not only for today, but with the future in mind. A continuous programme of new software is being produced, aimed at providing you with ever new exciting sounds and capabilities from your Echo keyboard.

prices incl. VAT) **\$\frac{900}{249.95}\$**Fitting kit **\$\frac{4000}{24.95}\$** 

Regent House, Lenton Street, Sandiacre, Nottingham NG10 5DJ Telephone (0602) 394000





The Power Behind the Printed Mode

COMPUTERS

COMILCIEND	
Acorn Electron Standard ALA01 with 5 Pack	109.00
Acorn Electron Yorkshire TV Pack	189.00
BBC Model B	339.00*
BBC Model B with DFS	399.00*
BBC Model B with DFS/MW 200 drive	529.00
Amstrad CPC 464 with Colour Monitor	339.00
Amstrad CPC 464 with Green Monitor	229.00
Apricot F1 with Free Yangyen Monitor	995.00
Apricot Fle with Free Yangyen Monitor	799.00
Sanyo DR101 Cassette Recorder	39.95
Acorn Electron Business Pack with view/view	
sheet	239.00
*with trade in	

DISK DRIVES	
Cumana CSX 100 40T single, no psu.(100k)	109.95
Cumana CSX 200 80T single, no psu.(200k)	149.95
Cumana CSX 400 80T single, no psu. (400k)	179.95
Cumana CS 100 40T single, with psu.(100k)	149.95
Cumana CS 200 80T single, with psu.(200k)	189.00
Cumana CS 400 80T single, with psu. (400k)	199.95
Cumana CD 200 40T dual with psu.(200k)	269.00
Cumana CD 400 80T dual with psu.(400k)	315.00
Cumana CD 400/S 40/80T switched, dual,	
psu.(400k)	355.00
Cumana CD 800/S 40/80T switched, dual,	
psu.(800k)	399.00
Disc interface kit, unfitted with DNFS ROM	89.00
Disc interface kit, fitted with DNFS ROM	117.00
Torch 280 disc pack, with perfect software and	
Z80 second processor	699.00
	299.00
AMS 3" Hitachi 100k special offer	109.00
AMS 3" Hitachi dual 200k special offer	
Box 40 Track Parrot discs with plastic box	16.00
Box 80 Track Parrot discs with plastic box	25.95
Sony 3.5" Single sided discs	45.00
Sony 3.5" Double sided discs	58.00
(All disc drives supplied come with manual, form	at disc
and all necessary cables etc.)	

ROMS & SUMPRIES	
AMX mouse superb plus software	89.95
Wordwise ROM	39.95
Wordwise plus ROM	52.00
View ROM	58.00
View sheet ROM	52.00
Disc Doctor ROM	33.95

Edinburgh

Tollcross,

12 Leven Street,

Edinburgh 031 228 1111

Edinburgh 031 557 2087

4 St. Andrew Square,

# **NEW SG-10 NLO**

# Only £259

inclusive of VAT & delivery

# VERY VERSATILE

replaces Gemini 10X

# **Features**

- 1) 120cps bidirectional logic seeking
- Near letter quality mode
- 3) Inexpensive ribbons
- 4) Epson and IBM compatible
- 5) Easily accessible dip-switches 6) Friction and Tractor feeds
- 7) Standard parallel Interface-free BBC cable
- 8) 12 months guarantee



## HOW TO ORDER:

ORDERS by post welcomed; please detach coupon and mail with payment.

Telephone orders welcome call 031-228 1111 or 031-228

We also welcome Government and Educational orders. All products supplied include our own 12 months guarantee backed by our own service centre staffed by

fully qualified engineers.


Order with confidence, 7 days money back guarantee.

All charges include VAT and carriage charges by courier. Dealer enquiries welcome.

## Aberdeen

77 Holburn Street, Aberdeen 0224 571735

Despatch Dept. Constable House, Hopetoun Street, Edinburgh EH7 4NF 031-556 0191 x240



SG-10 NLQ

# **NEW POWERTYPE** DAISYWHEEL

# ONLY £349

inclusive of VAT & delivery **AMAZING** VALUE

- 1) Quen compatible
- 2) 18 cps print speed
- 3) 136 column, heavy duty mechanism
- 4) 10, 12, 15 pitch with proportional spacing
- 5) Inexpensive cartridge ribbons
- 6) Serial and parallel interfaces
- 7) 12 months guarantee

Right is reserved to alter prices without prior notice.

	AWW	OD	DED
19./B	A		

To: Microworld Distribution, Dept. AU. 4 St. Andrew Square, Edinburgh EH2 2DB

P	1	e		a	S	e	S	e	r	10	d	1	n	n	E	-															
			*																												

I enclose a cheque for £		 	
My credit card no is			
Access/Visa/American Express (delete)	• • •	 	

1	Name		 	 												
1	Addre	ess	 	 												

ACORN USER MAY 1985

Glasgow 041 332 1116

Glasgow 041 226 3011

**BRANCH NETWORK** 

415/419 Blythswood Court,

Anderston Cross Centre,

Glasgow

11 Bath Street

# Micro movies

Take a stick man and make him do acrobatics with this dynamic piece of programming by Joe Faith. And there are three modems for the best cartoons from readers

# Capital routines

Peter Gaunt checks your typing to make sure it's capitals or lower case, depending on how you like it

# Multiple modes

Four modes on the screen at the same time with some nifty changes to his ideas from last month by Tristram Mabbs

# Add your own functions

Patrick Quick gives you a way to add extra commands to the Basic language on your BBC or Electron

# Sound compiler

Play tunes from machine code with Graham Jones

#### Measuring voltages 119

Paul Beverley puts the analogue port to good use

#### **Hints and Tips**

Basic 1 and Basic 2, coping with the Break key and a teletext chart from Martin Phillips

#### First Byte 45

Loops are one of the fundamental concepts in computing, so Tessie Revivis sets you on the right track

#### **Atom Forum** 124

Magicians playing around with Atoms! Just one of the topics Mike Barwise covers, along with printers and discs

The major listings for this issue are printed in the yellow section starting on page 97. These are also available on cassette (which includes a tape-to-disc transfer routine and index program) and in bar code format to save you typing them in. For details of how to order these, see pages 96 and 103

	Break Lan
Hints and Tips	97
Cartoons by computer	98
Capital programs	101
Graphics: a change mode	of 104
Beeb Forum	106
Hardware: measuring	volt-
age	108
Sound compiler	109
Bar code listings	111



Micronet members look out for free Acorn User programs. See page 75 for a great competition

#### Logo: the big four

65

The BBC, Logotron, Acornsoft and LSL all have versions of this much-vaunted language on ROM. Joe Telford gives an in-depth assessment of each one for school and home

## Alternative keyboards

A typewriter keyboard is often a barrier to young children using a micro. Chris Drage investigates three devices aimed at overcoming this problem

#### **Educational software**

167

171

175

Five packages covering everything from setting menus for meals through waves in physics to games of deduction

# **Magic Mushrooms** Build your own platform games to swap with friends

**Books** 

# Using discs and two starters for Basic

Hard disc system

169 10Mb of storage from GSL is let loose in a school

Games reviews

# Robotron, Maze and Manic Miner

Speech synthesis

Cheetah's Sweet Talker speaks three languages cheaply

# News


Hackers could face big fines, the 1985 Acorn User Show, Electron DFS, computer camps and the latest hardware, Ocean adventure game offer

Noticeboard and Blunderbox	18
Hints and Tips	39
First Byte	45
Letters	57
Central Processing	63
Dear Kitty	63
Joe's Jottings on Logo	65
Competition: 6502 and Plus 3 up for grabs	91
Back issues	92
Acorn User software	94
Subscriptions	96
Bar Code Reader offer	113
Beeb Forum	114
Atom Forum	124
Business News	127
Education News	137
Top 20 chart	163
User groups	197
Free adverts	201
Acorn Abuser's Diary	208

Editor Tony Quinn Technical editor Bruce Smith Sub-editor Julie Carman Editorial assistant Kitty Milne Art assistant Simon Carter Publishing director Michael Potter Editorial director Christopher Ward Editorial Redwood Publishing Ltd, 68 Long Acre, London WC2E 9JH. Tel: 01-836 2441. Advertising Simon Goode, Advertising manager, Computer Marketplace Ltd, 20 Orange St, London WC2H 7ED. Tel: 01-930 1612. Subscriptions Kate Evans, Subscription manager, Redwood Publishing, 68 Long Acre, London WC2E 9JH. Tel: 01-836 2441. Rates: UK £15; Europe £25; Middle East, Americas, Africa £30; Rest of the world £35 (prices include p&p for 12 issues). Published by Redwood Publishing Ltd, 68 Long Acre, London WC2E 9JH.

© Redwood Publishing Ltd 1985. All rights reserved. No part of this publication may be reproduced without prior written permission of the publisher. The publisher cannot accept any responsibility for claims or errors in articles, programs or advertisements published. The opinions expressed are those of the authors and do not necessarily represent those of the publisher, Acorn Computers Ltd or Acornsoft Ltd. Acorn, Acornsoft and the acorn symbol are the registered trademarks of Acorn Computers Ltd and Acornsoft Ltd.

Typeset and printed in Great Britain by Watmoughs Ltd, Bradford. Print production by Aquarius Print and Design, London. Distributed to the news trade by Comag, Tavistock Rd, West Drayton, Middlesex UB7 7QE. Tel: (0895) 44405

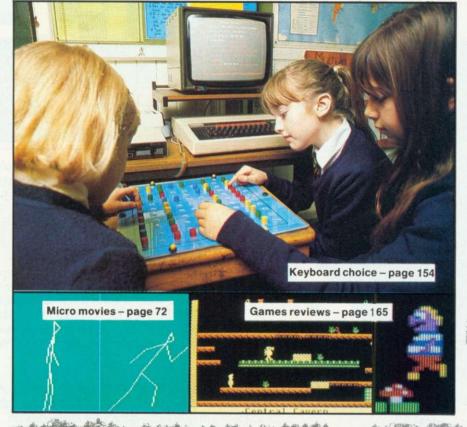

# Software guide

If you're after programs for school or home, here's the information on where to go - 800 titles covered and classified with addresses

### Logo software

65

Joe Telford checks up on four versions of this language on a chip

#### Valiant Turtle offer

Save up to £70 on an infra-red turtle and Logo language software

## Keyboards choice

154

Three ways to overcome the problems young fingers have with typing

# **Education news**

137 169

# GSL hard disc in a school Software reviews

159

# Treasure hunt

Scattered around this issue are clues. Find the answers, put them all together and you could win a 6502 second processor or Electron Plus 3

## Improving MemoPlan on the Z80

129

Extra features are available on this wordprocessor - if you know how to find them. Edward Brown show you

A new column by Edward Brown and Richard Clement, giving ideas for using the Z80 and answering questions

### Quickcalc spreadsheet

# Beebugsoft's offering put to the test

# Ledger and stock control software

136



Acorn User May 1985 Issue number 34


Cover illustration by Peter Bentley



# ROBOT SPECIAL

What's around, how they work with your micro and how to

use them



# Sideways RAM utilities

First of three articles on using these boards

#### Scrolling noticeboard

Leave messages that move as you read them

# Languages: Comal

Why is this language so popular in foreign schools?


#### View printer driver

Save yourself a fortune with this excellent program

# Making music

The Music 500 put to the test by Ultravox

#### Notes for authors



Please enclose all programs on disc or cassette, with listings if possible. Also follow the style used in presenting listings in the yellow pages sec tion. Photos should be 35mm, or larger, transparencies, or 5in by 7in

black and white prints. Ensure your name is on everything, and keep a copy. Enclose a suitable stamped, addressed envelope if the submission is to be returned. Attach a short letter with the article giving its title with a daytime phone number if possible. Address your article to the Technical editor. Articles are acknowledged on receipt, but not submissions for the regular columns, letters pages and competitions. Please limit telephone enquiries to the Technical editor to Wednesday and Thursday afternoons.





So now you have got your home computer, you're ready to talk Th to Cumana - the best name in memory. Already a market Ar leader throughout Europe for their range of disk drive: BE Cumana now have other products on offer, all to th Mic same exacting standards that have made their Sc disk drives the number one choice in the home and in education. COL as

### The Touch Pad

The Touch Pad is a low-cost graphic inc plotting aid for the BBC micro. This ed compact display cursor moving device and simplifies programming with the touch of thace stylus.

The product comes complete with an instruction booklet, basic software, stylus and connecting cable. Its uses are in graphics, computer aided design, education and games.

> £69.95 including VAT.

> > Dis

nov

Acc

Spe

Ele

Dis

On de

qua

pri

we

to i

sol

trus

**Disk Drives** 

Cumana have spent years on research, development and marketing a range of drives second to none. Their drives are compatible with BBC, Spectrum, Dragon, Oric, Tandy Models III and 4 and Video Genie. They are fully guaranteed for 12 months and approved for electrical

safety by the D.M.E.E. and are extensively used in GLC and ILEA establishments. Cumana were the first independent disk drive supplier and are now Europe's market leader. Their products have been proven in The the schools, universities and homes cor throughout Europe. Let us drive you icas the right direction, send now for further details of the Cumana range, ind or see them at our distributors and at Cu selected branches of W.H. Smith, in t Lasky's, Greens, Currys, and sin Spectrum UK. fror



**BE SAFE** 

the BEAB.

**NOT SORRY** 

Cumana's CS range of

single disk drives have been subjected to the

strict safety demands of

awarded BS415 approval so if you value safety do

disk drives have

also been

submitted for

approval.

They have now been

not trust it to anything

less than Cumana. Cumana's dual range of



The Acorn Electron Computer

A microcomputer with a proven track record. Using BBC Basic, the Electron was developed out of the Micro that has been chosen for over 80% of schools participating in the Government's current Micros In Schools project. It connects into almost any TV set and cassette player and is supplied with a comprehensive User Guide which runs through, in a simple to follow manner, the basic principles of programming. A wide range of software is available, including games.

educational packages and home

accounts.

Disk interface now available for the Acorn Electron, Spectrum and Spectrum + Dragon 32/64, details from Cumana. Electron Interface £149.95 inc. VAT.

## Diskettes

Only when Cumana found a double density diskette up to their stringent quality control requirements, and at a price that made sense to the end user, were Cumana ready to put their name

The result was a top quality diskette, complete with a plastic protective case for the ten-pack (they are also sold in two-packs!) together with index stickers.

Cumana diskettes are available now in both 51/4 inch and 31/2 inch as single or double-sided, 40 or 80 track, from your local computer dealer. Don't trust it to chance, go for the best name on record.

Cumana BBC Microcomputer compatible disk drives: Cumana disk drives supplied with formatting diskette, drive connecting cable and Cumana user guide. Independent power supply, mains lead and moulded plug included.

CS100 40 Track single sided (100K) CS200D 40 Track double sided (200K) CS200 80 Track single sided (200K) CS400 80 Track double sided (400K) £169.95 £192.95 £219.95 CD200 2 x 40 Track single sided (200K) CD400D 2 x 40 Track double sided (400K) CD400/S 2 x 80 Track single sided (400K) CD800/S 2 x 80 Track double sided (800K) £294.95 £325.95 £414.95

Cumana disk drives with independent power supply, mains lead and plug. Excluding other accessories.

CS100E 40 Track single sided (100K) CS200ED 40 Track double sided (200K) CS200E 80 Track single sided (200K) CS400E 80 Track double sided (400K) £192.95 £180.95 £208.95

Cumana disk drives supplied with formatting diskette and Cumana user guide. Power supply taken from BBC Microcomputer, with lead supplied.

CSXL100 40 Track single sided (100K) £115.95 CSX100 40 Track single sided (100K) CSX200D 40 Track double sided (200K) CSX200 80 Track single sided (200K) CSX400 80 Track Double sided (400K) £124.95 £134.95 £159.95 £189.95 31/6 INCH DRIVES

CSX351 40 Track single sided (100K) CSX354 80 Track double sided (400K) CDX352 2 x 40 Track single sided (200K) CDX358 2 x 80 Double sided (800K) £139.95 £199.95 £256.95 £383.95

The 'X' range takes its power from your microo £169.95

CS351 40 Track single sided (100K) CS354 80 Track double sided (400K) CD352 Dual 40 Track single sided (200K) £299.95 CD358 Dual 80 Track double sided (800K) £429.95 The 'CS' range comes complete with power supply.

# DISTRIBUTORS/RETAIL

Available from the following retail outlets: W.H.Smith, John Lewis Partnership, Greens Leisure, Laskys, Spectrum UK.

## Area distributors:

Area distributors:
Addons Ltd (Southampton) 0703 34775/6.
Audio & Computer Centre Ltd (Jersey)
0534 74000. Eltec Home & Business
Computers (Bradford) 0274 722512.
Fairhurst Instruments (Wilmslow) 0625
525694. HCCS Associates (Gateshead)
0632 821924. Hugh-Symons Distribution
Services Ltd (Bournmouth) 0202 26535.
Kingdom Design (Belfast) 0232 643720.
Lightning (Harrow) 01 969 5255. Microage
Distribution Ltd (North London) 01 205
7688. Microworld (Edinburgh) 031 228 7688. Microworld (Edinburgh) 031 228
1111. National Micro Centre (Stockport) 061
429 8080. Northamber PLC (Chessington).
Silicon Express (Leicester) 0533 374917.
Thompson Cook Distribution Ltd
(Birmingham) 021 328 3895, J. S. Simnett Computers (Kingston-upon-Thames) 01 541 1495

+ National Dealer Network



Cumana Limited, Pines Trading Estate, Broad Street, Guildford, Surrey. GU3 3BH Telephone: 0483 503121

All Prices Inclusive of VAT. All 80 Track 51/4" Drives are Switchable to 40 Track Mode

From DURELL

(Technical Support from Westland Helicopters)

NEW! BBC/ELECTRON AMSTRAD

Spectrum-Commodore 64-BBC/Electron-Amstrad
The ultimate flying experience



















BBC/ELECTRON

DURELL sales dept.,

Castle Lodge, Castle Green, Taunton, Somerset, TA14AB



# **Electron discs**

CUMANA has released a disc interface for the Electron running through the Plus 1 add-on. See page 9.

# Adventure for beginners

LEVEL 9's graphic adventure Emerald Isle for the BBC has 230 locations, each with its own picture. At £6.95, it's cheaper than usual, but then the company says it's not quite so mind-boggling and better for beginners.

# Eight new music discs

PERFORMER is a real-time recording package for users of the MIDI interface connecting electronic instruments to the BBC micro.

It is one of eight pieces of software for MIDI produced by Electromusic Research and sold in music shops. Prices range from £15 to £45 for each disc

# **User port extra**

A PLUG-IN board to provide two extra user ports through the 1MHz bus on the BBC is available for £30 from Hardworks, 1 The Corner, Horsey, Great Yarmouth NR29 4EH.

# Mole on micros

MOSAIC is to release two computer games based on the Adrian Mole books in the autumn to coincide with a Thames TV series.

The games are being written by Level 9, who also did *Eric* the Viking for Mosaic.

# **Graphics mouse**

GRAPHICS is the strength of a mouse package from SMC Supplies which comes with sprite and character designers as well as a full painting system.

The mouse costs £60 from SMC at 11 Western Parade, Great North Rd, Barnet EN5 1AD.

# Phone-tapping Bill could hit hackers

by Bill Penfold

HACKERS who use their computers and modems to break into electronic databases could soon be faced with hefty fines and even jail.

Tough new legislation against illegal phone tapping has inadvertently given victims of hackers a way to hit back: until now they could only charge offenders with minor items such as stealing electricity.

Now up to two years in prison plus £2000 in penalties are in prospect for hackers – many of them teenagers – who use public telecommunication systems to break into private networks, computer mailboxes or computer communications. It will end the uncertainty in the present law and enable courts to hand out sentences to match the offence.

# **New powers**

The new powers will be a spin-off of the Government's controversial Interception of Communications Bill now being piloted through the Commons by Home Secretary Leon Brittan. The main aim of the Bill is to enable the Home Office to authorise telephone tapping without breaking the European Convention of Human Rights. But it will also set out stringent penalties to prohibit other people from tapping the phone system—or



Home Secretary Brittan

illegally breaking into computer systems.

The Bill covers all public telecommunications systems, including links with abroad.

Concern over the activities of the hackers has risen rapidly over the last two years and came to the attention of the politicians last autumn with the headlines over the illegal break-in to Prince Philip's Prestel mailbox.

That incident grabbed public notoriority, but behind the scenes British Telecom and the Home Office had long been worried about the increasing number of hackers – some of whom regard it as merely a challenge, while others have more sinister intentions

The Bill – with connotations of MI5 bugging CND and civil liberties organisations – is one of the most contentious pieces

of legislation currently going through the parliamentary pipeline. Apart from the activities of the security agencies, most of the attention has inevitably focused on the world of international espionage, subversion and big-time crime.

But the Home Office and British Telecom were well aware that the Bill will effectively provide a legal framework for cracking down on the backers

The prospect clearly British Telecom pleases whose spokesman explained: Anything which gives greater control over the activities of some of those hackers is to be welcomed. The position has often been rather difficult. In many cases the only thing you can get them for is "theft of electricity", which was not really very satisfactory. So the proposed legislation will be very useful."

# Grey area

Not all hacking, however, will be covered by the new legislation. It appears to be a grey area if you use the public telephone system to break into a private data bank. But anyone illegally logging into a Prestel or Telecom Gold mailbox will soon be able to find the full force of the law descending on them.

This is clearly stated in the first clause of the Bill which says it will be an offence to unlawfully intercept communications' while they are being passed on public telecommunications systems.

● PRESTEL has decided to get tough and make an example of the hackers who it believes broke into the Duke of Edinburgh's mailbox last year.

The police, apparently acting on a BT tip-off, swooped on two suspects who have been charged with forging devices for recording information on Prestel computers. One of these 'devices' was a computer disc. Both face up to 10 years in prison.

# We're showing off again

THE 1985 Acorn User Exhibition will run from July 25 to 28 (Thursday to Sunday) at the Barbican Centre in London. With 25,000 people expected through the doors, and more than 100 exhibitors, it looks set to be another great show.

The entrance fee will be £2 for under-16s and £3 for adults, with a £1 discount on tickets ordered from the organisers in advance.

The exhibition will be based in the Barbican's Hall A, with

special sections devoted to communications, business, education and the home user.

Details from Acorn User Exhibition, 20 Orange St, London WC2H 7ED. Tel: 01-930 1612. Look out for the latest news in future editions of Acorn User.

● READERS who are Micronet members should look out for free listings to download by modem and news from Acorn User.



We offer a design development and manufacturing service for companies wishing to improve their products using Microprocessor Technology.



SIDEWAYS ROM/RAM EXPANSION FOR THE BBC MICRO

★FULL SIDEWAYS ROM EXPANSION to total of sixteen ROMS.

★ 16K battery backed CMOS RAM option – RAM is treated as ROM number 15 on read.

★ Software for SIDEWAYS ROMS may be down loaded and run in RAM under the true SIDEWAYS environment before transfer to EPROM using ATPL's EPROM programmer.

EXISTING sockets on BBC are usable and all EPROM sockets are accessible without removing SIDEWISE.

★ PLUG – IN – AND GO construction. Mounts neatly inside the BBC machine.

\* NO SOLDERING required to fit SIDEWISE. # FULL BUFFERING of address and data busses
- prevents data bus loading problems
associated with unbuffered boards.

advantage of these overlopments. ATPL has designed SIDE/WISE which provides you with a further twelve sockets giving a total capability of sixteen SIDE/WAY'S ROMS, the maximum number capable of being supported by the BBC computer operating system in addition1 the RIOM expansion, one of the SIDE/WAY'S ROM sockets may be defined as RAM, permitting SIDE/WAY'S ROM software to be loaded into the RAM area of the machine using normal OS

COMPATIBLE WITH ACORN MUSIC 500 (Software available)

Also available from ATPL: ACORN MUSIC 500 ISLAND LOGIC MUSIC SYSTEM

INCLUDING

The Electronic Keyboard for the BBC Micro The 'Symphony' Electronic Keyboard provides simulation of a wide range of

musical instruments and sound effects through your BBC micro computer FEATURES INCLUDE

4 Octave 49 note C-C keyboard with full size keys

Software included for up to 100 different sound effects to be created and modified whilst you are playing.

Complete set of 100 effects can be saved or loaded to or from disk or cassette

Effects selected by use of function keys

Each effect can be given a name for easy reference and an index continuously displayed

Software includes sound effects simulating musical instruments — piano, organ, violin, banjo, jazz bass, etc.

Octave shift, pitch bend and auto repeat functions

Optional 'sustain' foot switch for extra control

External amplifier or connection to Hi-fi system options available

The 'Symphony' Electronic Keyboard pack includes: keyboard and connector cable to BBC micro user port, software (please state disk or cassette) and comprehensive user guide

ATPL offer you the full range of BBC computers and peripherals. Send an S.A.E. (A4) for full technical data and our latest competitive prices. EVER HIT YOUR 'BREAK' KEY WHEN YOU DIDN'T MEAN TO?

FOR THE BBC MICRO

'BREAK-LOCK' to your BBC Micro and avoid disaster where

Fit ATPI

inadvertant use of 'BREAK' will cause loss of data and/or programmes

ATPL 'BREAK-LOCK' is a 2 position key-switch

Prevent accidental or unauthorised use of the 'BREAK' key.

 Act as a security device to prevent unauthorised use of your system more effectively and cheaper than security ROMs.

☐ Easily and neatly fit in the 'Ash-tray'.

Render demonstration machines tamper-proof.

# 



ONLY p+p 50p + VAT

APER)

INSIDEOUT is designed to make a sideways ROM socket available outside the BBC computer to allow for easy exchange of sideways ROM's.

MELE CAN BE USED FROM BBC MODEL B OR EXPANSION BOARD SOCKETS . SUPPLIED WITH LOW INSERTION FORCE SOCKET FOR EASE OF USE NO COSTLY CARTRIDGE PACKING . EPROM PLUG IN AND GO . NOT LIMITED TO ONE DEVICE . SOCKET RATED AT 100'S OF INSERTIONS

# PL SPECIAL OFFER for BBC Computers

8K CMOS RAM for ATPL SIDEWISE EXTENSION ROM/RAM BOARD

1 off £21 2 off £40

8K CMOS RAM PLUS SPOOLIT for SIDEWISE RAM AREA

Turns it into an 8K or 16K printer buffer 1 CMOS RAM + SPOOLIT DISC £31 2 CMOS RAM + SPOOLIT DISC £50

8K CMOS RAM PLUS DES SHIFT for SIDEWISE RAM AREA

Allows you to recover &OEOO to &18FF on a disc based system 2 CMOS RAM + DES SHIFT £50 8K CMOS RAM PLUS SIDESWIPE for SIDEWISE RAM AREA

Allows you to save and load sideways ROM's to disc 1 CMOS RAM

SIDESWIPE DISC £31 2 CMOS RAM + SIDESWIPE DISC £50

DISC BASED PROGRAMS

SPOOLIT £10 DFS SHIFT £10 SIDESWIPE £10

Please Add 50p p&p + VAT



Dept AU5 Station Road, Clowne, Chesterfield, S43 4AB. Telephone: (0246) 811585 (4 lines)

CONDITIONS OF SALE & DELIVERY

Cheques made payable to Advanced Technology Products Ltd. please allow 28 days for delivery. Cost of carriage or postage refer to each section. Quantity orders and oversea's carriage charged at cost. Condition of sales available on request.



ACCESS accepted. Carriage to be added to advertised price, then add VAT to the total.

# Telford's book

JOE Telford, well known to readers for his Jottings, has written a book, *BBC Micro Advanced Programming*, published by Prentice Hall at £9.95. With more than 100 programs in 392 pages, it's pretty comprehensive.

# **School saving**

READERS who feel they may qualify for discounts under Acorn's Micros in Schools scheme should contact the company's education division for details of the nearest dealer taking part. The number is (0223) 245200

# Torch upgrade

TORCH has released an improved version of its Unix system known as the Unicorn 1024. The speed of the 68000 chip at the heart of the £3000 add-on has been raised and the RAM available increased to 1Mb.

Contact Torch at Abberley House, Great Shelford, Cambridge CB2 5LQ, tel: (0223) 841000.

# Podd's a winner

PODD from ASK won the best educational software of the year title from the Computer Trade Association. The program aims to teach children aged five to ten about verbs, and is available for the BBC micro and Electron.

# Micros for trade

THE London School of Foreign Trade has opened a software library at 61 Westminster Bridge Road, London SE1 7HT, tel: 01-928 6810.

# Slomo change

SLOMO, the device to slow down software referred to in February's issue, is available from Nidd Valley Products and not Cambridge Computing Research as stated. For details contact Nidd on (0423) 864488.

# **TAB** grows

A CLOSED user group for BBC micro users is being established on The Australian Beginning (TAB).

TAB has been operating since 1981, with a bulletin board, product and club news and electronic shopping.

# **Electron marches on**

ACORN has committed itself to supporting the Electron until the end of 1986, and said that the machine will continue to be manufactured.

Alex Reid, the company's acting chairman, made these statements just before Acorn's shares were re-released on the stock exchange.

Electrons are still being supplied to British Telecom as part of the Healthnet communications system. They are being made in small numbers while present stocks left over from Christmas are run down.

The first casualty of the slimmed-down Acorn is the customer services department which has been disbanded. The four new divisions covering consumer, education and training, scientific and indus-





Piol

trial, and training within the company are expected to look after their own customers, rather than everything going through one department as it has done for two years.

Anyone contacting Acorn is told to approach their local dealer, but even dealers aren't getting much information and are waiting to see what happens next.

Manufacture of BBC micros will be controlled by the education division, whose director was formerly head of production at Acorn

On the ABC front, 54-yearold Elserino Piol of Olivetti who masterminded the Acorn deal has said in an interview with an Italian newspaper that there will be no overlap between products produced by the two companies.

Meanwhile, Acorn must be hoping that some of its products will be suitable for use by American communications giant AT&T. The company owns a quarter stake in Olivetti, and a deal between the two is largely held to be responsible for the Italians' profits leaping almost 70 per cent over last year.

Business news - page 127

# Banana mare to the state of the

Control hardware with a Banana

# Plug in a Banana for control

MONKEYS who want to learn about control technology should get hold of a Banana Micro Interface, says Castle Associates, because it's so easy to use.

The Banana plugs into the user and printer ports of the BBC micro and its various output voltages can be controlled to drive motors, relays, etc. Protection circuitry inside the

metal case protects both the Banana and the micro. It costs £175 plus VAT.

Castle Associates aims to release hardware and software for experiments to add to the book of ideas provided. Contact the company at Salter Road, Cayton Low Road Industrial Estate, Scarborough YO11 3UZ. The number is (0723) 584250.

# **New software for teachers**

MICROMATH is a new journal aimed at people using micros in education for teaching maths.

ATM, the Association of Teachers of Mathematics, has joined forces with publishers Basil Blackwell to produce *Micromath*, the first issue of which appears this month. For details contact Blackwell's at 108 Cowley Road, Oxford.

For English courses, Longmans has released a series of language games under the collective title *Quartext*. For £35 (plus VAT), the user receives two 80-track discs – one containing the programs, the other ten sample texts.

Available separately for £30 is *Textloader* which is a sort of wordprocessor to create new passages of text for the games. Longman also produces discs at £12 each for teachers of English as a foreign language.


Six simulations from John Wiley cover map-reading, being stranded on desert islands, orienteering, sheep dog trials, a scavenger hunt and river rafting. They are

aimed at children aged seven to 13.

All are designed to develop specific skills relevant to each task and encourage general strategy planning with group discussion.

The programs are supplied on 40/80 track discs with teachers' and students' notes. They cost from £14.95 to £19.95.

Finally, the MUSE conference runs from July 29-31 and will be held at Nottingham University.

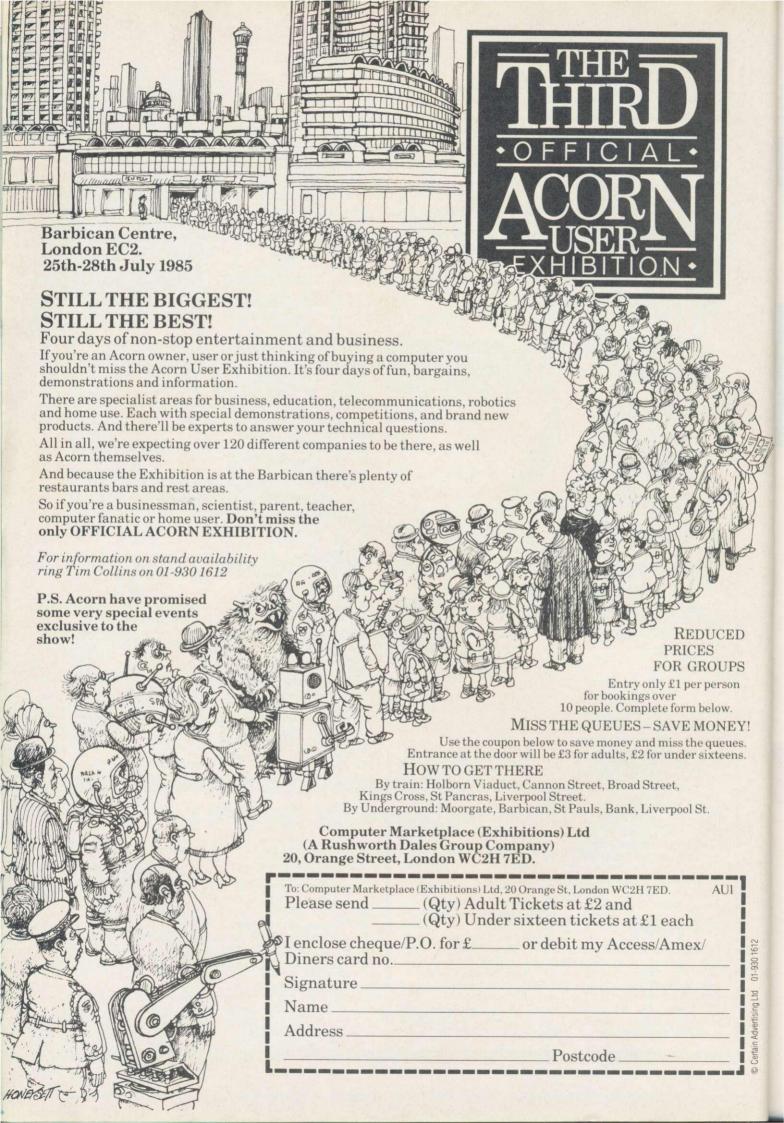

# Schools network goes into colour


THE Times Network for Schools now carries pages of colour and high-resolution graphics. The communication network hooks up BBC micros in schools using the Telecom Gold electronic mail service, but until now it has been based on a black and white text-only

The addition of colour pages using viewdata and hi-res graphics opens up the Network to far more educational applications. Also, it ensures the Network can compete visually with Prestel.

Possible applications of the new graphics pages include geography - there's a detailed

map of Britain on the system already - and colourful competitions. When such a page is read by a school's BBC micro. the network system software automatically switches the computer into graphics mode.

Although it was revealed in AU back in August 1984, the Times Network for Schools was only officially launched this April. However, every LEA in the country has subscribed to the Network and by the end of the month, over 2000 schools should be on-line. Derbyshire LEA has set up its own database within the Times Network, containing teachers' information and a children's gazetteer of Derbyshire.



TEACHERS of maths in secondary schools can look forward to their own conference in July. 'Mathematics at 16+' will be held at St Peter's College in Oxford from July 22 to 24. The fees range from £45 non-residents without meals to £65.

For full details, contact the conference secretary at 41a West St, Oundle, Peterborough PE8 4EJ.

The MEI project, which is behind the conference, has also produced a series of software to support teaching subjects such a graph plotting, statistics, numerical analysis and matrix algebra.

Each 40/80-track disc costs £17.50 and all are compatible with the 6502 second processor and Econet levels one and two. Contact MEI at the same address above.

# Stock bulletin

TECHNOMATIC has launched its own phone-in information service using Prestel protocol.

The system will initially run in the evening and at weekends with information on products the company stocks, and details of ordering and availability. Techno-line hopes to expand to 24-hour coverage, and will run on 01-452 1500 at 1200/75 and 300/ 300 baud.

# Tube software

TUBELINK, the Viewfax database for users of second processors, is carrying free software to convert discs from CP/M to the Torch CPN format.

Benjamin Rietti, the 14year-old editor, claims it is the most popular service for BBC owners with articles on using the Tube, machine code and ROM software.

Prestel users can access Tubelink on page 258216.

# Old games with new owners

QUICKSILVA has taken over Imagine titles the rights to seven games developed by Liverpool software house Bug Byte. This is the second such deal recently, Ocean taking over

after company folded.

Meanwhile, Incentive is to market its Confuzion game for the BBC micro and Electron at £6.95

66 83 55 52 86 ? ? ? 5 54 36 35 52 82 87 36 51 What is the sum of the missing numbers?



# **WIZADORE**

Just clip the coupon below for the chance of a free copy of Wizadore, the new graphics adventure from Ocean Software for the BBC micro.

The first 25 coupons pulled out of the postbag at the Acorn User's Long Acre offices will receive a tape.

And that's not all: Ocean is offering £100 for each of the next five months to the first entry out of the hat which completes the adventure. Simply write the codeword given at the end of the game on the form from the cassette inlay card and send it off to Ocean. The name of the £100 winner each month will be printed in Acorn User. Full details are given with each tape.

Look in Acorn User to see if you've won

But first of all, take your chance to get a free game. Cut out the coupon below and send it to: Ocean Offer, Acorn User, 68 Long Acre, London WC2E 9JH.

If my c	oupon	is one	of the	first	25	pulled
out of	the	postba	g at	Aco	rn	User,
please	send	me a	free	сору	of	Wiza-
dore,	the !	graphic:	s ad	ventu	ire	from
Ocean.						

Name	
Address	
Post code	

# AMX MOUSE

Catch an incredible AMX MOUSE! The advanced opto-mechanical device that brings to your BBC micro facilities once only available on more expensive computers. Now you can use ICONS, WINDOWS AND POINTERS in your own programs.

# AMX PACKAGE


Plug the MOUSE into the user port, and the EPROM into your board. The latter contains fast machine code routines for creating on-screen windows, icons and pointers. And means that the MOUSE buttons can be progammed for use with commercial software such as Wordwise and View. There are two manuals included, explaining how to operate the MOUSE and the ROM routines, which are available in both basic and machine code programs.

Included in the package are two superb programs:

AMX ART has to be seen to be believed! It's a computer-aided drawing program that's just as good for serious applications—such as the preparation of detailed architectural and engineering drawings or teachers' worksheets—as it is for having lots of family fun! And if you're artistically inclined, you'll be astonished at the quality of work you can produce and save. It makes full use of on-screen menus, pull-down menus and icons: the ideal, easy way for novices to learn and gain in confidence.

ICON DESIGNER is an invaluable program for creating and storing icons for use in your OWN programs.

The AMX MOUSE may be used with any BBC Model B fitted with the Operating System 1.2; and it's compatible with the 6502 second processor and disc or tape filing systems.

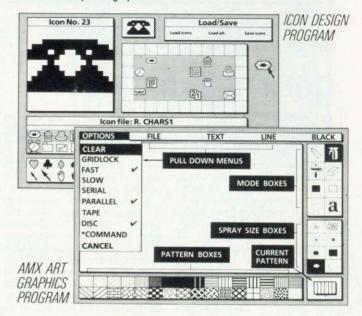

New!

# AMX DESK


DISC ONLY £24.95

A terrific new program designed for the AMX MOUSE. If you want to get properly organised—at home or at work—DESK is for you!

The main screen contains a desktop with header offering SYSTEM, FILE and EDIT menus – plus an additional menu for extra features; and there's a constant time display.

Down the right-hand side are icons displaying Disc Drives, Memo Pad, Telephone Book, Diary, Alarm Clock, Printer and Trash Can. Simply by using your MOUSE you can select any service you require.

- MEMO PAD Up to three pages of text may be stored. With printing at the touch of a button.
- TELEPHONE/ADDRESS BOOK-Up to 200 or 400 entries (depending on disc drive capacity) with handy scrolling search.
- DIARY Displays a calendar for three months, centred on the current month, with scrolling backwards and forwards. Dates with entries are highlighted; select a date and view the entries.
- ALARM Sounds at the time you've pre-set, whichever DESK service you're using.
- CALCULATOR A full-function calculator can be brought on-screen at any time, and results can be stored for use in Memo Pad, etc.

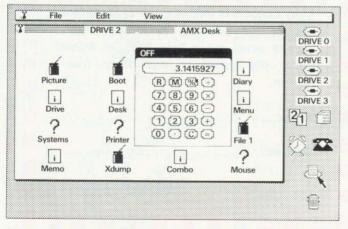

See us on Mouse Links on Viewfax tube link on Prestel: Page No. \*258216#

Any window showing Telephone/Address Book, Diary or Memo Pad may be dumped to the printer by simply selecting the printer icon. An interface program for Wordwise  $\pm$  and View means pictures created with AMX ART can be merged with text upon printing out.

# ew! AMX UTILITIES


DISC ONLY £14.95 INC

Another remarkable new program for the AMX MOUSE. Now you can enjoy many drawing features you'd never expect to find at this price!

The Zoom facility means easy and accurate amendments to your drawings: one dot becomes a character. You can copy, rotate and reflect; enhance circles; draw ellipses and arcs; and print icons, too. Borders can be added, and pictures can be stripped and

centred ready for saving and printing. There's colour sketch, too... Great for budding artists!

All disc software is available on 40 or 80 Track and 3" disc. Please state which you require when ordering.

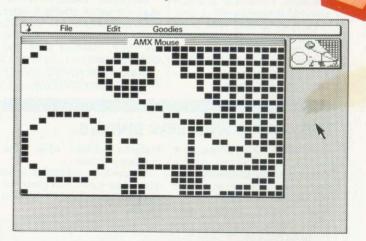


These exciting AMX products are available from top computer dealers. Or you can order direct from us. Send cheque/PO to Advanced Memory Systems Ltd, Green Lane, Appleton, Warrington WA4 5NG. Ring (0925) 62907)602690 for instant ACCESS and VISA orders.

# ZUUX MUUUSLE


POINTS THE WAY

FOR THE BBC MICRO MODEL B

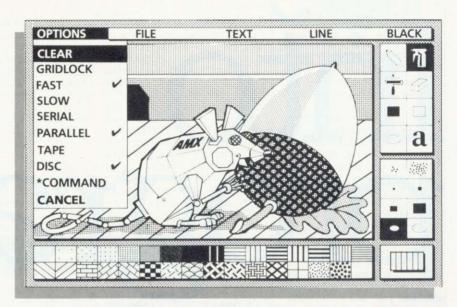

with AMX ART GRAPHICS PROGRAM

EDUCATIONAL QUANTITY DISCOUNTS

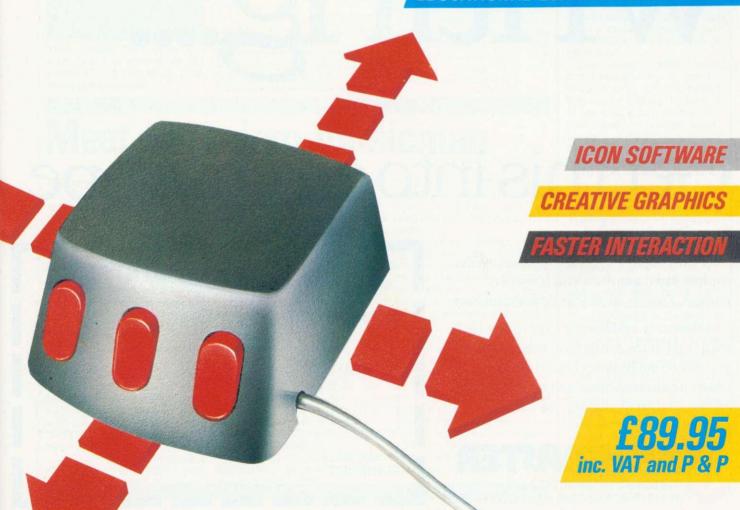

# voure ogram Writin

# Get this into an envelope

If the programs you are writing involve sophisticated graphics, you have two choices, a severe headache or Touchmaster.

Obviously you'll want to consider the matter, so in the mean time send away for your free Touchmaster literature and find out more about the best value/performance graphics tablet available... or take two pain killers!

# TOUCHMASTER



Touchmaster Limited, PO Box 3, Port Talbot, West Glamorgan, SA13 1WH.

Please send me free Touchmaster literature.	AU 5/85
Name	
Address	
Make of Domputer	

# Add discs to Electron

CUMANA has developed a disc interface for the Electron which works through the spare ROM cartridge slot on the Plus 1 add-on, as well as a double density controller for the Beeb.

The Electron product will control 5.25, 3in, or 3.5in drives using single or double density discs (the latter can hold twice as much information). It plugs into the Plus 1 and has a spare socket for ROM software. The device sells for £150, or £130 if a disc drive is purchased at the same time.

For BBC micro owners.

there's a double density disc filing system called QFS. It is supplied as a kit of parts to plug into empty sockets on the BBC's circuit board (issue 4 the board number is printed on the left near the copyright sign).

No soldering is needed to fit the kit.

#### **Files**

QFS costs £108, and apparently runs with *Elite* and *Aviator*. It is not limited to 31 files, as the Acorn DFS is.

The Cumana DFS brings the

number available for the BBC to something like eight. Acorn has yet to announce a replacement for its aged 0.9 system using the 8271 floppy disc controller.

This chip is in very short supply and cannot support double density.

However, the 1770 controller chip from Western Digital is used in Acorn's Plus 3 disc box for the Electron. This does support double density and is used in the ABC range, so would appear to be the successor to the 8271 chip for the BBC.

# THE MAN FROM



Our new columnist takes a sideways look at the news...

AFTER all the dust has settled, the interesting topic is where does Sinclair go from here? The Americans, despite some creakings from the direction of Commodore, are relatively secure with their huge home market. Amstrad has wider interests and is doing well (half year pre-tax profits up from £6.3m to £9.5m). Acorn is now in the soft embrace of the men from Turin (whose profits jumped 69 per cent over last year).

Sinclair is still very heavily dependent on one business area – home computing, a market which is showing all the signs of saturation. Forays into midget radios and TVs for those with 20/20 vision have not reduced that dependence significantly. The QL has not been a major success in getting Sinclair into business or education.

The electric trike, wondrous though it is, can only be seen as a big risk. It is hoped that 1986 will bring the launch of the C10, a two seater version (dual in line or transverse?). 1988/90 will see it boosted to the C15, a family four-seater with a top speed of 80 mph, and a range of 40 miles.

Work goes on apace to develop the new batteries needed to make all this come true. Perhaps Sinclair ought to devote a little money to pushing back other frontiers of knowledge.

Maybe they could form a consortium with Tonka Toys and the producers of Action Man to engage in the genetic engineering research necessary to produce a family small enough and daft enough to get into the C15!

Still, Uncle Clive is a fairly shrewd cookie who has come through against the odds before – one more lead balloon and he gets to keep the official receiver. Were his company ever to get into trouble, companies like GEC might move a bit more quickly than they did with Acorn.

# THE POCKET PROFESSOR

# COMPUTER DICTIONARY

THE GUIDE TO COMPUTING TERMS AND CONCEPTS

MICRO MINI

HAI PER

THIS picture isn't quite fullsize, but it is almost. At 361 pages it's 18 mm thick. Definitely pocket-sized.

# Software writers' guide

A GUIDE for educational software writers has been produced by the MEP's software unit at £25.

The 276-page book covers origination and design, coding, field trials, support, publication and evaluation of software.

In addition there are notes on BBC and RML machines dealing with speed, memory,

Ex-beauty star granted 7,8 on raft – confusion!

sorting, machine code and robustness. A model publishing agreement is included.

The book, called Educational Software: a Creator's handbook is distributed by Techmedia at 5 Granby Street, Loughborough LE11 3LD.

The CET has released guidelines aimed at making it possible for a database to be used by a wide range of data manipulation packages. The booklet is called *Draft File Interchange Format (FIF)*.

# Meet the micro musicman

by Harry Sinclair

WE'VE all had a little difficulty with the SOUND and ENVELOPE statements haven't we? Controlling four channels isn't easy. Well, how would you lke to try it with up to 89 channels?

Melvyn Wright who writes the loading music for BT's Firebird games and Epic's adventures is something of a past master at doing just that.

One of his many talents is making the rolls for 'player pianos' and mechanical organs. Having worked out the arrangement, he has to calculate the exact position of each note on the roll, mark them out with a set square and then cut them out individually with a razorblade.

He says it can take up to a year of spare-time work to pro-

A Long Way to Tipperary is the tune for this title – one of Melvin's nine arrangements



duce one with a complicated arrangement. Handling four channels must seem like bliss.

I had been told that Melvyn, an ex-BT employee, could knock out an opus for the Beeb in a morning, but not so. He reckons an hour for four seconds of music – and Fingal's Cave which he did for a recent adventure from Epic lasts six minutes!

Amazingly, considering the complexity of his arrange-

ments, Melvyn doesn't read music. He can hear what he wants in his head, and converts that to notes sitting at the piano.

Part of his secret is the method he has developed which allows him to compress the sound statement data (normally 4 bytes) into 1 byte, so his tunes can be considerably longer than most without grabbing too much memory.

Melvyn only started programming in 1981 on a ZX81. He wrote a program which did the impossible and made that little machine produce music. Moving on to a Spectrum, he was disappointed by its general lack of facilities and its musical abilities in particular.

That's why owners of the Beeb now have the pleasure of hearing his work.

Link to Giant Mainframes and network to thousands of Micro users via your 'phone with free Modems and Comms software in the British Telecom Modem competition.

British Telecom is offering 1000 free gift packs to plug direct into your home 'phone line.

# TELECOM



# 1000 FREE MODEMS

COEFICIAL ENITRY FORM

500 for Spectrum/Spectrum + 350 for BBC Model B 150 for Commodore 64

And if you haven't got a squaretype BT phone socket, British Telecom will arrange to alter your installation at no charge!

## HOW TO ENTER

(Monday 22nd April to Sunday 5th May 6pm to midnight)

For the 5 questions 'phone

01-627 3000 or

021-449 9944 or

031-225 8999

To get the Tiebreaker Sentence 'phone

01-627 1199 or

0532 455030 or

0632 324444

Complete the entry form using your skill and judgement, and send it off in the next post.

# RULES OF THE BRITISH TELECOM MODEM COMPETITION

- 1) The dial-in is available from 6pm Monday 22nd April to midnight Sunday
- 5th May 1985, when the competition closes.

  2) Entries must be postmarked the next working day after the questions and tiebreaker were obtained.

  3) Entries can only be made on the official entry forms and become the
- The competition is open only to residents of the United Kingdom over the age of 18 years. Employees of the Network Marketing Unit of British Telecommunications pic and PARKER REDMILE LTD, and their dependants are excluded. Only one winning entry per household.

  5) Entries not reaching the competition address before midnight on Thursday
- 9th May 1985 will not be considered.

  6) A list of winners will be provided at the competition address. Please send an
- SAE if you wish to receive it.

  7) The winners will be picked as follows from entries received on time and
- properly completed -The entries for each type of prize pack with all correct answers to the 5 questions and with the tiebreaker sentences judged most apt and humorous by the competition organisers will be chosen, subject to the stock of appro-
- priate prize packs. 8) The decision of the competition organisers is final and no correspondence will be entered into. Winners will be notified automatically.
- 9) British Telecommunications plc offers winners requesting BT 'phone socket
- conversion on entry forms to waive the charge normally made for such work.

  10) Details of how to get on Prestel/Micronet 800/Telecom Gold will be sent to winners. Subscriptions not included in prize.

OTTION LE EITHET TORIVI
A. Your answers:
Q1
Q2
Q3
Q4
Q5
B. Tiebreaker Sentence complete (25 words or less in total):
"
C. If I win, I would like the prize pack for the

- ☐ SPECTRUM/SPECTRUM +
- ☐ BBC MODEL B
- (Tick Choice)
- ☐ COMMODORE 64
- D. My home telephone line (\* Delete as appropriate)
- (a) already has a square-type BT 'phone socket \* or
- (b) would need converting to square-type BT 'phone socket \*
- If (b), the person renting the line from British Telecom must fill in this declaration-If this is a winning entry, I agree to ask British Telecom to convert my line to square-type BT 'phone socket at a convenient date before 1st July 1985. My line is on Residential rental, is not a coinbox and is not shared service. I understand British Telecom will not charge for doing the work.

Telephone number ... Signature

Date ....

E. I have read the rules of the British Telecom Modern competition and agree to abide by them. I am over 18 years old.

Signature of entrant ..... Date .....

Address

POST IMMEDIATELY TO:-British Telecom Modem Competition POBOX 73

**MITCHAM** SURREY CR42XU

(Postage stamp required)

WINNERS WILL BE NOTIFIED AUTOMATICALLY

# **Question time by modem**

ACORN'S chairman Alex Reid and boss of Watford Electronics Nazir Jessa are two of the guests set to appear on Celebrity Chatline, Micronet's live interview feature.

Users of the electronic system will be able to supply their questions in the hour before the show goes out - 7-8pm on Wednesday evenings

Micronet's editor David Babsky will put these questions to the guests and then send up the answers to appear on the country's computer screens as they are given.

Reid is scheduled to appear on May 8 and Jessa on April 24. Before then, on April 17, Paul Duffy of the Guild of Software Houses (GOSH) will be interviewed about piracy and how it affects the industry.

Richard Hooper of Prestel and Telecom Gold, who helped set up Micronet, will appear on May 1.

The programme is a spin-off from the Late Night Chatline which was accessed 1.9

million times in January, making it the most popular part of Prestel. Users on the Chatline can log on and talk to each other just like CB radio.

David Babsky was one of two Micronet staff who took a tumble in a recent parachute jump to raise money for the Ethiopia famine appeal.

He and press officer Claire Walker were still hobbling around on crutches with their left feet in plaster for the first interview. They both landed on sheep

# Six advertisers fall foul of ASA

SINCLAIR and Acorn are among the six companies in the computer market who have fallen foul of the Advertising Standards Authority in recent months.

The others were Software Supermarket, Data Technologies, Solidisk and Viglen. Several of the complaints were about incorrect prices in advertisements, and readers should always check on these before ordering.

The ASA is an independent body set up to monitor advertising claims.

Readers who have problems should write to ASA, Brook House, Torrington Place, London WC1E 7HN.

# Summer computer camps for all ages

COMPUTER camps are to be held all over Britain this summer for children and adults. Prices range from £13 a day to £90 a week, although costs vary with transport and facilities.

Dolphin camps cater for children aged 7–14, with BBC micros or Electrons for every child. Beaumont camps use several types of computer. Both feature Logo, robots and programming.

#### **Under-sevens**

Daybreaks courses are all focused around London and have similar timetables, but their Earlybird sessions take in computing for the undersevens.

The Earnley Concourse caters for people over 16 with one- and two-day courses on various aspects of computing,

from what can you actually do with them, through wordprocessing with *Wordwise* to learning Basic. Its computer centre runs BBC micros on an Econet.

Contact Dolphin at Grosvenor Hall, Bolnore Road, Haywards Heath RH16 4BX. Beaumont at 9 West Street, Godmanchester, Cambs PE18 8HG. The Earnley Concourse is at Earnley, Chichester PO20 7JL. Daybreak's address is Providence House, River Street, Windsor SL4 1QT.

Finally, Interaction is a charity which helps people set up their own computer camps. It trains potential course leaders in how to start and offers several books to get you going at the community level.

Interaction can be found at The Royal Victoria Dock, London E16.



# Watch this space

SEIKO has announced a wrist watch that connects to a micro. The RC1000 is a quartz watch with LCD display that allows the user to carry an assortment of data, from telephone book to diary, on his wrist.

It has a capacity of 2k and software will be available to connect to Acorn micros. All data is entered from the computer keyboard and transferred through the RS423 serial port to the watch.

Price hasn't been finalised, but is thought to be around £120 for watch, cable (shown fitted) and software. It should be in the shops by July.

# Open for repairs

RUMBELOWS has set up a repair service centre in London to cater for electrical equipment including computers.

The service centre is open from 8.30am to 6pm and is at Unit F, Greenford Industrial Estate, Field Way, Greenford, tel: 01-575 7400.

# **Help with Fortune**

EPIC Software, the adventure company whose titles include Wheel of Fortune, has released free help sheets for customers who get stuck. Send an sae to 10 Gladstone Street, Kibworth Beauchamp, Leicester LE8 0HL.

# Adventure chance

ADVENTURE Zone Software is running a competition with a £1000 cash prize for the best adventure game submitted. The top three will be marketed by the company. Details from 10 Ennis Close, Harpenden, Herts AL5 1SS.

# Prestel system for Australia

by Steve MacLeod

TELECOM Australia's Prestelbased videotex system, known as Viatel, should now be up and running.

Originally planned for 1982, the proposal was rejected by the then Government, but selection of the Prestel standard for the system was announced last year.

The emphasis so far has been on the quality of the information, rather than the quantity. There will initially be more than 45 information providers supplying news, weather, travel information and a range of consumer services such as home banking and shopping, in addition to electronic mail.

## Software

A microcomputing service, including bulletin board facilities and the ability to download software, is expected shortly.

No information was available on which computers will be catered for.

Viatel hopes to attract between 5,000 and 10,000 subscribers in its first year.

Telecom Australia is using Torch CH520 computers to create Viatel pages and for bulk updates of the system. Eight have been supplied by the Australian agent so far with a further 18 systems on order.

# **Business for PCW**

THE 1985 PCW Show is to be held at Olympia from September 4–8.

A special section for business computers will run alongside the main show in Olympia 2.

Details from Montbuild, 11 Manchester Square, London W1M 5AB.



HAL sings again in 2010 with Dr Chandra

# On television

☐ The Learning Machine, BBC TV's new series on computers and education, starts on April 25. Going out on BBC 1 at 10.55 pm on Thursdays for six weeks, the 25 minute programmes ask whether computers live up to expectations in the classroom. Why do girls miss out? And is learning Basic such a good idea?

It's aimed at parents, teachers and children alike—although at the broadcast time of 10.55 the BBC might be being a bit optimistic there. Leaflets, lists of software and demonstration packages are available from BSS, PO Box 7, London W3 6XJ. (Enclose sae).

□LOOK OUT for With a Little Help from the Chip, a series of six BBC TV documentaries about how computers and new technology can help the lives of the disabled. Transmission times and dates have yet to be decided.

☐THAMES TV's Database series returns in June for its third series. More details nearer the time

QED, CAN robots really do as much as people think? The QED team program a robot to pour a cup of coffee – but can it then fetch a chocolate biscuit? Heavy stuff. QED, BBC1, May 29, 9.25 pm.

# On radio

☐ Chip Shop . . . or rather it's not anymore. And the reason why reads like an episode from Dallas (another series that the BBC has lost).

The Radio 4 programme was scheduled to return in April for a third series and by all accounts the previous ones had been massively successful, with over a million micro buffs prepared to endure (sorry-listen to) Barry Norman's dulcet tones-and 3 million for the 'pop' Radio 1 version.

Chip Shop has never really had a proper 'home' or even a permanent staff and so the new series provided the ideal opportunity to press for a permanent studio in Manchester, and full-time staff. With all the furore over the BBC licence fee increase, and with the cor-

□ April 9-20, London Festival of Computing, various locations. Kicks off with a four day extravaganza in Covent Garden (9-12th), featuring demonstrations of robotics, community computing and communications. Over the weekend (12-13th) there's a Logo Spectacular in Camden Town and to wind up (18-20th) there's the London Computer Fair in Central Hall, Westminster.

poration threatening to cancel top-rating programmes such as *Doctor Who*, *Chip Shop* takes a low priority and so the third series has been put on ice. If, as seems likely, the Corporation does not get the licence fee increased to £65, then *Chip Shop* seems destined to go into permanent deep freeze.

☐ Inside Information, Radio 4
VHF, 4.30 pm, weekly starting
May 5. Ten programmes providing a basic grounding in
information technology.
Subjects include artificial
intelligence, communications
technology, control applications, etc.

# On film

On general release is 2010. the sequel to 2001. Worth seeing for the special effects which, as you might have guessed, owe a lot to computers. Some of the shots employ up to 10 separate elements - background, spaceships, etc, the movements of which all have to be co-ordinated if the shot is to look realistic. Enter the humble microcomputer, which controls and records the positions of the cameras.

# On Show

☐ April 16-18, Northern Computer Show 85, Belle Vue, Manchester. Contact 01-643 8040

□July 25-28, Acorn User Show, Barbican, London.

□July 29-31, MUSE Summer Course, Jesse Boot Confer-Centre, Nottingham ence University. Three days of talks, conferences and an exhibition covering all areas of computers in education. Things to look out for - Acorn showing off their interactive video and Econet: talks on wordprocessors and spreadsheets in the classroom; six sessions about education - plus primary much more. Price is £57.50 for the three days and further details are available on (0482) 20268

September 4-8, Personal Computer World Show, Olympia, London.

# To contact

☐ Acorn (0223) 245200 Acorn (London) 01-379 7358 Acornsoft (0223) 316039

A new bulletin board for modem users (1200/75 baud) is on (0223) 243642.

□ CABE (Computers in Adult Basic Education), c/o Pete Jeffs, Southern Neighbourhood Council, Hyslop Street, Liverpool 8. User group for ABE tutors in Adult and Further Education. Please

# **Blunderbox**

☐ APOLOGIES to one and all, the checksums provided in the Colours Interrupts (April) were incorrect. The checksums should be:

20203 21428 19413

☐MALCOLM Banthorpe's Turtle program (February issue) contained a slight error. In line 470 the + sign should in fact be a − sign. This now means that you turn left when LEFT is entered rather than turning right!

# For help

☐ To contact Acorn User authors, write c/o the editorial address given on page 2.

□ Seikosha AP/GP100 printer help sheets are available from Acorn User for 50p, plus sae. These consist of three programs, including a screen dump, and three pages of notes on using these printers with the BBC micro.

Monitor choice: Photocopies of the review of four monitors, plus a set of nine test programs from the June issue cost 72p (inc post).

# How to present programs and articles

FIRST read the 'Notes for Authors' on the contents page.

Your submission should be original and have a practical use. We receive many articles on subjects we have already covered – often quite recently.

A neat and clear presentation is very important. A few hours' thought about how your article looks, diagrams, appli-

cations and documentation will ensure that it is evaluated quickly and efficiently, and is more likely to be accepted.

Program presentation is also important. Follow the 'standard' we've adopted in the yellow pages. Most importantly, your program must run on Basic 1. The only exception is if the program is of a Basic 2

tutorial nature. Basic and illegal calls to routines in the MOS should not be used. Program lines should increment in steps of 10, with the first four being REMed as per the format in the yellow pages.

Program listings should not be indented, and avoid multistatement lines.

Use the standard assembler

presentation, one mnemonic per line, upper case mnemonics with lower case labels. If the assembler is long include a checksum.

Provide a list of PROCs, FN's and variables detailing the operation of each on a separate sheet of paper, along with any hints or tips regarding entering the program.



presents

# The Mr. Men Collection

(and it's not just for kids, either!)

First hands-on experience with

Then take a different direction with



Now your kids are ready to play



MIRRORSOFT's


Mr. Men Collection

is available in all good software stockists.

In case of difficulty or for further information, please contact:



Mirror Group Newspapers, Holborn Circus, London EC1P 1DQ. Tel: 01-822 3580

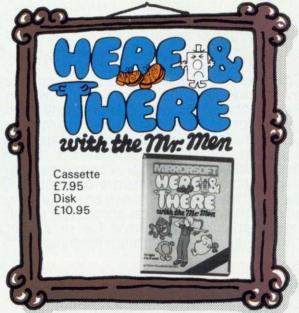

After that – or in between – the whole family can play



All programs available for RBC B or

19

# **Oxford Pascal is Fast**

Oxford Pascal compiles down to FAST COMPACT P-code, giving you the real speed and power of Pascal, together with the ability to compile very large programs.

# **Oxford Pascal is Standard**

Oxford Pascal is a full extended implementation of Standard ISO Pascal. This means that you can compile any Pascal program (subject to size), written on any computer, anywhere.

# Oxford Pascal is Compact

Because it compiles into P-code, Oxford Pascal reduces programs into the most compact form possible. In fact it allows you to pack more code into your BEEB than any other language, and should your programs become too large, you can still use the CHAIN command to overlay limitless additional programs without losing data.

# **Graphics & Sound Extensions**

In addition to the entire Pascal language, Oxford Pascal features a whole range of Graphics (all modes) and sound extensions designed to make maximum use of the BBC computer. Oxford Pascal also provides numerous extensions such as hexadecimal arithmetic and bit manipulation instructions.

# Oxford Pascal in Education

In Education, Oxford Pascal is fast becoming a de facto standard. It is already the most popular Pascal on the Commodore 64, and will soon be released for the Spectrum and the Amstrad. In fact, Oxford Pascal will soon be available for 90% of the computers installed in the U.K., and is already available in German, French, Swedish, and American versions. Students and teachers alike find that it makes sense to use a standard implementation of Pascal across the whole range of educational micros. Call us for details of our generous educational discounts.

# **Resident and Disc Compiler**


Oxford Pascal comes in two forms:


For Tape Users...Oxford Resident Pascal a compiler located largely in ROM which is available at any time. Programs can be written and compiled on the spot without disc or tape access, and compilation is fast enough to make using the compiler much like using the BASIC interpreter. Thus, learning Pascal is a simple interactive process. Some 15K of memory is available for user programs, the remainder being reserved for compiled object code.

For Disc Users...Oxford Disc Pascal offers all the above PLUS...a full disc compiler which is capable of using the WHOLE memory for Pascal object code, it is supplied with a powerful LINKER, allowing you to break large programming tasks down into separately compilable, easily-manageable files.

# Manual

Both these compilers come with a manual which has been carefully designed, not only as a quick reference guide, but also as a full tutorial for those new to Pascal.

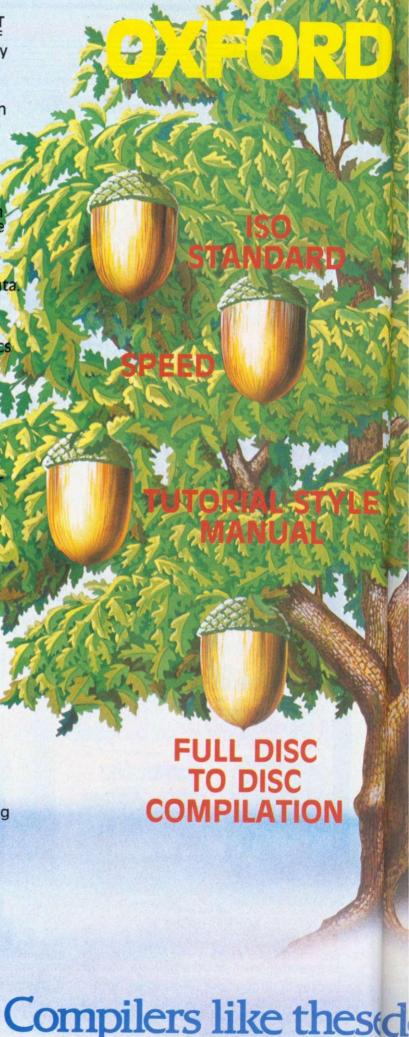

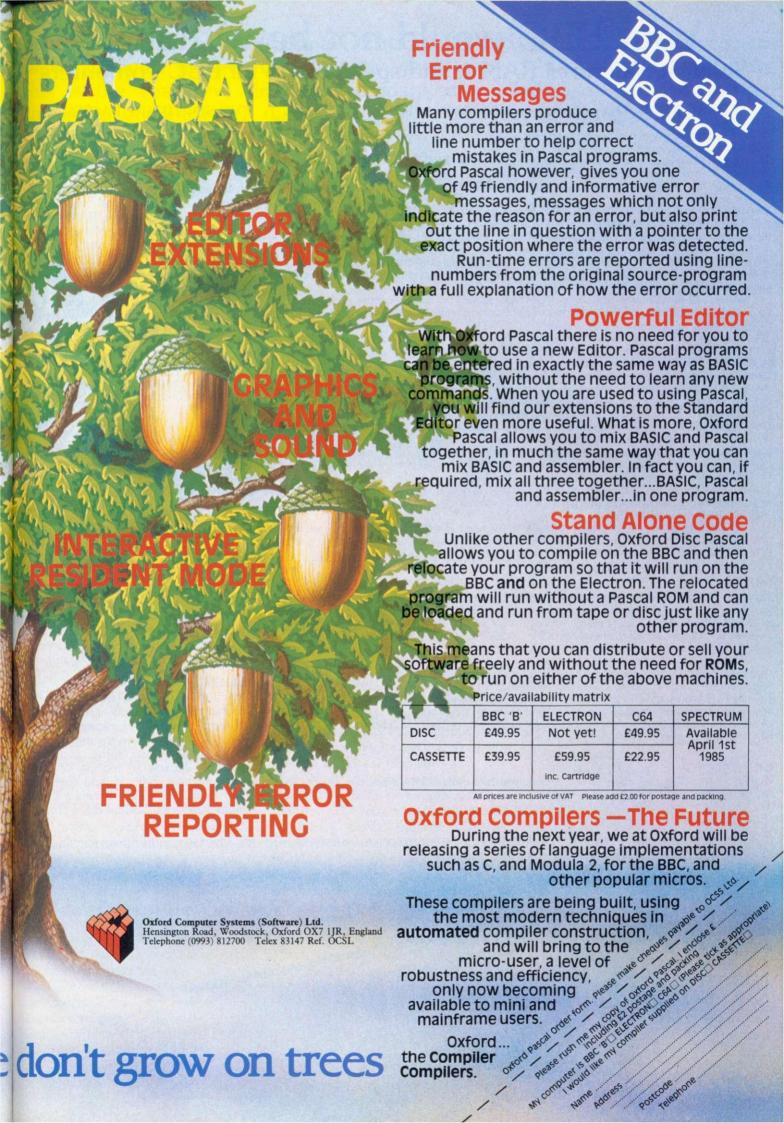

# Your BBC would not be without it Solidisk Sideways RAM is indispensible to all BBC computers

SOLIDISK's SIDEWAYS RAM is an almost indispensible add-on for the BBC user.

It is available in either 32k, 64k or 128k byte capacity and is compatible with all issues of BBC microcomputers along with most of the add-ons and ROMs obtainable for it.

To date, more than 37,000 units have been sold.

The Sideways RAM occupies the right most ROM socket of the BBC and sits in the same position in the micro's memory map as the paged ROMs.

This means that the Sideways RAM can run almost all ROM type software including languages,

utilities and filing systems.

The difference between Sideways RAM and Sideways ROM is that RAM can be written to meaning that only the presently required software has to be loaded into the machine, thus making redundant the multitude of high current consumption and often unsightly ROM extension boards.

Sideways RAM is also an invaluable tool for writing ROM type software to run on the BBC since software may be assembled straight into the area in which the final version will run. This will save a lot of time over using offset assembly and eprom programming/erasing on a non Sideways RAM equipped BBC.

For the user who is not interested in writing ROM type software but is in need of the utilities provided by the use of the Sideways RAM, we supply free software to make maximum use of the Sideways

AM facilities

These are included in the Sideways RAM Software package, a collection of no less than 5 diskettes containing nearly 100 programs, from database, word processor, music system, sprite graphic, printer buffer, virtual memory, spelling checker, RAM disk, RAM filing system, VDU replay, disassembler, machine code monitor, macro basic, video digitised pictures etc. and Solidisk Most Advanced Disk Filing System version 2.0.

Another extremely useful feature is the ability to configure the Sideways RAM as a 'SILICON DISC' as in our STLDISC program. It makes use of available Sideways RAM as an extra disc drive. Once the STLDISC program is loaded it acts exactly like a normal DFS with the exception that one drive is now allocated to the Sideways RAM. All operations on this drive are much faster than a physical disc drive and, of course, impart no mechanical wear to them. This means that programs

may be repetitively loaded, saved, spooled or exec'd many times and only the final version need actually be saved to disc.

The extensive use of the facilities offered in the STLDISC program will allow the physical disc drives to go longer between services and the discs themselves to last longer and could in fact pay back for

itself in a fairly short while.

The STLDISC program will operate on any size of Sideways RAM and will configure itself to the available space. Therefore a 16k board will give 4k bytes of storage, whereas the 32k will give 20k bytes and the 128k up to 116k bytes of 'Silicon disc' storage space.

# **PRICES**

The listed price (effective from the 15 April onwards) comprises the Sideways RAM fully guaranteed for 1 year, comprehensive manual and a software package consisting of 5 diskettes formatted either in 40 or 80 track. Please specify when ordering.

SWR32 (32k unit, by far the most popular): £58.95
 SWR64 (64k unit, new introduction model): £85.00

- SWR128 (128k unit, the second most popular): £149.00

As Solidisk Software Support Service has to produce in excess of 16,000 diskettes every month, we regret that we can no longer provide personalised service for disk copying. In extreme cases, when you need to update your software diskette, either reorder a new software package (which is always sold to you at nominal media cost (plus post and packing) or return the old package with £2.00 to cover post and packing. You may avoid post and packing costs if you call at Solidisk's stand at any BBC micro exhibition or at the Solidisk office.

# **UPGRADING**

Upgrading from a smaller model is very simple: you return the old RAM board to us with your payment.

The listed prices include the full software package and new manual.

# THE SOFTWARE PACKAGE

The Software package comprises of 5 diskettes, formatted either in 40 or 80 track. Please specify when ordering.

#### Volume 1:

Volume 1 contains all the general applications of Sideways RAM such as load and save ROMs (the Menu program), printer buffer (the Printer program), Improved Disk Filing System with unlimited catalog or PAGE at &E00 (STL0E00 and 2.0 ROM), Silicon Disc (the STLDISC program), the Quickcopy and the Fast Backup programs which use Sideways RAM to save you time and disk swapping effort.

#### Volume 2:

Volume 2 contains the Wordprocessor, Spelling Checker and the English Dictionary.

### Volume 3:

Volume 3 contains the Macro Basic (a program generator), a Linker-Editor and the Virtual Memory Program, which lets you use Sideways RAM to store Basic programs thus allowing otherwise too large programs to run.

## Volume 4:

Volume 4 contains a suite of programs, all part of the Solidisk Database system. This Database allows you to retrieve any record of up to 6500 records quicker than you can remove your finger; each record can have up to 15 fields of up to 60 characters long 15 utilities are included allowing printing of forms, tabulation, mailmerge, maths etc.


# Volume 5:

Volume 5 contains extensive The programming aids such as the powerful the Solimon, the 65C02 assembler, the Fi Solitrace, a dual screen tracing utility, the Invisible trace, the Sprite and Sprite generator capable of moving 32 sprites anywhere in a single picture frame, the VDU Recorder, which mimics a £10,000 graphic computer and more.

TH

th

SOLIDISK TECHNOLOGY LIMITED, 17 SWEYNE AVE, SOUTHEND-ON-SEA, ESSEX SS2 6JQ. TEL. SOUTHEND (0702) 354674 (10 lines).

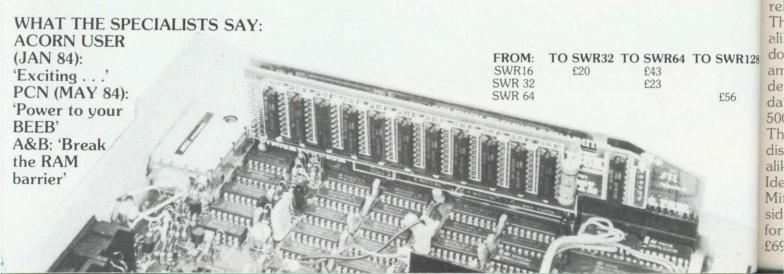

Introduced only last November the SOLIDISK DDFS has enjoyed an unprecedented popularity in a very short time. We think the reason for this is the ease and simplicity of installation and use, along with the capability of 60% extra disc capacity in the Double Density mode. This coupled with realistic pricing makes our DDFS an absolute best seller.

# WHICH DFS DO YOU NEED?

SOLIDISK produce no less than three types of Disc Filing Systems to cover all your requirements.

# 1. THE FLEXIBLE DDFS

The basic SOLIDISK DDFS (£38.95) is suitable for all ordinary users. It is supplied with the SOLIDISK 1.9 ROM. This ROM is compatible with the ACORN DFS; running all unprotected commercial software and disks from Acornsoft (Elite), Micro Power (Castle Quest), Island Logic (The Music System).

The 1.9 ROM offers both single and double density formats, with built in disc formatter and verifying, along with such features as automatic density sensing and 40/80 track software controlled switching. The speed is now programmable by the keyboard links to suit almost any type of disc drive and the maximum file size is now only limited by the capacity of the disc.

The DDFS can now be supplied with the Solidisk Most Advanced Disc Filing System (our 2.0 ROM). The total price of this system is £48.95 and the specifications are outlined below.


#### 2. THE FAST 8" CONTROLLER

This a totally new product intended for the business user where speed and reliability are paramount.

The date transfer rate of the 8" look alike is double that of a standard 5.25" double density formatted disc or an amazing four times that of a single density formatted disc. This gives a data transfer at the incredible speed of 500kbits or 64 k bytes a second.

This DDFS can be used with either 8" disc drives or the Mitsubishi 8" look alike or a mixture of the two.

Ideally suitable to be used with the Mitsubishi M4855 80 track double sided (2 MB unformatted or 1.3 MB formatted), the 8" DFS costs only £69.95 inclusive.

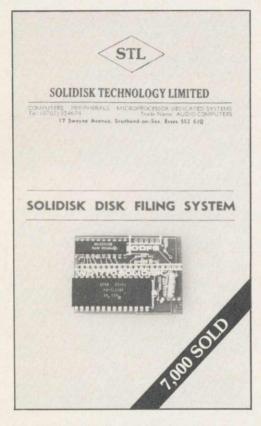

# 3. THE SEDUCTIVE DFDC

Ideally suitable if you already have an Acorn DFS. The DFDC will not only add Double Density capability but also improve the speed of your 8271 chip. The SOLIDISC DFDC (Dual Floppy Disc Controllers) is making a very large impact on the BBC user community with its extraordinary capability. It is currently supplied with the Solidisk Advanced Disk Filing System ROM 2.0 (£54.95).

The DFDC board simply sits in the place of the 8271 FDC chip (i.c.78) in the BBC. The 8271 is then inserted into the DFDC board and the ROM 2.0 inserted in place of the original DFS ROM.

Once the machine is up and running it is then simplicity itself to change FDCs; just throw the switch attached to the DFDC board, press BREAK and the other FDC is now selected.

This allows the user to get the best facilities available from both the 1770 and 8271 floppy disc controller chips with the minimum of fuss.


The DFDC board may also be used as a Stand Alone DFS if your BBC is not yet upgraded for disc systems. All the necessary chips and instructions are supplied and the 8271 may be added as an optional extra at a later date.

The SOLIDISK DDFS is now the ultimate in reliability with a minimum component count and software error trapping.

The DDFS consists of only 4 components to be plugged in to the BBC Microcomputer and can be fitted in just a few minutes by novice and expert alike.

Whilst many other manufacturers rely heavily on distribution outlets to do the selling for them, SOLIDISK relies on a good product and a large support network to win the heart of the user. With over 60 local experts, covering England, Scotland and Wales, a SOLIDISK National User Group in Holland and soon in Australia, SOLIDISK can offer many users regional free fitting and advice. Also with an ever increasing catalogue of free software, available to all SOLIDISK users, comprising of Programming tools, Graphic windows, Musical tunes, Spelling checker, Computer Aided Design, Disc utilities etc., even users who are new to the DDFS can expect to build up a large disc program library in a fairly short

Solidisk Software Support Service now has a responsibility to over 35,000 users and the ability to give you the best possible support matched only by the largest companies.

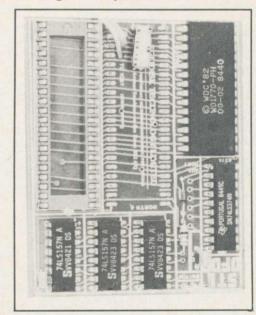

SOLIDISK TECHNOLOGY LIMITED 17 SWEYNE AVE, SOUTHEND-ON-SEA, ESSEX SS2 6JQ TEL. SOUTHEND (0702) 354674 (10 lines)

# **SOLIDISK DFS ROM 2.0 IS OUT:**

The Solidisk Advanced Disk Filing System for the BBC computer is now available for both Solidisk DDFS users and Acorn DFS users as an upgrade for the DNFS 1.2ROM.

#### Standard features include:

1) Unlimited Catalogue entries (up to disc capacity) without any special preparation.

With Computer Concepts's Disc Doctor or Watford's DFS, you have to specify BEFORE formatting if you want 62 filenames. Once formatted, you can no longer modify the format.

With ROM 2.0, there is no limit to the number of files and programs you can have on the same diskette. Until it is completely full.

#### 2) Unlimited filesize.

This feature is sometimes a very good sales argument for databases.

# 3) Automatic Write Error Correction.

Every disk write operation is immediately followed by a read operation to ensure that the recorded data is free of all errors. Then if needs be, ROM 2.0 will restart the write operation from the unsafe sector.

4) Automatic 40/80 track stepping.

No other DFS allows you to directly backup a 40 track disk to an 80 track disk, even if you have a switchable disk drive, since the hardware cannot replace the software! ROM 2.0 allows you to backup and copy any 40 track disk to 80 track, single to double density (if available) even on the same drive without any special care.

5) DISC REPAIR FACILITIES.

Disc sector editor (\*DZAP), memory editor (\*MZAP), recover good sectors (\*RECOVER), re-write multiple sectors (\*RESTORE), Read disk format (\*R40 and \*R80), recover bad sectors and bad track (\*RTRACK), repair and restore bad sectors and track (\*WTRACK) and the powerful disc copy (\*DCOPY) which is capable of duplicating even some non BBC disks in under 1 minute in both single and double density (if available).

6) Tape to disc facilities.

This facility allows automatic transfer of all programs and most games to disk (\*TAPEDISC and \*LOADTAPE). Only in some cases (multi-part game cassettes), will you need Clare's utilities.

7) Wordprocessing facilities.

This facility allows !BOOT and other text files to be edited, saved and printed. Any screen mode and text up to 24k can be handled.

## 8) PRICE

The 2.0 ROM costs £20.00 to all Acorn DFS users. Included in the price are the Advanced DFS User Manual and VAT. As an upgrade for the 8k Solidisk DDFS 1.9, the price is only £10.00 inclusive. Please note that you do not have to send back your present DDFS ROM when ordering, but post it later in the return envelope sent together with the 2.0 ROM, quoting your credit card number as a guarantee.


# SOLIDISK KEYBOARD AND CPU ARE NOT JUST PRETTY . . .

The keyboard is 12 mm lower than the normal BBC case, 2-3 degrees more angled, weighs only 5lbs, does not skid about on the desk while enjoying 2 feet of freedom from the computer unit — and makes a lot of difference to the typist (even 2 fingered ones!).

The CPU accommodates 2 disk drives and withstands any heavy weight monitor while providing easy attachment for the whole system, CPU and disk drives, to the desk if need be. There is good ventilation to the power supply too and all untidy cables are hidden away.

# PRICE

The complete CPU and keyboard case costs £30.00 inclusive + £3.00 post and packing. The system could be yours free as part of the Mitsubishi twin discs offer. Actually the best thing that happened to the BBC computer for a long time!

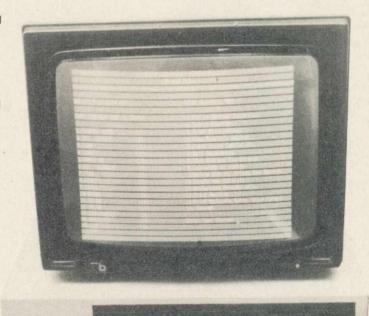

a

N

a

re

dA

0 (2

to


bla

ha

de

So

En

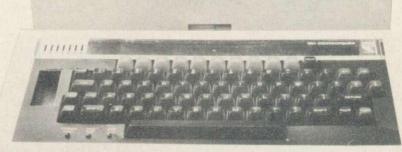

# SOLIDISK + MITSUBISHI BIG DEAL:

# THE MITSUBISHI 640K DISK OUTFIT:

This offer comprises:

- One Double Sided, 80 track Mitsubishi M4853 disk drive, cased in beige.

One Solidisk DDFS Single and Double Density Disc
 Upgrade.

- All leads and manuals (2).

- One Software package comprising 5 program diskettes as detailed below.

- Full one year guarantee.

- All for £209.95 inclusive of VAT and carriage.

# **IMPORTANT**

If you upgrade (now or later) to twin Mitsubishi M4853 disk system, Solidisk will offer you, subject to stock availability, absolutely free a CPU and keyboard case as shown earlier.

For that, you have the choice of ordering a 640k Mitsubishi disk outfit now and then later on, of returning your disk drive, enclosing payment of £160 to cover the second disk drive and carriage. Alternatively, save by ordering right now a complete twin Mitsubishi (2MB unformatted, 1.3 MB formatted) Fantastic Offer at only £359.95 inclusive.

# THE HARDWARE:

As described earlier as shown opposite.

# THE SOFTWARE:

The software comprises 5 diskettes, formatted in 80 tracks. Volume 1 contains the Word Processor, Volume 2 the Database, Volume 3 the new Spreadsheet 1.1, Volume 4 the disc, tape utilities and a blank dictionary.

It would take several pages to describe them all. In general, they are of the highest standard as our hardware products. Only the first 2 volumes will be described below.

described below

# Volume 1:

Solidisk Word Processor and Spelling Checker with English dictionary. Easier than View, Wordwise or Scribe, you enter the WP by \*WP (filename), then start typing. What you see on the screen will be exactly printed on paper.

You don't even need to read the manual twice, the most useful commands are all displayed on the top part of the screen.

This Word Processor features 80 column screen throughout, direct on screen justification, automatic margins, page numbering, printer special commands, Wordstar like editing commands for block move, block delete, block copy, print, save, load text to cursor, insert and overwrite, search and replace, total word count, word frequency count, free space, \* commands etc, etc.

Solidisk WP loads and saves texts under 1 second flat and also you may save the edited version as many times and under any filename you like.

And also better than any other wordprocessor, you can spell check your document without leaving it, simply type in Control-U.

It has self dictionary generating capability too. You may create any dictionary you like simply by entering the words.

Solidisk WP is also excellent as a training tutor for Wordstar, as used on most 16 bit computers.



# Volume 2:

Solidisk Database. Solidisk Database is a random access system, completely menu driven and more importantly, very easily customised to suit any particular need.

Important features include unlimited filesize and number of records, all maths functions and 80 column screen throughout. Solidisk Database is particularly simple to understand and easy to use. You are first presented with an option menu, which comprises 15 different options. Each option will then lead to a new menu and so on. Mostly you only have to enter an appropriate data or hit the RETURN key.

You can design a new database, list all records, edit them, merge them, split them, making mailshot with Solidisk WP etc. For instance, Solidisk telephone enquiries are dealt with by an ordinary BBC with twin Mitsubishi holding the last 4000 sales records. Typing in the name you retrieve the complete record quicker than you can remove your finger. It of course runs Solidisk Datafile.

# NEW PRODUCT ANNOUNCEMENTS

Solidisk MODEM.

Single chip FSK, Multistandard internal MODEM, requires no soldering, no adjustment.

Supplied with Menu Driven SoliComms 16k ROM, ready to be connected to any information provider such as Prestel or Gold. Auto dialling, auto answer, auto baud rate, auto error correction.

Available soon. Price: £39.95 inclusive.

# Solidisk Third Processor

Internally fitted 6502 compatible with Acorn Second Processor, 128k as standard, upgradable to 256k, 4 Sideways ROM sockets, software supplied in ROM allowing unused RAM to be loaded with Sideways Software or used as Silicon Disk. Available soon.

128k 6502 TP: £179.00 inclusive. 256k 6502 TP: £229.00 inclusive.



# IN STOCK:

- 1) NEW LOW PRICE EPROMS.
  2764s and 27128s are going down in price.
  5 x 2764s now cost you only 24.95 per pack.
  3 x 27128 now only 25.95 per pack.
- 2) PLENTY OF UVIPROMS AND UVIPACS.
- 3) ELECTRON DISK INTERFACE.
  This interface is BBC compatible and includes

3 Sideways ROM sockets.


It Plugs into the PLUS-1 and allows direct attachment of disk drive and software compatibility with BBC disks.

PRICE: £39.95 inclusive, P&P: £1.00.

# SOLIDISK LOCAL EXPERTS

We have people able to fit your equipment free of charge in all the following towns. If your area is not mentioned, ring the office!

Dunstable, Leighton Buzzard, Reading, Peterborough, Wimslow, Penzance, Torquay, Wimborne, Basildon, Stroud, Southampton, Hoddesdon, Watford, Bexley, Margate, Rochdale, Boston, London (all areas), Oldham, Hunts Cross, East Dereham, Rushden, West Bridgford, Wantage, Bambury, Grimsby, Kingston, New malden, Woking, Taunton, King Norton, Sutton Coldfield, Halesowen, Leamington Spa, Hassocks, Salisbury, Swallowne, Leeds, Huddersfield, Treowen Newtown, Newtownards, Co Fermanagh, Co Londonderry, Le Mesnil St Denis (France), Kalgoolie (Australia), Paramatta (New Sth Wales), Manawatu (New Zealand).

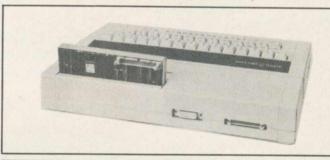


Short form price list. Full price list on request		
Qty Items	Prices	P&I
Sideways RAMs:		
SWR32	£58.95	£1.00
SWR64	£85.00	£1.0
SWR128	£149.95	£1.0
CPU & Keyboard		- 4
Case (both)	£30.00	£3.00
Solidisk DDFS.		
DDFS (with 1.9 ROM)	£38.95	£1.00
DDFS (with 2.0 ROM)	£48.95	£1.0
DFDC (with 2.0 ROM)	£54.95	£1.0
8" Controller	£69.95	£1.0
Special Offers.		
640k Disc Offer	£206.95	£3.0
1.3MB Fantastic Offer	£356.95	£3.0
Eprom Equipment.		
Programmer	£19.95	£1.0
Eraser	£19.95	£1.0
2764 x 5 new low price	£24.95	£1.0
27128 x 3 new low price	£25.95	£1.0
Datalife Diskettes.		0.78
MD525 SS/DD	£17.00	£1.0
MD550 DS/DD	£22.00	£1.0
MD557 2S/4D	£28.00	£1.0
65C02 with Software	£13.00	£1.0
Solimon-2 16k ROM	£13.00	£1.0
2.0 DFS 16k ROM	£20.00	£1.0
	Total =	

Address:					
nuuress.	1 - 1	RE W		19 191	
			1100	1 / / /	-
Barclay/Access:					
		T	TII		

Prices and specifications correct at time of going to press: we do reserve the right however to change without prior notice.

SOLIDISK TECHNOLOGY LIMITED, 17 SWEYNE AVE, SOUTHEND-ON-SEA, ESSEX SS2 6JQ. TEL. SOUTHEND (0702) 354674 (10 lines).

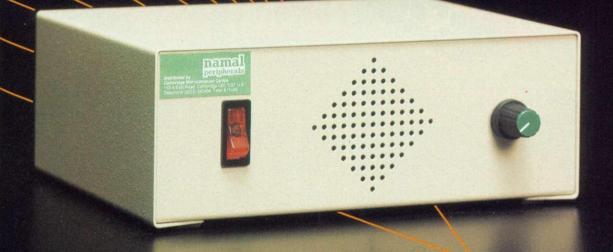

# Speech Computer

# **FEATURES**

- Instant conversion of typed ASCII text into speech
- Number pronouncing facility including £, \$ and arithmetic
- · Adjustable speed of speech
- Unlimited vocabulary
- Four inflexion levels
- Variable delay time between spoken phrases
- Selectable between phoneme mode/direct text to speech mode

# Dealer enquiries welcome **OEM** enquiries invited

Manufactured by: Cambridge Microcomputer Centre 153-54 East Road, Cambridge CB1 1DD Tel: (0223) 355404 Telex: 817445

# **SPECIFICATIONS**

CPU 780 ROM 8K RAM 2K Speech chip SC01A

Interfaces Centronics, Serial RS232 or 423 Baud rate Selectable from 50 to 9600

Audio output 500 m W Output impedance 8 ohm

Power requirements 220 V, 240 VAC, 50/60 HZ

Power consumption 20 VA

**Dimensions** 282(L) X 95(H) X 230 (W) mm

Weight

2 kg

- REAL VALUE FOR MONEY!
   Retailing at US \$200.00
   Generous dealer discount for quantity order.

Cambridge Microcomputer

THE PIONEER BRITISH SPEECH COMPUTER



The BBC Micro sound facilities have a lot of potential, MUROM will help you exploit this to the

Create your own tunes and sound sequences with ease, either with MUROM'S editor and a musical score or by using the Beeb to simulate a piano keyboard. Edit your creations with the full screen music editor. Then

	MUR	OM CHANNE	L EDITOR	
	CHANO	CHAN 1	CHAN 2	CHAN 3
HOTE	TEL	HÖËL	HOEL	NOEL
0008	s	C#1 1 0	F#0 5 4	555
0009	5	D#1 1 0	www	SSS
0010		E 1 1 1	www	555
0011		<b>www</b>	www	555
0012		A#1 1 0	<b>www</b>	555
0013		B 1 1 0	www	SSS
0014		D#1 1 0	D#3 5 1	SSS
0015		D#2 1 0	www	555
0016		F 2 1 1	SSS	555
0017		555	555	555
0018		SSS	SSS	SSS
0019		SSS -	SSS	SSS
0020		SSS	SSS -	555
0021		SSS	SSS	555
0022		555	SSS	SSS
0023		SSS	SSS	SSS
0024	5	SSS	SSS -	555
0025		SSS	SSS -	SSS -

switch to the envelope editor to tailor the tonal quality and select instrument type. Alternatively select one of the predefined instrument envelopes

Incorporate your music and sound sequences into any program of your own, to play back with or without MUROM plugged in. Playback is interrupt driven and may continue even while you run other programs.

Predefined instrument envelopes may be set up, e.g. \*FLUTE, \*SYNTH etc.

Instant sound effects may be called from Basic, e.g. \*ZAP, \*SIREN, \*EXPLODE etc.
MUROM is accompanied by a full instruction manual and

repertoire of music data on cassette.

# **COMMAND SUMMARY**

\*PLAY Calls the variable speed, interrupt driven playback

routine. Mode 7 display of tune playing. DISP

TEMPO
Alter tempo.

\*KEYB
Use BBC keyboard as a piano keyboard.

\*SCORE
Call up full screen music editor.

EDITOR SUB-COMMANDS:

MODE

Change from editing a single channel to editing all channels consecutively.

Move editor to any note in score.
Enable single stepping of music.
Change octave of any channel.
Change envelope of any channel.
Load previously created music.
Save edited score to disc or cassette.
Toggle note entry between note name and keyboard position.
Sound envelope editor.

"SYNTH ... etc. ten predefined envelopes.

"ZAP ... etc. ten predefined effects.
Transpose up or down by a number of semitones.
Disable colour output for monochrome screens. GO PLAY OCTV ENVL LOAD SAVE

KEY

\*ENVLP FLUTE, EXPLODE,

\*TRANS

BBC & Electron

CODE MONITOR NOW WITH **DUAL SCREENS** 





# 60 New Commands for debugging and

Our very popular machine code monitor has been enhanced by the addition of a number of new facilities, including Dual Screen Operation and full screen memory editor.

Now if you are debugging a game, or any other program with a visual display, you can single step through it instruction by instruction and actually watch the effect on the screen.

You can also revert to the monitor screen at the press of a least a grant projectors, adjusted a grant projectors.

key to examine registers, edit code, read variables, alter memory etc., and then switch back to your display screen and continue running (or single stepping), without losing your display.

# features include

- Exmon II : 60 machine code commands.
  Full dual screen operation.
  Full screen memory editor, input in hex, Ascii or as assembler instructions.
  - \* Search for hex, or Ascii string, including wildcards.
    \* Move memory block.

  - Verify that two blocks are the same.

  - Verify that two blocks are the same.

    \* Relocate code to run at another location.

    \* Fill memory with series of hex bytes or Ascii string.

    \* Execute all \* commands.

    \* Single step with skip option.

    \* Up to 10 breakpoints which may even be set in Rom.

    \* Conditional breakpoints . . . e.g. Break if register X=5.

    \* User definable work area.

Note: The Electron version does not feature dual screens.



£29.00 EXMON II £29.00 MUROM

Available from your local dealer and selected branches of W.H. SMITH'S 🧌 Prices include VAT





ACCESS & BARCLAYCARD ORDERS & ENQUIRIES: TEL ST. ALBANS (0727) 60263

MAIL ORDER (POST FREE) TO: BEEBUGSOFT, Mailing Dept 13,P.O. Box 109, High Wycombe Bucks.

# TOOLKIT ROM from BEEBUGSOFT

BASIC Programmer's Aid for the BBC micro



- 27 new commands to make life easier
- Saves hours in program development and debugging
- Supports both cassette and disc systems
- No command name conflict with other Roms
- Ideal for expert and novice alike
- Fitting instructions and a 32 page manual supplied
- You'll wonder how you ever managed without it

# SPECIAL **FEATURES**

SCREEN EDITOR An extremely powerful editor, allowing the use of cursor keys to list a program line-by-line in either

direction and move to any part of a program to overtype or insert new code and corrections.

ocedures and functions variables er option: 1 ch string: X% ALCUX, VX, WX, XX, YX)
AX=UX+2:ENDPROC

ERROR DETECTION Powerful facility to trap an error in a Basic program as it runs. It will then automatically enter the Screen Editor, display the line in error and position the cursor close to the statement at fault.

"TOOLKIT is an essential utility for all Basic programmers using the BBC Micro. . . . an indispensable aid packed full of powerful utilities." ... highly recommended,"

"The Beebugsoft Toolkit costs £27 and in my opinion is worth every penny. Since it has been installed in my BBC it has been used extensively and I can find no fault with it. Highly recommended to lazy programmers!"

# MANA

# **COMMANDS**

\*CHECK Verify a program or data in

memory with disc/cassette. \*CLEAR Clear all variables including

integers.

\*EDIT Enter full screen editor. 'FREE Display free memory and pseudo variables.

'HELP INFO Display a screenful of useful

system information. \*MEMORY

Display memory contents. Merge a program in memory \*MERGE with one on disc/cassette.

\*MOVE Move program to run at specified address.

\*NEW As NEW, but can be issued from

within a program. Cancel enhanced error \*OFF

handling. 'OLD

As OLD, but can be issued from within a program.

Auto error handling - enters \*ON

editor at line in error. \*PACK Efficient program compactor.

Intelligently recover bad \*RECOVER

programs.

Allow partial renumbering. \*RENUMBER Extended error reporting \*REPORT

facility.

\*SCREEN Screen dump to cassette or disc.

Display utilities menu. 'UTIL

'UTIL 1 String search.

'UTIL 2 String search and replace. \*UTIL 3 Move Basic program lines. List procedures and functions. 'UTIL 4

List values of A% to Z%. 'UTIL 5 \*UTIL 6 List numeric variables.

\*UTIL 7 List string variables. \*UTIL 8 List names of arrays.

Set up range for utilities 1 and 2.



PRICE £27.00 INC. VAT

Available from your local dealer and selected branches of W.H. SMITH'S


'UTIL 9



Access Orders and enquiries: Tel: ST. ALBANS (0727) 60263

Mail order (Post Free) to:

BEEBUGSOFT, Mailing Dept. 13 P.O. Box 109, High Wycombe, Bucks.

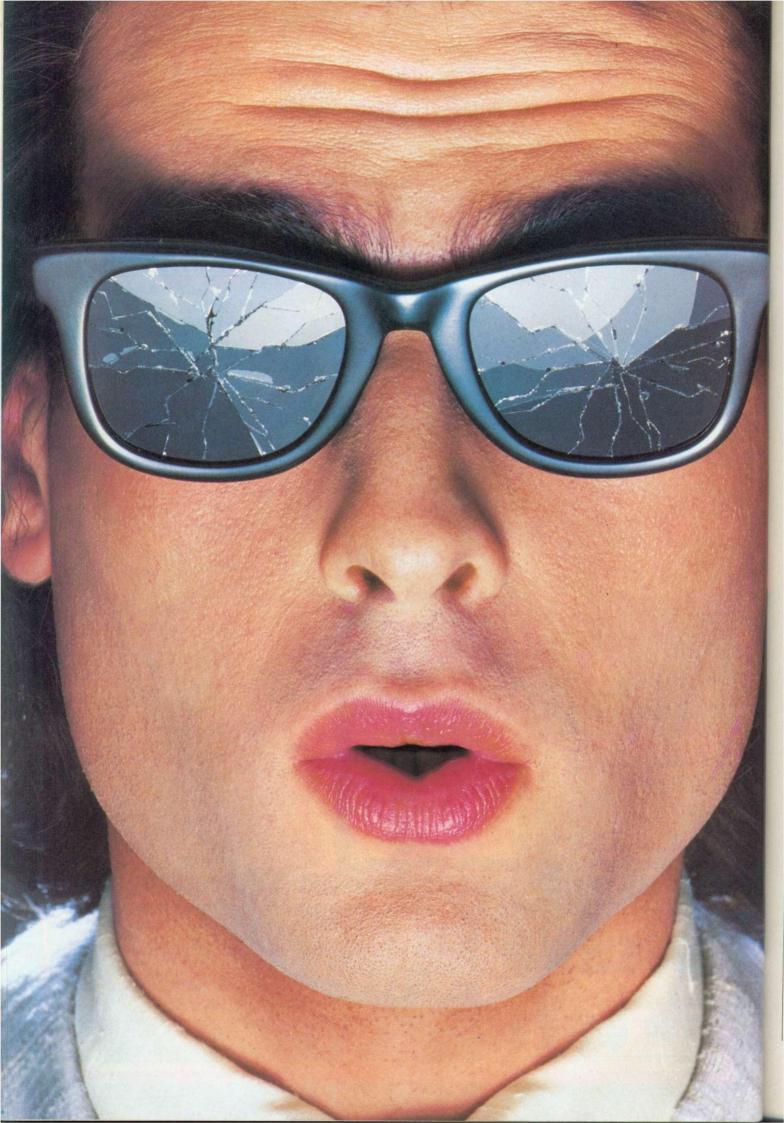

# You should see what he's just seen.

Micronet 800.

Stretching the mind of your micro far beyond its limits.

Micro evolution continues with this unique communications, information and software system. Set on our mainframes nationwide.

Includes 30,000 pages and access to Prestel™ with its full range of services.

A tremendous Communications section that networks you to thousands of other members across the country. Send and receive electronic messages and graphics at a touch of a button.

And there's the Chatline service, Swapshop and Teleshopping.

Check with daily updates on the very latest computer news.

Micronet also has its own huge facts data base.

And a choice of up-to-the-minute software to download absolutely free.

For only £13 a quarter and just a <u>local</u> telephone call whenever you want to connect up (that's only 22p per half hour at cheap rates) you could be part of Micronet.

The only accessory you need is a Modem.

A small price to pay to join the other visionaries on this exciting new system.

micronet 800

Fill in the coupon for more details and send to Micronet 800, Durrant House, 8 Herbal Hill, London EC1R 5EI.

But be warned, Micronet 800's features are almost limitless and constantly updating. So maybe you'd be better to call in at Laskys, John Lewis, main Boots or your local Micronet 800 Action Station.

To feast your eyes on all the amazing things it can do.

To: MICRONET 800, Durrant London EC1R 5EJ. Telephone ( Please send me the full facts abo	01-278 3143.
Name	
Make/Model of Micro	
Address	
Telephone	AUS
°For 97% of telephone users.	

Prestel is a trademark of British Telecommunications.

On Prestel

# See Micronet 800 in action.

AVON

Bath. Boots, 1 Marchants Passage, Southgate. Tel: 0225 64402.
Bristol. Avon Computer Rentals, 16 West Street, Old Market.
Tel: 0272 550600.
Bristol. Boots, 59 Broadmead.
Tel: 0272 293631.
Bristol. Laskys, 16-20 Penn Street. Tel: 0272 20421.
Clevedon. Computer Centre, 12A Old Street, Clevedon.
Tel. 0272 879514.
BEDFORDSHIRE

BEDFORDSHIRE
Bedford. Boots, The Harpur Centre,
Harpur Street. Tel: 0234 56231.
Dunstable. Dormans, 7-11 Broad
Walk. Tel: 0582 38302.
Leighton Buzzard. Datasine,
59 North Street. Tel: 0525 374200.
Leighton Buzzard. Milton Keynes
Music & Computers, 17 Bridge
Street. Tel: 0525 382504.
Luton. Hobbyte, Unit 16, The
Arndale Centre. Tel: 0582 457195.
Luton. Terry More, 49 George
Street. Tel: 0582 23391.

BERKSHIRE BEDFORDSHIRE

BERKSHIRE Slough. MV Games, 245 High Street. Tel: 75 21594.

BUCKINGHAMSHIRE
Bletchley, RAMS Computer
Centre, 117 Queensway.
Tel: 0908 647744.
Chesham. Reed Photo &
Computers, 113 High Street.
Tel: 0494 783373.

Cambridge, Boots, 65-67 Sidney Street and 28 Petty Curry Street. Tel: 0223 350213 Cambridge. Cambridge Compute Store, 4 Emmanuel Street. Tel: 0223 358264

Cambridge. Logic Sales, Unit 6, Midgate Parade, Peterborough. Tel: 0733 49696.

Peterborough. Boots, 40-42 Bridge Street, Queensgate. Tel: 0733 63352.

CHESHIRE

CHESHIRE
Chester. Boots, 47-55 Foregate
Street. Tel: 0244 28421
Chester. Computer Link, 21 St.
Werburgh Street. Tel: 0244 316516.
Chester. Laskys, 7 The Forum,
Northgate Street. Tel: 0244 317667.
Crewe. Midshires Computer
Centre, 68-78 Nantwich Road.
Tel: 0270 211086
Fllesmere Port RER TV & Audio

Tel: 0270 211086

Ellesmere Port. RFR TV & Audio, 1 Pooltown Road, Whitby.
Tel: 051-356 4150.

Hyde. C Tech Computers, 184
Market Street. Tel: 061-366 8223.

Macclesfield. Camera Computer
Centre, 118 Mill Street.
Tel: 0625 27468

Macclesfield. Computer Centre, 68 Chestergate. Tel: 0625 618827.
Marple Computer Centre 30-32 Market Street.
Tel: 061-427 4328

Stockport. National Micro Centres

Tel: 061-427 4328
Stockport. National Micro Centres
36 St Petersgate. Tel: 061-429 8080
Widnes. Computer City, 78
Victoria Road. Tel: 051-420 3333.
Wilmslow. Wilmslow Micro
Centre. 62 Grove Street.
Tel: 0625 530890.

CLEVELAND Middlesbrough. Boots, 88-90 Linthorpe Road, The Cleveland Centre. Tel: 0642 249616

Tel: 0642 249616.

CUMBRIA

Kendal. The Kendal Computer
Centre, Stramongate.
Tel: 0539 22559.
Penrith. Penrith Communications
14 Castlegate. Tel: 0768 67146.
Whitehaven. P D Hendren,
15 King Street. Tel: 0946 2063.
Workington. Technology Store,
12 Finkle Street. Tel: 0906 66972.

DERBYSHIRE

Alfreton. Gordon Harwood, 67-71 High Street. Tel: 0733 836781 Chesterfield. Boots, 35-37 Low Pavement, Market Place. Tel: 0246 203591. Tel: 0246 203591.

Chesterfield. Computer Stores, 14 Stephenson Place.
Tel: 0246 208802.

Derby. Boots, 1 Devonshire Walk. Tel: 0322 45886.

DEVON

Exeter. Boots, 251 High Street, Tel: 0392 32244. Exeter. Open Channel, Central Station, Queen Street. Tel: 0392 218187. Paignton. Computer Systems Ltd, 35 Hyde Road. Tel: 0803 524284. Plymouth. Syntax, 76 Cornwall Street. Tel: 0752 28705.

eaton Computer Shop, 1c Harbour Road, Tel: 0297 22347. Tiverton. Actron Microcomputers, 37 Bampton Street. Tel: 0884 252854. DORSET

Bournemouth. Lansdowne Computer Centre, 1 Lansdowne Crescent, Lansdowne. Tel: 0202 20165. Tel: 0202 20165. Dorchester. The Paper Shop, Kings Road. Tel: 0305 64564. Poole. Lansdowne Computer Centre, 14 Arndale Centre. Tel: 0202 670901.

Tel: 0202 670901.

ESSEX

Basildon. Basildon Software
Centre, 78-80 Liberty Shopping
Hall, East Square. Tel: 0268 27922.

Braintree. Mirage Microcomputers
Ltd, 24 Bank Street. Tel: 0376 48321.
Chelmsford. Maxton Hayman,
5 Bromfield Road. Tel: 0245 354595.
Chelmsford. Way In Computers,
7 Village Square, Chelmer Village.
Tel: 0245 467858.
Colchester. Boots. 5-6 Lion Walk.

7 Village Square, Chelmer Village.
Tel: 0245 467858.
Colchester. Boots, 5-6 Lion Walk.
Tel: 0206 577303.
Colchester. Colchester Computer
Centre, 3a Short Wyre Street.
Tel: 0206 47242.
Grays. H. Reynolds, 28a Southend
Road. Tel: 0375 31641.
Harlow. Harlow Computer Centre,
17 Staple Tye. Tel: 0279 22846.
Hornchurch. Comptel Computer
Systems, 112a North Street.
Tel: 0402 446741.
Ilford. Boots, 177-185 High Road.
Tel: 01-553 2116.
Romford. Software Plus,
72 North Street. Tel: 70 65271.
Southend-on-Sea. Computerama,
88 London Road. Tel: 0702 335443.
Southend-on-Sea. Computer
Centre, 336 London Road.
Tel: 0702 337161.
Southend-on-Sea. Estuary

Tel: 0702 337161.

Southend-on-Sea. Estuary
Personal Computers, 318 Chartwell
North, Victoria Circus Shopping
Centre. Tel: 0702 614131.

GLOUCESTER
Cheltenham. Laskys, 206 High
Street. Tel: 0242 570282.
Cheltenham. Screen Scene, 144

Georges Road. Tel: 0242 528979. Gloucester. Boots, 38-46 Eastgate Street. Tel: 0452 423501.

HAMPSHIRE Basingstoke. Fishers, 2-3 Market Place. Tel: 0256 22079. Southampton. Business Electronics, Micromagic At Atkins, 7 Civic Centre Road. Tel: 0703 25903 Waterlooville. GB Microland, 7 Queens Parade, London Road. Tel: 0705 259911.

Tel: 0705 259911.

HERTFORD

Hitchin. County Computers,
13 Bucklesbury. Tel: 0462 36757.

Potters Bar. the Computer Shop,
107 High Street. Tel: 0707 44417.

Stevenage. DJ Computers,
11 Town Square. Tel: 0438 65501.

Watford. SRS Microsystems,
94 The Parade, High Street.
Tel: 0923 26602.

Watford. Watford Electronics,
Cardiff Road. Tel: 0923 405588.

Welwyn Garden City. DJ
Computers, 40 Fretherne Road.
Tel: 96 28444.

HUMBERSIDE

HUMBERSIDE Beverley. Computing World, 10 Swabys Yard, Dyer Lane. Tel: 0482 881831.

KENT
Ashford. DGH, 10 North Street.
Tel: 0233 32597.
Ashford. Geerings of Ashford, 80 High Street. Tel: 0233 33366.
Bromley. Boots, 148-154 High Street. Tel: 01-460 6688.
Bromley. Computers Today.
31 Market Square. Tel: 01-290 5652.
Bromley. Walters Computers, Army & Navy, 64 High Street.
Tel: 01-460 9991.
Chatham. Boots. 30-34 Wilmout. Chatham. Boots, 30-34 Wilmott Square, Pentagon Centre. Tel: 0634 405471. Gravesend. Gravesend Home Gravesend. Gravesend Home Computers, 39 The Terrace. Tel: 0474 23871. Gillingham. Regal Software Supplies, 49 High Street. Tel: 0634 579634.

Tel: 0634 579634.

Maidstone. Kent Micros, 51 Union Street. Tel: 0622 52784.

Rainham. Microway Computers, 39 High Street. Tel: 0634 376702.

Sevenoaks. Emest Fielder
Computers, Dorset Street.
Tel: 0732 456800.

Shortlands. The Village House of Computers, 87 Beckenham Lane.
Tel: 01-460 7122.

65 High Street. Tel: 0795 25677.

Tunbridge Wells. Modata
Computer Centre, 28-30 St. Johns
Road. Tel: 0892 41555.

LANCASHIRE

LANCASHIRE
Blackburn. Tempo Computers,
9 Railway Road. Tel: 0254 691333.
Blackpool. Blackpool Computers
Store, 179 Church Street.
Tel: 0253 20239.
Burnley. IMO Business Systems,
39-43 Standish Street.
Tel: 0282 54299.
Preston. 4Mat Computing,
67 Friargate. tel: 0772 561952. Preston. 4-Mat Computing 67 Friargate, tel: 0772 561952. Preston. Laskys, 1-4 Guildhall Arcade. Tel: 0772 59264. Wigan. Wildings Computer Centre, 11 Mesnes Street. Tel: 0942 22382.

LEICESTERSHIRE LEIGESTERSHIRE
Leicester, Boots, 30-36 Gallowtree
Gate. Tel: 0533 21641.
Market Harborough. Harborough
Home Computers, 7 Church Street.
Tel: 0858 63056.

Tel: 0858 63056.

LONDON
W1. Computers of Wigmore
Street, 104 Wigmore Street.
Tel: 01 486 0373.
W1. Laskys, 42 Tottenham Court
Road. Tel: 01-636 0845.
W1. Lion House, 227 Tottenham
Court Road. Tel: 01-637 1601.
W1. Sonic Foto Micro Center,
256 Tottenham Court Road.
Tel: 01-580 5826.
W1. Tomorrows World Today,
27 Oxford Street. Tel: 01-439 7799.
W1. Walters Computers. DH Evans.
W1. Walters Computers.

W1. Tomorrows World Today, 27 Oxford Street. Tel: 01-439 7799. W1. Walters Computers, DH Evans, Oxford Street. Tel: 01-629 8800. WC1. Transam Micro Systems, 59-61 Theobalds Road. Tel: 01-405 5240. W5. Laskys, 18-19 Ealing Broadway Shopping Centre. Tel: 01-567 4717. W8. Walters Computers, Barkers, Kensington High Street. Tel: 01-937 5432. SE7. Vic Oddens Micros, 5 London Bridge Walk. Tel: 01-403 1988. SE9. Square Deal,

Tel: 01-403 1988.
SE9. Square Deal,
373-375 Footscray Road,
New Eltham. Tel: 01-859 1516.
SE15. Castlehurst Ltd, 152 Rye
Lane, Peckham. Tel: 01-639 2205.
EC2. Devron Computer Centre,
155 Moorgate. tel: 01-638 3339.
N14. Logic Sales, 19 The Bourne,
The Broadway, Southgate.
Tel: 01-882 4942.
N22. Boots, 38-40 High Road

New Johnson Street, Hendon. 128 January Southgate. N22. Boots, 38-40 High Road, Wood Green. Tel: 01-881 0101. NW3. Maycraft Micros, 58 Rosslyn Hill, Hampstead. Tel: 01-431 1300. NW4. Davinci Computer Store, 112 Brent Street, Hendon. Tel: 01-202 2272. NW7. Computers Inc, 86 Golders Green. Tel: 01- 209 0401. NW10. Technomatic, 17 Burnley Road, Wembley. Tel: 01-208 1177. MANCHESTER

MANCHESTER
Bolton. Computer World UK Ltd,
208 Chorley Old Road.
Tel: 0204 494304. Tel: 0204 494304.

Manchester. Boots, 32 Market
Street. Tel: 061-832 6533.

Manchester. Laskys, 12-14 St.
Marys Gate. Tel: 061-833 0268.

Manchester. Mighty Micro,
Sherwood Centre, 268 Wilmslow
Road, Fallowfield. Tel: 061-224 8117.

Manchester. NSC Computer
Shops 29 Hanging Ditch. Shops, 29 Hanging Ditch Tel: 061-832 2269. Manchester. Walters Computers, Kendal Milne, Deansgate. Tel: 061-832 3414.

Oldham. Home & Business Computers, 54 Yorkshire Street. Tel: 061-633 1608. Swinton. Mr Micro, 69 Partington Lane. Tel: 061-728 2282.

Lane. Tel: 061-728 2282.

MERSEYSIDE

Heswall. Thornguard Computer
Systems, 46 Pensby Road.
Tel: 051-342 7516.
Liverpool. Hargreaves, 31-37
Warbreck Moor, Walton.
Tel: 051-525 1782.
Liverpool. Laskys, Dale Street.
Tel: 051-236 3298.
St. Helens. Microman Computers,
Rainford Industrial Estate, Mill
Lane Rainford. Tel: 0744 885242.
Southport. Central Studios,
38 Eastbank Street. Tel: 0704 31881.

MIDDLESEX

MIDDLESEX Enfield. Laskys, 44-48 Palace Garden Shopping Centre. Tel: 01-363 6627. Harrow. Camera Arts, 42 St. Anns Road. Tel: 01-427 5469. Harrow. Harrow Micro, 24 Springfield Road. Tel: 01-427 0098.

Hounslow. Boots, 193-199 High Street. Tel: 01-570 0156. Southall. Twillstar Computers Ltd, 7-Regina Road. Tel: 01-574 5271. Teddington. Andrews, Broad Street. Tel: 01-997 4716. Twickenham. Twickenham Computer Centre, 72 Heath Road. Tel: 01-892 7896. Uxbridge. JKL Computers, 7 Windsor Street. Tel: 0895 51815. NORFOLK Norwich. Adams, 125-129 King Street. Tel: 0603 22129. NOTTINGHAMSHIRE Sutton in Ashfield. HN & L. Fisher, 87 Outram Street. Tel: 0623 54734. OXFORDSHIRE

87 Outram Street. Tel: 0623 54734.

OXFORDSHIRE
Abingdon. Ivor Fields Computers.
21 Stern Street. tel: 0235 21207.
Banbury. Computer Plus,
2 Church lane. Tel; 0295 55890.
Oxford. Absolute Sound & Video,
19 Old High Street, Headington.
Tel: 0865 65661.
Oxford. Science Studio, 7 Little
Clarendon Street. Tel: 0865 54022.

SCOTLAND.

Clarendon Street. Tel: 0865 54022.
SCOTLAND
Aberdeen. Boots, 133-141 Union
Street. Tel: 0224 585349.
Edinburgh. Boots, 101-103 Prince
Street. Tel: 031-225 8331.
Glasgow. Boots, 200 Sauchiehall
Street. Tel; 041-332 1925.
Glasgow. Boots, Union Street
and Argyle Street. Tel; 041-248 7387.
Glasgow. Tom Dixon Cameras,
15-17 Queen Street.
Tel: 041-204 0826.
SHROPSHIRE

Tel: 04Ī-204 0826.

SHROPSHIRE

Shrewsbury. Clairmont
Enterprises, Hills Lane.
Tel: 3647 52949.

Shrewsbury. Computerama, 13
Castlegate. Tel: 0743 60528.

Telford. Computer Village Ltd,
2/3 Hazeldine House, Central
Square. Tel: 0952 506771.

Telford. Telford Electronics,
38 Mall 4. Tel: 0952 504911.

STAFFORDSHIRE

STAFFORDSHIRE STAFFORDSHIRE
Newcastle-under-Lyme.
Computer Cabin, 24 The Parade,
Silverdale. Tel: 0782 636911.
Stafford. Computerama, 59
Foregate Street. Tel: 0785 41899.
Stoke-on-Trent. Computerama,
11 Market Square Arcade, Hanley
Tel: 0782 268524.

SUFFOLK
Bury St. Edmunds. Boots,
11-13 Cornhill. Tel: 0284 701516.
Bury St. Edmunds. Suffolk
Computer Centre, 1-3 Garland
Street. Tel: 0284 70503.

Street. Tel: 0284 705503.

SURREY
Bagshot. P & H Electronics, 22-24
Guildford Road. Tel: 0276 73078.
Croydon. Laskys, 77-81 North End.
Tel: 01-681 8443.
Croydon. The Vision Store,
53-59 High Street. Tel: 01-686 6362.
Croydon. The Vision Store,
96-98 North End. Tel: 01-681 7539.
South Croydon. Concise
Computer Consultants, 1 Carlton
Road. Tel: 01-681 6842.
Epsom. The Micro Workshop,
12 Station Approach.
Tel: 0372 721533.
Guildford. Walters Computers,
Army & Navy, 105-111 High Street.
Tel: 0483 68171.
Wallington. Surrey Micro Systems,

Tel: 0483 68171.
Wallington. Surrey Micro Systems, 53 Woodcote Road. Tel: 01-647 5636.
Woking. Harpers, 71-73
Commercial Way. Tel: 0486 225657.
SUSSEX
Bexhill-on-Sea. Computerware, 22 St. Leonards Road.
Tel: 0424 223340.

Brighton. Boots, 129 North Street. Tel: 0273 27088. Brighton. Gamer, 71 East Street. Tel: 0273 728681. **Brighton.** Laskys, 151-152 Western Road. Tel: 0273 725625.

Crawley. Gatwick Computers, 62 The Boulevard. Tel: 0293 37842. Crawley. Laskys, 6-8 Queensway. Tel: 0293 544622. Eastbourne. Boots, 15 Eastbourne Arndale Centre. Tel: 03232 7742.

TYNE & WEAR
Newcastle-upon-Tyne. Boots, Eldon Square. Tel: 0632 329844.
Newcastle-upon-Tyne. Laskys, 6 Northumberland Street.
Tel: 0632 617224.

Newcastle-upon-Tyne. RE Computing, 12 Jesmond Road. Tel: 0632 815580.

WALES Aberdare. Inkey Computer Services, 70 Mill Street, The Square, Trecynon. Tel: 0685 881828. Aberystwyth. Aberdata at Galloways, 23 Pier Street.

Aberystwyth. Aberdata at Galloways, 23 Pier Street.
Tel: 0970 615522.
Cardiff. Boots, 26 Queens Street & 105 Frederick Street.
Tel: 0222 31291.
Cardiff. Cardiff Microcomputers, 46 Charles Street. Tel: 0222 373072.
Cardiff. The Computer Shop, 41 The Hayes. Tel: 0222 26666.
Cardiff. Laskys, 32-36 Town Wall, St. Davids Centre. Tel: 0222 41619.
Cardiff. Randall Cox, 18/22 High Street Arcade. Tel: 0222 397162.
Mold. Clwyd Personal Computers, Unit 19, Daniel Owen Precinct.
Tel: 0352 56842.
Newport. Gwent Computers,

Tel: 0352 56842.

Newport. Gwent Computers,
92 Chepstow Road. Tel: 0633 841760.

Swansea. Boots, 17 St. Marys
Arcade, The Quadrant Shopping
Centre. Tel: 0792 43461.

Swansea. The Microstore, 35-36
Singleton Street. Tel: 0792 467980.

WARWICKSHIRE Coventry. Coventry Micro Centre, 33 Far Gosford Street. Tel: 0203 58942.

Tel: 0203 58942.
Coventry. Impulse Computer
World, 60 Hertford Street Precinct.
Tel: 0203 553701.
Coventry. JBC Micro Services, 200
Earlsdon Avenue, North Earlsdon.
Tel: 0203 73813.
Coventry. Laskys, Lower Precinct.
Tel: 0203 27712.

Tel: 0203 27712. Leamington Spa, IC Computers 43 Russell Street. Tel: 0926 36244. Leamington Spa. Leamington Hobby Centre, 121 Regent Street.

Leamington Spa. Leamington Hobby Centre, 121 Regent Street. Tel: 0926 29211. Nuneaton. Micro City, 1a Queens Road. Tel: 0203 382049. Rugby. O.E.M., 9-11 Regent Street. Tel: 0788 70522.

WEST MIDLANDS

Birmingham. Boots, City Centre House, 16-17 New Street. Tel: 021-643 7582. Birmingham. Laskys, 19-21 Corporation Street. Tel: 021-632 6303. Dudley. Central Computers, 35 Churchill Precinct. Tel: 0384 238169. Stourbridge, Walters Computer Systems, 12 Hagley Road, Tel: 0384 370811.

Tel: 0384 370811.

Walsall. New Horizon, 1 Goodall Street. Tel: 0922 24821.

West Bromwich. DS Peakman, 7 Queens Square. Tel: 021-525 7910.

YORKSHIRE

Bradford. Boots, 11 Darley Street. Tel: 0274 390891.

Leeds. Boots, 19 Albion Arcade, Bond Street Centre.
Tel: 0532 33551.

Sheffield. Laskys, 58 Leopold Street. Tel: 0742 750971.

York. York Computer Centre, 7 Stonegate Arcade.
Tel: 0904 641862.



# **ECHNOMATIC**

**BBC Computer & Econet Referral Centre** 17 Burnley Road, London NW10 1ED Tel: 01-208 1177 305 Edgware Road, London W2 Tel: 01-723 0233

Please add carriage: (a) £8; (b) £2.50; (c) £1.50; (d) £1 and 15% VAT to order value

OCOON	MOLITED	SYSTEMS
HOOKIN	HIPUIER	STOLEILIS

BBC Model B	£299(a)
BBC Model B + DFS	£346(a)
BBC Model B + Econet	£335(a)
BBC Model B + Econet + DFS	£399(a)
ACORN 10Mbyte Hard Disc	1300(a)
BBC Dust Cover	Contract to the Contract of th
BBC Carrying Case	CONTRACTOR OF THE PARTY OF THE

# UPGRADE KITS

... £55 (d) 1.2 O/S Rom. £7.50 (d) Acorn DFS Kit £89 (d) DNFS Rom. £17.50 (d) Econet Kit ...... £55 (d) 4816AP RAM £1.50 (d) Basic II Rom with User Guide ...... £22.50 (d) 1.2 O/S Rom..... £7.50 DNFS Rom..... £17.50 4816AP Memory upgrade RAM (each) £2.00



We are pleased to announce the launch of our online information system. Pages available will include:

- \*New Products \*Comment Box
- \*Technical Pages \*Comments on Stock and availability of Products
- \*Placing of Orders and many others. . . .

Techno-Line 01-452 1500 Weekdays: 18.30 to 09.30 Sunday: 24 hours

MAY'85

Please note that a 'Prestel' type terminal must be used. **ECONET ACCESSORIES** 

Econet Starter Kit£85 (b)	Printer Server Rom£41 (d)
File Server Level I£75 (d)	10 Station Lead Set £26 (c)
File Server Level II£210 (d)	Adv. Econet User Guide £10 (d)

### **ACORN BITSTICK**

The renowned 'BITSTICK' graphic CAD package. Using the onscreen menu and colour pallette, it can draw freehand as well as lines and shapes with great accuracy. Any part of a drawing may be magnified many times, and up to 48 drawings may be saved on a disc. In total, a friendly yet sophisticated CAD system offering tremendous value. £325(a)

ACORN's multiplotter driver for Bitstick graphics. £79(c) (All popular plotters included)

Epson FX80 screen dump routine for Bit Stick. £35 (d)

#### ACORN WINCHESTER DRIVES

Acorn Hard Discs are now available in 10 and 30 Mbyte versions. The drive plugs into the 1 MHz bus. The ADFS filing system with its hierarchical filing structure provides excellent file management facilities. Data transfer rate of 1 Mbit/sec and average seek time of 85 ms provides the user very fast access to very large amounts of data. File Server Level III can be installed on the Hard Disc before delivery.

10 Mbyte Winchester Drive £1300 (a)

30 Mbyte Winchester Drive £1999 (a)

Add £200 to the cost if File Server Level III is to be installed.

# **ACORN Z8O 2nd Processor**

This processor converts your BBC into a CP/M based business micro providing it with computing power a professional would need. The free software package supplied includes three office productivity programs (word processor, spreadsheet and a database), NUCLEUS report generator, a business program ACCOUNTANT plus three programming languages and comprehensive manuals.

All for only £348 (a)

See our section on CP/M software for other packages available for use with this processor.

# ACORN 6502 2nd Processor

This processor is designed for the serious computer user who wants to get even more out of his micro. It increases memory by upto 44K for BASIC programs and upto 60K for assy. lang. programs regardless of the screen mode (Ideal for VIEW and WW+). Programs run upto 50% faster. This combination offers computing power of systems costing way twice as much £175 (a) NEW 3

# ACORN P-SYSTEM

The long-awaited-for portable operating system has arrived. Intended for use with the 6502 Second processor, this portable operating system is a complete implementation and comes complete with a Filer, Editor, and compilers for two languages, USCD PASCAL and FORTRAN-77. Widely used in universities and colleges, as well as being popular with business software authors, P-System is user-friendly, offering ease of program development as well as portability. £263(b)

# TORCH GRADUATE SYSTEM

The ultimate upgrade - converts your BBC into a powerful 16 Bit business computer and makes it disc and hardware compatible with the IBM PC. With 256K RAM and single/dual drives, it simply connects through the 1MHz bus. (The disc drives can be used in both BBC and IBM mode, without requiring a disc interface.) The top-of-the-range Model G800/2 comes complete with the free Xchange range of software, and includes a full-feature word processor, a financial planner, a database and a business graphics package all 'linkable'

(This highly acclaimed software is now available for the IBM PC at a cost of over £400!)

G800/2: £999(a)

Technical Information: Automatic V21/V23 for both 300/300

and 1200/75 Baud. Standard Viewdata/Prestel Protocols.

# OTHER TORCH PRODUCTS

Z80 Card ZEP100 with PERFECT Software P + Z80 Basic	ackages £275,(a)
Z80 Disc Pack ZDP240 with software as above	£650 (a)
20Mb Hard Disc + 1 x 400K Floppy Drive	£1,950 (a)
Unicorn 68000, Unix OS/Z80B/512K, 20MB	
Hard Disc. 400K Floppy	£3495 (a)

# TECHTEL 'IN-HOUSE' INFORMATION CENTRE

A unique concept that allows you to provide information in public places. A member of the public is able, without assistance, to view information about your products or services.

Techtel is a complete package allowing you, in conjunction with a BBC and disc drive, to set up an in-house 'Viewdata' type information system. The friendly software package will allow you to set up a 'Prestel' type database of up to 700 pages, (depending on drive) containing both graphics and text. This menu-driven database could hold details of products or services supplied by your company. Typical user would be any company needing to pass information to the public e.g. banks, dept. stores, hotels, travel & estate agents etc. etc.

The package also includes a 'carousel' type display, allowing each frame to be displayed for a specified time, before moving on to the next frame.

A unique facility of Techtel is its 'through-glass' keyboard. Its special numeric keyboard can be placed inside a shop window. yet may be used by customers outside - thus allowing the unit to be left unattended.

The package includes the special keypad, Teletext Loader and Editor, and full instructions. £175(b)

# PRINTERS

ALL PRINTERS HAVE A 12 MONTH GUARANTEE

# DOT MATRIX

#### KAGA TAXAN:

- \* Epson Compatible Control codes \* 80 or 156 Column \* NEAR LETTER QUALITY Print using 23 x 18 matrix
- \* Text Modes include Normal, Italic, Enlarged, Condensed, Super/Sub Script, Proportional
  - \* Dot Addressable graphics in various modes
  - \* 3K buffer which can also hold user defined characters
    - \* Extra ROM/RAM socket for custom print fonts
  - \* Friction & Tractor feed with built in paper roll holder

# KP810 (80 column) £255 (a) KP910 (156 column) £349 (a) EPSON:

The industry standard printer offering the quality, reliability and versatility.

RX80T £210 (a) RX80FT £220 (a) RX100 £345 (a) FX80 £315 (a) FX100 £430 (a)

# **BUFFALO 32K Buffer for EPSON PRINTERS**

This compact 32K buffer can be fitted internally on any EPSON printer within a few minutes. It does not require external power or any modification to the printer. It will hold about 15 A4 pages of text freeing your computer for other jobs in a fraction of the time it would normally have to wait for the printer to finish all that printing. Supplied with full fitting instructions. £99(d)

#### DAISY WHEEL

BROTHER HR15: • 14 cps • 3K Buffer • Two colour printing • Proportional spacing \* Underline \* \* Bold \* Shadow print \* Super/Subscript + many other features.

# BROTHER HR15 £325(a)

JUKI 6100: • 15 cps • 2K Buffer • Switchable 10/12/15 cpi • Proportional printing • Linear Motor for max reliability.

JUKI 6100 £325(a)


# VIEW & VIEWSHEET PRINTER DRIVER GENERATOR

This printer driver generator comes with predefined drivers for EPSON FX80, JUKI 6100 and lets you generate printer driver for any BBC compatible printer. Gone are the days when you had to buy dedicated drivers. The screen driver program supplied with it lets you view the text as it is going to appear on the paper including the bold, italics, underlined characters etc. Supplied on disc. £10(d)

# GRAPHICS PLOTTER/WORK STATION

Equally at home in the artists studio, hobbyists workshop, science lab or a classroom, this system has something to offer for everyone. The 3 colour graphics plotter provides both precision and versatility. The carriage can be moved with an accuracy of 0.025cm over an A4 area — the plotter being able to accept paper and far thicker materials at sizes of up to A3. The basic plotter carries 3 colour pens each of which is software selectable. Additional accessories greatly enhance the versatility of the unit without losing the accuracy. The servo controlled drill/router, and scriber can be used on various materials. A unique Opto Sensor (using a Hewlett Packard device) turns the plotter into a high-res scanning digitiser to read & store whole diagrams and photographs. Workstation comes complete all accessories.

# Workstation Complete £490(a)

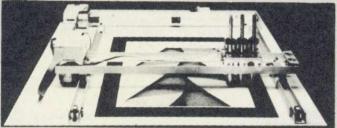

# Basic Plotter £270(a)

Opto Sensor £72(c) Drill/Router Attachment £79(c) Power Supply: PS12V £42(c) PS24V £78(c) Scandump Utility Disc £14.95 (d)

# **TECHNOMATIC**

All prices exclude VAT

# PRINTER ACCESSORIES

#### EPSON

Paper Roll Holder £17(d) FX80 Tractor Attachment £37(c).
Interfaces: 8143 RS232 £28(c); 8148 RS232 + 2K £57(c);
8132 Apple II £60(c); 8165 IEEE + Cable £65(c)
Serial & Parallel Interfaces with larger buffers available.
Ribbons: RX/FX/MX80 £5.00(d); RX/FX/MX 100 £10(d);
FX80 Dustcover £4.50(d)

KAGA TAXAN: RS 232 Interface + 2K buffer £78(c); Ribbon KP810/910 £6(d)

JUKI: RS232 Interface £65(c); Spare Daisy Wheel £14(d); Ribbon £2.50(d); Sheet Feeder £182(a) Tractor Feed Attach £129(a)

BROTHER HR15: Sheet Feeder £189(a) Ribbons Carbon or Nylon £4.50(d)

BBC Printer Lead: Parallel (42") £7(d); Serial £7(d) Printer Leads can be supplied to any other length.

Plain Fanfold Paper with extra fine perforation (Clean Edge): 2000 sheets  $9.5'' \times 11'' \, £13$ (b) 2000 sheets  $14.5'' \times 11'' \, £18.50$ (b) Labels per 1000s: Single Row  $3\frac{1}{2}'' \times 17/16'' \, £5.25$ (d) Triple Row  $2-7/16'' \times 17/16'' \, £5.00$ (d)

## **EPSON HI-80 PLOTTER**

EPSON technology has once again scored a first by introducing a sophisticated A4 size plotter that does not need specialised software or programming skills to operate it and yet keep the cost within the reaches of all computer users. Features include 4 pens at a time — upto 10 colours to choose from, a variety of pen nibs, high speed plotting. Powerful software command codes include single commands to plot circles, ellipses or triangles. Line or bar graphs and pie charts can be plotted in a variety of exciting styles very simply by keying in the data into the computer. Detailed leaflet on request. £399 (a)

# PRINTER SHARER/BUFFER

A unique sharer/buffer that provides a simple solution to improve system utilisation. It can be connected to up to three computers and it will automatically switch between the computers to scan for data — no manual switching required. High speed data input rate to the buffer cuts down the normal waiting time for the computers for the printing operation to complete and thus allowing the computers to be used for other uses. The 64K buffer would hold over 30 A4 pages of text.

Facilities include: COPY, PAUSE AND RESET. LED indication for percentage of memory available and data source. Mains powered. Send for detailed specification.

TSB 64 Buffer/Sharer £245(a) BBC Cable Set £30

## PERIPHERAL & COMPUTER SHARERS

We now offer an extended range of peripheral sharers to allow the user to switch between computers, printers and modems. High quality switching mechanisms housed in fully shielded metal cases ensure reliability. No external power input required.

All lines on the sharers are fully switched (36 on parallel and 25 on serial)

	Parallel	Serial
3 Computers to a Printer	36V36-3 £69(c)	25V25-3 £64(c)
4 Computers to a Printer	36V36-4 £85(c)	25V25-4 £74(c)
2 Computers/2 Printers X-over	36V36-X £69(c)	25V25-X £69(c)
BBC Cable Set 3 to 1 (1m ea.)	£32(c)	£34(c)
BBC Cable Set 4 to 1 (1m ea.)	£39(c)	£41(c)

#### Computer Sharer:

1 computer to 2 printers fitted with Cable for BBC TCS26 £19.50(c).

# GRAFPAD

A low cost graphic tablet offering the performance & durability required by industrial and educational users. It is compact, accurate & reliable; working area 240 × 192mm + menu area. Comes complete with a CAD package. £110(b).

DDX software £99(b).

# 01-208 1177

Please add carriage: (a) £8; (b) £2,50; (c) £1,50; (d) £1 and VAT at 15% to order. Carriage (a) sent by Datapost

All monitors supplied with BBC lead

# MICROVITEC

All 14" monitors now available in plastic or metal cases, please specify your requirement.

14" RGB 1431 Std Res

£165(a) £240(a) £389(a)

with PAL & Audio 1431 AP Std Res 1451 AP Med Res These monitors can receive TV programs thru a Video Recorder

£205(a) £280(a)

20" RGB with PAL & Audio

2030CS Std Res

1451 Med Res

1441 Hi Res

£380(a)

2040CS Hi Res £685(a)

**KAGA TAXAN 12" RGB** 

VISION II Hi Res £225 (a) VISION III Super Hi Res £325 (a)

SANYO CD3125NB 14" RGB Std Res £169 (a)

# MONOCHROME MONITORS:

SANYO DM8112CX Hi Res 12" Green Screen	£90(a)
KAGA KX1201G Hi Res 12" Etched Green Screen	£99(a)
KAGA KX1202A Hi Res 12" Etched Amber Screen	£105(a)
PHILIPS DGD Hi Res Green Screen	£75(a)
ZENITH 122 Hi Res 12" Amber Screen	£68(a)
Swivel Base for Kaga Monochrome fitted with Digital Clock	£21(c)
Monitor Plinth for the BBC	£13.50(b)
Double Tier Plinth for BBC and flat pack dual drive	£19.50(b)
BBC Leads Kaga RGB £5(d) Microvitec £3.50(d) Monochrom	e£3.50(d)

# **RB2 TRACKER BALL**


Marconi with its years of experience making tracker balls for use in Military and Air Traffic Control have developed a quality device for the serious hobbyist, for educational uses, and for low cost CAD/CAM applications. RB2 is a compact, ergonomically designed tracker ball that provides precise positional control and rapid direction changing using a freely rotating resin ball in any direction without the limiting stops or the zero point drift of joystick controls. Three switch

buttons enable easy software manipulation to incporate the use of the tracker ball. Appropriate software will enable the RB2 to take over the functions of cursor keys in word processing, CAD/CAM applications and two dimensional positional controls of robots, drillheads etc. RB2 which plugs into the user port is supplied with utility programme to use it as a joystick with other software, a comprehensive graphics/CAD program and a program demonstrating its editing capabilities. User guide includes instructions on writing your own programs for the RB2.

# **AMX MOUSE**

In conjunction with a controlling ROM this sophisticated mouse has many advanced features such as Icons, Windows etc., these can be used in ordinary programs as well as sophisticated CAD Design. The supplied 'AMX ART' is a superb, yet simple-to-use CAD package allowing the creation of amazing graphical designs. A screendump for drawings is included. It can also be used with Wordwise/View to replace the cursor keys. Supplied complete with CAD Package, ROM and full instruction manual. £75(b)

# DISC DRIVES

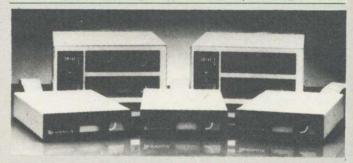

TECHNOMATIC disc drives come fitted with high quality slimline Japanese mechanisms and represent the state of art in disc drive technology. They are built to highest standards and are all tested to their full performance capability before packaging. All versions of drives are offered with or without integral power supplies. Power supplies for dual drives are of switch mode type and generously rated. Attractively designed steel casings are painted in hard wearing BBC in matching paint. All dual drives can be supplied in stacked version or with built in plinths. The plinth version cases are of sturdy construction to carry any monitor and provide a simple method of having a compact computer system installation. All drives can operate in single and double density modes. Drives are supplied with cables, manual and formatting disc and are ready to be fitted to the computer.

Single Drives:

£85(b) PS100 with psu £125(b) × 100K 40T SS TS100 PS400 with psu £149(b) £125(b) 1 × 400K 80/40T DS TS400

**Dual Drives**: Stacked Version:

PD200 with psu £200(a) TD200 £175(a) 2 × 100K 40T SS PD800 with psu £300(a) £275(a) × 400K 80/40 DS TD800

Plinth Version:

2 × 100K 40T SS TD200P £195(a) PD200P with psu £220(a) TD800P £295(a) PD800P with psu £315(a) × 400K 80T DS

# DISC DRIVE MULTIPLEXER

A simple device that enables up to four computers to be connected to one single or dual drive. Ideal unit for installing in classrooms where networking is not planned or necessary or the costs have to be kept low or where software information is shared. Several of these units can be installed in series to connect more computers to access the same discs. Units supplied with 5' of cable per outlet as standard. Mains powered.

TDM 4 Quad Unit (upto 4 computers) £135(a) TDM 2 Dual Unit (2 computers) £75(b)

Note: All computers must be fitted with a DFS

# 3M FLOPPY DISCS

**Authorised Distributor Data Recording Products** 

Industry standard high quality discs with guaranteed error free performance for life.

Discs in packs of 10:

40T SSDD **£15(c)** 80 T SSDD £22(c) 40 T DSDD £18(c) 80 T DSDD £24(c)

# DISC ACCESSORIES

Single Disc Cable £6(d) Dual Disc Cable £8.50(d) 10 Disc Library Case £1.80(d) 30 Disc Case £6.00(c) Lockable Storage Boxes 40 Discs £14(c) 100 Discs £19(c)

The FLOPPICLENE disc head cleaning kit is the ideal way to ensure the optimum performance of your drives. The use of disposable cleaning discs eliminate the risk of recontamination and abrasion of the sensitive disc heads and ensure continuously reliable data capture and transmission.

Floppiclene with 20 disposable cleaning discs. £14.50(b).


# COMMUNICATIONS

# MODEMS

**ACORN PRESTEL:** The official Acorn add-on — an advanced BT Approved. Auto-Dial, Prestel Terminal ideal for British Telecom Gold. Comprehensive software includes 'tagged' frames, downloading of Telesoftware, saving of frames, printing, sophisticated 'Mailbox' handling c/w editor. A built-in speaker allows line monitoring. A simple !BOOT file allows automatic operation £99(b)

**BUZZ BOX** A full spec, BT approved, pocket size, direct connect modem with both originate & answer modes, full & half duplex, allowing access to many databases, bulletin-boards as well as Intercomputer communications. It conforms to CCITT V21 300/300 Baud Standard. Battery/mains powered £62(c) BBC Lead £6 External PSU £9(c)

**MINOR MIRACLES WS2000** A world standard modem, having BT approval, covering V21,V23,BELL 103/113/108 and including 75,300,600,1200 Baud ratings. (It even includes 'reverse



Prestel'!). This is the modem that will cover 'Prestel' type systems as well as Bulletin Boards both in the UK and abroad. What possibly gives this modem its biggest advantage is its option of computer control. A 25Way RS232 input as well as possible

computer controlled auto-dial/auto-answer makes this modem unique. WS2000 £129(c) BBC Serial Cable £7

WS2000 Auto-Dial card: includes an integral loudspeaker for monitoring of the phone line £30(d).

BBC User Port cable (for modern control) £7.

SKI KIT (Allowing total control of the modern by your computer) £10.

DS1 Disc (for Commstar): When used with the Auto-dial card, SK1 Kit, and a user port cable, this software will dial out to Prestel, enter your password etc. and leave you in Commstar. Will also store many bulletin board telephone numbers for autodialling £10.

WS2000 Auto-Answer Card £30(d).

(Please note that the A/D & A/A Cards are still awaiting BABT Approval.)

**DEMON** A High Performance, yet low-cost Modem. Features include: Auto-dial & auto-answer, Auto baud rate scan, 75,300,1200 Baud rates with V21, V23 and Bell standards. Sophisticated software in ROM allow many features like: Auto-Dial. Redial, Remote facilities etc. An Auto-Dial disc allows storage of commonly dialled numbers. UNICOM £49.95(b) Unicom ROM £20 Unicom Disc £9.95 Unicom Cable £6(d) Not BT approved

**TELEMOD-2** A BT approved modem complying with CCITT V23 1200/75 Duplex & 1200/1200 Half-Duplex standard, that allows communication with Viewdata services e.g. Prestel, Micronet etc., as well as using 1200 Baud for communicating with other computer users. Mains powered. TELEMOD 2 **£65(b)**BBC Lead **£7.00** 

COMMSTAR An ideal communications Rom. Extremely easy to use, yet very versatile. It features both a Prestel mode as well as a Terminal mode, thus offering very good value for money. In Prestel mode, all normal Prestel features are available including, downloading of software, saving and retrieving of pages on disc, page tag, revealing of hidden text etc. Its terminal mode is ideal for bulletin boards etc. All input may be copied into a buffer in memory over which full control is available. Controls of protocols are very simple and any type of file, (not just ASCII) may be sent using XModem protocols. Even includes an elapsed time-clock. £29(d)

**TERMI-II** A good all round package for communicating with notice boards, electronic mail services etc. Termi is a semintelligent terminal emulator allowing the BBC to act as a dumb terminal, slave BBC graphics terminal, or VT52 terminal. The rates at which data is sent or received is easily set up with rates of up to 4800 Baud with 40/80 col. selectable. Allows files to be transmitted from disc, or a copy of incoming data to be sent to a file or to a printer. (Termi is not suitable for PRESTEL). £28(d)

communicator This is a full 80 col VT100 terminal emulation program on 16K eprom. It is a more advanced program than TERMI and features easy to follow screen menus. The rate at which data is sent or received is easily set up with rates up to 19200 Baud with 80 column text. Allows files to be transmitted from disc, or a copy of incoming data to be sent to a file or to a printer. (Communicator is not suitable for PRESTEL). £59(d).


# **TECHNOMATIC**

All prices exclude VAT

# EPROMER II

A sophisticated eprom programmer that handles the full range of single rail eproms (incl 27256) and allows the user full control of the programming process.

Its powerful menu driven software makes the



Integral power supply ensures no power drain from the computer.

 Interfaces through 1 MHz bus, fully buffered and complies with the Acorn protocols.

\* Eproms upto 16K (27128) programmed in single pass.

\* Selectable programming voltage 25/21/12.5V

Selectable programming method — normal or high speed algorithmic. High speed programming enables 27128 to be programmed in just over 2 mins. Normal programming skips addresses FF data to increase programming speed. Automatic verification on completion of programming.

verification on completion of programming.
User can select any section of the eprom from a single byte to its full address range to Blank Check/Read/Program/Verify enabling program development/changes very simple.

\* Full screen editor with HEX/ASCII input.

 Full tape/disc filing facility. Data input from keyboard/Tape/ Disc/Eprom.

Constant display of all options selected.

 Several BBC BASIC programs can be entered on a single eprom.

EPROMER II with Manual & Cassette £99(b) Software on disc £3 ROM based software £10

# **UV ERASERS**

UVT1T Eraser with built-in timer and mains indicator. Built-in safety interlock to avoid accidental exposure to the harmful UV rays. It can handle up to 5 eproms at a time with an average erasing time of about 20 mins. £59(b).

UV1T as above but without the timer. £47(b).

For Industrial Users, we offer UV140 and UV141 erasers with handling capacity of 14 eproms. UV141 has a built in timer. Both offer full built in safety features UV140 £61; UV141 £79(b).

# **SMARTMOUTH**

The original 'Infinite Speech' Synthesiser — Still the best around!! A ready built, self contained speech synthesiser unit, attractively packaged with built in speaker. Tailored frequency response audio stages for optimum sound quality. Any word can be easily created — very economical with memory. Plugs into the user port — no roms required. Demo and development programs supplied on cassette (easily transferred to disc) £31(c)

# 'TIME-WARP' REAL-TIME CLOCK CALENDER

We have broken the price barrier! A low cost unit, allowing the facilities of units costing far more. Built to professional standards, it opens up the total spectrum of Real-Time applications. Possibilities

spectrum of Real-Time applications. Possibilities include desk diary/planner, calender, continuous display of on-screen time and date information, automatic document dating, precise timing and control in scientific applications — its uses are endless. Simply plugs into the user port — battery backup is supplied as standard. A full manual as well as Extensive software on cassette (easily transferred to disc) — no ROMs needed. £29(c)



# RAMROM-15

The advanced sideways ROM/RAM expansion system. This is an external unit, using high quality construction, attractively packaged in a BBC coloured metal case, allowing easy access to all the sockets. (Allows other units to be fitted inside the BBC). Absolutely no soldering is required. Allows 11/12 additional sideways ROMs to be fitted with an option of up to 16K sideways RAM. All commonly available RAM can be used i.e. 4801/6116/6264 or xx128. All the hardware to take the RAM is already fitted e.g. battery backup. For development work and further expansion, most of the 6502 processor signals are available. Supplied with utility disc and full instruction manual. £112(b)

# 01-208 1177

Please add carriage: (a) £8; (b) £2.50; (c) £1.50; (d) £1 and VAT at 15% to order. Carriage (a) sent by Datapost

# ATPL SIDEWISE ROM EXPANSION BOARD

This is a well constructed expansion board, that does not require soldering in its installation. All buses are buffered. It allows full sideways Rom expansion to a total of 16 ROMs. One socket has been split into two 8K sockets to allow the use of 8K byte CMOS RAM chips, giving a total of 16K sideways RAM. This is ideal for sideways rom development, and will also allow downloading of software from cassette or disc. The battery backup option will allow retention of data in the RAM, when power to the computer is removed. Several link-selectable options include the choice of type of Eprom, and a 'write-protect for the RAM option. £39(d) Back-up Kit £18.

# **ACORN IEEE INTERFACE**

This interface enables a BBC computer to control any scientific and technical equipment that conforms to the IEEE488 standard, at a lower price than other systems, but without sacrificing any aspect of the standard. The interface can link up to 14 separate IEEE compatible devices. Typical applications are in experimental work in academic and industrial laboratories, with the advantage of speed, accuracy and repeatability. The interface is mains powered and comes with cables, IEEEFS ROM, and user guide. £282(a)

# **ACORN TELETEXT INTERFACE**


This interface allows the retrieval and storage of data transmitted by both BBC and IBA. There are currently many educational and other programs being transmitted, and this unit will allow their retrieval absolutely free. In 'Terminal' mode, the system receives and decodes pages from both Ceefax and Oracle. (These pages can be stored). In 'Telesoftware' mode, the system can load, run and execute programs that are transmitted. This unit gives you a professional teletext terminal at a cost effective price. £180(b)

# **ACORN MUSIC 500**

Convert your BBC micro into a sophisticated music composition aid and sound effects generator. Custom made software will provide you with the flexibility to compose, experiment, perform and teach music. Stereo output can be connected to a sound system including your home stereo unit. Full specification on request.

£174(a)

# DATABASE MANAGEMENT SYSTEM

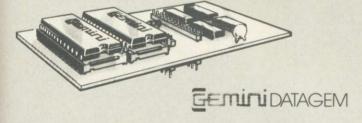

The Definitive Random Access, 24K ROM Based DATABASE MANAGEMENT SYSTEM.

Datagem is the first truly flexible database for the BBC Micro that can make your system really useful and efficient, saving you money in the long run. The system includes a carrier board containing two Eproms, demonstration applications disc in both 40/80T, professional documentation with quick reference card, and 'Trans' utility program. Features include: 'almost unlimited' file size (max 10MByte) 'supports up to 4 drives 'Max of 5000 records per file 'max 6K record size 'max of 62 fields '9 level hierarchical search system with facilities to store results of searches. Searches can be any one of the following: Search, Include, Exclude, Combine, Common or Difference 'user defined variables 'generates form letters from records. Please ask for leaflet. £112(c).

STARdataBASE A fast machine code, true random access database program in a 16K Eprom. Up to 4096 records in a file, up to 69 fields in a record. The record layout is totally user defined. Entirely menu driven—thus very user friendly. Extremely fast searches are possible using the Keysearch facility. Mailmerging from View and Wordwise, and address labelling. Its printer configuration suits any BBC compatible printer. £75(d)

# ROMs/SOFTWARE

VIEW Acorn's new version V2.1 word processor rom. Advantages include printing straight from memory and editing in any mode. £48(c)

HI VIEW Disc based version of VIEW word processor for use with the 6502 2nd processor. Allows 47K of user memory.

VIEW INDEX Disc based program to create an index from VIEW text files. Ideal for anyone concerned with writing extensive reports or books. £13(d)

**WORDWISE** One of the most popular word processors for general use £34(d). Wordwise SpellCheck Disc — A must for any serious word processor user. Normal price £16.50(d). If bought with Wordwise: No p&p and only £14.

WORDWISE PLUS The new advanced Wordwise on a 16K eprom, for the more specialised users who require added features and flexibility. New facilities include: 2nd Processor compatible allowing 80 column previewing in all cases, a new Basic-like language, new editing features and embedded commands etc etc. Four new programs are also supplied allowing mail-merging, index generating, two-column text printout and continuous processing. A new 56 page introductory manual and a 180 page reference manual complete this rather special package. Finally, it is able to use existing Wordwise files without any modification. £49(d).

**SPELICHECK II:** A rom based fast machine code program that works with both VIEW and WORDWISE. Vocabulary disc supplied with 6000 words can be expanded to well over 17000 words on 100K drive. Fully compatible with 6502 second processor.

ISO-PASCAL: Acorn's full implementation of International Standard Pascal on two 16K ROMs. Disc Version for use on 6502 2nd Processor also supplied. Comprehensive manual. £60(c)

ACORN LOGO A full implementation of the Logo language from Acornsoft. Supplied as two ROMs with a tutorial course and technical manual. £60(b)

Publications popular spreadsheet rom includes many new features including full compatability with the 6502 2nd processor running as HiCalc allowing 44K of user memory, operate in any mode, greater flexibility in printer control, spooling as ASCII file etc. All these features are in addition to the existing powerful features such as handling of labels and numbers as values. Column width control and features normality found in well designed spreadsheets.

VIEWSHEET Acorn's spreadsheet provides 255 columns and 255 rows and will operate in any mode. Windows can be created which can then be rearranged to provide any print format required. Function keys provide for easy entry of commands. Printer control codes can be used using the printer driver. Fully compatible with VIEW and the 6502 2nd Processor.

**BCPL** A full implementation of the BCPL compiler language consisting of the language rom, disc containing the BCPL compiler, a screen editor, a 6502 assembler, other utilities and programming aids and examples of BCPL code and a 450 page manual. BCPL can be used to develop games programs, commercial packages, system software, to write control systems and to produce programs which otherwise would need to be written in assembler.

£52(b)

BCPL STAND ALONE GENERATOR Utilities in this package enable the programs developed using the BCPL rom to be converted so that they can be run on any BBC micro whether it has a BCPL rom or not. Stand alone programs for other 6502 based systems can also be developed.

BCPL CALCULATIONS PACKAGE: supplied on disc, it supports floating point, fixed point and fast integer calculations. It includes the BCPL calculation files, example files and a comprehensive user guide.

£17.30(b)

## ACORN LISP Rom

£43(d)

G:FORTH An advanced implementation of FORTH which follows the 79-Standard specification on a 16K ROM and has a full double number extension set. It incorporates an editor, 6502 assembler, very fast turtle graphics and supports extensive string and file handling. It contains 540 predefined words including those for reading joystick ports, produce sounds, set and read the time and produce random numbers. Fully compatible with disc or tape filing systems and works in any mode. Package comes complete with a USER GUIDE, Introduction to FORTH and 16K GFORTH ROM

DISC DOCTOR Computer Concept's popular disc utility rom which adds 20 commands to the DFS system. £27(d)

**DISCINASTER** Beebug's a disc utility which provides additional DFS commands and utilities including disc menu to automatically RUN/\*RUN programs, converting 40 track discs to 80 track and enable dual catalog.

**EXMON II** Updated version of the EXMON rom with facilities including dual screen operation and full screen memory editor. £24(d)

TOOLKIT This ROM adds 27 new commands to the BBC BASIC. These include a full screen editor, merge, relocating data in memory, program compactor, listing of variables and memory search.

**SLEUTH** A debugging tool for BASIC programs which includes features like single stepping of dual screen programs, and accelerator to run programs from full speed to freeze frames. £24(d)

**GRAPHICS ROM** Adds 28 new graphic related commands and features include sprites, turtle graphics, rotation, scaling, 3D plotting all using "\*" commands.

PRINTMASTER This ROM features the most versatile screen dump for EPSON MX/RX/FX80 and Kaga 810 printers. It supports three types of dumps. The first allows any graphics on the screen to be dumped. Colours appear as shades of grey. Any part of the screen can be printed at any position on the paper in any one of four orientations. The screen dump may be magnified by any factor x2, x3, x4 etc. A special feature allows true MODE 7 screen dumps with TELETEXT text & graphics. The second dump allows any text to be dumped whilst the third dump will print the contents of a file on disc whilst the computer is doing other things. This is not all. All printer functions can be called up using the "command. "DEFINE allows the printer to define his own characters and store them. "GPRINT allows printing of enlarged text in any position, orientation, size & shade. "WINDOW allows windows to be defined in any size and position on the screen. Can allow you to do printing as background cepration while the computer does other jobs. In short this one ROM does it all.

DUMPMASTER Disc based program that produces fast machine code routines for a variety of printers incl. EPSON MX/FX, STAR 910, Seikosha, NEC PC8023, INTEGREX 132A. Dumps in 8 shades in any mode including teletext mode. Snapshot facility allows dumps from games and other programs.

**murom** Sound Extension Rom: Helps you create your own tunes and sound sequences either with MUROM's editor and a musical score or using the keyboard to simulate a piano. Edit your creations with the full screen music editor and then switch to envelope editor to tailor the tonal quality and select instrument type. Incorporate the music into other programs or playback with or without MUROM. Instant sound effects can be called from Basic eg \*ZAP, \*SIREN, \*EXPLODE etc.

£24(d)

**BILLBOARD** A useful program that enables your BBC to produce super-large 'Billboard' type characters i.e. a continuous horizontal scrolling of super-large characters. Supplied in ROM. £16.50(d).

HELP Rom based comprehensive on screen HELP facility to aid and speed up programming. £21(d)

**MICROGUIDE** Keyplate: This keyplate fits neatly over the keyboard and provides ready reference to a comprehensive list of VDU codes, wipe clean pen supplied, it can be used for fn. key identification etc. Spiral bound microguide book contains lots of useful information on keywords, abbreviations, "FX commands and error messages — saves hours thumbing through the manuals and guides. £6.50(d)

**MICROTEXT** This authoring system developed by the NPL allows production of a wide range of man-computer dialogues. User can draw up a frame made up of text/graphics and combine a series of frames to create modules which are incorporated into a program. An expert in any field can create complete courses of computer based instruction material. Applications include interviewing systems, teaching packages, training courses and interactive demonstrations and simulations. Disc \$53(b) Cassette \$43(b)

REPLICA II 40 & 80 Track Versions available. £10.35(d)

**BROM** — the new utility ROM from Clares — a Toolkit ROM that gives you full screen editing. Many extra functions are included. £30(d).

**DESIGN** Design is a second processor which allows information to be displayed in a format suitable for demonstrations, slide projections, handouts or presentations. Graphs, Pie Charts & Bar Charts are quickly produced; automatically drawn & scaled. Versatile labelling facility, 25 User defined, 4 large macro characters plus screen dump facilities included. £16.50(d) Disc (80 or 40 Track).

**SUPERPLOT** Superplot is ideal for screen representations of mathematical functions. It will plot on automatically scaled axes, in Cartesian, Polar or Parametric co-ordinate systems and will allow overlapping of graphs. Cass £8.50(d).

# TECHNOMATIC LTD

MAIL ORDERS TO: 17 Burnley Road, London NW10 1ED (Tel: 01-208 1177 Telex 922800)

SHOPS AT: NW London: 15 Burnley Road, London NW 10 1ED

Dollis Hill 2 mins walk, ample car parking space)

West End: 305 Edgware Road, London W2, Tel: 01-723 0233 (Near Edgware Road ♦) CP/M SOFTWARE FOR TORCH Z8O ACORN Z8O PROCESSOR

We can now supply almost any CP/M based software package in a format suitable for the Torch Z80 and Acorn Z80 second processors. The following are generally available from stock.

DBASE II £335(a) WORDSTAR PROFESSIONAL £380(a)

WORDSTAR £275(a)

DBASE II Tutorial ..... £32(c)

PROPASCAL £220(a)

Supercalc 2 £200(c)

Phone for your specific requirements

Please specify the type of format (TORCH or ACORN) required

**SPELICHECK I** Menu driven spelling checker for Wordwise or VIEW. Dictionary contains 6000 words and is expandable to 1700 on 100K disc. £16.50(d) Disc (80 or 40 Track) Specify whether Wordwise or VIEW.

**MASTERFILE II** The new version of the popular general purpose file management system. It allows large amounts of information to be stored and processed. It is extremely powerful yet flexible to use. The disc version allows up to 17 fields per record, and the only limitation as to the number of records is the capacity of the disc. Typically, using 5 fields, about 2000 records may be stored on a 100K disc. This latest version features many new facilities including use with WORDWISE/VIEW £16.50(d) Disc (80 or 40T).

**HERSHEY CHARACTER** font generator: Disc based menu driven package with 1500 new characters made up from 9 different Hershey character fonts. Flexible utility allows choosing of any characters and appending them to users programs. Screen dump routine for Epson printers included. £12.50(d).

When ordering software on disc plese specify track format (40/80)

# BOOKS

(No VAT p&p £1.50 per book)

CPUI/Assembly Language Books 6502 Applications	(	MOAMIP	orh r
6502 Assy Lang Prog	CPU/Assembly Language	e Books	
\$502 M/C for Beginners. \$ 5.95 \$502 Advanced Programming. \$11.95 \$502 Programming. \$13.95 \$502 Programming. \$13.95 \$6800 Prog Reference Manual. \$ 9.00 \$6809 Assy Lang Programming. \$13.45 \$6809 Programming. \$14.95 \$FORTRAN Cookbook. \$2.49 \$FORTRAN Cookbook. \$2.49 \$FORTRAN Cookbook. \$2.49 \$FORTRAN Cookbook. \$2.49 \$FORTRAN Cookbook. \$2.250 \$FORTRAN Cookbook. \$2.250 \$FORTRAN BASIC to PASCAL. \$2.50 \$FORTRAN BASIC FOR BEGINNERS. \$2.50 \$BBC BASIC Corporation of the BBC \$2.50 \$BBC BASIC for Beginners. \$2.50 \$Gateway to Computing BBC1. \$2.50 \$Gateway to Computing BBC2. \$2.50 \$Gateway to Compu	6502 Applications	£12	2.50
\$502 Advanced Programming \$11.95 \$502 Programming \$13.95 \$6800 Prog Reference Manual \$9.00 \$6809 Assy Lang Programming \$13.45 \$6809 Programming \$13.45 \$6809 Programming \$12.95 \$LANGUAGES \$12.50 Mastering the CP/M \$14.95 FORTRAN Cookbook \$8.00 Introduction to PASCAL \$14.95 FORTRAN Cookbook \$8.00 Introduction to PASCAL \$14.95 Prog the Micro with PASCAL \$8.50 From BASIC to PASCAL \$9.00 The UNIX Book \$12.50 BBC Micro Books \$12.50 BBC Micro Frach U to Prog. \$2.50 BBC SIC \$12.50 BBC BASIC Programming on the BBC \$12.50 BBC BASIC Programming on the BBC \$12.50 BBC BASIC or Beginners \$12.50 BBC BASIC \$12.50 BBC BBC BBC BBC BBC \$12.50 BBC BBC BBC BBC BBC \$12.50 BBC BBC BBC BBC \$12.50 BBC \$12.50 BBC BBC \$12.50 BBC \$12.50 BBC BBC \$12.50 BBC \$12.50 BBC \$12.50 BBC \$12.50 BBC \$12.50 BBC BBC \$12.50	6502 Assy Lang Prog	£17	7.50
\$6502 Programming	6502 M/C for Beginners.	£ !	5.95
6809 Assy Lang Programming	6502 Advanced Program	ming£1	1.95
6809 Assy Lang Programming	6502 Programming	£13	3.95
6809 Assy Lang Programming	6800 Prog Reference Ma	anual£	9.00
LANGUAGES  CP/M Handbook	6809 Assy Lang Program	nming£13	3.45
CP/M Handbook	6809 Programming	£12	2.95
Mastering the CP/M			
Mastering the CP/M	CP/M Handbook	£12	2.50
FORTRAN Cookbook.   8.00 Introduction to PASCAL. 214.95 Prog the Micro with PASCAL. \$8.50 From BASIC to PASCAL. \$9.00 The UNIX Book. \$12.50 BBC Micro Books Books for Beginners: Let Your BBC Teach U to Prog. \$2.50 BASIC programming on the BBC — Cryer. \$5.50 BBC BASIC. \$6.50 BBC BASIC for Beginners. \$6.25 BBC Micro for BBC \$6.25 BIC Micro for BBC \$6.25 BIC Micro for Micro \$6.25 BIC Micro for BBC \$6.25 BIC Micro for BBC \$6.25 BIC Micro for BBC \$7.50 BIC Micro for BBC \$7.50 BIC Micro for BBC \$7.50 BIC Micro for BBC \$7.95 BASIC Rom User Guide \$9.95 BBC Micro Revealed \$9.95 BBC Micro Revealed \$9.95 BBC Micro Revealed \$9.95 BBC Micro Revealed \$9.95	Mastering the CP/M	£14	1.95
Introduction to PASCAL 214.95 Prog the Micro with PASCAL £ 8.50 From BASIC to PASCAL £ 9.00 The UNIX Book £12.50 BBC Micro Books Books for Beginners: Let Your BBC Teach U to Prog £ 2.50 BASIC programming on the BBC — Cryer £ 5.50 BBC BASIC for Beginners. £ 6.25 BBC BASIC for Beginners. £ 6.25 BBC Micro for Beginners. £ 6.25 Easy Prog for the BBC Micro . £ 5.00 Friendly Computer Book £ 3.50 Gateway to Computing BBC1 £ 4.95 Gateway to Computing BBC2 £ 4.95 Gateway to Computing BBC2 £ 4.95 Gating More from Your BBC & Electron £ 5.95 Introducing the BBC Micro. £ 5.95 Introducing the BBC Micro. £ 5.95 Introducing the BBC Micro. £ 4.50 Step by Step Programming 3 C 5.95 Step by Step Programming 2 £ 5.95 Languages/Programming 30 Hour BASIC £ 6.75 Advanced User Guide. £ 7.50 Advanced W/C Tech for BBC £ 7.50 Advanced Prog Tech for BBC £ 7.95 Assembly Lang Prog for BBC £ 7.95 Assembly Lang Prog and Ed E 7.95 BASIC Rom User Guide £ 9.95 BBC Micro Revealed £ 2.90 BBC Micro Revealed £ 2.90	FORTRAN Cookbook	0 5	00.8
Prog the Micro with PASCAL	Introduction to PASCAL	214	1.95
The UNIX Book \$12.50 BBC Micro Books Books for Beginners: Let Your BBC Teach U to Prog £ 2.50 BASIC programming on the BBC — Cryer. £ 5.50 BBC BASIC . £ 5.50 BBC BASIC for Beginners. £ 6.25 BBC Micro for BBC £ 2.50 Gateway to Computing BBC1. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Introducing the BBC Micro. £ 4.50 Step by Step Programming 1. £ 5.95 Step by Step Programming 2. 5.95 Languages/Programming 30 Hour BASIC . £ 6.75 Advanced User Guide. £ 7.50 Advanced W/C Tech for BBC. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.95 ASSembly Lang Prog and Ed — Birnbaum. £ 8.75 ASSEMBLY Lang Prog and BBC £ 7.95 BASIC Rom User Guide. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 2.00	Prog the Micro with		
The UNIX Book \$12.50 BBC Micro Books Books for Beginners: Let Your BBC Teach U to Prog £ 2.50 BASIC programming on the BBC — Cryer. £ 5.50 BBC BASIC . £ 5.50 BBC BASIC for Beginners. £ 6.25 BBC Micro for BBC £ 2.50 Gateway to Computing BBC1. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Introducing the BBC Micro. £ 4.50 Step by Step Programming 1. £ 5.95 Step by Step Programming 2. 5.95 Languages/Programming 30 Hour BASIC . £ 6.75 Advanced User Guide. £ 7.50 Advanced W/C Tech for BBC. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.95 ASSembly Lang Prog and Ed — Birnbaum. £ 8.75 ASSEMBLY Lang Prog and BBC £ 7.95 BASIC Rom User Guide. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 2.00	PASCAL	9.8	50
The UNIX Book \$12.50 BBC Micro Books Books for Beginners: Let Your BBC Teach U to Prog £ 2.50 BASIC programming on the BBC — Cryer. £ 5.50 BBC BASIC . £ 5.50 BBC BASIC for Beginners. £ 6.25 BBC Micro for BBC £ 2.50 Gateway to Computing BBC1. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Introducing the BBC Micro. £ 4.50 Step by Step Programming 1. £ 5.95 Step by Step Programming 2. 5.95 Languages/Programming 30 Hour BASIC . £ 6.75 Advanced User Guide. £ 7.50 Advanced W/C Tech for BBC. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.95 ASSembly Lang Prog and Ed — Birnbaum. £ 8.75 ASSEMBLY Lang Prog and BBC £ 7.95 BASIC Rom User Guide. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 2.00	From BASIC to PASCAL	8 9	00.6
BBC Micro Books Books for Beginners: Let Your BBC Teach U to Prog. £ 2.50 BASIC programming on the BBC — Cryer. £ 5.50 BBC BASIC. £ 5.50 BBC BASIC. £ 5.50 BBC BASIC for Beginners. £ 6.25 BBC Micro for Beginners. £ 6.25 Easy Prog for the BBC Micro. £ 5.00 Friendly Computer Book. £ 3.50 Gateway to Computing BBC1. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Introducing the BBC Micro. £ 5.95 Introducing the BBC Micro. £ 5.95 Introducing the BBC Micro. £ 5.95 Step by Step Programming 1 £ 5.95 Step by Step Programming 2 £ 5.95 Languages/Programming 30 Hour BASIC. £ 6.75 Advanced User Guide. £ 12.50 Adv BASIC Rom User Guide. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced M/C Tech for BBC. £ 8.50 Assy. Lang. Prog. made easy. £5.95 Assembly Lang Prog for BBC. £ 7.95 Assembly Lang Prog 2nd Ed — Birnbaum. £ 8.75 Applied Assembly Lang on BBC. £ 7.95 BASIC Rom User Guide. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 9.95	The UNIX Book	£12	2 50
Books for Beginners: Let Your BBC Teach U to Prog. £ 2.50 BASIC programming on the BBC — Cryer. £ 5.50 BBC BASIC for Beginners. £ 6.25 BBC Micro £ 5.00 Friendly Computer Book. £ 3.50 Gateway to Computing BBC2. £ 4.95 Introducing the BBC Micro. £ 5.95 Introducing the BBC Micro. £ 4.50 Step by Step Programming 1. £ 5.95 Step by Step Programming 30 Hour BASIC Advanced User Guide. £ 6.75 Advanced User Guide. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.95 Assembly Lang Prog and Ed £ 7.95 Assembly Lang Prog and Ed £ 7.95 Assembly Lang Prog and Ed £ 7.95 BASIC Rom User Guide. £ 9.95 BBC Hicro Revealed. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 2.00			
Let Your BBC Teach U to Prog. £ 2.50 BASIC programming on the BBC — Cryer. £ 5.50 BBC BASIC £ 5.50 BBC BASIC £ 5.50 BBC BASIC for Beginners. £ 6.25 BBC Micro for Beginners. £ 6.25 Easy Prog for the BBC Micro. £ 5.00 Friendly Computer Book. £ 3.50 Gateway to Computing BBC1. £ 4.95 Gateway to Computing BBC2. £ 4.95 Gateway to Computing BBC2. £ 4.95 Getting More from Your BBC & Electron £ 5.95 Introducing the BBC Micro. £ 5.95 Introducing the BBC Micro. £ 5.95 Step by Step Programming 1 £ 5.95 Step by Step Programming 2 £ 5.95 Languages/Programming 30 Hour BASIC. £ 6.75 Advanced User Guide. £ 7.50 Advanced User Guide. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.95 Assembly Lang Prog and Ed — Birnbaum. £ 8.75 Asplied Assembly Lang on BBC £ 7.95 BASIC Rom User Guide. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 2.00			
BASIC programming on the BBC — Cryer		Prog e	50
BBC — Cryer. £ 5.50 BBC BASIC	BASIC programming on	the	
BBC BASIC for Beginners. £ 6.25 BBC Micro for Beginners. £ 6.25 BBC Micro. £ 5.00 Friendly Computer Book. £ 3.50 Gateway to Computing BBC1. £ 4.95 Gateway to Computing BBC2. £ 4.95 Getting More from Your BBC & Electron. £ 5.95 Introducing the BBC Micro. £ 4.50 Step by Step Programming 1 £ 5.95 Step by Step Programming 2 £ 5.95 Languages/Programming 30 Hour BASIC. £ 6.75 Advanced User Guide. £ 7.50 Advanced User Guide. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.50 Assembly Lang Prog and easy. £ 5.95 Assembly Lang Prog and Ed — Birnbaum. £ 8.75 Applied Assembly Lang on BBC £ 7.95 BASIC Rom User Guide. £ 9.95 BBC Micro Revealed. £ 9.95 BBC Micro Revealed. £ 2.00	BBC — Cryer	0 1	5.50
BBC BASIC for Beginners £ 6.25  BBC Micro for Beginners £ 6.25  Easy Prog for the BBC Micro £ 5.00  Friendly Computer Book £ 3.50  Gateway to Computing BBC1 £ 4.95  Gateway to Computing BBC2 £ 4.95  Getting More from Your BBC & Electron £ 5.95  Introducing the BBC Micro £ 4.50  Step by Step Programming 1 £ 5.95  Step by Step Programming 2 £ 5.95  Languages/Programming 30 Hour BASIC £ 6.75  Advanced User Guide £ 12.50  Adv BASIC Rom User Guide £ 7.50  Advanced M/C Tech for BBC £ 8.50  Assembly Lang Prog Tor BBC £ 7.95  Assembly Lang Prog 10 BBC £ 7.95  Assembly Lang Prog 2nd Ed  — Birnbaum £ 8.75  Applied Assembly Lang on BBC £ 7.95  BASIC Rom User Guide £ 9.95  BBC Rom Book B. Smith £ 9.95  BBC Micro Revealed £ 2.00	BBC BASIC	C I	
BBC Micro for Beginners. £ 6.25 Easy Prog for the BBC Micro	BBC BASIC for Beginne	rs c	2.50
Easy Prog for the BBC  Micro	BBC Micro for Beginner	9 0	2.25
Micro	Fasy Prog for the BBC	S (	2.23
Friendly Computer Book	Micro	0.1	00
Gateway to Computing BBC1 £ 4.95 Gateway to Computing BBC2 £ 4.95 Getting More from Your BBC & Electron £ 5.95 Introducing the BBC Micro £ 5.95 Step by Step Programming 1 £ 5.95 Step by Step Programming 2 £ 5.95 Languages/Programming 3 £ 6.75 Advanced User Guide £ 12.50 Advanced User Guide £ 7.50 Advanced M/C Tech for BBC. £ 8.50 Advanced M/C Tech for BBC. £ 8.50 Advanced M/C Tech for BBC. £ 8.50 Assy. Lang. Prog. made easy £5.95 Assembly Lang Prog for BBC. £ 7.95 Assembly Lang Prog 2nd Ed £ 7.95 Assembly Lang Prog 2nd Ed £ 7.95 BASIC Rom User Guide £ 9.95 BASIC Rom User Guide £ 9.95 BBC Rom Book B. Smith £ 9.95 BBC Micro Revealed £ 2.00	Friendly Computer Book	C 4	
Gateway to Computing BBC2. £ 4.95 Getting More from Your BBC & 5.95 Introducing the BBC Micro. £ 4.50 Step by Step Programming 1. £ 5.95 Step by Step Programming 2. £ 5.95 Step by Step Programming 3. £ 6.75 Advanced User Guide. £ 6.75 Advanced User Guide. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced M/C Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.50 Advanced Prog Tech for BBC. £ 7.95 Assembly Lang Prog for BBC. £ 7.95 Assembly Lang Prog and Ed — Birnbaum. £ 8.75 Applied Assembly Lang on BBC £ 7.95 BASIC Rom User Guide. £ 9.95 BBC Rom Book B. Smith. £ 9.95 BBC Micro Revealed. £ 2.90			
Getting More from Your BBC & Electron			
Electron £ 5.95 Introducing the BBC Micro £ 4.50 Step by Step Programming 1 £ 5.95 Step by Step Programming 2 £ 5.95 Languages/Programming 3 30 Hour BASIC £ 6.75 Advanced User Guide £ 12.50 Adv BASIC Rom User Guide £ 7.50 Advanced M/C Tech for BBC £ 8.50 Advanced M/C Tech for BBC £ 8.50 Advanced Prog Tech for BBC £ 8.50 Assy. Lang. Prog. made easy £5.95 ASSembly Lang Prog for BBC £ 7.95 Assembly Lang Prog 2nd Ed £ 7.95 ASSEMBLY EARLY	Gatting More from Your	DDC 2	1.95
Introducing the BBC Micro			- 05
Step by Step Programming 1 . £ 5.95 Step by Step Programming 2 . £ 5.95 Languages/Programming 30 Hour BASIC			
Step by Step Programming 2. £ 5.95  Languages/Programming 30 Hour BASIC. £ 6.75  Advanced User Guide. £ 12.50  Adv BASIC Rom User Guide. £ 7.50  Advanced M/C Tech for BBC. £ 8.50  Advanced Prog Tech for BBC. £ 8.50  Assy. Lang. Prog made easy. £ 5.95  Assembly Lang Prog for BBC. £ 7.95  Assembly Lang Prog 2nd Ed  — Birnbaum. £ 8.75  Applied Assembly Lang on BBC. £ 7.95  BASIC Rom User Guide. £ 9.95  BBC Rom Book B. Smith. £ 9.95  BBC Micro Revealed. £ £ 2.00	Stan by Stan Brogramm	ing t	
Languages/Programming 30 Hour BASIC	Step by Step Programm		
30 Hour BASIC £ 6.75  Advanced User Guide			3.95
Advanced User Guide	Languages/Programming	,	
Adv BASIC Rom User Guide £ 7.50 Advanced M/C Tech for BBC £ 7.50 Advanced Prog Tech for BBC £ 8.50 Assy. Lang. Prog. made easy £ 5.95 Assembly Lang Prog for BBC £ 7.95 Assembly Lang Prog 2nd Ed — Birnbaum £ 8.75 Applied Assembly Lang on BBC £ 7.95 BASIC Rom User Guide £ 9.95 BBC Rom Book B. Smith £ 9.95 BBC Micro Revealed £ 2.09	30 Hour BASIC	£ 6	3.75
Advanced M/C Tech for BBC £ 7.50 Advanced Prog Tech for BBC £ 8.50 Assy. Lang. Prog. made easy £5.95 Assembly Lang Prog for BBC £ 7.95 Assembly Lang Prog 2nd Ed — Birnbaum	Advanced User Guide	£12	2.50
Advanced Prog Tech for BBC. £ 8.50 Assy. Lang. Prog. made easy	Adv BASIC Hom User Gi	Jide € 7	.50
Assembly Lang Prog of BBC. £ 7.95 Assembly Lang Prog for BBC. £ 7.95 Assembly Lang Prog 2nd Ed — Birnbaum	Advanced M/C Tech for	BBC € 7	.50
Assembly Lang Prog for BBC £ 7.95 Assembly Lang Prog 2nd Ed — Birnbaum	Advanced Prog Tech for	.BBC £ 8	3.50
Assembly Lang Prog 2nd Ed  — Birnbaum	Assy, Lang, Prog. made e	asy£	5.95
— Birnbaum	Assembly Lang Prog for	BBC £	7.95
— Birnbaum	Assembly Lang Prog 2nd	t Ed	
BASIC Hom User Guide£ 9,95 BBC Rom Book B. Smith£ 2,00 BBC Micro Revealed£ 2,00	- Birnbaum	2	3.75
BASIC Hom User Guide	Applied Assembly Lang	on BBC. g	7.95
BBC Rom Book B. Smith £9.95 BBC Micro Revealed £ 2.00	BASIC HOM User Guide		9.95
BBC Micro Revealed£ 2.00	BBC Rom Book B. Smith	£9	9.95
BCPL User Manual Acorn£15.00	BBC Micro Revealed	9	2.00
215.00	BCPL User Manual Acou	rn	5.00
	The state of the s	10 011 077	00

٠	1.30 per book)		
	Beyond BASIC BBC Publ		
	Creative Assembler on BBC	3	5.95
	Drawing your own BBC progs	5	26.95
	Discovering BBC M/C	e	6.00
	Expert Guide James	ç	6.50
	Exploiting BBC BASIC	0	6.95
	FORTH Acorn	5	7.50
	Further Programming for BBC	5	5.50
	LISP Acorn	0	7.50
	Programming the BBC	-	
	Structured Programming	L	6.50
	S-PASCAL Acorn	E	
	Using BBC BASIC	£.	7.50
		21	0.00
	SOUND & GRAPHICS:		
	Advanced Graphics with BBC	£	
	BBC Graphics & Sound	£	7.50
	BBC Micro BASIC, Sound		
	& Graphics	3	7.50
	Creative Graphics Acorn	3	7.50
	Graphics on the BBC Micro	8	6.00
	Turtle Graphics	3	7.50
	EDUCATIONAL:		
	35 Educational Programs	c	6.00
	BBC Micro in Education	0	6.60
	Prog for Education (Pri.Sch)	E .	5.05
	DISC DRIVE SYSTEMS:	F	0.90
	BBC Micro Disc Companion		7.05
	Dies Beek	-	
	Disc Book	£	3.50
	Disc Programming Techniques	E	6.95
	Disc Systems	£	6.95
	Using Floppy Discs	£	6.95
	APPLICATIONS:		
	<b>BBC Filing Systems &amp; Databases</b>	5	7.95
	BBC Software Projects	£	6.95
	Business Programming on BRC	C	7.05
	Business Applications on BBC	£	7.95
	DIY Robotics & Sensors	8	6.95
	Essential Maths BBC/Electron	ç	5.95
	Exploring Music with BBC	-	
	& Electron	0	9.95
	Graphs & Charts Acorn.	0	7.50
	Interfacing Projects for BBC	c	6.95
	Making Music on the BBC	0	5.50
	GAMES:	-	0.00
	21 Games for the BBC Micro		5.00
	100 Programs for the BBC	L	6.00
	Creating Adventure Programs	E	6.00
	Instant Arcade Games	1	
	BBC User Guide Acorn	2	2.95
	MISCELLANEOUS BOOKS:	1	5.00
			13.
	6522 VIA Book	٤	4.50
	0704 00 -4 D		

EPROMS: 8K 2764-25 £4.20(d); 2764-30 £4.20(d) 16K 27128-25 £9.50(d); 16K 27128-30 £9.50(d) RAM: 8K standard power 6264-15 £9.50 (d) 8K lower power 6264 LP-15 £9.90(d)


01-208 1177

All prices exclude VAT. Please add carriage (a) £8 (b) £2.50 (c) £1.50 (d) £1.00 and 15% VAT to order value Carriage (a) by Datapost.

For fast delivery telephone your order quoting VISA or Access card or official order number.

(Minimum telephone order £5)

ORDERS FROM GOVERNMENT ESTABLISHMENTS, UNIVERSITIES, COLLEGES, STATE SCHOOLS, HOSPITALS, NATIONALLY RECOGNISED PLCS WELCOME.



# The differences between Basic 1 and 2, disabling the Break key and a chart of teletext characters are among Martin Phillips' topics

**Keeping hands** 

off the

# **Break key**

I GET many requests for methods of disabling the Break key in programs. At a superficial level it can be disabled (\*KEY10 OLDIM RUNIM), but it's very difficult to protect all programs from the effect of pressing it.

Two sorts of protection have been requested. The first is for methods of disabling it against the deliberate Break key-pushers. This problem is very difficult to overcome because even if the Break key is protected they will find other methods to interrupt a program, eg, switch the machine off at the back. Even the most elaborate program cannot overcome this!

The second is for the inadvertent pressing of Break. This is often requested by school teachers who are frustrated when a program has to be loaded in again. This becomes less of a problem when the children become familiar with the machine, as they soon learn not to press the Break key.

For the latter problem there are three solutions – I shall list them in order of ease and usefulness.

The most obvious solution is not to press the Break key! Often beginners press it simply to clear the screen or stop a program, and it becomes a habit. It's not difficult to teach even very young children that this key should not be pressed. They will, of course, try it to see what happens, but they soon learn that it's not in their interests to press it.

To prevent the key being pressed inadvertently, Philip Baum (aged 12) has designed a simple but effective Break key guard, which earns him £5. It is made from a small piece of card

which fits over the Break key of either the BBC micro or the Electron. Figure 1 is a template and should be drawn up to the dimensions shown and cut from card along the solid lines. Score along the dotted lines, then Sellotape it to form a box shape. The same idea can be used to protect other keys too.

The third method of protection is more drastic, involves a certain amount of soldering experience, and is only possible on the Beeb. When the BBC micro was being designed, the specifications were for a Break key at the back of the machine. It was eventually decided to put it on the keyboard, but provision was made for it to be moved to the back of the computer if so required. On older machines, there is a reset hole at the back of the machine, just to the left of the analogue port (looking from the front). This is missing on newer machines but there is provision for the switch on the circuit board. A push-button must be wired to this switch position on the main circuit




Figure 1. Template for Break key guard




Figure 2. Where to cut the link on the keyboard circuit board

IF YOU have a technical hitch or a programming problem let Martin Phillips give his diagnosis. We'll pay £5 if you raise a really interesting point. Please give full details of the system you're using and include a listing where appropriate, making your question as specific as possible. WRITE TO: Hints & Tips, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

board. This then should act in just the same way as the Break key does, and can be used with the CTRL key for autobooting discs.

Next it's necessary to disable the Break key itself. This can be done on older machines by cutting the link on the keyboard circuit board shown in figure 2. On newer machines, with the new keyboard, it's not possible to get at the links because of the metal keyboard plate which covers the circuit board—the only way is to cut the track from the Break key that leads to the connector.

# Let the

# experts find

# your faults

I OFTEN receive letters from readers describing a fault on their computer and asking for advice on how to repair it. To give an answer here is very difficult without having the machine to test, as there are often many possible causes.

In many cases the simple answer is to return it to your local computer shop and let them deal with it. In my experience, most faults cost very little to rectify. Reputable computer shops can usually carry out the repairs quickly, and they have the equipment to test the micro. This can end up much cheaper than attempting a repair yourself and risking further damage.

You can help the dealer by providing a written description of the fault, or the circumstances under which it occurs – eg, that random characters appear on the screen after the computer has been on for several hours. That way the service engineer knows he should leave the computer switched on for some time before looking for the fault (the sooner he finds the problem the cheaper the repair bill). Intermittent faults have a habit of only occurring at home, and the computer behaves perfectly when in the computer, shop – obviously these are very difficult to



# **UNBEATABLE VALUE**

51/4" DISC	1-4	5-9	10+
	Boxes	Boxes	Boxes
SIN	NGLE S	IDED	
Description	Ex. VAT	Ex. VAT	Ex. VAT
Double Density			NATION.
40 Track 48 TPI	11.90	10.90	9.90
Double Density			
80 Track 96 TPI	17.90	16.90	15.90
DC	UBLE S	SIDED	
Description	Ex. VAT	Ex. VAT	Ex. VAT
Double Density			
40 Track 48 TPI	16.90	15.90	13.90
Double Density			
80 Track 96 TPI	19.90	18.90	17.90
PLASTIC LIBRARY CASES £1.50 Ex. VAT			x. VAT
Packing & Delivery 75p per box or Free for 10 + boxe			10 + boxes

Education Authorities, Dealers & OEM's can obtain quantity discounts on 8'',  $5\frac{1}{4}$ " &  $3\frac{1}{2}$ ". Please phone for prices.

AIM is a well established company in the United States and Great Britain and our reputation is such that we supply only prime quality, American manufactured Diskettes with Lifetime, no quibble, guarantees.

We **AIM** to dramatically reduce your operating costs, so why not call us for all your requirements.

AIM Diskettes are shrink wrapped, packaged in boxes of ten and come complete with hub ring, sleeve, write protect and coloured library labels.

Please send the following quantity of AIM D	Please send the following quantity of AIM DISKETTES		ADVANCED INTERNATIONAL MARKETING (L
Description	Qty	Price (ex VAT)	
10 SS/DD 40 T 48 TPI			74a Heath Road, Twickenham, TW1 4BW
10 SS/DD 80 T 96 TPI		Mary Comment	Telephone: 01-891 3644. Telex: 946461 (USA) 111 West St John Street, San Jose, Cal 95113
10 DS/DD 40 T 48 TPI			
10 DS/DD 80 T 96 TPI		E. E. Hart 201 to	Name
Plastic Library cases £1.50		all multiplication in	Address
Total value exclusive o	f VAT	To Take Mark L	D. J. J.
Total packaging & delivery		Post code	
Sub-Total exclusive o	f VAT		Please debit my Access card, No
VAT a	15%		
TOTAL VALUE (payable to AIM)		Signature:	

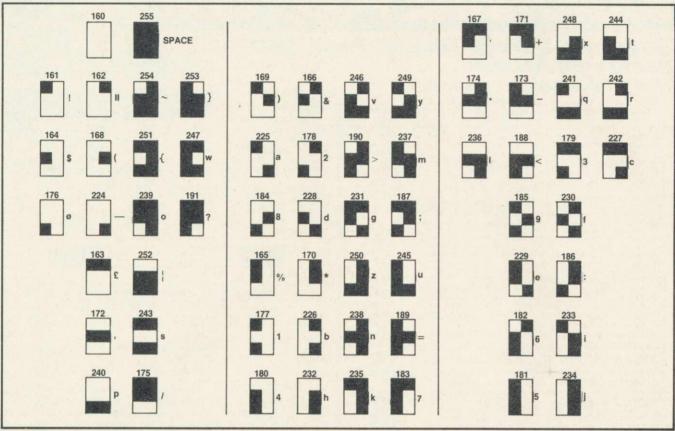


Figure 3. Graphical order layout for the teletext characters

# Teletext characters

# on show

A USEFUL chart of the BBC's teletext characters wins £5 for D Webb of London. He was prompted to devise the chart after trying to use the one in the BBC User Guide, which is set out in numeric and not graphical order, and uses black for the background and white for the coloured characters. He also found that character 228 was upside down (yet another User Guide bug?).

Mr Webb laid out his teletext character sheet with the following logic:

1) Sort characters into groups of '0' cells, '1' cells, '2' cells, etc.

2) Pair each shape with its partner if it has one, ie, left-hand and right-hand.

3) Pair these shapes with their inverse partner, eg, black cell for white cell.

4) Arrange with top left-hand cell starting in the top left-hand corner.

.5) Number so that black cell represents actual screen pixel shaded.

If all this seems rather complicated, then look at the chart (figure 3). It really is far easier to find which number refers to a particular character.

The teletext characters can easily be entered from the keyboard. First press CTRL together with a function key.

f1 gives red graphics

f2 gives green graphics

f3 gives yellow graphics

f4 gives blue graphics

f5 gives magenta graphics

f6 gives cyan graphics

f7 gives white graphics

Pressing any of the keys shown on the chart will give the appropriate teletext character. These can be included in programs by enclosing them and the function key code inside speech marks after a PRINT statement. They can also be put after a REM statement provided it, too, is enclosed by speech marks. Do be careful if using this technique in listings you intend to print out, for these teletext codes do funny things to the printer and have to be filtered out using the \*FX6 call. Even so, the printer will not be able to display these codes.

Listing 2 allows you to view all these codes. It is a short routine which will display each of the codes in turn plus the ASCII number. The codes are displayed in green, but can be changed by altering the CHR\$(146) in line 30:

CHR\$(145) gives red graphics CHR\$(146) gives green graphics CHR\$(147) gives yellow graphics CHR\$(148) gives blue graphics CHR\$(149) gives magenta graphics CHR\$(150) gives cyan graphics CHR\$(151) gives white graphics Note that ASCII codes 192 to 223 do not produce graphics characters. If required, these can be filtered out of the above listing by inserting another line, eg:

25 IF N > 191 AND N < 224 THEN GOTO 50

# No filing system,

# no application

IN FEBRUARY'S Hints and Tips, I published a procedure for determining the current filing system, and asked how it was possible to select no filing system.

C J Davies from Hove in Sussex has written a short routine (listing 3) to produce a dummy filing system that will then give a 'no filing system' error if any filing system command is given.

The program works by calling OSFSC with A=6 to warn the current vector owner that it is no longer in control, then setting up the vectors to the dummy filing system, and lastly issuing ROM service call &0F to warn other ROMs of the vector change.

Please don't write in to ask for applications for this program! The only possible one I can think of is as some form of protection against copying, but even this is doubtful.

Buy direct through Prestel (Page \*2582020) using your Access

Most programs available on Micronet

, , ,,	oc programs available of the lice of the		
105	MAILING Holds 218 addresses. Alpha & Post code sorts.		
	searches, any label format, delete, add and amend	£11.95	В
201	GAMES 1 5 Card, Minefield, Darts, Pontoon & Mrmidon	£5.95	B/E
202	STOCKMARKET Exciting world of Stocks and shares, 1-4 players.	£5.95	B/E
301	HANGMAN Word game in English, French, German, Italian, Spanish.	£7.95	В
302	DISTANCES Three graphic maps of U.K., EUROPE & the WORLD.		
002	Calculate the distance between any 2 places	£4.95	B/E
303	FLAGS 98 full colour flags of the world with questions	£4.95	B/E
304	STATPACK Statistics package giving over 30 results	£11.95	В
305	GRAPH Produce varied graphs & charts of functions	£7.95	В
306	FRENCH A New audio visual computer way to learn a language	£7.95	В
307	SPELL-CHECK Add to WORDWISE		
	15000 words in 12 dictionaries ideal in education	£17.95	В
504	PROCAID includes SEARCHBAS to search a BASIC program and alter it.		
	PROCVAR to list variables in a BASIC program & PROCFLUSH to clear		
	resident integers in RAM	£3.45	A/B
505	UTILITY-A Our best selling tape includes PROCAID. DEFCHER to		
	design & display graphic characters, SORTM/C a very fast machine	05.05	4.10
	code numeric sort. SORTBAS the undisputed fastest BASIC sort routine.	£5.95	A/B
520	BANNER Print giant text and graphics on paper for displays	£3.95	A/H
521	BIGLETR Print as above on screen/paper with screen dump	£5.95	A/B
600	FORTH '79 FORTH second language ROM	£34.74	В
601	LOGO-FORTH Advanced Turtle Graphics Language ROM with FORTH	£57.50 £57.50	B
602	PASCAL T Structured language ROM with compiler-interpreter XCAL Computer Assisted Learning ROM for presentations	£65.00	В
603			
605	WORDWISE Super fast & easy to use wordprocessor in ROM	£33.95	В
606	CDUMP Screen dump, 8 colours, suitable for GP700A	£12.95	В
607	GDUMP Screen dump ROM, 8 shades, 8 sizes and windows	£17.95	В
608	GRAPHICS NEW ROM for Sprites, LOGO, circles, etc	£27.50	В
700	BOOKS Various titles for the BBC Micro from	£6.95	
801	CASSETTES C15 Computer quality tapes packed in 10's	€4.50	
810	5.25" DISCS MEMOREX: SS/SD 40/80T £19.95 SS/DD 40/80T	€20.95	
901	EPSON RX-80 T/F Superb. 100cps with Tractor & Friction feed	£275.00	
902	EPSON FX 80 Magnificent 160cps, 6 founts, graphics, F/T Roll	£365.00	
910	DISC DRIVES Slimline 3" or 5\cdot\" 100K-800K Japanese Format disc	£369.00	
	cable and excellent manual. Plus £50 of FREE Software	£189.00	
915	DISC UPGRADE Double or Single Density available in one system	289.00	
920	VDU STAND Stainless Support protects your micro	£19.95	
930	GREEN VDU 12" Green Monitor, cream sloping front case	£79.95	
931	COLOUR VDU JVC 14" Colour Monitor 370 x 470 pixels	£179.95	
	The state of the s		

ADD VAT TO ALL PRICES EXCEPT BOOKS

Add £1.75 for programs on 40 or 80 Track Disc. No post charge in UK Send for our free brochure for more information before parting with your money

# memo-calc

107 MEMO-CALC £12.95 B C/D
"IT MUST BE AMONG THE LEAST EXPENSIVE PIECES OF USEFUL SOFTWARE YOU WILL EVER BUY" Revue by Practical Computing July 1983.

Database/calcsheet program which allows up to 255 columns. The number of rows is automatically set from 5 to over 1000 depending on the columns declared. Both numeric and alphanumeric data can be stored in any cell and can be of any length up to 255 characters.

There are a multitude of uses for this program from accounts to diaries, club or personnel records etc. and is probably the one program that we all need. MODE7
107a Manual for MEMO-CALC included free otherwise £2.00 (0% VAT)



Part 1 is a BASIC program running in MODE7 which accepts new data on employees, allows additions, deletions and alterations, listing of P35 & automatic alterations to the codes as required by tax notice P7X. Fully user friendly with colour and graphics to make life simple for the operator.

Fully User Triendry with colors and pay to perator.

Part 2 (WEEKLY) or Part 3 (MONTHLY) is designed to handle the calculations of wages and N.I. It allows for standard pay, two overtime rates, optional pension funds (monthly only) other pay, holiday pay, bonuses, post-tax adjustments and no pay.

106b COIN ANALYSIS £4.95 B C/D

106c PENSION £4.95 B C/D EXTRA

106d PAYSLIP FORMS £25.00 per 1000 EXTRA

Buy direct or Prestel No. 25821534

£27.95

**Most Programs** Now Available For SX Basic Dealer Enquiries

# **ORGANISATION AT** YOUR FINGERTIPS!

We are pleased to offer you a wide range of products primarily for the BBC microcomputer software, firmware and hardware for your computer system.

# PERSONALISED SOFTWARE

"We are happy to quote for writing programs to suit your own specific purpose. Please telephone for detals in first instance."



# CASHB

102 CASHBOOK £11.95 B C/D
FIRST CHOICE This is a double entry cashbook program showing cash
and bank credits and debits. i.e. 4 columns. Any number of individual
accounts can be used and analysed or totalled individually or
cumulatively by associated group. A friendly but very practical, and
reliable program which despite its low cost is used by many people in a
range of situations from domestic and clubs to schools and businesses.
MODE7
102d CASHBOOKd £19.95 B D
SECOND CHOICE This version of the above program uses random
access disc files and can hold up to 1250 entries on 100K discs and up to
2500 on 200k discs. There is sophisticated protection against
unauthorised use built in. MODE 7
102f ACCOUNT £29.95 B D

102f ACCOUNT £29.95 B D THIRD CHOICE This version of the above program uses random access disc files and an hold up to 1100 entries on 100K discs, and up to 2250 on 200K discs. Included is a choice of CASH/BANK or VAT/BANK headings. Over 830000 possible accounts combinations. Ledger sheets and summaries can be printed as well as full accounts. The latest balance is available at any time. This program is only available on disc MODE 7

# Special Interest Items

### NEW EXTENDED PAYROLL

Disc only version of our very popular PAYROLL with extensions to include three O/T rates, SSP, contracted in and out, pensions, personnel records and many other features - £49.95 + VAT.

ACCOUNT and CASHBOOK d PROGRAM OWNERS Please note we can now offer monthly analysis feature. Return your disc with £10.00 for upgrade.

# **Top Mailing Program**

**RANDOM MAILING up to 1850** addresses, names, phone numbers & codes one disc. Selective printing any number of labels, repeat, stationery or fan fold. Automatic WORDWISE & letters produced repeatedly with personalised names many other features such as automatic sorting by company or personal names. By far the best and most comprehensive program of its type for the BBC Micro Price £29.95 + VAT

25 Fore St. Praze, Camborne Cornwall.TR14OJX tel: 0209 831274

# What's the difference

# between Basic 1

# and Basic 2?

THERE are two versions of the Basic language available for the BBC micro—Basic 1 and Basic 2. It's easy to tell them apart—as soon as the computer is switched on type REPORT and press Return. A copyright notice will be printed out; if the year is 1981, then it is Basic 1, and if it's 1982 then the version is Basic 2. The Electron is only supplied with the Basic 2.

Although there are many BBC micros with Basic 1, a lot of people are writing programs on a machine with Basic 2 and not checking that they work on Basic 1. The unfortunate person with Basic 1 finds that the program will not work because the author has used some feature of Basic 2 that either is not present in Basic 1 or does not work correctly.

My 'Black Book' of publishers who have committed this error is rapidly growing, and includes some surprising names – publishers one would have expected to test their programs under all conditions. Even the national MEP has committed this error in recent software it has distributed.

My own machine has both Basic 1 and Basic 2, and I can easily switch between the two using the \*FX142 call. The parameter following the \*FX142 is the ROM socket number of the version of Basic to be selected. I have placed them in the ROM sockets so that Basic 1 is selected by default. That way all my programs are tested on Basic 1, and I am able to give special Basic 2 versions where appropriate.

Many readers with Basic 1 will be wondering if it's worth buying the new version. Unlike the newer operating system, which was sold quite cheaply, it's expensive to purchase Basic 2 — mine cost about £40. There are only a couple of bugs to be cured, and several new commands have been introduced. Because of the number of computers which were supplied with Basic 1, I feel it's unlikely we'll reach the point where owners are expected to have upgraded their machines to the new Basic, in the same way as was expected with the old 0.1 operating system.

What are the differences to be found in Basic 2? INSTR works even if the second string is longer than the first; ON... GOTO and ON... GOSUB can be followed by ELSE without a byte being left on the stack; several improvements were made to the error messages; the

SIN, COS and LN functions were completely recoded to make them more accurate; the binary to decimal string conversion routines used for PRINT and STR\$ were changed to allow up to 10 figures of precision on printing.

A new statement, OSCLI, was introduced, and four new operations were made available in the assembler – EQUB, EQUW, EQUD and EQUS. A new statement (OPENUP) was introduced which had the same token as OPENIN, and OPENIN was given a new token value.

None of these changes is very significant but some can create problems if the program is then to be run using Basic 1. Obviously, EQUB, EQUW, EQUD and EQUS should be avoided completely, asshould OSCLI.TheON...GOTO...ELSEOTON...GOSUB...ELSE bug is best avoided by not using that syntax.

The INSTR bug, however, can be annoying. It causes unpredictable results when the second string is longer than the first. This can be avoided by always using INSTR in a function:

DEF FNinstr (a\$,b\$)
IF LEN(b\$) > LEN(a\$) THEN = 0
= INSTR(a\$,b\$)

# Quickfire

# questions

PROBLEMS trying to insert fan-fold paper into a printer? Then don't insert the end of the paper, fold it at the first perforation and then insert it into the printer. The fold makes a strong, clean edge with less risk of tears and jamming, and once threaded, the surplus paper can be rewound.

TAKE THE cover off the BBC now and then (unplug it first) and you will be amazed at the dirt that collects under the keyboard. Clean between the keys with a clean new paint-brush. Unfortunately this is not so easy to do with the Electron, as the keyboard is fastened to the top part of the case, so I'd advise Electron owners not to open up the machine unless it's absolutely necessary.

IF A function key needs to be recalled, type AUTO and press Return, then press the function key and its contents will appear as a program line (or as a series of program lines). If in the middle of a program then start the AUTO line number off at a high line number and delete when finished with. This will work with Basic 1 or Basic 2. Similarly, the very useful OSCLI which is not available on Basic 1 can be implemented by using a short procedure:

DEF PROCoscli (a\$) DIM A 20 \$A = a\$ X% = A MOD 256 Y% = A DIV 256 CALL &FFF7 ENDPROC

This procedure will also work with Basic 1 and Basic 2, although it's rather clumsy. It's not good programming to put the DIM statement in the procedure – it's best put at the start of the program. The DIM space, in this case 20, can be varied to suit the expected length of the OSCLI string.

A different way of doing this, avoiding the use of the DIM statement, is to specify the memory start location for the string. The following example uses locations &900 on. Note that it's not possible to use zero page locations here

DEF PROCoscli (a\$) A = &900:\$A = a\$:X% = 0:Y% = 9 CALL &FFF7:ENDPROC

The other main problem Basic 1 users will find when typing in listings is that they get an error message at a line containing OPENUP. This should be changed to OPENIN for the program to work correctly.

# Disc full

# message bug

MY PLEA for help with a 'Disc full' message in February's issue had only two replies – from C Sherin and B Beeston – indicating that this is a very obscure fault. There would appear to be two problems: one in the Watford DFS, and the other in the disc drive itself. Mr Sherin managed to cure a similar fault by having his disc drive realigned.

Why the 'Disc full' message? This is a minor bug in the DFS, I believe. I have got this error message when doing a \*BACKUP using a twin switchable drive. It appears if one tries to backup from one format to another, eg, 40 track to 80 track (which is not possible). It seems that perhaps this error message is called at an inappropriate time.

You'll find Hints and Tips listings 1 and 2 on yellow page 97



# The original and still the leader in value.

# Floppy Disk Prices

All disks are 51/4", 48tpi, featuring write protect notch, centre hubs, double and single density, Tyvex sleeves and full set of labels.

25 SS/DD disks in MEGA•BOX £29 plus VAT £4.35 and £2 p&p = £35.35 25 DS/DD disks in MEGA • BOX £39 plus VAT £5.85 and £2 p&p = £46.85 50 SS/DD disks in MEGA • BOX £50 plus VAT £7.50 and £2 p&p = £59.50


**\*50** DS/DD disks in **MEGA**•**BOX** £70 plus VAT £10.50 and £2 p&p = **£82.50**\*

10 SS/DD disks in mini box £13 plus VAT £1.95 and £2 p&p = £16.95 10 DS/DD disks in mini box £18 plus VAT £2.70 and £2 p&p = £22.70 \*£5 PRICE REDUCTION

The MEGA BOX is a top quality rigid plastic storage box with see-through lid and four dividers. Holds up to 60 diskettes.

# THE midiebox

15 DS/DD disks in our midiobox at a bargain price. Our new midiobox has some great features. It's made of high impact plastic and holds up to 30 51/4' disks, but is one of the neatest on the market. Measuring only 6"×6"×3", the rigid lid conveniently holds the disks you are working on ready to hand. And with 15 DS/DD disks its a bargain at only £20 plus £3 VAT and £2 p&p = £25.





# SUPERDISK

Suitable for any user, any computer, any format. Single sided, double sided, 48 or 96 tpi. Individually tested.



10 in a mini • box £19 plus VAT £2.85 and £2 p&p = £23.85

15 in a midi box £25 plus VAT £3.75 and £2 p&p = £30.75

25 in a MEGA • BOX £42 plus VAT £6.30 and £2

p&p = £50.30 50 in a **MEGA•BOX** £80 plus VAT £12 and £2 p&p = £94.00

Disco·Tech (U.K.) Ltd., Lex House, 3-6 Alfred Place, London WC1, England.

Disco-Tech (U.K.) LTD. are the sole distributors of XLTRON.



XLTRON disks are recommended for BBC, Atari and Commodore computers. If you need advice on other micros just ring 01.631 0255

# **Our Quality Promise**

You can order with confidence. We buy disks from international manufacturers to our specifications, then test, retest and grade them in our London laboratorie

# Fully Guaranteed

The XLTRON quality control is so stringent that we can give our famous 'two for one' guarantee. If you find a faulty disk, return it to us, and we'll send you two in exchange immediately. All part of our five year guarantee

# Personal Callers Very Welcome

We're now established in our new showroom in Alfred Place. You can save our £2 delivery charge by calling in – you'll be welcome weekdays from 10.00am till 5.00pm Saturday 10.00am-4.00pm.

# Help Lines


Technical: 01-631 0255 01-631 3600 Sales:

If you want help or information to place an order just ring our 'help' lines.

# Official Orders

We accept orders from all government bodies, schools, universities, libraries, armed forces etc. We despatch on receipt of an official purchase order. If you can't raise a cheque without an invoice, just post or telephone your order and we'll

RHINOKOTE is a registered name of Disco Technology Ltd.  XLTRON is a registered name of Disco Technology Limited.	send you a pro-forma by return.
To: Disco·Tech (U.K.) Ltd., Lex Ho	ouse, 3-6 Alfred Place, London WC1, England
Just fill in the coupon or send your order on a por Please send me the following, (tick the appropria	steard or letter. Or phone your order on 01.631 3600 At the boxes):
(QTY) \Bigcup SS/DD \Bigcup DS/DD \Bigcup	SUPERDISK disks in a
□ MEGA•BOX □ m	idi•box   mini•box
I enclose a cheque/p.o. for £ or debit	my Access/Diners/Amex card
card no.	
Name:	_Signature:
Address:	
	Postcode:
(Block Capitals Please)	

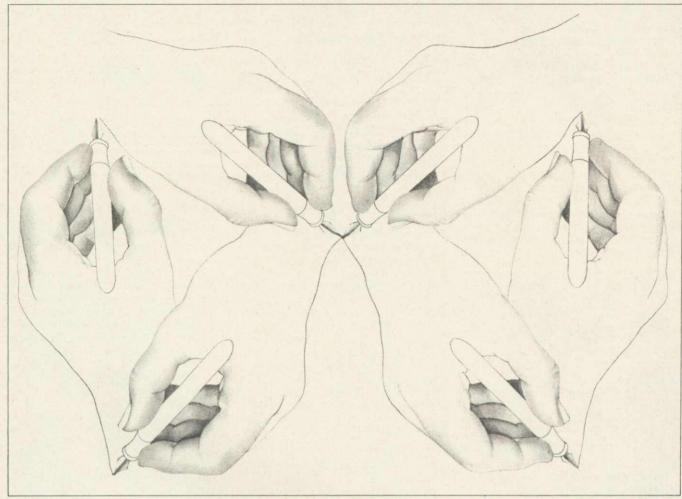

# LOOP THE LOOP

Tessie Revivis discusses one of the key issues for

# understanding and writing successful programs

NE AREA where computers excel is their ability to perform repetitive tasks simply and quickly. For example, when your micro is switched on and you think it's just sitting there waiting for you to type a command in, it's actually executing an incredibly fast program that is repeating an endless stream of loops. Consider just what the program does; it looks at the keyboard, it displays characters on the screen, it flashes the cursor and so on – you can almost imagine that there are a thousand leprechauns running around inside with buckets of information.

Program loops are an extremely important facet of learning to program correctly, and there are two different types available on the Electron and BBC micro. First there is the FOR ... NEXT loop – this is used when we

know the number of times we wish that particular loop to be repeated. The second type is the REPEAT... UNTIL loop – this is used to repeat a loop until a certain condition is met. FOR ... NEXT loops are probably the most common so I'll examine these first.

Suppose we wanted to print a list of numbers from 1 to 1,000,000. The hard way would be to write a program with a million lines, each printing a single number – obviously ludicrous and time-consuming. Utilising a FOR...NEXT loop, the whole program takes just three short lines:

10 FOR N% = 1 TO 1000000 20 PRINT N% 30 NEXT N%

Value of @% to Format 2 with 5 decimal places to a field width of 8 places

The FOR and NEXT commands are called the entry and exit positions, and as you can see, they are at opposite ends of the program. Because we want to perform the loop one million times we need to keep a record of the current count values. To do this we can use a variable, N% in this instance. You can use any variable you like but it's good to get into the habit of using the same variable to perform the same function wherever possible. This helps to ensure that your program is error-free, and makes the program easier for you to write and follow. I always use N% and L% to act as number and loop counts respectively. Avoid using the letters I and O as variables such as I% or 0% because they can be confused with ones and noughts.

The counting program begins by page 46 ▶

defining the range of N%, which starts at 1 and goes on to 1000000. Line 20 prints the current value of N%, and finally line 30 says do the NEXT value of N% – this effectively increments the value of N% by 1. When N% reaches its maximum prescribed value the loop is completed. The program in this instance would finish but if it formed part of a bigger program it would continue with the next line.

This loop has limitations in that it only goes up or increments in steps of one. How would we go about printing the even numbers between 0 and 100? One answer would be to add an extra one to the loop variable within the FOR ... NEXT loop itself:

10 FOR N% = 0 TO 100 20 PRINT N% 30 N% = N% + 1 40 NEXT N%

Line 30 adds one to the current value of N%. Remember that the loop itself adds one to N%, giving us the step size of two. This method is clumsy, though, and an extra statement can be added to the FOR... NEXT combination to specify the exact step size. This keyword is STEP and is inserted at the end of the FOR line. Our even numbers program would become:

10 FOR N% = 0 TO 100 STEP 2 20 PRINT N% 30 NEXT N%

Much neater, you'll agree. See if you can modify this program to print the numbers from 25 to 75 in steps of five. We can also get FOR... NEXT loops to work in reverse (to count backwards if you like), by reversing the order of the loop control variable parameters and specifying a negative step size. The following program counts from 100 down to 1:

```
10 FOR N% = 100 TO 1 STEP - 1
20 PRINT N%
30 NEXT N%
```

Here the entry value is 100, the exit value is 1 and the step size is - 1. What would happen if we left out the STEP size in this program?

The second type of loop is REPEAT ... UNTIL. This does not require a variable to work on but has to test for a certain condition being met. The loop will repeat continuously until that condition is met.

We could translate our one to one million counting program as follows:

```
10 N% = 0
20 REPEAT
30 N% = N% + 1
40 PRINT N%
50 UNTIL N% = 1000000
```

The immediate thing to note here is that

```
10 FDR A%=1 TD 100
20 FDR B%=1 TD 100
30 FDR C%=1 TD 100
40 FDR D%=1 TD 100
50 NEXT D%
60 NEXT C%
70 NEXT B%
80 NEXT A%
```

Figure 1. If FOR . . . NEXT loops are nested inside each other, they must be symmetrical

the program is longer, twice as long in fact, so it's not very efficient when used as a counting loop. The reason is that the program itself must take into account, and remember to increment, the loop control variable. First line 10 sets N% equal to nought. Then it enters the loop, increments N% by one prior to printing its value. Finally it tests to see if N% is equal to one million.

REPEAT... UNTIL loops are much more useful in testing for non-counting conditions. Suppose we wanted to detect and display a key pressed at the keyboard and continue doing so until the Q key was pressed. Using a REPEAT... UNTIL loop makes this task simplicity itself:

```
10 REPEAT
20 C$ = GET$
30 PRINT C$
40 UNTIL C$ = "Q"
```

Run the program, and press any of the alphanumeric keys. They are displayed until you press the Q key. The UNTIL condition in the loop at line 40 has now been fulfilled so the loop is exited. The condition you test for in the UNTIL statement can be almost anything that can be evaluated by the program. You can even make a program repeat forever (well, until Escape or Break are pressed) by changing line 40 to read:

#### 40 UNTIL FALSE

Loops may also enclose loops. In other words it's quite permissible to place a loop inside a loop, a technique known as 'loop nesting'. Two REPEAT... UNTIL loops can provide the basis for a number guessing game:

10 REM Number Guessing

```
20 REPEAT
30 R% = RND (9) + 49
40 REPEAT
50 PRINT "Guess a number";
60 G% = GET
70 IF G% < > R% PRINT "Wrong!"
80 UNTIL G% = R%
90 PRINT "Correct, well done!"
100 REM Press a key to continue
110 K% = GET
```

You should be able to see the two loops. The outer loop is the overall con-

120 UNTIL FALSE

trol loop, in this case it just ensures that the program repeats when finished(!). The inner loop is responsible for playing the game and continues asking you to guess until you get it right.

FOR...NEXT loops may also be embedded with REPEAT...UNTIL loops and vice versa. Similarly FOR...NEXT loops may be nested inside each other, but care must be exercised here. Look at the following program—what's wrong with it?

```
10 REM Nested loops
20 FOR N% = 0 TO 100
30 PRINT N%
40 FOR L% = 1 TO 99
50 PRINT "L% = ":L%
60 NEXT N%
70 NEXT L%
```

Have you spotted the mistake? The NEXT variables are the wrong way round. If you run this program you will get an error message. FOR...NEXT loops nested within one another must be symmetrical: a FOR must always have a matching NEXT, as figure 1 shows.

Another downfall is trying to jump out of loops before they have fulfilled their potential, as this awful example shows:

```
10 FOR N% = 1 TO 100
20 IF N% = 50 THEN GO TO 50
30 NEXT N%
40 END
50 PRINT "N% = 50"
```

Here the loop will never be completed and this will leave the computer in a very confused state of mind. If your program was of any length this would almost certainly cause it to crash at some stage. If you must jump out of a loop do so by fulfilling the exit condition. The above program could be rewritten to ensure a smooth run thus:

```
10 FOR N% = 1 TO 100
20 IF N% = 50 THEN N% = 100
30 NEXT N%
40 PRINT ''N% = 50''
```

Here, although the FOR...NEXT loop only goes from 1 to 50 the computer is fooled into thinking it has completed it 100 times and remains happy.



# **Watford Electronics**



Dept. AU, 250 High Street, WATFORD, ENGLAND Tel: Watford (0923) 40588/37774 Telex: 8956095 WAELEC ACCESS ORDERS Tel: (0923) 50234



# BBC Micro 'B' Only: £299

Price includes FREE 5 games software packages

BBC MICRO 32K + 32K

(extra 32K RAM Card already fitted)

Only: £359

BBC B with Watford DFS	£342
BBC B with Acorn DFS	£352
BBC B with Watford DDFS	£375
BBC B with ECONET	£335
BBCB + DFS + ECONET	£395
BBCB + DFS + 32K RAM Card	£407
BBC B + 13 ROM Board fitted	£325
BBC B + 32K RAM +	
13 ROM Board	£386
BBC B + DFS + 32K RAM +	
13 ROM Board all fitted	£439

Complete BBC B ECONET Networking System now available.

(P.S. ROM based software purchased with any of the above Micros will be fitted free of charge).

6502 Acorn 2nd Processor	£175
Z80 Acorn 2nd Processor	£339
TORCH Z80 Card + Software	£275
TORCH Z80 Card + Soft. + Disc Pack	£649
TORCH UNICORN Z80 System	£650
Acorn Bitstick Acorn IEEE Interface Complete Acorn Teletext + Interface (Securicor carriage on Micros £7)	£325 £280 £195

# **Dust Cover for BBC Micro**

Protects your expensive Micro from foreign bodies while not in use. £3.50

#### **PRINTERS**

	EPSON RX80 Printer	£209
	EPSON RX80 F/T Printer	£219
	EPSON FX80 Printer	£316
	EPSON FX 100 Printer	£429
	Centronics PRINTER CABLE for all	the
ab	ove printers to interface with the B	BC
M	icro.	£7
(:	Securicor carriage charge on printer	s £7)

## **RX & FX PRINTER INTERFACES**

Epson interfaces fit inside the printer to allow connection using techniques other than Centronics.

RS232 £25 RS232 + 2K Buffer £5!;
IEEE 488 £62

### **JX-80 FULL COLOUR PRINTER**

The new Epson JX-80 DOT MATRIX COLOUR printer is fully compatible with the popular FX-80. Using a four colour ribbon, printing can be in 7 colours with speeds of up to 160 CPS. It is capable of 80 characters per line or 137 in condensed mode. Its resolution is selectable from 480 to 1920 dots per line. The printer has a friction and fully adjustable tractor feed mechanisms as standard.

Introductory offer £525

# PRINTER RIBBONS & VARIOUS DUST COVERS

Type	Ribbons	<b>Dust Covers</b>
MX100/FX100	£10.00	£5.25
FX80/MX80	£4.75	£4.95
RX80	£4.75	£4.50
GP80	£4.50	
GP100	£4.95	£3.95
GP250	£5.95	£3.95
KAGA KP810	£5.95	£4.75
CANON PW1080	£5.95	£4.75
MICROVITEC MONIT	TORS -	£5.50

# 4 COLOUR PLOTTER PRINTER

SAKATA SCP-800 printer/plotter facilitates plotting & printing in 4 colours on paper upto A4 size, using easily replaced pens. In text mode it prints upto 12 CPS. Max 160 Char. per line. In graphics mode it offers full plotting facilities incl. drawing, moving, scaling of text, rotation & drawing of axes. (Write for a sample printout).

# Only £175

Set of 4 SPARE PENS only £3.95

#### PRINTER SHARER

Allows 3 BBC Micros to be connected to one

Only: £65

# **BROTHER HR-15**

DAISY-WHEEL PRINTER

Brother HR15 is a high-quality daisy-wheel ideal for a budget printer for serious use. Notable features of this printer include a 3k buffer, 18cps (max), bi-directional printing, proportional spacing, Centronics or RS232 interfaces as standard, optional sheet feeder and an optional keyboard.

With immediate effect, we are offering at no extra cost ON-SITE 12 months
Maintenance on all HR15 Printers purchased from WATFORD on or after March 1985.
W.E. GIVES YOU A GREAT DEAL

ONLY £325 (carr. £7)

Single Sheet Feeder	£195
Electronic KEYBOARD	£135
TRACTOR FEED Attachment	£90
RIBBON CARTRIDGES:	
Fabric £3.75; Carbon £3.7!	5;
Multistrike £6	

DAISYWHEELS (various typefaces) £18

## **Listing Paper (Perforated)**

2,000 Sheets 9½" Fanfold Paper	£13
1,000 Sheets 15" Fanfold Paper	£9
Teleprinter Roll (Econo paper)	£4

Carriage on 1,000 Sheets £1.50

## **PRINTER LABELS**

# (On continuous fanfold backing sheet)

1,000	90×36mm		£5.00
1,000	90×49mm		£7.75
1,000	102×36mm		£6.25

Carriage on 1,000 Labels £1.00

All prices exclude VAT

# **SPECIAL OFFER**

HITACHI EPROMs for Sideways ROMs 2764–250ns £3.99 27128–250ns £8.99

RAMs (Low power) for ATPL, WATFORD, etc., Sideways ROM Boards

6116LP (2K) £3.10 6264LP (8K) £9.25

(Maximum of 5 ROMs or RAMs of any one type per order). Dealers inquiry welcome.

# KAGA KP810 NLQ PRINTER

This new Japanese printer has EPSON FX/RX compatible control codes and is functionally equivalent to an FX80 with the added advantage of its 'Near Letter Quality' mode. It is solidly built and features include: Normal, Italic, Enlarged, super/subscript, proportional spacing and user-defined character set. Extras over the FX80 included in the price are Near Letter Quality (NLQ) print ideal for correspondence, Proper adjustable tractor feed, half speed quiet mode and 3K buffer. The printer is bi-directional and logic seeking to give a speed of 140CPS for high throughput in conjunction with the standard 3K buffer. 8K RAM may be added to give more user-defined character sets. Centronics parallel interface + Watford's 12 month NO QUIBBLE WARRANTY.

Special Offer: ONLY £252 (£7 carr.)

RS232 interface + 2K buffer to connect to other micros.

# **EPSON HI-80 PLOTTER**

The latest addition to the popular range of EPSON Printers/Plotters. Prints in upto 10 colours. Has many more features. Please write in for spec sheet.

Price: Only £399 (£7 carr.)

#### **KAGA KP910 Printer**

Similar to the KP810 but with 17" carriage for wide print. Gives 156 columns of normal print or 256 columns in condensed mode. Ideal for printing out spreadsheets.

ONLY £339 (£7 carr.)

## **PRINTER LEAD**

Centronics lead to connect BBC micro to EPSON, KAGA, SEIKOSHA, NEC, STAR, JUKI, BROTHER, SHINWA etc. printers.

Standard length (4 feet long) Extra long (6 feet long)

£7

Continued .



# THE ULTIMATE DFSs for the **BBC MICRO**

Watford are proud to be able to supply both SINGLE and DOUBLE DENSITY versions of their highly acclaimed Acorn compatible DISC FILING

# THE FEATURES OF WATFORD'S SINGLE & DOUBLE DENSITY DFS.

- The system allows standard Acorn's 31 files or 62 files per disc side.
- Built-in formatting program.
- Built-in Disc VERIFIER.
- Built-in SECTOR EDITOR.
- Double step mode allows use of 40 or 80 track Discs on 80 track drives. (software switchable).
- A WORKFILE function allows a program to be edited and repeatedly saved having only typed its name once.
- Allows use of AMBIGUOUS filenames.
- Two commands exist to allow transfer of programs from tape to disc
- An Advanced COPY COMMAND is included.
- RENAME has been extended to allow the use of ambiguous filenames.
- An improved OPENOUT command.
- A SPACE command informs you of the space left on the disc.
- 2K of RAM can be reclaimed from the DFS by setting "PAGE" to &1100.
- The \*CAT command automatically utilises the full width of an 80 column screen where available.
- FULLY COMPATIBLE WITH TELETEXT TORCH and both ACORN 2nd PROCESSORS.
- Disc prepared on ACORN DFS can be both read & written to on WATFORD's DFS & vice

Please write-in for further detail technical specifications

What do the independent press say?

"Good value for money" – Beebug
"A very worthwhile package" – The Micro User
"You'll be buying a very powerful package" –
Personal Computer News

'Superior DFS; Excellent disc sector editor" -Computer Answers

Without a doubt the most sophisticated DFS software yet written for the BBC microcomputer. This powerful DFS is fully compatible with the ACORN DFS, yet has much increased power due to the additions, carefully designed to make life easier in normal use. It consists of 16K of efficiently written machine code. It is entirely self contained and so does not require a utilities disc to function. to function.

# SINGLE DENSITY INTERFACE PRICES

- DFS (Disc Filing System) ROM £18
- Complete Disc Interface Kit
- Incl. DFS ROM & fitting instructions £89
- Acorn's DFS Kit complete
- £86 £6.95
- DFS Manual (comprehensive)
- (Our DFS Manual is suitable for both versions of Watford's DFSs and the Acorn DFS)
- We will exchange your existing Acorn DFS for Watford's ULTIMATE DFS for


Please note that this is FULLY Acorn DFS compatible and runs, without exception, all products tested, including Elite'

Watford's DFS is exclusively available from Watford Electronics. We DO NOT retail this product through dealers. Every ROM carries a printed label with our LOGO and a serial number.



**ACCESS** HOT LINE (0923 50234) 24 Hours

# WATFORD'S ULTIMATE **DOUBLE DENSITY** DFS



but SOPHISTICATED

We are proud to bring to you the Watford Electronics Double Density Board for the BBC

The DDFS supplied is a new version of the popular Watford Electronics DFS re-written to make full use of the capabilities of the new

double density controller. We are proud to announce that our double density now runs all known versions of Acornsoft's best-selling game Elite. DDFS also runs Hi-View, Fortress; Aviator, Castle Quest, etc.

- Increases storage capacity of your Disc Drives by the maximum physically possible, 80% !!!
   Our system will use the whole of an 80 track
- drive. Inferior systems do not allow files longer than &3FFFF bytes, but with our system files
- can be as long as one disc side.
  Discs may be created in either single or Discs may be created in either single or double density format with the built in formatter and in single density mode are fully compatible with normal Acorn format discs.
   The density of the disc you put in is automatically sensed by the system and you are informed of the density in the catalogue display.
   Copying of files between single and double density discs is automatically catered for.
   The double density stream is of course factor.
- The double density system is of course faster than single density

NOW Our 8271 emulator has been extended to cope with illegal sector IDs.

The Watford Electronics DDFS implements an The Watford Electronics DDFS implements an extremely comprehensive 8271 emulator so that commands passed through OSWORD & 7F are correctly interpreted. Other manufacturers thought that read and write sector alone were sufficient – we decided to implement every command of the 8271 that was physically possible. We have allowed the use of all the received registers including hold tracks, allowed. possible. We have allowed the use of all the special registers including bad tracks, allowed access to deleted data etc., etc. The emulator itself takes up around 1K of compactly written machine code. We reckon it will run many of the protected discs now available. Gain all the advantages of the WE DFS together with much increased storage and compatibility with many existing protected discs. write-in for full technical specifications)

Complete Double Density Disc Interface

£85 **DDFS Manual** £6.95 (no VAT) We will exchange your existing Single Density Interface for our DDFS Unit for £45 (Carriage £1.50)

# 3M - 54" DISKETTES

Top quality 3M – SCOTCH Diskettes from Watford Electronics (Your 3M Appointed Distributors). All discs carry a lifetime warranty. These discs are quiet in operation and insert positively with their reinforced hub rings. Bo of 10 supplied complete with self stick, disc labels and write protect tabs.

#### DON'T SETTLE FOR LESS, BUY THE BEST

10 × S/S D/D 10 × D/S D/D 10 × S/S D/D 40 Track Diskettes 40 Track Diskettes 80 Track Diskettes £18 10 x D/S D/D 80 Track Diskettes £24

FREE with every pack of 10 x 3M Discs this most useful "Post-It" NOTE PAD & TRAY PACK.

# **MYSTERIES OF DISC DRIVES & DFS** REVEALED

Are you tired of faulty cassettes, and lengthy loading times? Do you want to upgrade your BBC micro to take discs but you get tied up in the plethora of jargon surrounding the choice and

For instance, what is the difference between For instance, what is the difference between single and double density formats, how can you use a 40 track disc on an 80 track disc drive? What is the difference between a DFS and disc interface kit? Should you acquire a single Disc drive or twin? What does 48 TPI and 96 TPI discs mean? These are just a few of the questions you may have asked yourself and never found the answer or maybe you have yet oncounter these questions. to encounter these questions

Now the mystery of buying a suitable interface and disc drive for your BBC micro is revealed in Watford Electronic's new book entitled 'MYSTERIES of DISC DRIVES & DFS REVEALED. It describes in fine detail, yet remaining very readable to the beginner, how disc drives operate, the type of interfaces available, which type of discs to use on a disc drive and how data is stored on the discs.

There is even a handy section describing the phrases you are likely to encounter, and how to interpret them. This book must be an essential purchase at £5.95, especially if you own or are thinking of buying a disc system.


£5.95 (Book No VAT)

# **DISCALBUMS**

Attractively finished in beige leather-look vinyl, these conveniently store upto 20 Discs. Each Disc can easily be seen through the clear view

£4.25

# **LOCKABLE DISK** STORAGE UNITS



Strong plastic cases that afford real protection to your discs. The smoked top locks down. Dividers and adhesive title strips are supplied for efficient filing of discs

M35 holds upto 40 discs

£12

M85 holds upto 95 discs

£15

# FLOPPY HEAD CLEANER KIT

The heads in a floppy disc drive are precision made and very sensitive to dirt. Drive manufacturers recommend that you clean the heads approximately once a week. Unless your home or office is dust free one of these kits is a very sensible precaution against losing valuable data. A dirty head can destroy many disks before you realise the trouble. Very simple to use.

Only £9

# **PLASTIC LIBRARY CASES**



for Disc Storage 51" (holds 10) £1.80

# **BBC MICRO** WORD-PROCESSING PACKAGE

A complete word-processing package (which can be heavily modified to your requirements, maintaining the large discount). We supply everything you need to get a BBC micro running as a word-processor. Please call in for a

**EXAMPLE PACKAGE** 

EXAMPLE PACKAGE
BBC Model B, Watford Electronics' DFS upgrade,
WORDWISE ROM, Twin 200k Epson drives in
beige, Zenith 12" Hi-resolution monitor (Green or
Amber), Brother HR15 daisywheel printer.
Gemini software: BEEBCALC spreadsheet,
analysis and DATABASE software on disc. 10 ×
3M disc, 500 sheets fan-fold paper, 4 way mains
trailing socket, manuals, all leads and BBC
carpling case.

**NEW LOW PRICE** Only £1,089



We stock a range of monitors to suit all needs Choice of a monitor is a matter of personal taste so we recommend that whenever possible, you ask for a demonstration at our shop

#### MICROVITEC

- 1431 Medium resolution as used on the BBC television computer programme ..... £165
- 1451 − High resolution, suitable for word processing in mode 0 ......£
- 1441 High res, exceeds the capabilities of the BBC micro £385 1431AP RGB + PAL and AUDIO ...... £199 • 1451AP RGB + PAL and AUDIO ...... £285

 Dust Cover for Microvitecs ...... £5.50 All Microvitec Monitors are 14" RGB in their distinctive right angle sturdy metal case or the new beige plastic case. They are supplied complete with connecting lead to the BBC and a 3pin mains plug.

# KAGA

- KAGA Vision 2 High Res. Colour ........... £225
- KAGA Vision 3 Super High resolution, Colour £310

Kaga Monitors are 12" RGB colour units housed in an attractive beige plastic cabinet. They all have as standard, a genuine etched anti-glare screen.

# ZENITH

12" Ultra high resolution monochrome monitor. Ideal for word processing as its green or amber screen is very restful to read. The high resolution makes it good for games too – you can really see the detail that has been put into the graphics ONLY £66

LEADS BNC Lead for Zenith or Philips .......£3 RGB lead for KAGA

N.B. Carriage on Monitors £7 (securicor)

# SWIVEL BASE FOR MONITORS



Only £15

# DISC DRIVES PRICES SLASHED

(ALL DRIVES NEW SLIM-LINE)



(DRIVES Cased with Cables. No PSU. Connects directly to the BBC's power socket.)

- CLS 100 Single, TEC Single sided 40 track 100K,  $5\frac{1}{4}$ " Disc Drive £CLS200 Single EPSON Drive, Double sided 40 track, 200K,  $5\frac{1}{4}$ " £
- CLS400 Single, Mitsubishi/Epson Double sided 80 track 400K,  $5\frac{1}{4}$ " Disc Drive ...... £126
- CL\$400\$ Single, Mitsubishi/Epson Double sided 40/80 track Switchable, 400K,  $5\frac{1}{4}$ " Disc Drive .....£135
- CLD200 TEC Single sided 40 track 200K
- CLD400 Epson, Double sided 40 track 400K 
   5½" TWIN Drives
   £199

   CLD800 Mitsubishi/Epson Double sided 80 track 800K, 5½" TWIN Drives
   £235
- CLD800S Mitsubishi/Epson Double sided 40/80 track switchable, 800K, Drives ..... £269

# DISC DRIVES CASED WITH PSU & CABLES



- CS200 Epson Double sided 40 track 200K 5¼" Single Disc Drive ...... £139
- CS400S Mitsubishi/Epson Double sided 80 track 400K 51 Single Drive ...... £149
- CD400 EPSON Double sided 40 track 400K
- CD800 Mitsubishi Double sided 80 track 800K 5¼ TWIN Drives ......£295
- CD800S Mitsubishi Double sided 40/80 track Switchable 800K TWIN Drives ......£299
- DFS Manual (comprehensive) £7 (No VAT)

(Carriage on Disc Drives £7 securicor)

You do not require a formatting Disc nor the expensive 40/80 track switchable Drives when using Watford's sophisticated Disc Filing System which has this facility as one of the many facilities incorporated in it as standard.

Cont.

- MITSUBISHI & EPSON Slimline 400K Disc Drives that we supply are Double sided Double Density, 1 Megabyte unformatted, (With BBC Micro 400K after fermatting). When used in conjunction with our Double Density Interface, you obtain 725K formatted. Track density is 96 TPI, track to track access time is 3mSec. These drives are very fast, quiet and efficient. We strongly recommend them.
- Extensive test carried out in our workshop has proved that the BBC Micro's own switchmode power supply is capable of driving 2 disc drives and a host of Sideways ROMs without undue heating. We recommend our CLS & CLD range of Disc Drives which will save you considerable expense without sacrificing performance.
- Please send an SAE, for further technical specification on our Disc Drives.

# **DUST COVERS**

(1 of duf Disc Diffes)	
Single (without PSU)	£3.20
	£3.85
	£3.25
	£3.90
Twin (side by side with PSU)	£3.95

#### FORTH ROM for BBC

This ROM provides a complete implementation of the FIG-FORTH standard (including editor). Supplied with a large tutorial manual at only £32

**TINY PASCAL for BBC Micro** 

£54

ROM-SPELL OXFORD DICTIONARY

A ROM based fast spelling checker essential to serious word processing users of the BBC micro.

Compatible with the popular word processors VIEW, WORDWISE and also with \*SPOOLED text files. Allows misspelt words to be changed without returning to the word processor. Simply load the text and execute the spelling checker, correcting the words as you go along, or all at once at the end.

An optimised word compacting technique gives a comprehensive 30,000 word dictionary as standard as well as a user defined dictionary for specialist applications. Efficient data storage also means faster operation, text can be checked at 160 words per minute!!! Equivalent to looking a word up in a standard dictionary in well under half a second! half a second!

An ambiguous word checking facility allows partially spelt words to be checked against the dictionary and all the matches displayed. This is ideal when you are uncertain of a spelling and a boon for crossword addicts!

Full access to the dictionary from BASIC allows users to check words from within their own programs. Useful for educational programing and also to compilers of word puzzles and anagram

Save time spent looking in dictionaries, use ROMSPELL.

ROMSPELL is supplied on a ROM with the dictionary disc and full instructions for Only:

(Please specify 40 or 80 tracks when ordering)

Continued -



# THE EPSON RX/FX/KAGA PRINTER COMMANDS REVEALED

So you bought yourself a new printer, because the salesman in the shop showed you how clever it is and impressed you with all sorts of printouts to show its capabilities – he may even have offered you a special price

offered you a special price.

However, now that you have got it home and connected it to your BBC microcomputer, you are wondering how to make it perform these magical tasks. The manual seems to give no magical tasks. The manual seems to give no clues, and when you type in the example programs, the computer throws the LPRINT statements back in your face.

Now what do you do, when this £400 piece of high technology refuses even to move its

head, and you have stayed up until 2 in the morning with copious supplies of coffee, desperately trying to print something out. Once again, Watford Electronics comes to your help with our new book entitled THE EPSON FX/KAGA PRINTER COMMANDS REVEALED

This book describes in plain, easy to understand English how to use your printer (Kaga KP810, Canon PW1080A, or any other Epson FX-80 compatible printer) with the BBC micro, both from Basic and your Wordwise wordprocessor.

wordprocessor.

It describes in detail how to obtain the maximum in graphics capability from your printer and includes full indexes allowing you to cross index the numerous commands. Every command is explained in detail, with an accompanying BBC Basic program and an example of its use from

> This book is superb value at only £5.95 (Book - No VAT)

# **EPSON FX/RX NEAR LETTER QUALITY PRINT ROM**

# **EPSON NLQ ROM** for the BBC Micro



Impress your friends and business colleague with the quality of your letters and printed material with Watford's very simple to use EPSON NLQ! (Near Letter Quality) ROM. Suitable for FX80, RX80, RX80F/T, FX100. Look at the features:

Simply type \*NLQ80/100 and a single VDU code to use NLQ print.

NLQ is then available without any modifications from BASIC, WORDWISE, VIEW (with NLQ DRIVER) or virtually any other

program or language.

Single codes select PROPORTIONAL type (yes even on the RX80); ENLARGED type; UNDERLINED type. These features can be used seperately or in any combination.

Full UK character set; Standard 'pica size'

Proportional spacing; Enlarged; Underlined; Normal type

The NLQ ROM is incredibly easy to fit and use. Supplied complete with Manual.

Only: £22

#### VIEW PRINTER DRIVER for NLQ ROM

This specially written printer driver has been designed to allow View access to the full features of our NLQ ROM. must for all VIEW and NLQ ROM users

£7.00

# **DUMPOUT3 NOW WITH EXTRA FEATURES!**



A highly sophisticated screen dump ROM. This has to be the most flexible and powerful screen dump ROM yet produced for the BBC micro. It will put on paper anything you see on the screen, including all Mode 7 facilities etc. We have to admit that there is one facility that we cannot replicate – if anyone can supply flashing ink we would like to know!

The ROM also provides window setting utilities and two new OSWORD calls that allow mode 7 graphics pixels to be read and plotted using the standard graphic co-ordinate system. The latest version includes a graphic dump trigger for dumping screens from games whilst they are running

Two commands are used to operate the dump

routines:

\*\*GIMAGE – This provides a full graphics dump of any Mode (including Mode 8). There are many optional parameters but you need only specify the parameters you wish to change.

- V <scale>, H <scale> These 2 byte numbers give fine control over the size of the dump from minute to enormous. Unlike other dump ROMs, scale works the same in all modes inc. mode 7
- R <0-3> Print dump rotated by 0, 90, 180, 270 degrees.
- I <indent> Set gap from left edge of paper.
- X <min><max>, Y <min><max> Selects screen area, by default the whole graphics window is dumped
- P Dump shows physical colour values
- G Grey scale reproduction, dumps otherwise use a negative scale (white prints darkest).
- T Two tone dump for maximum resolution.
- M < mask> 8 bit colour mask.
- E Contrast expansion to make mode 7 text and separated graphics stand out clearly from the background.
- C All mode 7 graphics are printed as contiguous to improve the shading in graphic areas
- K Key-triggered dump. The dump does not commence immediately, but can be triggered off later by pressing <SHIFT><0> or <CTRL><ESCAPE>.
- S Switch-triggered dump. As K, but the trigger is an external switch (not supplied) connected to the user port. The S option can still work with games that corrupt RAM page D. \*TIMAGE <indent> Does a fast, text only, dump of the contents of the text window in any
- \*GWINDOW and \*TWINDOW These commands draw the graphics and text windows, commands draw the graphics and text windows, respectively, on the screen and allow them to be changed with the cursor keys. Note that GIMAGE and GWINDOW work fully in mode 7. Designed for use with the following printers: CP80, GP80/100/250, CANNON, STAR, KAGA/TAXAN, NEC, SHINWA CP80, GEMINI, EPSON MX/RX/FX, LPVII, NEC PC8023, DMP100/120/200/400, etc. etc. Price including comprehensive manual

£24

### **VIEW WORDPROCESSOR**

We are supplying the new VIEW version 2.1 allowing printing of memory contents etc

# HI-VIEW

A special version of VIEW designed for use with 6502 2nd Processor. Available on disc, it offers

£49

VIEWSHEET (Acornsoft)

£49

Di

ha

pro

gu

far

to De

the

ha

len

an

rec

da

SYS

flex

file

nor

opt

and

scr

flex

dis fori

for typ

acc

eas

to a

sys File

allo

to I driv

be the

loo

acc

## Watford's own Sophisticated VIEW PRINTER DRIVER for Epson FX80 & KAGA KP

To simplify using the full facilities of the Epson FX80 or Kaga KP810 use this printer driver. Full facilities are provided for selecting between fonts etc. The disc includes examples of use and instructions. Available on 40 or 80 track di (please state which required).........................£9

#### **VIEW DRIVERS FOR JUKI & BROTHER PRINTERS**

Only £8

# VIEW/VIEW SHEET PRINTER **DRIVER for SILVER REED** (Officially approved by Silver Reed)

A range of VIEW Printer drivers to complement the Silver Reed range of printers EXP400/500/550 & 770 EB 50 and converted typewriters EX43/44 & 55.

Only: £8

# BEEB PRINTER ROM



This utility ROM is designed to simplify using all the facilities of your printer. It has many facilities:

- ★ Selection of printer modes such as underline, font and size is by 'Single Key' operations.
- ★ From Wordwise, a single number following OC will select a mode rather than a long and inco.nprehensible string of control codes. This makes using your printer with Wordwise much more convenient.
- ★ When using Basic (or other languages) you can have control over the formatting of the output to the printer in the style of a wordprocessor. You can define page top, bottom and side margins etc. with intelligent page skip for binders an option. All supported printers will now respond to form-feed etc. commands.
- ★ User defined characters are printed as you see them on the screen so that non-standard characters are automatically printed out correctly.
- Commands select the options for the following printers: GP100, STAR, NEC, MX/FX, KAGA, LP/VII/DMP100, DMP200.

Operates with either parallel or serial interfaces.

\* Supplied with a 50 page manual that is very comprehensive and easy to follow. Please specify printer type when ordering so that we can send the correct function key strip.

Price: £24

# TWO DATABASE MANAGEMENT SYSTEMS



# DISCDATA

Discdata is an entirely disc based database handling system. It is extremely easy to use through its comprehensive menu system. The simplicity is such that we do not feel the need to provide explanation on use in the written guidance supplied with the program. The first-time database user will rapidly become amiliar with this package designed throughout to be simple and obvious.

be simple and obvious.

Despite the ease of use this system provides all the facilities needed for complex data handling problems. The length of database that can be handled is only limited by the total space on the disc. You can have up to 20 fields with page length records up to 254 bytes in length. Adding and deleting records, amend titles, field names and records. Sort on any field and search for any record or group of records in any field. The database may be re-formatted after creation, the system will re-write all your files for you automatically. You may add extra fields and extend the length of existing fields freely.

Dutput formatting is very powerful. You are allowed 40, 80 or 132 column output modes going to printer or screen. Selected fields can be going to printer or screen. Selected fields can be put in any order on the screen or printer, either across the paper or down. Output can start or stop anywhere in the file. Decimal fields are automatically totalled and records output are counted. Version 2, now on sale has improved nounted. Version 2, now on sale has improved input and amendments procedures giving full record edit as well as the 3 extra features . . . String searching, Calculations on numeric fields, and the ability to create sub files from your main files.

On disc at

Only £17

(Please specify 40 or 80 track when ordering)

### FILE-PLUS

The File-Plus package is even more powerful and flexible than Disc-Data. It is also largely menu driven but has its own command language for file searching. The 16K ROM contains all the normally required routines, with lesser used options supplied on the utilities disc. All input and output formatting is controlled through screen forms. A full screen editing system is used to define a form which allows tremendous flexibility in the format in which your data is displayed. It is very easy to change from form to form so that you can type in your data with one form, and examine it with others. You will typically design several forms before starting to access the database so that you can quickly and asily see the fields of each record that you want to appear in the layout you decide on. The form system is also used for output to your printer. File Plus has a unique file linking system that allows the entire on-line storage of your system to be used for one database. This can give around 1.5 Megabyte databases using dual

to be used for one database. This can give around 1.5 Megabyte databases using dual drives and double density.

The built in FQL (File-Plus Query Language) can be used for searching the database. Presented in the form of a powerful command language with looping facilities etc. this allows the most flexible access to your data possible. Full arithmetic operations are provided to allow the system to be used for statistical analysis.

Cont.

Cont.

Operations supported are -, +, \*, /, +-999999 9999.9999 and compare facilities =, >,<>>

Many keywords are supported by the language: assign, compare, display, and, goto, iff, ift, print, read, search, spool and update.
Supplied with a very detailed 70 page manual to explain all the facilities with many examples

Only £43

(Please specify 40 or 80 tracks for the utilities disc)

# DATAGEM

Gemini's 24K ROM based DATABASE Management System Special Offer: £105

# PEN PAL-VERSATILE LIGHT PEN SOFTWARE

Do you have a light pen that never gets used? Then this piece of software is for you. This package offers many useful facilities that make the light pen a useful device to own. Facilities included are:

- Pixel, Line and Character definition Free hand drawing
- All Colours
- Fill, Refill and stripes
  User defined "Brush strokes" plus character definer
- Grid, Scale and perspective aids 2 to 200 points palletable in one design with Circles and "rubber banding"
- Move design/character to any screen position
   Save and Load screens, User defined characters and line drawings for video titles, own programmes etc.

This program has many uses in education and at home. It is supplied with a comprehensive instruction manual.

# LIGHT PEN



This Light Pen for the BBC micro is packaged in a neat pen shape with built in switch. So complete with our sophisticated Pen-Pal software on cassette (see elsewhere in this ad)

Only £23

(For software on disc please add £2)

# DISC EXECUTOR

Disc Executor is a sophisticated disc utility for the transfer of your programs from cassette to disc. It copes with 'locked' files and full length adventures (up to &6E blocks long) and programs that load below &EOO. Disc Executor is simple to use and provides menus to prompt the user along the way. Disc Executor will cope with the vast majority of tapes. (Please note that Disc Executor is not compatible with double density disc interfaces. disc interfaces - keep reading our adverts though!)


Price only £10

(Please specify whether 40 or 80 track disc when ordering)

Systems complete program development package in a 16K ROM. Full assembling and debugging facilities provided. We are now supplying the new 6502 2nd processor compatible version

SPECIAL OFFER ONLY £43

# **ROM MANAGER**



Provides comprehensive management of all your installed ROMs – BEEBUG Nov. '84'. This ROM is unique in its capabilities. It allows you, the user, full control over the BBC Micro's sideways ROM paging system with simple to use commands. This ROM is essential for those with several ROMs. At a simple level ROM MANAGER can be used to remove the problem of clashing command names and allow full use of all the facilities of your ROMs. This is coupled with facilities to completely enable or disable various ROMs in the machine including ROM manager itself.

manager itself.
ROM MANAGER can also be used to develop HOM MANAGER can also be used to develop sideways ROMs using the machine's standard memory. This is achieved by sending sideways ROM calls to your code in RAM, saving the expense of fitting sideways RAM for ROM development purposes. ROM status reports are also given by the ROM, including ROM lengths, checksums, entry points supported and current filing system title. filing system title.

The ROM also provides facilities to examine ROMs, list function keys for editing, modify RAM (using a HEX/ASCII editor) and list ROM titles neatly and concisely

All selection between particular ROMs is by the name of the ROM and this may be abbreviated for convenience. ROM numbers can also be used if required. This ROM is very simple and obvious to use. All the facilities are explained in the clear and detailed manual.

Price £22

#### **BUFFER & BACKUP ROM**

For those with sideways RAM fitted in their machines this utility ROM will make full use of this facility. By using the sideways RAM area for extra memory the following features are implemented

- 4K or 16K buffer for parallel printer. Dumps selection of Disc files to Tape.
- Makes backup copies of tapes on to tape and dis
- Displays contents of paged ROMs on screen. Menu display of ROM filing system contents
- Comprehensive manual.


Only £22

### **ULTRACALC 2**

The mark 2 version of the BBC Publications extremely popular electronic spreadsheet ROM. Features include: Simple communication with reatures include: Simple communication with program, with many prompting messages; Full range of editing commands; Efficient memory usage, allowing large spreadsheets to be constructed; The handling of labels, as well as numbers, as values; Individual variations of the width of columns; Display available in all screen modes; Operates as HICALC on 6502 2nd processor giving 44k of workspace; Flexible printer controls

Only: £66

Continued -



Watford's own Machine code Monitor ROM written by Andrew Bray (Cambridge), co-author of the BBC Micro Advance User Guide.

The most powerful and versatile machine code monitor ROM yet written for BBC Micro. It has all the normal memory editing, moving and relocating facilities, plus all editing is with a full screen editor allowing scrolling up and down memory, entering in lex. ASCII or standard assembler memonics.

allowing scrolling up and down memory, entering in Hex, ASCII or standard assembler mnemonics. In use as a debugging tool, you run code under a total emulation system. Ever felt a desperate urge to set a break point in ROM? No problem — you can even have breakpoint on reading or writing locations in memory and on register contents. The system fully supports debugging of sideways ROMs e.g. BASIC can fully and easily be run from within Beebmon and from there DFS and other sideways ROMs can be used in total emulation mode.

Beebmon can even run itself. In so doing you can nest Beebmon up to a level limited only by the memory size. Beebmon uses 256 bytes of workspace, located anywhere in memory, even on the 1MHz Bus. Beebmon effectively uses no zero page workspace, so your program (e.g. BASIC) can use any or all of the base page. How does it achieve this? By providing a 6502 interpreter all programs running under it exist in a vertual BBC, so special memory locations like the ROM latch are not actually accessed by your programs, instead they alter a location in Beebmon's workspace. Emulation also allows immediate return to Beebmon command level by ctrl-escape no matter what code is being executed at the time. All this exceptional power and flexibility is complemented by a clear and detailed manual included in a value for money price of:

£24

# DISASSEMBLER ROM

Discover the hidden secrets of BASIC and the OPERATING SYSTEM with this easy to use

progammers tool.

A ROM based machine code Disassembler for the BBC micro. It enables machine code programs to be listed in BASIC/DUMP format and thus is the perfect complement to the built in assembler. It allows Sideways ROMs, files on disk or tape to be listed, and also has a comprehensive editor, allowing mnemonics to be altered directly, as well as HEX, DECIMAL ASCII and BINARY memory editing. There is also a full set of labelling facilities available (up to 3,200 labels), with the major locations and routines already labelled.

locations and routines already labelled.
Thus DIS-ASM enables any monitor program, such as BEEBMON to be used to much greater effect as it is not necessary to disassemble memory each time

the display is altered.

ONLY £18

Now Available


"Acorn Speech Synthersizer"

"We can now supply the official Acorn speech chips, manual and full fitting instructions.

ONLY: £19.50

# 32K RAM

**EXPANSION BOARD** 



Now Watford Electronics brings you the latest state-of-the-art MEMORY EXPANSION BOARD for your BBC microcomputer. It's ribbon cable simply plugs into your micro's 6502 processor socket. This compact board which fits inside the computer doesn't just give you 16k or even 20k of extra RAM, but a massive 32K!!!

There are many more useful facilities available with this board:

- The top 20K of the expansion RAM can be used as the screen display memory, leaving all the standard BBC RAM free for programs or data storage. This allows good graphics and long programs to be combined. For instance you could have MODE 0/1/2 GRAPHICS AND 28K OF PROGRAM SPACE. The extra memory can be used by virtually any language or utility such as BASIC, VIEW, WORDWISE (1.20+), WORDWISE-PLUS, etc. and NOW COMPATIBLE with Beebug's TOOLKIT.
- The FULL 32K or the bottom 12K of the expansion RAM can be used as a PRINTER buffer for SERIAL PARALLEL printers, sound channels, RS423, keyboard or speech synthesiser. This allows very long text files to be printed while you are using 28K of program and 20K of graphics! THE BUFFER IS UNIQUE because it replaces one of the BBC Micro's buffers so all the buffer options are available on it. eg. \*FX15,21, 138, 145, ADVAL(—no.) etc.
- This board is the IDEAL COMPLEMENT to any WORD PROCESSING system, disc or cassette based. There is no need to wait for slow printers as you can type in long text in 80 column display mode while printing is going on − TWO JOBS DONE SIMULTANEOUSLY!!! (an equivalent printer buffer would cost you £120 +).
- Unlike our competitors, the board is compatible with a vast range of software and hardware available for the BBC microcomputer, including our ROM expansion boards, double density DFS units, and the ATPL ROM extension board. This is because our board is connected to the computer by means of a ribbon cable without soldering. It can either be left in the micro or stuck to the lid with the 4 self adhesive feet supplied.
- The board comes with a comprehensive manual and ROM based software with a large range of commands for machine code and BASIC users, including many \*HELP messages.
- Now the ROM has had a host of utilities added to the large number already provided and has been made even easier to install.

Only: £65

# **GRAPH PAD**

With this popular British Micro's Graph-pad, you can add new dimensions to your computer enjoyment. It helps you to create your own application programs by the simple use of the Graphpad. Ideal for Educational use. Supplied complete with Cables, Manual and a two program cassette.

SPECIAL OFFER £86

#### **BEEBFONT ROM**

BEEBFONT is a remarkable and different concept in BBC software supplied on a 16K ROM. It allows you to display text on the screen in 13 different styles:

C

G

D

fea ea

SI

N

No

do allo eff

uni

inte

via

da

ext

uni

ext RC

ter RC

wit 12

sta

.

run


It works in modes 0, 1, 2 and 4 using the full colour capabilities of each mode. Characters are printed in the same way as normal. Selection between the various fonts is very easily achieved with Ctrl-V press this followed by a font number and the output will continue in the new font. Beebfont ROM is particularly useful in display work with the characters produced at twice the normal size. You can create your own character fonts with the editor supplied. You can also print-out pre-formatted text files using the service the special characters with

You can create your own character forts with the editor supplied. You can also print-out pre-formatted text files using the special characters with Epson FX, RX and NEC printers. The full range of character styles can be used, controlled from within the text. The editor and spooler program are supplied with the package, on cassette or disc. The spooler allows word processor (Wordwise & View) output to be printed in the new characters.

output to be printed in the new characters. A twenty page manual is supplied. Please state printer type and media for the editor & spooler when ordering (cassette, 40 or 80 track disc).

ONLY £32

# Mk-2 13 ROM SOCKET EXPANSION BOARD

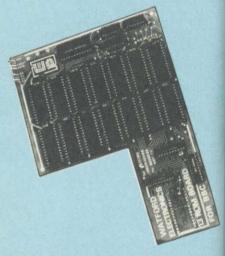

Now all lines fully buffered – On board battery back-up facility – will now accept EPROMS 2716, 2732, 2764 & 27128 and ROMs 6116 & 6264.

Simply plugs into one of the four ROM sockets currently available in BBC Micro. There are only 5 solder connections to be made. Full instructions are supplied. Unlike other ROM Boards, this board has been ergonomically designed to enable the user. easy further expansion inside the Micro, e.g. Double Density Board, Torch Board, RAM Card, etc., without any clash. (At Watford, we think ahead). Our Mk2 13 ROM Socket Board enables the User to increase the sideways ROM capacity from the basic 4 sockets upto full 16 capable of being supported by current operating systems. In addition the board is designed with the facility to hold upto 16K RAM, which when switched into operation is automatically selected by any WRITE signal to the Sideways ROM area. This gives the User the ability to write a utility or language up and running (new ROM software can be developed and tested in situ.)

The Board gives the User, plenty of freedom to explore the possibilities of the new paged ROMs due in the coming months and offers them the chance to develop their own.

All lines are fully buffered and the board meets or exceeds all timings for operation in the BBC Microcomputer.

Supplied ready-built and tested complete with fitting instructions.

Only £30

PCB NI-CAD Battery for ROM Boards.

£2.75

## COMPUTER CONCEPT'S ROMS

CARETAKER Basic Utility	£28
Graphics ROM	£28
Disc Doctor ROM	£28
TERMI	£27
COMMUNICATOR	£58

# Wordwise

Without doubt a very sophisticated piece of software for the BBC Micro. It has all the features of a professional word processor yet is easy to use


SPECIAL OFFER THIS MONTH: £32

# **WORDWISE PLUS**

Now available from stock

£47

# SIDEWAYS ZIF SOCKET

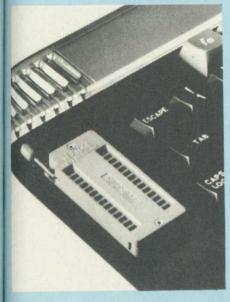

Now Watford Electronics brings you a ROM Now Watford Electronics brings you a ROM board for small budgets or for those of you who do not wish to open up your Micro frequently. It allows you to change ROMs quickly and efficiently with the minimum of effort — no screws to loosen or keyboard to remove. The unit consists mainly of a zero insertion force (ZIF) socket on a small circuit board which is located into the position of the 'ROM Cartridge' and is connected to one of the internal ROM sockets via a ribbon cable. via a ribbon cable

- Very simple to install. NO SOLDERING REQUIRED. The ZIF eliminates the possibility of damage to your ROM pins when inserting and extracting them.
- unrestricted access to the keyboard, unlike other cartridge systems. In addition, there are no costly extras, such as ROM cartridges for every new ROM. • The low profile of the socket allows
- All data and address lines are correctly terminated to ensure correct operation of suitable ROMs with the BBC micro. We also supply a purpose designed see-through storage container with anti-static lining, allowing you to store up to 12 ROMs, protecting them from mechanical and static damage.
- This versatile hardware solves the problem of running out of socket space, simply unplug the ROM and plug in a different one. It is a real must for Professionals and Hobbyists alike.

ONLY £18

# **WORDWISE PLUS UPGRADES**

Existing users of Wordwise can upgrade to WORDWISE + for £17. Please return the old WORDWISE package complete with Chip and MANUAL with your remittance and we will send you the new WORDWISE + package.

### **BEEBUG SOFT**

SLEUTH ROM TOOLKIT ROM	£25 £23
ACORN 1.2 DNFS ROM	£15
ACORN 1.2 OS ROM	£10
ACODNI BACIC 2	620

on systems with telectrun by Briti unications conditions

**PRESTEL TERMINAL** 

For the BBC Microcomputer



The Watford Prestel package consists of the B.T. approved Watford MODEM 84 (1200/75 baud full duplex 1200 baud half duplex direct connect) and a very sophisticated Prestel Terminal ROM. Please write-in for full technical literature

## PRICES

MODEM 84 £55 (with Lead & Manual) MODEM 84 complete with PRESTEL SOFTWARE ROM, Lead £75 and manuals PRESTEL SOFTWARE ROM £20 +Manual USER to USER 1200 BAUD SOFTWARE ROM (At these incredibly low prices for such a sophisticated BT Approved Prestel Terminal, Modem 84 has to be the best buy around)

# Nightingale Modem

(Carriage on Modem £2)

Now Watford brings you PACE's NIGHTINGALE MODEM PACKAGE including the popular Commstar ROM software for the BBC Micro. Nightingale is considered to be by far the most versatile BT approved modem available at the price for the BBC Micro. It is ideal for home or business use. It offers Prestel/Viewdata baud rates (1200/75 & 75/1200) as well as 300/300 baud full duplex for communication between RBC and other communication between BBC and other computers, including bulletin boards. A bargain at our

SPECIAL INTRODUCTORY OFFER

(Price includes **COMMSTAR ROM &** 

**COMMSTAR ROM package** 



# 16K **DISC RAM**

This is the RAM you've been waiting for!! This battery backed up, write protectable 16K sideways RAM board allows you to run from disk every sideways ROM available. Beware of other sideways RAM boards which are not backed up as certain ROMs will not run in these boards even though the RAM can be write protected. The Battery Backup facility allows retention of DATA after power off. On switch on the Micro will think the WATFORD DISC RAM is a ROM. Features available are: Features available are

- No soldering or modifications to BBC micro
- Plugs into normal ROM socket fitting neatly under the keyboard allowing room for other add-ons.
- Easy to use. Comes with disk based software to SAVE and LOAD ROMs. Allows you to make backup copies of your ROMs.
- Disk software can be copied onto other discs when disc is full.
- All existing ROMs can be stored on disk and used in DISC RAM.
- No messy plugging and unplugging of your ROMs. Simply Load the one you want into DISC RAM
- Ideal for Professional users to develop ROMs. Backup facility allows testing of final versions without using EPROMs.

  The switch provided allows backup and write protection to be switched off externally.
- Can also be used as 16K printer buffer RAM

Only: £39

P.S. 16K DISC RAM Board is not designed to work in conjunction with a Sideways ROM

# Versatile BEEB SPEECH SYNTHESISER Unit



SIMPLY the best! - An unlimited speech synthesis system. Complete with easy-to-follow manual. Controlling software is in ROM so no Cassette Loading problems

PHONEMES for word synthesis – That means unlimited vocabulary! No extra speech dictionary chips to buy!

BUILT-in Library of approximately 500 words to

BUILT-in Library of approximately 500 words to get you started.

ENGLISH accent — Utilises inflexion techniques to produce highly comprehensible speech.

EASY to use system — Just plug the software ROM into a socket, the Speech unit into the User Port, and away you go! No specialised 'dealer upgrade' required!

COMPACT unit — The whole system is built into a small case — easily tucked behind the computer. Auxillary output socket provided for direct connection to an external amplifier. amplifier.

HOURS of fun! - Suitable for any application -Games, Educational Programs, Specialised Packages

We know this all seems to good to be true but DON'T BE LEFT SPEECHLESS! Order your Versatile Speech Unit now!

SPECIAL OFFER £35

Continued .

BOOKS (No VAT on Bo	ooks)
30 Hour BASIC (BBC Micro)	£6.9
35 Education Programs for BBC	£6.95
40 Educational Programs for BBC	£5.95
100 Programs for BBC Micro	£6.95
6502 Application Book 6502 Assembly Language Program	£11.95 £13.95
6502 Assembly Language	113.90
Subroutines	£14.25
6502 Machine Code for Beginners	£5.95
6502 Machine code for Humans	£7.95
A young persons guide to BBC Basic Advanced Machine Code Technique	£4.50
for BBC	£7.95
Advanced Programming for the	
BBC Micro	£6.95
Advanced User Guide for BBC Micro	£11.95
Advanced Graphics with BBC	£9.95
Advanced 6502 Programming	£12.45
Assembly Language Programming	
BBC Micro Advanced Programming Technique	£7.95
for the BBC Micro	£7.95
BBC BASIC for Beginners	£7.95
BBCBASIC	£5.95
BBC DIY Robotics & Sensors BBC Forth	£6.95
BBC MICRO add on guide	£7.50 £6.95
BBC Micro An Expert Guide	£6.95
BBC Micro Book BASIC Sound &	
Graphics	£7.95
BBC Micro Graphics and Sound BBC Micro Programs in Basic	£6,95 £5.95
BBC Micro ROM PAGING Syste	m 1.0.90
Explained	£2.00
BBC Micro Revealed	£6.95
BBC Micro Disc Companion BBC Micro in Education	£7.95 £6.50
Basic Programming on BBC Micro	£5.95
BBC Software Projects	£5.95
Brain teasers for BBC micro	£5.95
CP/M Handbook with MPM CP/M The software BUS	£11.95
Creating Adventure Programs on	£8.95
BBC Micros	£6.95
Creative Animation & Graphics	£7.95
Creative graphics on BBC Micro Complete Programmer for BBC	£7.50
DISC FILING SYSTEM (DFS)	£5.95
Operating Manual for BBC	£6.95
Discover BBC Machine Code	£6.95
Discover FORTH DIY Robotics & Sensors with BBC	£13.95 £6.95
Easy Programming for the	10.33
BBC Micro	£5.95
Exploring FORTH	£6.95
Further Prog. for BBC Micro FORTH on the BBC Micro	£5.95 £7.95
Forth Programming	£14.40
Functional Forth for the BBC Micro	£5.95
Games BBC Computer Can Play	£6.95
Getting more from your BBC & Electron	FR 95
Graphs & Charts on BBC Micro	£6.95 £7,50
Graphic Art for BBC Computer	
	£5.95
Handbook of Procedure & Function	£5.95 is for the
Handbook of Procedure & Function BBC Micro	£5.95 s for the £6.95
Handbook of Procedure & Function	£5.95 s for the £6.95 £5.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL	£5.95 for the £6.95 £5.95 £14.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program	£5.95 for the £6.95 £5.95 £14.95 £6.45
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP	£5.95 for the £6.95 £5.95 £14.95 £6.45 £9.25
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette	£5.95 s for the £6.95 £5.95 £14.95 £6.45 £9.25 £15.50
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and	£5.95 is for the £6.95 £5.95 £14.95 £6.45 £9.25 £15.50 £8.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED	£5.95 for the £6.95 £5.95 £14.95 £6.45 £9.25 £15.50 £8.95 <b>DFS</b>
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M	£5.95 for the £6.95 £5.95 £14.95 £6.45 £9.25 £15.50 £8.95 <b>PFS</b> £5.95 £13.65
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED	£5.95 for the £6.95 £5.95 £14.95 £6.45 £9.25 £15.50 £8.95 <b>DFS</b>
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M Programming the 6502 Programming the BBC micro Programming the Z80	£5.95 is for the £6.95 £5.95 £14.95 £6.45 £15.50 £8.95 <b>DFS</b> £13.65 £11.95 £14.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M Programming the 6502 Programming the ZBO Programming the ZBO Programming with Graphics	£5.95 is for the £6.95 £5.95 £14.95 £6.45 £9.25 £13.65 £11.95 £6.95 £13.65 £11.95 £5.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M Programming the 6502 Programming the BBC micro Programming the Z80 Programming with Graphics Structured Prog. with BBC BASIC	£5.95 is for the £6.95 £5.95 £5.95 £6.45 £9.25 £15.50 £8.95 <b>DFS</b> £5.95 £1.95 £6.95 £6.50
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M Programming the 6502 Programming the BBC micro Programming the Z80 Programming with Graphics Structured Prog. with BBC BASIC The Complete FORTH	£5.95 is for the £6.95 £5.95 £5.95 £14.95 £9.25 £15.50 £8.95 <b>PFS</b> £5.95 £13.65 £11.95 £6.95 £14.95 £6.95 £6.50 £6.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M Programming the 6502 Programming the BBC micro Programming the Z80 Programming with Graphics Structured Prog. with BBC BASIC The Complete FORTH The Complete Programmer The Epson FX/KAGA PRINTER	£5.95 is for the £6.95 £5.95 £14.95 £6.45 £15.50 £8.95 <b>DFS</b> £13.65 £113.65 £14.95 £6.95 £6.95 £5.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M Programming the 6502 Programming the BBC micro Programming the Z80 Programming with Graphics Structured Prog. with BBC BASIC The Complete FORTH The Complete Programmer The Epson FX/KAGA PRINTER Commands REVEALED	£5.95 is for the £6.95 £5.95 £14.95 £15.50 £8.95 £13.65 £11.95 £6.95 £14.95 £6.95 £5.95 £5.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M Programming the 6502 Programming the 6502 Programming the Z80 Programming with Graphics Structured Prog. with BBC BASIC The Complete FORTH The Complete Programmer The Epson FX/KAGA PRINTER Commands REVEALED Using Floppy Discs with BBC Micro	£5.95 is for the £6.95 £5.95 £5.95 £14.95 £9.25 £15.50 £8.95 <b>DFS</b> £5.95 £13.65 £11.95 £6.95 £5.95 £5.95 £5.95
Handbook of Procedure & Function BBC Micro Introducing the BBC Micro Introducing LOGO Introducing LOGO Introduction to PASCAL Let your BBC teach u to program LISP LISP Cassette Logo Programming Mysteries of DISC DRIVES and REVEALED Mastering CP/M Programming the 6502 Programming the BBC micro Programming the Z80 Programming with Graphics Structured Prog. with BBC BASIC The Complete FORTH The Complete Programmer The Epson FX/KAGA PRINTER Commands REVEALED	£5.95 is for the £6.95 £5.95 £14.95 £15.50 £8.95 £13.65 £11.95 £6.95 £14.95 £6.95 £5.95 £5.95

Watford brings you

# THE

The program is simplicity itself and the user manual is virtually redundant'... Micro User Jan. 85

Bring into your home or office the last word in user friendly input devices for the Beeb. The AMX MOUSE that won the hearts and the minds of thousands of visitors at the Show has arrived at Watford Electronics at a very special price!

Using simple Icons, and small movements of the mouse on a work surface, you can select any one of the functions from the pull down menus. The mouse will operate from within Wordwise, View and many other software packages. The three buttons built in to the mouse are user programmable for many extra functions

The package consists of the mouse, the advanced controlling software in ROM and a disc containing the Icon designer and the AMS ART

To summarise this superb product a comment passed by a very senior authority on BBC micro at the last Micro User Show was, 'My only criticism of the product is that, IT'S TOO



**OUR SPECIAL PRICE** ONLY: £68.50

AMX Art Utilities Disc £12.95 AMX Desk Disc £21.50

# PLINTHS FOR BBC MICRO AND PRINTERS



Protect your computer from the weight and heat of your monitor. The BBC micro plinths have slots for maximum ventilation. The single plinth is suitable for a BBC and monitor, whilst the double height version provides enough room for our stacked or side-by-side dual disc drives or TORCH Disc pack, to be placed in the centre section. If you use our stacked drives, the remaining space can be used for further peripherals e.g. Speech Synthesizer, EPROM programmer or simply stationery. The computer slides neatly in to the lower section allowing easy access to remove the lid. The printer plinth is equally sturdy but without the cooling slots. It allows for access to the paper from the front as well as from the rear, (a facility not often thought of in similar products) if the paper is located beneath the plinth. This is a very located beneath the plinth. This is a very convenient way to work especially if your work area is not deep enough to take the printer and area is not deep enough to take the pilitary paper separately.

SINGLE BBC PLINTH £11 (carr. £1.50)

DOUBLE BBC PLINTH £20 (carr. £2.00)

PRINTER PLINTH £10 (carr. £1.50)

# **EPROM PROGRAMMER**



The Watford Electronics' EPROM programmer for the BBC micro is a high quality self contained package. Programs all popular EPROMs from 2K to 16K: 2716, 2516, 2532, 2564, 2764 and 27128. All manufacturers' specifications have been followed to program EPROMs at the correct speed – wrong timings could destroy your EPROMs. The unit has its own power supply so does not put heavy loads on the BBC power supply as do some other units. Connects directly to the 1MHz bus following all Acorn recommendations on addressing and bus recommendations on addressing and bus

### SOFTWARE PACKAGE

The software is supplied on an EPROM which plugs into the Micro and is instantly available with a single command (no time wasting as on Cassette/disc loading). It is a fully purpose designed and ingegrated package to simplify ROM development. The system is menu driven with many prompts to available the second control of the control of with many prompts to avoid any accidents.

Software facilities include: Load File – Save File – Down Load EPROM – Program EPROM – Verify – Blank Check – Editing of memory contents prior to

Programming.

Also included is an automatic system to allow Basic programs to be put in EPROM and accessed through the \*ROM filling system. More than one program may be put in an EPROM. All these facilities and more are explained in the comprehensive and clear 15 page manual.

# SPECIAL OFFER £69

(£3 carr.)

# LOW COST 'DIN' **EPROM PROGRAMMER**

D

to

to

RS

Ca

A high performance, low cost, self contained 'DIN' EPROM PROGRAMMER for the BBC Micro's user port.



The features are:

- Will program 2716, 2732, 2532, 2764 & 27128 EPROMs.
- Copy Eprom into memory and compute checksum.
  Blank check EPROM.

- Blank check EPHUM.
  Program EPROM from memory.
  Verify programmed EPROM and display checksum.
  All \* commands may be used from menu
- High speed programming on 2764 & 27128. Machine code SOFTWARE supplied in ROM.

Only: £49.50 (carr. £2)

# ANTI GLARE MONITOR SAFETY SCREEN



HEADACHES? TIRED EYES? Don't take pills - Use a Watford Electronics anti-glare filter!

• Made in Britain by a long established glass

Available in 12" & 14" versions – please specify the exact monitor type when ordering.

Special Price: £16.00 (carr. £1)

# **SURGE PROTECTOR Plug**

Fitted in place of your normal mains plug, this device protects your equipment against mains surges. Nearby lightning strikes, thermostats switching and many other sources put high voltage transient spikes on to the mains. This can lead to data corruption in memory and on disc and can result in spuriously crashing machines. Suitable for computers, Hi-Fi, Fridge Freezers etc. Max Surge current 2KAmp; max. Voltage 250. Essential for serious computer users.

Protection for only £9.50

# FLEXIBLE KEYBOARD CONNECTOR

A 'Keyboard to Micro' replacement jumper lead.

£4 95

# **ATTACHE CARRYING** CASE for BBC Micro

The Attache carrying case is attractively finished in mottled antique brown leatherette. The case is made of tough plywood, providing a very solid and safe way to carry your BBC micro. There is room provided to fit all the leads necessary behind the computer and manuals in the front. Locks supplied with two keys. Price £12 (£2 carr.)

# **DATA RECORDER AND ACCESSORIES**

Top quality slimline portable cassette recorder designed specifically for use with home computers. Mains/Battery operated with tape counter £20

DATA CABLE to connect recorder to BBC £2.50

DATA CASSETTES Top grade tested C12 Data cassettes

supplied in library cases 35p each; 10 for £3.20.

# ASSORTED CONNECTING **LEADS**

(All ready made and tested)	
CASSETTE LEADS 7 pin DIN Plug	
to 5 pin DIN Plug + 1 Jack Plug	£2.00
to 3 pin DIN Plug + 1 Jack Plug	£2.00
to 7 pin DIN Plug	£2.50
to 3 Jack Plugs	£2.00
6 pin DIN to 6 pin DIN Plug (RGB)	£2.50
MONITOR LEADS	
KAGA/SANYO Colour Monitor Leads	£5.00
Monochrome monitor leads BMC to Phono	
DISC DRIVE POWER LEADS	
DIOC DITTE I DIVETT LEADO	

Supply from BBC power supply to standard Disc Drive connector

Single £3.00 Dual £3.75

# **MISCELLANEOUS** CONNECTORS

	Plugs	Sockets
RGB (6 PIN DIN)	30p	45p
RS423 (5 pin Domino)	40p	50p
Cassette (7 pin DIN)	25p	65p
ECONET (5 pin DIN)	20p	30p
Paddles (15 pin 'D')	110p	215p
BBC Power Plug 6 way	80p	-
Disc Drive Plug 4 way	75p	-

# 4 WAY MAINS DISTRIBUTION SOCKET



4 way top quality mains trailing sockets. Supplied wired up with mains plug ready for use. Can be screwed to floor or wall if required. Very useful for tidying up all the mains leads from your peripherals. Allows the whole system to be switched on from one plug

£9.99

# THE INVESTIGATOR

This sophisticated Utility program on disc, enables you to make security back-up copies of most of your valuable Disc Software. Makes full use of all 8271 (will not run with double density DFSs) facilities to discover the precise format of your protected disc so that an exact copy can be produced. Supplied with detailed instructions. Please specify 40 or 80 track disc when Only £20

RESERVED

This space is reserved for the launch of our new ROM. See next month's advert.

# **ADVENTURE GAMES (level 9)**

COLOSSALADVENTURE	£8.50
ADVENTURE QUEST	£8.50
DUNGEON ADVENTURE	£8.50
SNOWBALL ADVENTURE	£8.50
LORDS OF TIME	£8.50
Please add £2 50 for Discs	

# MISCELLANEOUS

28 pin ZIF	SOCKET (Textool)	£6.95
	The second secon	

28pin DIL PLUG £2.90 SOLDER type

# **RIBBON CABLE**

28way 55p/ft; 34way 60p/ft

8way DIP SWITCH

£0.85

## **CHIP SHOP**

7438 40p; 74LS04 25p; 74LS123 £1; 74LS244 95p; 74LS393 £1.20;	74LS00       30p         74LS10       25p         74LS163       70p         74LS245       £1.60         4013       60p
4020 £0.90	4816 £1.85
LM324 £0.45	UPD7002 £4.40
6502A CPU £5.45	65C02 CPU £9.50
6522 £3.40	6845SP £7.50
SAA5050 £8.75	SN76489 £5.50
2764-250nS £4.25	27128-250NS £9.75
6116LP-2K £3.25	6264LP-8K £9.95
8271 £50	ACORN DNFS £15
ACORN OS 1.2 £10	ACORN BASIC 2 £20

#### TEX FPROM ERASERS

EPROMs need careful treatment if they are to survive their expected lifetime. Over erasure of EPROMs very rapidly turns them into ROMs! The TEX erasers operate following the manufacturers specifications to give the maximum possible working life by not erasing too fast. We use these erasers for all our own erasing work.

• ERASER EB – Standard version erases up to

£28

ERASER GT - Deluxe version erases up to 28 chips. Has automatic safety cut-off to switch off the UV lamp when opened. Spare UV tubes £9

# **VOLTMACE DELTA 14** JOYSTICK SYSTEM

The Voltmace system provides full facilities for connecting the Delta 14 handset.

Delta 14 handset – On its own makes a high quality centre sprung analogue joystick with £12.50

Adaptor Module allows use of two joysticks and

Adaptor Module allows use of two joysticks and provides hardware to access all the keys on the keypad of the joystick £12.55
Transfer program allows use of the keypad keys and joystick to simulate any key on the keyboard. This works by creating a machine code patch that stays in memory while another program is loaded in. Allows any game to be used with joysticks. Supplied on disc or tape.

Tape £5.10 Disc £7.95

## STANDARD JOYSTICKS

These are standard analogue type with a fire button on each joystick. Twin joysticks go to a single moulded plug, long leads provided.

Single Player version £9.75 Two Players version £15.00

# SPECIAL OFFER

2764-250ns £3.99 27128-250ns £8.99

6116LP (2K) £3.10 6264LP (8K) £9.25



**ACCESS HOT LINE** 0923 50234 24 Hours

NEW

# LOGOTRON LOGO

LOGO is a specially developed language carefully designed to teach the basics of both programming and logical, ordered thinking. Until recently, there wasn't a version of LOGO available for the Beeb. Now Watford Electronics are proud to bring the highly acclaimed version of LOGO from LOGOTRON. This version is recommended by most local education

Supplied on a 16k ROM for easy fitting, the LCSI LOGO is accompanied by a high quality ring bound manual for easy reference. Please onte the LCSI Logo is not just the well known graphics section of LOGO, but the FULL implementation. Educational establishment making a quantity order? Contact us for a possible discount.

ONLY: £55

Prices subject to change without notice and available on request.

MAIL ORDER AND RETAIL SHOP. TRADE AND EXPORT INQUIRIES WELCOME.
GOVERNMENT AND EDUCATIONAL ESTABLISHMENTS OFFICIAL ORDERS ACCEPTED. CARRIAGE: Unless stated otherwise, please add £1 to all cash orders.

VAT: UK customers please add 15% VAT to the total cost incl. Carriage.

SHOP HOURS: 9.00am to 6.00pm. Monday to Saturday. (Ample Free Car Parking Spaces) ACCESS ORDERS: Simply phone: Watford (0923) 50234. (24 Hours)



Dept. AU, 250 High Street, WATFORD, ENGLAND Tel: Watford (0923) 40588/37774 Telex: 8956095 WAELEC An Introduction to Computer Programming

Realise the Potential of your Computer



THE BBC & ACORN
ELECTRON
First Steps in BASIC

The user guides which are supplied with the BBC Computer and the Acom Electron are excellent reference books.

There are also lots of very worthy books on sale which attempt to teach people how to program in BBC BASIC

However learning a complex subject from books alone can be a very boring and daunting process.

There is a need to present the essential elements of computer programming in a more interesting form, so that students

can gain the basic knowledge they require in order to further their studies, using the many books which are available.

The VIDEO CLASSROOM is designed to meet this need.

Other subjects in the VIDEO CLASSROOM series includes:

First steps in BASIC for Sinclair Spectrum, the Commodore 64, Amstrad 364/464 and the first steps in MSX BASIC.

For more details on the 'Video Classroom' Clip this Coupon

Name..

Address.



Home & Continental Computer Services Ltd. Market Square, Biggleswade, Beds. Telephone: Biggleswade (0767) 318844



Video Classroom comes from the originators of the Gemini Integrated Business Systems

# This one will

# run and run

Sir, Acorn User ran a review of the Acorn Z80 second processor and the CP/M bundled software [June 1984]. On the strength of this article, I decided not to buy the Torch Pack and rushed out and twisted Technomatic's arm to sell me their last Z80 unit before I left to work in Iran.

As night life in Tehran is not what one would call hectic I have been systematically working through the Acorn bundled software. I have now arrived at the Mallard Professional Basic package.

Acorn supply a beautiful glossy ring-binder on the Z80 Professional Basic which lists all the Basic statements allowed - such goodies as WHILE. .. WEND, etc, which leaves me drooling. But when I run the Basic CP/M disc and type in PBasic, besides the usual splurge about copyright, the screen tells me that this is a 'Run-only program'. When I try to enter my own Basic statements from the keyboard I get the genteel rebuke 'Mistake-Direct Mode'

The Acorn manuals are distinctly coy, simply saying 'you will be more likely to use BBCBasic to run your own programs and use PBasic to run programs written by professionals.' Your reviewer last June skipped the whole problem, simply commenting that 'Mallard is a more Microsoft-type Basic'.

Don't think I am blaming you for my problems with PBasic but please tell me is this PBasic a con? How can I join that band of 'professionals' to write programs in a 'more Microsoft Basic' for my own computer? Where can I buy programs written by these 'professionals'? Am I a victim of the CP/M virus and simply have to hit CONTROL and Q at the same time to open the magic door? What is a 'Runonly' program?

John Hunt Tehran Iran

Richard Boyd of Acorn replies: The first page of the Z80 Professional Basic User Guide gives the information that the system, as implemented, is 'Run only'.

Acorn decided to implement the Basic in this manner to give users the option of using software written in this Basic, eg, Accountant and Nucleus, without the need to write their own software since they already have the use of BBC Basic to write their own programs 'interactively'.

Basic on most micros is 'interpreted' so that a user can write his program and the Basic will interpret each line as he types it in. This is totally different from most other 'high' level computer languages, eg, Cobol, Pascal or Fortran, which usually have to be written in an editor, compiled and then run.

Acorn has implemented the last two parts of this procedure ('compile' and 'run') but still allows the user to write his own program using an editor, eg, MemoPlan.

To write a Z80 Professional Basic program you should enter *MemoPlan*, enter 'LINE' mode (which does not insert its own carriage returns), type in the program and 'write' to disc with a '.BAS' extension to the filename.

This program can then be run by typing in PBasic filename .BAS which will run the program you have stated.

# **Torch mystery**

# solved


Sir, Having read Paul Beverley's article on Second Processor timings (AU January), and discovered that you are no further forward on the Torch 'mystery', I started my own investigations. I think I can now reveal all!

I can confirm that the effect is caused by the periodic 'polling' of the I/O processor to test whether the Escape key has been pressed. The significant factor is that, when the test is made, the I/O processor must complete any operation it is performing before returning the Escape status to the Z80. Therefore, if the Z80 chooses to test for Escape just after it has issued the DRAW command it must wait for the completion of the DRAW and therefore the parallelism is 'lost'. It happens that the Z80 does not test for Escape after every statement but only after every ten; and this lessens the slowing effect of this test! The phasing of the escape test with respect to the FOR . . . NEXT loops will therefore vary, giving rise to the odd effects discovered.

Fortunately, this effect is readily mitigated, albeit by poking into the code of Basic (ugh!). By changing the value of a byte in the Z80, we can determine how often the Escape key is tested: the appropriate byte is &3619 (version 1.92) or &37C4 (version 2.30). If this byte is set to zero, Escape will be tested only after every 256 statements. Adding the following line to the program:

5 ?&3619 = 0 : REM. for version 1.92 (&37C4 for version 2.30)


makes the 'parallelism' figure consistently about 85 per cent.



To restore the normal rate of testing, the contents of this byte should be returned to 10. Other values can be experimented with: a value of one results in Escape being tested after every statement and the parallelism all but vanishes!

Richard Russell

# Fast error-free programming

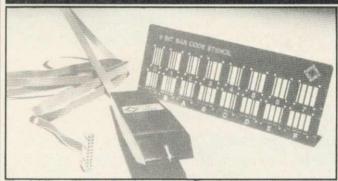

The Addison-Wesley Bar Code Reader pack

Sir, I have recently acquired a Bar Code Reader and am very pleased with its operation. To be able to put a long program in the computer without any typing errors and in such a short space of time is a boon.

I must say, however, that I did not find it easy to start with. The speed taught by the *Scan* program was far too fast – once I slowed down my scan, the programs went in without trouble. The two essentials I found necessary to load every scan were an absolutely flat surface to read off and an even movement of the scanner. I have just entered 80 lines of bar code with only two repeat scans – something I despaired of in the first few hours of practice.

I am interested in buying an expansion board to take care of the screen memory leaving more room for the program. However, where is the software to justify this purchase? Writing long programs is not

my forte at present so there would need to be software available first. Why don't the manufacturers of these boards sponsor programs would provide an incentive to to purchase their users products? There must be many programs written for 48k machines that could be adapted.

Allan Miles Devon

Sir, I have been very pleased with the programs in Bar Code format that have been printed in the last few editions of Acorn User. Having just received my Bar Code Reader I'm keen to obtain as many listings as possible. The whole idea of Bar Codes appeals to me greatly, as little can be said for my typing.


An excellent idea from a truly excellent magazine, with first class service.

Dennis Cornfield Sunderland page 59 ▶


ASK a silly question, pass a fair comment, stage an angry protest – we don't mind what you write to us about (or about us!). Keep 'em short, keep 'em sweet, but keep 'em coming! The address is: Letters, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

# N()W 2=100%

UDM DDFS

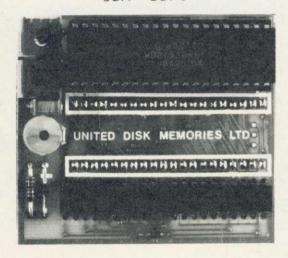



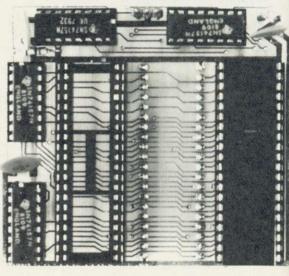

" 100 % " BOARD

# YES IT IS NOW POSSIBLE !

NOW YOU HAVE THE OPTION OF WHICH FILING SYSTEM TO USE. SIMPLY INSERT OUR NEW "100%" BOARD INTO THE 8271 SOCKET, RE-FIT YOUR UDM DDFS INTO THE NEW "100%" BOARD, AND YOU ARE READY TO GO.

BUT IF FOR ANY REASON YOU NEED TO USE AN ACORN DFS. THEN ALL YOU HAVE TO DO IS JUST PLUG AN 8271 INTO OUR NEW "100%" BOARD, ALONG WITH THE UDM DDFS, PLUG IN THREE TIL CHIPS IN YOUR 'BEEB, AND THE CHOICE IS NOW ENTIRELY YOURS.

THERE ARE NO FLYING LEADS TO SOLDER, NO TRACKS TO CUT, NO WORRIES ABOUT WHAT GOES WHERE.....HARDWARE/SOFTWARE SWITCHABLE; JUST CONNECT THE SWITCH AND MAKE YOUR CHOICE

"100%" BOARD IS AVAILABLE IN FOUR PACKAGES:

- THE "100%" BOARD AND SWITCH ON ITS OWN.
- THE "100%" BOARD AND SWITCH WITH 8271 AND TTL.
- 3. THE "100%" BOARD AND SWITCH WITH UDM DDFS.
- THE "100%" BOARD AND SWITCH WITH 8271 AND TTL AND UDM DDFS.

END THE FRUSTRATIONS OF HAVING TO DECIDE WHICH FILING SYSTEM TO BUY.....

BUY THE UDM "100%"KIT, ..... AND BE FULLY COMPATIBLE !

CALL/WRITE NOW FOR PRICES AND FURTHER INFORMATION.

DEALER ENQUIRIES WELCOME !



# **New routines**

# for old printers

program (Printer Driver for the Epson MX80) published in the March 1984 issue provides a wide range of facilities for the Mk3 version but is not directly applicable to earlier versions of this printer. Users with access to the older Mk2 printer will need to modify the routines to obtain a satisfactory printer driver and will have to ensure that the highlight codes are used correctly in the View text files.

The changes required to the program published in March are as follows:

Delete the following lines: 290, 460, 500 to 530, 590, 670 to 710, 940, 980 to 1040

Replace lines 420, 580, 890, 920 and 950 to 1060 with the following:

printed in the normal mode.

It should also be noted that the double width mode is automatically cancelled by the MX80 Mk2 when a new line command is received. This will not cause problems where the double width text is used only for single line titles, but where longer passages are required in double width the highlight codes should be used on all lines with the double width on command at the start of each line and the off command at the end of each line. Other limitations worth noting are that condensed and normal sized text may not be mixed on a single line, and that a single word or phrase in a line of text cannot be emphasised (any attempt to do this will result in either all or no text being emphasised).

Since underlining is not supported by the Mk2, some users may prefer to allocate a different function to highlight code 128 and a useful facility would



Michael Furminger: new programs forecasting the weather

# Satellite

# software packs

Sir, In the August 1984 issue of Acorn User, Robin Mudge wrote about my work at Nene College on satellite reception

As a result I have received many interested enquiries as to how the BBC micro can be used as a satellite decoder, and requests for information about good, cheap equipment sources, as well as helpful comments on the software.

I have produced two new software packs which cover tronics of

> Michael Furminger Northants

for weather pictures.

the needs of most users. These allow both mode 1 and mode 2. distortion corrected pictures to be displayed. The special feature of Pack 1 is that no external clock is required, it uses the powerful features of the 6522 VIA to provide picture synchronisation. Pack 2 allows people who require stored reception, or users of my old hardware interface, to gain the benefits of the new software. Both packs, as well as the lowcost interface and receiver are available from Timestep Elec-Wickhambrook, Surrey. The packs cost £9.95 (cassette) and £12.95 (disc).

420 .Highlight

580 LDA&32F5:BEQ DoubleWidthOff :LDA#14

:JMP Out:.DoubleWidthOff LDA#20:JMP Out 890 PRINTTAB(0,10) "Select Test (Keys B, C, D, L or M)'

920 REPEAT K\$=GET\$: K%=INSTR("BCDLMZ".K\$ :UNTIL K%>0

950 IF K%=1 THEN PROCEmphasise: PROCFrin t:PROCEmphasise

960 IF K%=2 THEN PROCDoubleWidth: PROCPr int:PROCDoubleWidth

970 IF K%=3 THEN PROCCondensed: PROCPrin t:PROCCondensed

1050 IF K%=4 THEN PROCEmphasise: PROCDoub leWidth:PROCFrint:PROCDoubleWidth:PROCEmp hasise

1060 IF K%=5 THEN PROCDoubleWidth:PROCCo ndensed: PROCPrint: PROCCondensed: PROCDoubl eWidth

Finally add a new line into the | Print procedure definition, as

1055 A% = 13:CALL Printer

When running the program the final address value printed out by line 820 will now read &32B1 (instead of &32EF) and only five test keys are supported. Having satisfactorily tested the printer driver, pressing key Z will save a file called EPSON which will be loaded by View in the normal way.

When using the Mk2 version of the MX80 it is essential that the highlight commands to switch off the condensed or emphasised modes are placed on the line following the end of the desired section. Placing these codes on the same line as the text that is intended to be condensed or emphasised will result in that text being

be the double width mode. To do this it is only necessary to change the CMP#130 intruction in line 440 to CMP#128 and the LDA&32F5 in line 580 to LDA&32F3

**Tony Rudkin** Herts

All the Ns are prime numbers higher than 1 (ie. 2, 3, 5 or 7):

> NNN NN\*

NNNN NNNNØ

NNNNN

What is the result of the multiplication?

# Easy editing

Sir, I read with interest Jacquetta Mergarry's article on Wordwise Plus in the February issue of Acorn User.

I am a user of Wordwise Plus and find it extremely good. It has features and qualities of word processors costing several times the price.

I must say that I found the

example Wordwise Plus program given in her article of absolutely supreme value. For those readers who may have missed the article, it listed a program that would delete every tenth word from the text being processed.

Now I know how journalists manage to fit their articles into the space available!

Graham Allan Kent

# Board is not

# the issue

Sir, I recently bought a 6502 second processor for my BBC micro which does not work because I have an Issue 3 board. The 6502 second processor is not compatible with Beebs that have issue 3 or 4 boards.

I am waiting for my dealer to get the bits from Acorn to make the necessary modifications.

My complaint is that Acorn do not inform a purchaser that if his micro has an issue 3 board it will need modifying. A note should be included in the documentation to this effect. Since the item is sold by mail order and people insert the ROMs themselves (maybe thinking they have damaged it), this is quite important.

**Peter Mott** Lancaster

Dave Bell of Acorn replies: the 6502 and Z80 second processors should work with all versions of the BBC model B PCB. If you have any specific problem with the system then consult your dealer for assistance, as in your case. For information, I use a 6502 second processor with an unmodified issue 3 BBC micro PCB.

page 61 ▶

# PINEAPPLE SOFTWARE

Programs for the BBC model 'B' with disc drive with FREE updating service on all software

## DIAGRAM

 A program which allows you to store very large diagrams - up to 39 mode 0 screens - and view or edit them by SCROLLING the computer screen around over any part of the diagram.



#### **FEATURES**

- Draw diagrams, schematics, plans etc., in any aspect ratio, e.g., 10\*3, 2\*12 screens.
- Access any part of the diagram rapidly by entering an index name, e.g. TR6, R5 etc., to display a specific section of the diagram, and then scroll around to any other part of the diagram using the cursor keys.
- Up to 128 Icons may be predefined for each diagram, e.g. Transistors, resistors etc., in full mode 0 definition, up to 32 pixels horizontally by 24 vertically.

£25
Including P & P

disc - 40T/80T

compatible

All orders

sent by return

of post.

 Many other features including, selectable display colours, comprehensive line drawing facilities, TAB settings, etc.

Hard copy printouts in varying print sizes up to 9 mode 0

screens on an A4 size sheet, compatible with most dot matrix

• Disc contains sample diagrams and two versions of the program, one of which will work from a 16k sideways RAM.

Comprehensive instruction manual

#### **BASIC COMPILER**

- A really professional Basic compiler for the BBC micro enabling
  you to write programs in basic which may then be compiled
  into extremely fast 'optimised' machine code. The program
  allows the use of a large number of Basic keywords, and long
  programs up to 11k of compiled code may be compiled
  directly. Larger programs may be produced by using built in
  overlay techniques

  FEATURES
- Keywords \*Fx, ABS,ADVAL,AND,ASC,CALL,CHR\$, CLG,CLS, COLOUR, DEF,DIM,DIV,DRAW, ELSE,END,ENDPROC, ENVELOPE, EOR,FALSE,FN, FOR,GCOL,GET,GOSUB,GOTO,IF,INKEY,INPUT, LEN,LET,LOCAL,MOD,MODE,MOVE,NEXT,NOT,ON,OR,PLOT,POINT, POS, PRINT,PROC, REM,REPEAT,RETURN, RND,RUN,SGN, SPC, SOUND,STEP,STOP,STR\$,TAB,THEN,TIME,TO,TRUE,UNTIL,USR, VAL,VDU,VPOS and any O.S. command. (statements starting with \*)
- String handling using \$ indirection operator.
- Handles 16 bit signed integer numbers.
- Nesting of loops and procedures, and parameter passing for functions and procedures.
- Assembly language statements may be incorporated into the basic source code.
- Library routines may be stored on disc and incorporated into any compiled program.
- Comprehensive instruction manual.

£25

including P & P Supplied only on disc 40T/80T compatible All orders sent by return of post.

PINEAPPLE SOFTWARE, 39 Brownlea Gardens, Seven Kings, Ilford, Essex IG3 9NL



# First the

# good news

Sir, After reading David C Morris's letter from Sheffield about Elite not working on the Microware DFS, I thought I must write and tell you the good and bad news.

If your DFS is made by UDM and will not work on Elite (and many other programs, eg, Mini Office) then it is an old 1.95, 1.1 or 1.98 system. However, this can be upgraded to Office, Labyrinth, Clares' Replica II, etc, with no problem, but seems to take rather longer to load than the Acorn DFS

and simpler to check if there is

a keyword in a record during

\$(d\$(q%),k%)

351,0 ENDPROC

Delete: d1\$ (record%)

3500 NEXT

Now the bad news. It cost me £12.50 to get the new ROM and I had to send the old one back.

The ROM in question is positioned at the right-hand side of the micro under the keyboard. It is in either IC 88 or IC 100 or somewhere near. Send this and a letter explaining the situation to United Disk Memories, Stanhope House, Fairbridge Road, London N19 3HP. Also ask for a new Disc Drive Manual as there are a few extra commands with the new ROM.

I hope this will help Mr Morris and other readers to get the most out of their DDFSs.

Records bonus in database change

J N Willmott N Humberside

# How big are


# turtle steps?

Sir, I was amazed by M P Doyle's letter in the February Acorn User which complained about the 'arbitrary units' used by the Jessop and Valiant turtles.

What is sacred about 'conventional units'? (They were, of course, arbitrary before became accepted.) Which conventional units would Mr Doyle wish to use? Inches, centimetres, picoparsecs? What is this centimetres, 'reality' of which Mr Doyle speaks - there is no special

reality in units of conventional measurement, and nothing that a child cannot learn about geometry using non-conventional measurement systems.

Any line can be measured with a ruler. Let the child discover the relationship between inches and turtle



The Valiant Turtle takes larger steps than the Jessop Turtle but neither uses conventional units of measurement

(which was: aa#bb#cc#dwill d#ee#) be: cc#dd#ee#aa#bb# during sorting.

This method works faster than

the one in your listing.

A B van der Bom The Netherlands

Mike Fryer replies: These ideas seem very sound and interesting. They should certainly substantially increase the number of records that can be handled.

However lines 2070, 2090 and 2100 should also be deleted, and the additional lines 3420 to 3510 should be renumbered 2181, 2182, to 2190 so that they form part of DBASE5 (so that the disc based system will still function properly). The approximate number of records (mr%) calculated in lines 740 and 1020 is now too low, and in both cases the formula should be replaced by:

mr% = (HIMEM-- TOP - 1800)/(0.3\*nc%): IF mr% > 200 THEN mr% = 200

Some readers have had problems with the Database program. It looks as if line 555 is mainly to blame. It's not obvious from the article that there is a space between the quotes at the end of the printed line and the beginning of the next. It should read:

555 \$&C00="LOAD DBASE" +n\$+""+STR\$ (t%)

Other points to note are that in lines 510, 1200, 1240, 2370 the " is produced by the SHIFT key. May I also suggest you replace the f in line 130 by a 0 (zero) and the P%(f% + 1) in line 1220 by p%(f% + 1).

units. Teach the turtle to draw a 'turtle unit ruler', cut it out and use it to plan your future

class work

But if you must, just tell LOGO (REDEFINE) to move the turtle in centimetres (or rods, poles and perches), and hide the change away (BURY) so that the children don't find out!

**Dr Hamish Macleod** University of Edinburgh

# The art of

# printing £s

Sir. In the Letters column of your February issue, Mr Abel of Dunbartonshire wrote of his difficulties in getting a £ sign to print on his Shinwa CP80 printer.

The £ sign, several accent marks and other characters as well as a backspace character, will print on the Shinwa if a combination of Shift and the function keys is used.

If used in mode 7, this combination produces coloured text on the screen, but the embedded codes will produce these characters on the printer. The Shinwa manual makes no mention of them. Shift/f1 produces the £ sign.

D A Deaver Saudi Arabia

FADE + DEAF + BEAD = ?

page 63 ▶

Sir, As a Beeb owner I was the deletion process, instead very pleased to find Mike Fryer's database program listof checking it in advance. The secret of my solution lies in the ing in the December issue of positive and negative values your magazine. of m% and of the INSTR() - 0.5 However, when typing in statement. The addition of commas to k\$ and q\$(1,f% + 1)and taking a close look at the program I discovered some is necessary to prevent deletinteresting changes could be ing or including records conapplied. After a couple of taining a keyword which is hours' work my version longer than k\$. appears to save quite a large amount of memory space. I'll explain the changes I've made in my listing: I thought it would be faster

As you can see, I split each record in two, and exchanged both parts, instead of putting the field on which the records have to be sorted in another array. For example, when sorting on the third field, d\$(g%)

1625 IF c\$="D" THEN m%=-1 ELSE m%=1 1630 j%=0 1635 ks=","+ ks +"," 1640 FOR g%=1 TO e% 1650 PROCumpak (1,g%) 1655 IF m%\*(INSTR(","+q\$(1,f%+1)+",",k\$)-0.5)> O THEN j% = j% + 1 : d\$ (j%) = d\$ (g%)1660 NEXT 1665 e%= i% Delete: PROComit, PROCsplit, in% (record%) 2080 IF ans%>1 THEN PROCrepak 2110 REPEAT 2120 flg%=0 2130 FOR q%=1 TO e%-1 2140 IF d\$(g%)>d\$(g%+1) THEN dum\$=d\$(g%+1):d\$( g%+1)=d\$(g%):d\$(g%)=dum\$:flg%=12150 NEXT 2160 UNTIL flg%=0 2165 IF ans%>1 THEN ans%=f%+3-ans%:PROCrepak 3420 DEFPROCrepak 3430 LOCAL k%,j% 3440 FOR g%=1 TO e% 3450 k%=0 3460 FOR j%=1 TO ans%-1 3470 k%=INSTR(d\$(g%),"!",k%+1) 3480 NEXT 3490  $d \pm (g\%) = RIGHT \pm (d \pm (g\%), LEN(d \pm (g\%)) - k\%) + LEFT$ 

# HARD OR



# SOFT?



Midwich Computer Company Limited, Gilray Road, Diss, Norfolk, IP22 3EU. Telephone: Diss (0379) 4131

# THE WINCHESTER HARD DISC DRIVE FOR THE BBC MICRO

- Available now!
- Ideal for Econet systems.
- Econet Level 2 compatible.
- Acorn DFS compatible.
- Fast ex-stock delivery.
- Low prices.
- Large capacities 5, 20<sup>†</sup> & 25<sup>†</sup> Mb.
- Comprehensive user manual and utility software included.
- Simple installation.
- 12 month warranty.0n site maintenance
   & extended warranty available.

† (Available April 1985.)

5Mb HARD DISC ONLY £850 + VAT 20Mb<sup>†</sup> HARD DISC WITH INTEGRAL FLOPPY DISC BACKUP

£1500 + VAT (quide only)

The ideal cost effective solution for Econet storage problems.

# MIDWICH BBC COMPATIBLE FLOPPY DISC DRIVES

- Lower prices.
- High quality Japanese mechanisms.
- 100K to 800K storage capacities.
- Available with integral Disc Interface.
- Optional integral power supply.
- 12 months warranty.
- Complete with utilities disc and comprehensive user manual.
- All 400K and 800K drives are 40/80 track switchable.
- Improved design. Easier operation.

HC1 BBC 400 BBC 400D BBC 400P

BBC 400DP

BBC 400PI

Single 100K – Alps Single 400K 40/80 track Dual (2 × 400K) 40/80 track Single 400K 40/80 track with integral power Dual (2 × 400K) 40/80 track with integral power Single 400K 40/80 track with integral power and Disc Interface Dual (2 × 400K) 40/80 track with integral power and Disc Interface £ 69.95 £160.00 £290.00

£186.00

£320.00

£380.00



# CENTRAL PROCESSING... CENTRAL PROCESSING...

I Montgomery, Cleadon

Occasionally pound signs  $(\mathfrak{L})$  have crept into listings — though we hope that they will not do so in future. But yes, when they have done they normally refer to the hash character (#).

For a comprehensive list of Epson control codes I suggest you purchase the February Acorn User listings cassette, where they are contained in a Wordwise format.

George Scerri, Malta.

To my knowledge there are no books containing detailed descriptions of the OSWORD calls &7A to &7E. These calls are mainly concerned with writing to and from the disc controller chip itself and as such are used by many software houses to implement their protection. The October 1984 issue of

tainly due to some form of 'ROM protection' that prevents it being used in sideways RAM. Obviously I am not at liberty to disclose how you might be able to circumgate this

T. G. Ward, Bideford

The program time specified for a 2764 EPROM is  $50\text{ms} \pm 5\text{ms}$  per byte. However you can normally get away with a very much shorter time period, and the writers of programming software tend to take advantage of this fact.

I would suggest that your problem may have its roots in the software provided with your EPROM programmer, which is being just a bit too skimpy with its programming time.

Patrick Smith, North Shields

A good selection of Electron

Because of the large amount of technical enquiries we receive in the *Acorn User* office we are now unable to reply to individual letters. However, this new feature is intended to answer as many of your queries as possible, and should provide a useful information spot. Please keep your letters short and to the point.

Acorn User gives some insight into these calls however.

Christopher Morris, Louth

You will need an RS423 interface for your Electron to be able to use a modem. Acorn will be producing one that will plug into one of the two cartridge sockets in the Plus-1, but I am unable to give a date for its launch.

Sgt Boyd BFPO 45

A checksum program for use in entering Basic programs is well under way – we hope to present it in the near future.

Francis Aries, Herts

Your problem is almost cer-

XX XX\* XXX XXX + 1XX XXXXX

This is an ordinary multiplication and addition sum. The Xs represent any digit. What's the result? software can normally be found in larger branches of WH Smith. If you do have problems try writing to Acornsoft for their software catalogue.

BS Greenes, Gateshead

Yes it is possible to use the BBC micro to control a synthesiser in the manner you suggest, but you would need to use a good amplifier. A typical example of this type of application is the Music 500 package. I do not know of any books giving details of how to build this type of hardware.

Kevin Bowen, Cardiff

All the details of the activity board were published in the August 1984 issue of *Acorn User*.

R P Dennis, Mansfield

The fact that the same error keeps occuring tends to suggest that the problem is in the disc itself. No amount of sector re-editing will resolve this, so I would suggest you transfer the contents of the disc to a new one and discard the faulty disc.

T A Manning, Wirral

There is certainly enough memory for *Quadline* (January 1985) to run on the Electron. I suggest that you re-read the notes on how to enter the program.

Kitty advises on

communications

-the equipment

and terms used

I would like to use my BBC micro to gain access to one of the many bulletin boards that are now available. I am unsure exactly what a lot of the terms involved mean, so a gentle introduction would be most appreciated! Could you give me some advice as to exactly what equipment I am likely to need please, and what it will cost?

Linda Dhondy Isle of Lewis

First, you will need to purchase a modem. This is the box of tricks that connects your micro to the telephone, converting the signals that both require into a suitable format.

There are many different types of modem available, and at varying costs. One thing you must ensure is that the modem is BABT approved. This means that British Telecom have seen and approved the system for use with the national telephone network system. Using a non-approved system can be dangerous to both you and other users and you can be fined if you are caught at it.

Before deciding on your modem, evaluate what you will require from it. For example, if you are only interested in using Prestel with Micronet 800 and Viewfax, then a modem which could also use other boards might be an extravagant extra. In this case, a modem such as the Acorn Prestel Adapter would be more suitable.

Another term you will need to understand is baud. This simply refers to the speed at which data is transmitted and received by the BBC micro. Various combinations are used such as 300/300 (transmit and receive at 300 baud) for BT Gold, 1200/75 for Prestel, and so on. Many modems will cater for all: for example, the Minor Miracles WS2000 or the Nightingale by Pace.

The final term you should be familiar with is duplex;



modems may be either full or half duplex. The former means that data may be transmitted in both directions at once; the latter is only capable of transmitting or receiving but not both together. Again most modems will cater for both.

Many also offer auto dial and answer options. The auto dial facility allows the modem to dial the number for you, and in many instances sign on to the board you are dialling. Auto answer allows you to set up your own bulletin board so that people may call you and leave their messages. You will need to dedicate your micro for this, however. Again, it's a matter of whether these are cost effective or not.

One final point on the subject of modems is to remember that you will need one of the new plug-in type phone wall connections to allow your modem to be connected. Most new phone installations will use these plug-in systems; older versions can be changed by BT for a small charge.

Obviously you will need some software to drive your modem, and it's best to have this in ROM. There are many packages around such as Termi and Communicator from Computer Concepts, Comstar from Pace and more recently the Demon Zromm from Rushworth Dales, which is very flexible. Some modems such as the Prestel Adapter come with software already in-cluded. Beware, though, if you buy an auto dial or answer modem that the software you select also has that capability. A dealer can advise you.

As to the cost, it varies enormously. You can spend between £60 and £200 on a modem, with software ranging widely in price (ROMs being more expensive). Have a look at the comparative reviews on modems and software in the February and April 1985 issues of Acorn User, and scour the advertisements.

# 

for the

# BBC "B" MICRO

# LOGO SOFTWARE LIMITED

LSL LOGO grew out of a feasibility study commissioned by the Department of Industry to develop a LOGO ideally suited for educational use in Britain.

LSL LOGO is the only LOGO to use a separator (a comma) between commands in the same line. This means that procedures in LSL LOGO are much simpler to understand.

LSL LOGO is the easiest LOGO to debug. There are 23 error messages which pinpoint bugs with unrivalled accuracy, and 9 debugging commands, including the unique **WALK** which enables the user to execute a procedure step by step.

LSL LOGO is the fastest and most efficient LOGO around. Its innovative dynamic memory management gives the user bigger and more flexible memory space, vastly extended levels of recursion and capacity for more procedures.

LSL LOGO comes packed on a single EPROM. Future developments include floor turtle and robot interfaces, a sprite board, and a range of supporting documentation including feedback, worksheets, and a procedure dictionary.

LSL LOGO is written in Assembler by a British software house. It makes full use of the BBC Micro's own operating system, and is readily accessible to advanced users wishing to customise their own LOGO.



LSL LOGO comes equipped with a lavishly illustrated 232-page manual, including the Young Person's Guide to Logo, the full Technical Specification, and Quick-reference section

# BOOKLET

A free 16-page booklet, Why LOGO, fully describes the history and the scope of the language. Write today for a copy, or ring 01-891 0989

enclose cheque/PO for £	or debit my
Access No.	
Name	
Address	

# the right bit...

# CVX 16.2 ROM/RAM **EXPANSION BOARD**

- Up to 16 Roms fully buffered
- 16K Ram Option
- Write protect
- Battery Backup
   Same Name switching
- Simply Plug-in (no soldering/cuts)
- Full Documentation

£49.95 plus postage & packing £1.50

# **DECCA VIEWDATA** RGB MONITOR

- Standard Resolution
- 1/P TTI/RGB
- Daisychain facility
- Built-in Speaker

£155 - including BBC cable + secure delivery £8 -

# DISK DRIVES

400K 40/80 SW

Highest quality shugart SA 465 Slimline drives

Direct connection to BBC

- All Cables Fitted

£149 - Single cased

£299 - Twin Cased + Secure Delivery £8 -

#### ROM MASTER

- Sideways ROM/RAM UTILITY

  Load/Save Sideways Rom

  Powerful 2 pass labelling reverse assembler

  Save/Reload basic into S/W RAM
- List contents of Rom
- Disasembly to Disk

Rom Disable - ROM
Rom Map - ROM
Direct Edit sidways Ram
Write enable/write protect Switch between & 08/& 09 Link Configeration CV x 16-2 only

£19.95 plus postage & packing £1.50


# NASHUA

Professional Quality Disks MDI SSSD 40/T £14.95 MDID SSDD 40/T £16.10 MDZD DSDD 40/T £20.70 MDIF SSDD 80/T £25.30 MD2F DSDD 80/T £27.60

All with Hub Ring
 Prices per pack of 10 disks

Plastic Library case £1.50

All prices plus £1.00 postage & packing

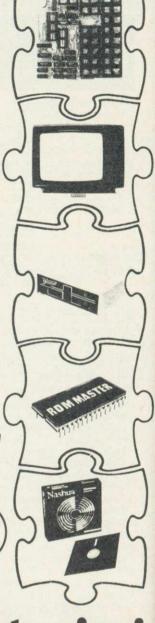

# at the right price!

ALL PRICES

INCLUDE

V.A.T.



# COMPUTER VILLAGE 28

### FREEPOST

Hazeldine House, Central Square, Telford, Shropshire.

	- 10-14
A	(0952
WSA	50677

CV x 16-2 ROM/RAM Expansion Board		£49.95		Please find enclosed full remitance Please debit my Access/Barclaycard
DECCA Viewdata RGB Monitor		£155.00		Number
Single Cased Disk Drives	4	£149.00	1165	Signature
Twin Cased Disk Drives		£299.00		Address
ROM MASTER		£19.95		
Nashua, Quality Disks	· m			Tel. No

COMPUTER VILLAGE Hazeldine House, Central Square, Telford, Shropshire. Tel: (0952) 506771

A full implementation in two language ROMs
for the BBC Microcomputer Model B

# LOGO: THE BIG FOUR

Joe Telford compares the major

implementations of the language

aving introduced Logo to the uninitiated (April issue), and pointed out some of its strong points and failings, I'll now consider the implementations of Logo on the BBC micro. There are four major versions of the language currently available, from Acornsoft, Logotron and LSL, and Open Logo, developed by the Open University and produced by BBC Publications.

### Introduction

varying extensions

LOGOTRO N\_

The first thing to mention is that as we were hearing about Logo for the BBC micro two years ago, we might be forgiven for expecting that the final packages would be of a uniformly high standard. My impressions of all the Logos were somewhat reduced when I discovered that each had its own standard. This is fine. once you've learned it, but it requires a cross translator to transfer routines between dialects. This is a very sad state of affairs. Whatever the end product, we should be moving towards standardisation of Logo, with perhaps

I suspect a major reason for my annovance at the differences in the languages is that it makes a comparative review more difficult. Each version has different strengths and weaknesses, and it becomes difficult to decide on an overall 'winner'. The approach I take

in this review is to examine the four Logos in parallel and by sections.

# Overview of each system


Two of the four Logos (Acornsoft and Open Logo) were supplied with preproduction manuals. The Acornsoft implementation comprised two 16k chips, a tutorial manual and a reference manual. Also in the pack was a disc of extensions and demonstrations. Acornsoft Logo was written in BCPL by Acornsoft: wealth of commands

Chris Jobson and John Richards and seems quite close to the Apple Logo currently available. The Logotron version came in its finished packaging and consisted of a manual in a ring binder plus a single 16k chip, written in machine code. This version

to the LCSI standard and as such should be completely compatible with other Logos written to that standard, for example, the Sinclair Spectrum and Atari 800XL. In fact this is only partly true. Page 163 of the Logotron manual says that they have removed POTS, POPS and PONS, which respectively print out titles, procedures and names. because they were confusing. Page 77 of the Sinclair Logo manual regards these words as part of the LCSI standard. Because the Sinclair version was also written by SOLI, I can only assume that the LCSI standard is variable which reduces the effectiveness of

The LSL implementation also arrived in its finished packaging, with a single 16k machine code chip and one manual. This version, which seems to have been some time in preparation. was written by Paul and Kay Crowe of

Open Logo came as two 16k chips (one being the language, the other including maths extensions), a tutorial manual and a reference manual. Also included was a disc of example programs and a second processor copy of Open Logo. page 67

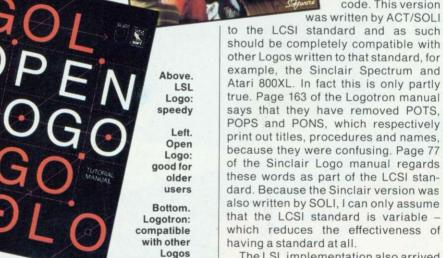



This utility package has many special features for use with discs, plus other utilities that everyone will find useful: Function key editing, powerful disassembler, recovery of data from corrupted discs, complete disc editor and compatible memory editor, string search in memory or on disc, built-in help menu, verifying and formating of 35, 40 and 80 track discs, and also a special format which allows 60 files on each side of a disc.

Available from all good BBC mick dealers or by 'phoning/writing to



Computer Concepts

Gaddesden Place, Hemel Hempstead, Herts.

HP2 6EX. Telephone: (0442) 63933



RRP 33.35 incl.

LANGUA

All the versions ran on the second processor although, because of its structure, Open Logo had to be loaded from disc (not necessarily a bad thing!).

#### The manuals

Both Open Logo and Acornsoft Logo had dot-matrix printed manuals, because they were pre-production copies. There were a number of typographical errors and diagrams were not included, but this should be corrected in publishing. Open Logo's tutorial manual uses an interesting style of writing which includes 'I did...' It always makes for good reading in narrative form, and is not unpleasant. Perhaps it emphasises the adventurous nature of Logo.

LSL have produced a spiral-bound manual with colour-coded sections, and one of the most interesting acknowledgements I've ever read twice. The sections include a children's tutorial, teacher's notes and a reference section. There are a number of typographical errors, but an enclosed sheet corrects them. Issue two of the manual was due to go to press and this would correct the copy to date.

Logotron's manual has been designed for expansion. In a glossy ring binder, the loose-leaf pages can be updated as new extensions appear. Several times the index informed me that a word was on page n, while it was actually a page or two earlier or later.

In both the Acornsoft and Open Logo manuals, items are very well explained, with the Open Logo manual being best in terms of information about the language syntax and extension to machine code. In my opinion, the Logotron manual is best at explaining Logo programming for the interested teacher or adult, while LSL's manual with its simple layout is easiest to use. Its 'Young person's guide to Logo' is also more appropriate for children than the other tutorials. The last page of the LSL manual has a set of

perforated function key overlays, which can be fitted to the BBC micro to help with handling the editor.

# Benchtesting

Table 1 demonstrates the speeds of the different Logos. Figure 1 contains the listings used. Both LSL and Logotron Logo perform well, with Logotron taking the edge. Acornsoft's *bête noire* seems to be list processing, while Open Logo seems to baulk at graphics.

The odd result for LSL in benchtest 6 reflects the lack of a machine code ATN function. This seems trivial, but without it conversion back to degrees cannot be performed.

Even the fastest Logo performs more slowly than Basic, but we should remember that in many educational situations all the Logos will perform fast enough for children. It is mainly in limiting situations where the speed will be critical, eg, in music, information handling, control and some language processing.

# **Graphic primitives**

The widest range of primitives here come from Acornsoft Logo. The special functions of this version include returning the distance of a turtle from any point on the screen, as well as the direction of travel needed to reach that point. In Acornsoft Logo and Logotron Logo the general approach to finding an equivalent of PLOT is to provide a SETNIB command which duplicates the facility. LSL Logo uses the subset FILL/NOFILL, and Open Logo uses PAINT. This is the only version that will fill a predrawn shape.

In all versions, drawing with the turtle showing is much slower than drawing with the turtle hidden. For some reason, Open Logo is particularly slow here.

Only the Open and Acornsoft versions have multiple turtles already available. Open Logo has four, while Acornsoft has up to 32, although this

requires loading an extension from disc. Open Logo allows the user to keep track of each turtle in relation to the others. However, multiple turtles run slower than single turtles, and it should be possible to run a turtle in LSL or Logotron Logos to give the appearance of two or three separate turtles. This will require some programming expertise on the part of the user, or waiting until the sprite boards for these two Logos become available.

All the turtle 'fields' are roughly rectangular except for LSL Logo, which uses a square field and a larger turtle step (eg, FORWARD 50 in LSL Logo is equivalent to FORWARD 200 in the others).

# **Numeric primitives**

Again a wide range from Acornsoft, some of which must be loaded from an extension. The OU version also has a wide range, but these are built in. Logotron, Acornsoft and the OU versions use infix notation as well as prefix notation. This means that

PR 23 + 54

will work as well as

PR SUM 23 54

LSL goes for the more traditional prefix notation, with the result that its arithmetic routines are very swift indeed. It is worth noting that Open Logo has some of its keywords rearranged so that, for example, PICK in Open Logo is a variation of RANDOM on the others. Not good for converting between Logos, but remember my comments about standardisation.

# Control flow and conditional primitives

Again Acornsoft has the widest range, if not the best implementation. Following the Apple format, it uses THROW and CATCH to switch control during execution. It also includes a DOFOR-EVER loop. Although all the Logos in-

Bench Test No	t No Test tasks		Logotron	LSL	Open
1	100 empty repeat loops	0.14	0.22	0.99	0.45
2	100 procedure calls	0.67	0.63	2.10	0.85
3	100 assignments of a 10-element list	3.10	0.84	2.20	2.52
4	100 assignments & 2 way parameter passing	4.20	1.60	2.80	3.49
5	100 sets of arithmetic	16.00	7.20	4.20	7.40
6	100 sets of trig	21.00	13.00	76.00*	9.90
7 Turtle shown	100 × 2 sets of forward backward	31.00	16.00	40.00	54.00
7 Turtle hidden	100 x 2 sets of forward backward	19.00	5.00	11.00	31.00
B Turtle shown	100 × 4 sets of 90 deg left turns	33.00	26.00	40.00	45.00
3 Turtle hidden	100 x 4 sets of 90 deg left turns	22.00	13.00	11.00	7.50
9	100 printings of a 10-element list	15.40	4.40	6.00	5.60
10	100 reversals of a 10-element list	126.00	21.00	54.00	68.00

\* ATN function not available - replaced by Logo procedures from LSL manual

Times in seconds

PR :cat = []

for example:

must be translated to

PR EMPTY:cat

This again gives an increase in speed, but is not so flexible. Only Open Logo allows consideration of the >= or <= operation without resorting to AND or OR, and this is done with the new commands GEQ and LEQ, ie:

clude an IF . . . construction, LSL does

not include infix notation here, so that

IF GEQ 73 [PRINT 7] [PRINT 3]

should print 7.

68

No outright winner or loser in this section.

# Data and list processing primitives

As we have come to expect, Acornsoft has the lead here, too, with the largest available selection of commands and operations. Unfortunately it is in this area where its timings are worst. Before assessing whether there is a winner in this category, we need to consider some of the problems associated with the four Logos.

Open Logo and LSL Logo both use the JOIN operation to combine lists or words. This in itself is reasonable, and compares with the use of SENTENCE by the other two Logos. Unfortunately it is not possible to join a WORD to a LIST in LSL Logo or Open Logo, so that

#### PRINT JOIN [WE LUV] "KITTY

produces an error message which confirms this. Obviously, spokesmen for the various products will differ over which is the better approach, though I feel that the general solution is often the best. In talking about non standardisation, users should consider the Open Logo approach to naming things. Although

MAKE "Cleverland [Teaseside Heartlepool etc]

is acceptable,

PRINT: Cleverland

issues the error message

:Cleverland has no meaning

To print correctly we should use

PRINT Cleverland

You might think that this would cause confusion between procedures and named variables. The first time I defined "Cleverland as a variable, I tried to use it as a procedure by typing just

Cleverland

and was foiled by the message

Don't know what to do with system error 3. Press Break.

Feeling that this was so far from Logo philosophy, I intuitively extracted and refitted the Open Logo chips and tried again. This time I was rewarded with

Cleverland has no meaning

```
benchtest 1:
PRINT "S REPEAT 100 [] PRINT "E
benchtest 2:
TO BLOCK
PRINT "S REPEAT 100 [BLOCK] PRINT
benchtest 3:
TO BLOCK
MAKE "LIST [A B C D E F G H I J]
PRINT "S REPEAT 100 [BLOCK] PRINT
benchtest 4:
TO ENLIST :list
MAKE "newlist RELIST :list
TO RELIST : list
OUTPUT : LIST
PRINT "S REPEAT 100 [ENLIST [a b
         cdefghij]] PRINT "E
benchtest 5:
TO BLOCK :size :inc
MAKE "size :size + :inc
MAKE "size :size - :inc
MAKE "size :size / 2
MAKE "size :size * 2
PRINT "S REPEAT 100 [BLOCK 50 10]
         PRINT "E
benchtest 6:
TO BLOCK :size
MAKE "trig (ATN ((SIN :size) /
       (COS :size)))
PRINT "S REPEAT 100 [BLOCK 50]
benchtest 7:
TO BLOCK :size
REPEAT 2 [FORWARD :size BACK :size]
PRINT "S REPEAT 100 [BLOCK 50]
         PRINT
benchtest 8:
TO BLOCK :size
REPEAT 4 [LEFT :size]
```

benchtest 9: SETMODE 7 TO PRINTER :text :times MAKE "c 0 REPEAT :times [MAKE "c :c + 1 PRINT (FPUT :c :text)]

PRINT "S REPEAT 100 [SQUARE 90]

PRINT "E

PRINT "S PRINTER [a b c d e f g h
i j] 100 PRINT "E

benchtest 10:
TO BLOCK
MAKE "newlist REVERSE [[A] [B] [C]
[D] [B] [F] [G] [H] [I] [J]]
END
TO REVERSE :list
IF :list = [] [OUTPUT []]
OUTPUT SENTENCE REVERSE BF :list
FIRST :list
END
PRINT "S REPEAT 100 [BLOCK] PRINT

Figure 1. The listing used to perform the 10 Logo benchtests

Apparently a subset of Open Logo must work with only one chip. Even so, this new approach to naming variables is a move away from whatever standard seemed to exist.

Talking in terms of non standard languages, LSL has its own problems because it uses commas to separate commands. I assume this is done for speed and ease of decoding. It seems strange to start with, but I expect it can be lived with.

Back to Acornsoft Logo, which contains such a wealth of extra list processing commands like ADDITEM, ERITEM and SETITEM that if it wasn't for its slowness of operation I'd be more than impressed. Logotron Logo and Acornsoft Logo come out joint top here.

# **Debugging primitives**

As usual, Acornsoft is the most complete, using a particularly useful powerful tracing command. However, complete here does not mean best. The honours here go to LSL Logo with its easy to use debugging commands: SPY, TRACEP, TRACEV, REPORT and WALK.

Logotron has the smallest set of debugging procedures.

#### **Procedures**

Acornsoft and Logotron have the largest range of procedural primitives, followed by Open Logo and then LSL. Particularly amusing are the non-standard commands for reclaiming workspace: TIDY (Acornsoft), RECYCLE (Logotron) and GCOLL (Open Logo).

### File handling primitives

There are two types of file handling primitives to consider. The first is the facility to save procedures to a filing system, the other is to save datafiles. All the versions can SAVE and LOAD single procedures, although Open Logo and Acornsoft Logo have commands to load and save screens currently available as primitives. All except LSL have some means of packaging the procedures so that the whole workspace can be saved as one filename. All versions appear to work with Econet, although Logotron recommends a modification to its SAVE primitive if an Econet is in use.

I personally prefer to \*SPOOL text to the filing system, as this gives me maximum flexibility and also allows me to use either *Wordwise Plus* or the Acorn wordprocessor as a very powerful editor.

When it comes to data filing, the story is much reversed. The first prize for data handling must go to LSL, with a wide range of filing commands. Logotron is also in the running, but alas,

having used the wonderful data handling commands of Acornsoft Logo, we are unable to file any database made with them. This omission must be regarded as serious by teachers of IT and awareness courses. I wonder if Acornsoft consulted its CES team on this matter? After all, this is highly thought of by teachers of computing and advisers across the country.

# Machine specific commands

However machine specific commands are presented, it is inevitable that they will try to mimic the Basic equivalents, down to the name if possible. Thus we lose the lovely ? operator for the dubious DEPOSIT or POKE and EXAMINE or PEEK. These commands are lacking on LSL's version, and despite my condemning them, it does seem a good idea to have some way of getting to terms with monitoring and controlling the environment. Logotron also lacks an ADVAL command (surely an important facility) and the real time clock of the other versions. This is sad because timing and handling time is very valuable to young children. Only Open Logo supports OSWORD calls. but this seems in keeping with its apparently academic aims. Acornsoft Logo wins this round, with Open Logo second.

# Memory

All these versions of Logo make demands on memory, and all except LSL perform garbage collection on demand. Memory is generally measured in nodes, the number of which vary depending on the screen mode in use. One way of measuring memory usage is to use a standard (ha!) program which eats up memory, and to see how many times it will recur before running out of room.

A typical program might be:

TO SPACE :no PRINT :no

SPACE:no+1 (or SPACE ADD:no 1)

PRINT :no END

which gives the results shown in table 2 when called in mode 7 with the command SPACE 0.

Added to which, a Fibonnacci sequence test by recursion failed at similarly low numbers on Acornsoft Logo. Open Logo wins here, and Logo-

# **SUPPLIERS AND PRICES**

# Acornsoft Logo

Available from Vector Marketing at £59.95.

Education class sets of 10 at £300. Information from Bob Coates (Senior Education Advisor), Acorn Computers, Fulbourn Road, Cherry Hinton, Cambridge CB1 4JN

# Logotron Logo

Available from Logotronics at £59.95.

Education class sets of 10 at £300. Information from Chris Roper, Logotronics, 5 Granby Street, Loughborough, Leics.

# LSL Logo

Available to home users from LSL at £59.95.

(Education prices and delivery from Edward Arnold, 41 Bedford Square, London WC1B 3DQ.)

Information from Chris Squire, LSL, 316a Richmond Road, Twickenham, Middlesex.

# Open Logo

Available from BBC Publications at £69.95.

Information from Software Editor, Software Department, BBC Publications, 35 Marylebone High Street, London W1M 4AA.

tron just beats LSL into second place because of the fatal out of space error in LSL.

### The editor

Each version has an editor, in effect an input buffer for entering and editing procedures. It takes the form of a blank text screen and behaves like a simple wordprocessor. However, all the Logos except LSL can create procedures outside their editors, using commands like TO or DEFINE.

Within the editors, each has its peculiarities, Acornsoft's seems to take up a large amount of memory permanently. Logotron's alters to fit the current mode. Open Logo's is prettiest, in a multicoloured mode 7 display. It also contains the most information in switchable HELP menus. LSL's, although having only very basic text editing commands, follows the format

of editing in BBC Basic. The others are 'on screen editors', where all changes are implemented when the editor is left, although the screen alters as the editing is done.

# **Error messages**

All the Logos support a set of error messages. Generally these are all very informative. I particularly liked Acornsoft's easily understandable messages, although Open Logo is impressive too.

I was sad to see that some of Logotron's messages had to be decoded: for example, with a fence in place Acornsoft Logo gave the message 'Turtle hit fence', LSL Logo said 'Can't FORWARD 500 Out of bounds', but Logotron said 'I don't like 500 as input'.

### **Extensions**

All the four firms have planned or are currently offering extensions. Acornsoft's are already available on disc and included in the package. Utilities for screen dumping, multiple turtles, maths routines, and floor turtles are among the offerings here.

At the time of writing, Logotron is planning a sprite extension board at around £160 as well as other extensions on disc, which are expected to be as cheap as possible. This would certainly be welcome.

LSL has its own sprite board in the pipeline, and is taking feedback from users as to what extensions it should add, although procedure packaging is definitely on the cards. Hopefully it will not be long before these arrive.

Open Logo comes with a disc of utilities, which are very interesting to run. Also expected are distance learning material from the OU based on their Logo, and this in terms of adult education may prove a deciding factor in the battle of the Logo chips.

All versions have or expect to have, (or believe other companies will provide) extensions for the two common turtles:

- 1. The Jessop Turtles (All species)
- 2. The Valiant Turtle (Acornsoft Logo will drive four at once!)

and for their close relatives:

- 3. The Penman Plotter
- 4. The BBC buggy

# Conclusions

As you can see, there is no outright overall winner in the battle of the turtles. It depends on your own interests and on which facilities you need. Let's consider my likes and dislikes across the group.

#### Open Logo

I liked its maths routines, its editor, its

Logo	Recurrences	Comments	
LSL	644	Out of room is a fatal error	
Open Logo	409	Recoverable	
Logotron	324	Recoverable	*
Acornsoft	80	Editor uses large part of workspace	

documentation, its extension disc and the disc copy for second processor use. I disliked its speed for list processing and graphics, the twin chip system, its way of naming variables (this is personal preference) and its lack of datafile handling.

Conclusion: probably most useful for older users, but I look forward to probable OU teaching materials.

# LSL Logo

70

I liked its speed, its debugging primitives, the datafile handling, the single chip system and the manual. I disliked the lack of infix notation, the lack of ATN function, commands separated by commas (again personal preference), the editor and the fatal 'out of room' problem

Conclusion: I became more impressed with this version as I used it. Most likely to have success with children in the middle school range.

#### Logotron Logo

I liked its overall speed, the editor, its list processing, the single chip system, its filing and the manual. I disliked its method of changing modes, the system

crashing on using \*COMPACT, \*COPY or \*FORMAT, the lack of ADVAL command, debugging commands and time clock.

Conclusion: for general use, this Logo covers a wide range. It is generally compatible with Spectrum, Atari and Apple Logos and hence should appeal to many users. However, I would like to see an extension disc curing some of the problems. The sprite board should also prove interest-

#### Acornsoft Logo

I liked the wealth of commands, the extension disc, its documentation, the graphics generally and particularly the multiple turtles (which can change shape). I disliked its slowness, its twin chips, the space used by the editor, and the lack of datafiling commands.

Conclusion: despite its slowness, this version has much to offer, particularly in the area of cheap graphics, eg,

> See page 79 for Acorn User's special offer on the Valiant Turtle

the multiple turtles, etc. Users need to beware of its problems with recursion, which are partly caused by the space used by the editor. Acorn is making the language available for the Electron, and users needing compatibility should think about this version. I would probably place this with younger users, and include a floor turtle in the package.

# Final considerations

In many ways one version of Logo would have forced the issue of which one to buy. Certainly Acornsoft's is not up to the standard of BBC Basic, but then nor are any of the others. If you want to buy a Logo system, you need also to think in terms of the end cost. An expansion ROM board may be needed for the two-chip systems, while the single chip versions may need expensive sprite boards to give multiple turtles

Schools wishing to enter the realm of Logo should almost certainly buy either Acornsoft or Logotron versions because of the low prices currently available. It might be wisest for home users to check with their children's schools before buying their own copy.

# DATA-ACQUISITION FOR THE BBC MICRO

- Single and dual channel up to 1 Mhz sampling rate. Timebase calibrated in 1-2-5 sequence with external timebase input facility.
- Memory 2K bytes non volatile. Signal Input AC/DC co Signal Input - AC/DC coupled. Stepped attenuator from 5mV/Div to
- 5V/Div in a 1-2-5 sequence. Signal Output DC coupled to oscillo-
- scope, or chart recorder. Interface standard 8-bit parallel interface developed for BBC micro (can be configured for use with other micros).
- Used independently of micro will convert any oscilloscope into a storage oscilloscope.
- from £470.00 plus VAT and carriage.
- Complete systems available FT 2000 ACOUSTIC ANALYSIS AND MEASUREMENT SYSTEM, Many applications, including tests requiring the simulation of anechoic sound proof chambers. INSERTION GAIN ACOUSTIC ABSORPTION

Capable of performing

PHASE RESPONSE DISTORTION ANALYSIS REVERBERATION ANALYSIS

NOISE SPECTRUM
FREE FIELD RESPONSE
DIRECTIONAL CHARACTERISTICS

SAP disc based program supplied with all BBC interfaced units features:

- Large, fast display of stored data on the moni-tor screen with appropriate amplitude and timebase calibrations.
- Expansion facility of displayed data for detailed examination of sections of the stored
- Measurement of displayed signal by keyboard controlled cursor
- Storage of waveforms to floppy disc with fast Hard copy output to analogue, digital or dot
- matrix printer/plotter.

  Averaging routines of up to 32,000 sweeps
- providing improved signal/noise ratio. Easy to use with detailed 22 page User Guide.

## DATALOGGING AND INTERFACE SYSTEM Various software packages available (including spike processing with window discriminators) for physiological recording and analysis. Full details on request

# MONITORS

Philips 7502 12" green screen Ferguson 14" Colour

£72.50 + £7 p & p

Monitor/TV Microvitec Standard £239.00 + £7 p & p

Colour Monitor £210.00 + £7 p & p

ALL PRICES EXCLUDE VAT

#### **DISK DRIVES**

CS100 single with accessories £119.95 + £7 p & p CS100E second unit for above CS400 Single £149.95 + £7 p & p

SYSTEMS

400K unit CD200 Dual Unit £189.95 + £7 p & p £284.95 + £8 p & p

2 × 100K CD800S Dual Unit 2 400K £414.95 + £8 p & p

#### PRINTERS

NEC 8023 120 cps Ensign 165 cps letter quality (similar spec to

FX 80) Daisywheel Printers £340.00 + £9 p & p

£225.00 + £9 p & p

DFS INTERFACE

**UDM DDFS** £99.95 + £2 p & p

# **GRAPHITEK ELECTRONICS**

Please call (0272) 551781/2 for further information or send remmitance to: GRAPHITEK ELECTRONICS LTD, Hayward House, 140 Hayward Road, Bristol BS5 9QA Telephone: (0272) 551781/2


# MICRO MEDIA-MICRO MEDIA

## SUPPLIES SAVE ££££

#### FLOPPY DISCS NASHUA 5 YEAR WARRANTY

All prices inclusive of VAT and carriage.

SS/SD 48 SS/DD 48 SS/DD 48 SS/DD 48 SS/DD 96 SS/DD 48 SS/DD 96 S/DD 96 SS/DD 96 SS/DD 96 SS/DD 96 SS/DD 96 SS/DD 96 SS/DD 96 SS/D	51/1	TPI	1-2 boxes	3+boxes
DS/DD 48 SS/DD 96 DS/DD 96 DS/DD 96  24.80  21.50  3M Lifetime guarantee  5\frac{1}{4}" TPI SS/DD 48 DS/DD 48 DS/DD 48 DS/DD 96 D			13.50	12.75
SS/DD 96 DS/DD 96 24.80 21.50  3M Lifetime guarantee  5\frac{1}{4}" TPI SS/DD 48 DS/DD 96 DS/	SS/E	DD 48	15.85	13.85
DS/DD 96         24.80         21.50           3M Lifetime guarantee         3M Lifetime guarantee           5½" TPI         1-2 boxes         3+boxes           SS/DD 48         16.30         14.00           DS/DD 48         21.40         18.70           SS/DD 96         24.25         21.00           DS/DD 96         28.00         24.30           DS/DD 96         28.00         3+ boxes           10 × 5½ See 10         3.50         3.00           30 × 5¼ Rexel         8.00         7.50           90 × 5¼ Lock Lid         17.80         —           Ribbons         per ribbon         per box           Brother HR15 M/S         5.60         5.10 × 6           Canon PW 1080         7.40         6.75 × 6           Epson FX/MX 80         4.85         4.00 × 5           Epson FX/MX 100         6.50         5.25 × 3           Juki 6100         4.20         3.50 × 6           Kaga KP 810         7.40         6.75 × 6           Oki Micro 80/82         2.35         1.90 × 12           Walters VM 2000         4.65         4.15 × 4           Continuous Labels         1000         4.50           1"" × 9½" 50	DS/I	DD 48	18.95	16.75
3M Lifetime guarantee           5½" TPI         1-2 boxes         3+ boxes           SS/DD 48         16.30         14.00           DS/DD 96         24.25         21.00           DS/DD 96         28.00         24.30           Disc Storage         1-2 boxes         3+ boxes           10 × 5½ See 10         3.50         3.00           30 × 5½ Rexel         8.00         7.50           90 × 5½ Lock Lid         17.80         —           Ribbons         per ribbon         per box           Brother HR15 M/S         5.60         5.10 × 6           Canon PW 1080         7.40         6.75 × 6           Epson FX/MX 80         4.85         4.00 × 5           Epson FX/MX 100         6.50         5.25 × 3           Juki 6100         4.20         3.50 × 6           Kaga KP 810         7.40         6.75 × 6           Oki Micro 80/82         2.35         1.90 × 12           Walters VM 2000         4.65         4.15 × 4           Continuous Labels         1000         3000 +           89 × 36 – 1000         6.00         4.50           11" × 9½" 500         17.00           Exact A4)         70 GSM 2000	SS/E	DD 96	20.90	17.90
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	DS/I	DD 96	24.80	21.50
SS/DD 48       16.30       14.00         DS/DD 48       21.40       18.70         SS/DD 96       24.25       21.00         DS/DD 96       28.00       24.30         Disc Storage $1-2 \bar{b}oxes$ $3+boxes$ $10 \times 5\frac{1}{4}$ See 10       3.50       3.00 $30 \times 5\frac{1}{4}$ Rexel       8.00       7.50 $90 \times 5\frac{1}{4}$ Lock Lid       17.80       —         Ribbons       per ribbon       per box         Brother HR15 M/S       5.60       5.10 $\times$ 6         Canon PW 1080       7.40       6.75 $\times$ 6         Epson FX/MX 80       4.85       4.00 $\times$ 5         Epson FX/MX 100       4.20       3.50 $\times$ 6         Juki 6100       4.20       3.50 $\times$ 6         Kaga KP 810       7.40       6.75 $\times$ 6         Oki Micro 80/82       2.35       1.90 $\times$ 12         Walters VM 2000       4.65       4.15 $\times$ 4         Continuous Labels       1000       3000 $+$ 89 $\times$ 36 $-$ 1000       4.50         Listing Paper       per box         11" $\times$ 9\frac{1}{2}" 500       17.00         (Exact A4)       70 GSM 2000       22.50         100 GSM 1000	3M	Lifetime g	guarantee	
SS/DD 48       16.30       14.00         DS/DD 48       21.40       18.70         SS/DD 96       24.25       21.00         DS/DD 96       28.00       24.30         Disc Storage $1-2 \bar{b}oxes$ $3+boxes$ $10 \times 5\frac{1}{4}$ See 10       3.50       3.00 $30 \times 5\frac{1}{4}$ Rexel       8.00       7.50 $90 \times 5\frac{1}{4}$ Lock Lid       17.80       —         Ribbons       per ribbon       per box         Brother HR15 M/S       5.60       5.10 $\times$ 6         Canon PW 1080       7.40       6.75 $\times$ 6         Epson FX/MX 80       4.85       4.00 $\times$ 5         Epson FX/MX 100       4.20       3.50 $\times$ 6         Juki 6100       4.20       3.50 $\times$ 6         Kaga KP 810       7.40       6.75 $\times$ 6         Oki Micro 80/82       2.35       1.90 $\times$ 12         Walters VM 2000       4.65       4.15 $\times$ 4         Continuous Labels       1000       3000 $+$ 89 $\times$ 36 $-$ 1000       4.50         Listing Paper       per box         11" $\times$ 9\frac{1}{2}" 500       17.00         (Exact A4)       70 GSM 2000       22.50         100 GSM 1000	51"	TPI	1-2 boxes	3+boxes
SS/DD 96       24.25       21.00         DS/DD 96       28.00       24.30         Disc Storage $1-2 \text{ boxes}$ $3+ \text{ boxes}$ $10 \times 5\frac{1}{4}$ See 10       3.50       3.00 $30 \times 5\frac{1}{4}$ Rexel       8.00       7.50 $90 \times 5\frac{1}{4}$ Lock Lid       17.80       —         Ribbons       per ribbon       per box         Brother HR15 M/S       5.60       5.10 × 6         Canon PW 1080       7.40       6.75 × 6         Epson FX/MX 80       4.85       4.00 × 5         Epson FX/MX 100       4.20       3.50 × 6         Juki 6100       4.20       3.50 × 6         Kaga KP 810       7.40       6.75 × 6         Oki Micro 80/82       2.35       1.90 × 12         Walters VM 2000       4.65       4.15 × 4         Continuous Labels       1000       3000 + $89 \times 36 - 1000$ 6.00       4.50         Listing Paper       per box $11'' \times 9\frac{1}{2}''$ 2000       17.00         (Exact A4)       70 GSM 2000       22.50         100 GSM 1000       25.00			16.30	14.00
DS/DD 96         28.00         24.30           Disc Storage         1-2 boxes         3+ boxes $10 \times 5\frac{1}{4}$ See 10         3.50         3.00 $30 \times 5\frac{1}{4}$ Rexel         8.00         7.50 $90 \times 5\frac{1}{4}$ Lock Lid         17.80         —           Ribbons         per ribbon         per box           Brother HR15 M/S         5.60         5.10 $\times$ 6           Canon PW 1080         7.40         6.75 $\times$ 6           Epson FX/MX 80         4.85         4.00 $\times$ 5           Epson FX/MX 100         6.50         5.25 $\times$ 3           Juki 6100         4.20         3.50 $\times$ 6           Kaga KP 810         7.40         6.75 $\times$ 6           Oki Micro 80/82         2.35         1.90 $\times$ 12           Walters VM 2000         4.65         4.15 $\times$ 4           Continuous Labels         1000         3000 $+$ 89 $\times$ 36 $-$ 1000         6.00         4.50           Listing Paper         per box           11" $\times$ 9\frac{1}{2}" 2000         17.00           (Exact A4)         70 GSM 2000         22.50           100 GSM 1000         25.00	DS/I	DD 48	21.40	18.70
Disc Storage         1-2 boxes $3 + boxes$ $10 \times 5\frac{1}{4}$ See 10         3.50         3.00 $30 \times 5\frac{1}{4}$ Rexel         8.00         7.50 $90 \times 5\frac{1}{4}$ Lock Lid         17.80         —           Ribbons         per ribbon         per box           Brother HR15 M/S         5.60         5.10 × 6           Canon PW 1080         7.40         6.75 × 6           Epson FX/MX 80         4.85         4.00 × 5           Epson FX/MX 100         6.50         5.25 × 3           Juki 6100         4.20         3.50 × 6           Kaga KP 810         7.40         6.75 × 6           Oki Micro 80/82         2.35         1.90 × 12           Walters VM 2000         4.65         4.15 × 4           Continuous Labels         1000         3000 +           89 × 36 – 1000         6.00         4.50           Listing Paper         per box           11" × $9\frac{1}{2}$ " 2000         17.00           (Exact A4)         70 GSM 2000         22.50           100 GSM 1000         25.00	SS/I	DD 96	24.25	21.00
$10 \times 5\frac{1}{4}$ See 10       3.50       3.00 $30 \times 5\frac{1}{4}$ Rexel       8.00       7.50 $90 \times 5\frac{1}{4}$ Lock Lid       17.80       —         Ribbons       per ribbon       per box         Brother HR15 M/S       5.60       5.10 $\times$ 6         Canon PW 1080       7.40       6.75 $\times$ 6         Epson FX/MX 80       4.85       4.00 $\times$ 5         Epson FX/MX 100       6.50       5.25 $\times$ 3         Juki 6100       4.20       3.50 $\times$ 6         Kaga KP 810       7.40       6.75 $\times$ 6         Oki Micro 80/82       2.35       1.90 $\times$ 12         Walters VM 2000       4.65       4.15 $\times$ 4         Continuous Labels       1000       3000 $+$ 89 $\times$ 36 $-$ 1000       6.00       4.50         Listing Paper       per box         11" $\times$ 9½" 500       17.00         (Exact A4)       70 GSM 2000       22.50         100 GSM 1000       25.00	DS/I	DD 96	28.00	24.30
$30 \times 5\frac{1}{4}$ Rexel 8.00 7.50 $90 \times 5\frac{1}{4}$ Lock Lid 17.80 — Ribbons per ribbon per box Brother HR15 M/S 5.60 5.10 × 6 Canon PW 1080 7.40 6.75 × 6 Epson FX/MX 80 4.85 4.00 × 5 Epson FX/MX 100 6.50 5.25 × 3 Juki 6100 4.20 3.50 × 6 Kaga KP 810 7.40 6.75 × 6 Oki Micro 80/82 2.35 1.90 × 12 Walters VM 2000 4.65 4.15 × 4 Continuous Labels $1000$ $3000 + 4$ 50 Listing Paper $11'' \times 9\frac{1}{2}''$ 500 17.00 (Exact A4) 70 GSM 2000 25.00	Disc	Storage	1-2 boxes	3+ boxes
90 × $5\frac{1}{4}$ Lock Lid       17.80       —         Ribbons       per ribbon       per box         Brother HR15 M/S       5.60       5.10 × 6         Canon PW 1080       7.40       6.75 × 6         Epson FX/MX 80       4.85       4.00 × 5         Epson FX/MX 100       6.50       5.25 × 3         Juki 6100       4.20       3.50 × 6         Kaga KP 810       7.40       6.75 × 6         Oki Micro 80/82       2.35       1.90 × 12         Walters VM 2000       4.65       4.15 × 4         Continuous Labels       1000       3000 + $89 \times 36 - 1000$ 6.00       4.50         Listing Paper       per box $11'' \times 9\frac{1}{2}''$ 500       17.00         (Exact A4)       70 GSM 2000       22.50         100 GSM 1000       25.00	10 ×	5½ See10	3.50	3.00
Ribbons         per ribbon         per box           Brother HR15 M/S         5.60 $5.10 \times 6$ Canon PW 1080         7.40 $6.75 \times 6$ Epson FX/MX 80         4.85 $4.00 \times 5$ Epson FX/MX 100 $6.50$ $5.25 \times 3$ Juki 6100         4.20 $3.50 \times 6$ Kaga KP 810         7.40 $6.75 \times 6$ Oki Micro 80/82         2.35 $1.90 \times 12$ Walters VM 2000         4.65 $4.15 \times 4$ Continuous Labels $1000$ $3000 +$ $89 \times 36 - 1000$ $6.00$ $4.50$ Listing Paper $9er box$ $11'' \times 9\frac{1}{2}''$ 2000 $4.50$ $11'' \times 9\frac{1}{2}$ 2000 $17.00$ (Exact A4) $70$ GSM 2000 $22.50$ $100$ GSM 1000 $25.00$	30 ×	5 <sup>1</sup> / <sub>4</sub> Rexel	8.00	7.50
Brother HR15 M/S       5.60 $5.10 \times 6$ Canon PW 1080       7.40 $6.75 \times 6$ Epson FX/MX 80       4.85 $4.00 \times 5$ Epson FX/MX 100 $6.50$ $5.25 \times 3$ Juki 6100       4.20 $3.50 \times 6$ Kaga KP 810       7.40 $6.75 \times 6$ Oki Micro 80/82       2.35 $1.90 \times 12$ Walters VM 2000       4.65 $4.15 \times 4$ Continuous Labels $1000$ $3000 + 4$ $89 \times 36 - 1000$ $6.00$ $4.50$ Listing Paper $9er box$ $11'' \times 9\frac{1}{2}''$ 500 $17.00$ (Exact A4) $70 \text{ GSM } 2000$ $22.50$ $100 \text{ GSM } 1000$ $25.00$	90 ×	5½ Lock Lid	17.80	_
Canon PW 1080       7.40       6.75 × 6         Epson FX/MX 80       4.85       4.00 × 5         Epson FX/MX 100       6.50       5.25 × 3         Juki 6100       4.20       3.50 × 6         Kaga KP 810       7.40       6.75 × 6         Oki Micro 80/82       2.35       1.90 × 12         Walters VM 2000       4.65       4.15 × 4         Continuous Labels       1000       3000 +         89 × 36 - 1000       6.00       4.50         Listing Paper       per box         11" × 9½" 500       4.50         11" × 9½" 2000       17.00         (Exact A4)       70 GSM 2000       22.50         100 GSM 1000       25.00	Ribb	oons	per ribbon	per box
Epson FX/MX 80	Brot	ther HR15 M/S	5.60	5.10 × 6
Epson FX/MX 100 6.50 5.25 × 3  Juki 6100 4.20 3.50 × 6  Kaga KP 810 7.40 6.75 × 6  Oki Micro 80/82 2.35 1.90 × 12  Walters VM 2000 4.65 4.15 × 4  Continuous Labels 1000 3000 +  89 × 36 - 1000 6.00 4.50  Listing Paper per box  11" × 9½" 500 17.00  (Exact A4)  70 GSM 2000 22.50  100 GSM 1000 25.00	Can	on PW 1080	7.40	6.75 × 6
Juki 6100       4.20 $3.50 \times 6$ Kaga KP 810       7.40 $6.75 \times 6$ Oki Micro 80/82       2.35 $1.90 \times 12$ Walters VM 2000       4.65 $4.15 \times 4$ Continuous Labels       1000 $3000 +$ $89 \times 36 - 1000$ 6.00 $4.50$ Listing Paper       per box $11'' \times 9\frac{1}{2}''$ 500       4.50 $11'' \times 9\frac{1}{2}''$ 2000       17.00         (Exact A4)       22.50         100 GSM 1000       25.00	Eps	on FX/MX 80	4.85	4.00 × 5
Kaga KP 8107.40 $6.75 \times 6$ Oki Micro 80/822.35 $1.90 \times 12$ Walters VM 20004.65 $4.15 \times 4$ Continuous Labels $1000$ $3000 +$ $89 \times 36 - 1000$ $6.00$ $4.50$ Listing Paper $per box$ $11'' \times 9\frac{1}{2}''$ 500 $4.50$ $11'' \times 9\frac{1}{2}''$ 2000 $17.00$ (Exact A4) $70 \text{ GSM } 2000$ $22.50$ $100 \text{ GSM } 1000$ $25.00$	Eps	on FX/MX 100	6.50	5.25 × 3
Oki Micro 80/82       2.35       1.90 × 12         Walters VM 2000       4.65       4.15 × 4         Continuous Labels       1000       3000 +         89 × 36 - 1000       6.00       4.50         Listing Paper       per box         11" × 9½" 500       4.50         11" × 9½" 2000       17.00         (Exact A4)       22.50         100 GSM 1000       25.00	Juki	6100	4.20	3.50 × 6
Oki Micro 80/82       2.35 $1.90 \times 12$ Walters VM 2000       4.65 $4.15 \times 4$ Continuous Labels       1000       3000 + $89 \times 36 - 1000$ 6.00       4.50         Listing Paper       per box $11'' \times 9\frac{1}{2}''$ 500       4.50 $11'' \times 9\frac{1}{2}''$ 2000       17.00         (Exact A4)       22.50         100 GSM 1000       25.00	Kag	a KP 810	7.40	6.75 × 6
Continuous Labels       1000       3000 + $89 \times 36 - 1000$ 6.00       4.50         Listing Paper       per box $11'' \times 9\frac{1}{2}''$ 500       4.50 $11'' \times 9\frac{1}{2}''$ 2000       17.00         (Exact A4)       22.50         100 GSM 1000       25.00			2.35	1.90 × 12
89 × 36 – 1000 6.00 4.50  Listing Paper per box  11" × 9½" 500 4.50  11" × 9½" 2000 17.00  (Exact A4)  70 GSM 2000 22.50  100 GSM 1000 25.00	Wal	ters VM 2000	4.65	4.15 × 4
Listing Paper       per box         11" × 9½" 500       4.50         11" × 9½" 2000       17.00         (Exact A4)       22.50         100 GSM 1000       25.00	Con	tinuous Labels	1000	3000+
$11'' \times 9\frac{1}{2}'' 500$ 4.50 $11'' \times 9\frac{1}{2}'' 2000$ 17.00 (Exact A4) 70 GSM 2000 22.50 100 GSM 1000 25.00	89 ×	36 - 1000	6.00	4.50
11" × 9½" 2000 17.00 (Exact A4) 70 GSM 2000 22.50 100 GSM 1000 25.00				
(Exact A4) 70 GSM 2000 22.50 100 GSM 1000 25.00	11"	$\times 9\frac{1}{2}$ " 500		4.50
(Exact A4) 70 GSM 2000 22.50 100 GSM 1000 25.00	11"	$\times 9\frac{1}{2}$ " 2000		17.00
100 GSM 1000 <b>25.00</b>	(Exa	act A4)		
100 000111 1000	70 0	SSM 2000		
All prices inclusive of VAT and carriage	100			
		All prices inclus	sive of VAT and carri	age

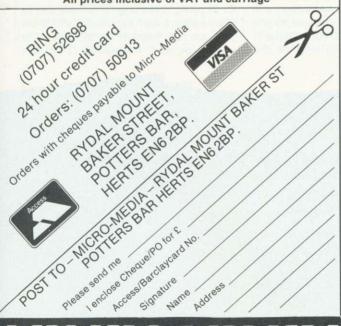





# GRIFFEN COMPUTERS

8 RAINSFORD ROAD, STANSTED, ESSEX CM24 8DU

#### **ROM SOFTWARE**

#### SPECIAL OFFER

#### WORDWISE-PLUS only £48.00 (c)

EXMON II B/E TOOLKIT B/E MUROM SPELLCHECK II 40/80 SLEUTH	£26.25 (b) £24.65 (b) £26.25 (b) £28.60 (b) £26.25 (b)
WORDWISE PRINTMASTER (EPSON) PRINTMASTER (STAR) CARETAKER GRAPHICS DISC DOCTOR	£36.00 (c) £27.50 (b) £27.50 (b) £27.50 (b) £27.50 (b) £27.50 (b)
CLARES BROM ISO-PASCAL LOGO VIEW ADE (40/80) SPY II ADDCOMM ULTRACALC II	£31.50 (b) £62.00 (c) £62.00 (c) £48.00 (b) £54.00 (b) £27.50 (b) £26.75 (b) £71.50 (b)

#### DISC SOFTWARE

#### SPECIAL OFFER

#### PROXIMA BEEB-TEXT only £14.00 (b)

A disc based multi-font text display program. Features infinitely variable width and height of individual words. Variable italics, shadow and outlining are supported. Possibly the best value titling package for the Beeb!

SPELLCHECK (WORDWISE) 40/80	£16.20 (b)
SPELLCHECK (VIEW) 40/80	£16.20 (b)
MASTERFILE II 40/80	£17.90 (b)
CLARES BETABASE 40/80	£23.90 (b)
CLARES REPLICA II 40/80	£11.90 (b)

#### **DISCS & INTERFACES**

ACORN DNFS	£99.95 (b)
UDM DDFS (Version 2)	£89.95 (b)
OPUS DDOS	£99.95 (c)
40 TR S/S	£14.95 (b)
40 TR D/S	£17.25 (b)
80 TR S/S	£18.90 (b)
80 TR D/S	£20.90 (b)
27128 MITSUBISHI UV EPROMS 250nS	£10.50 (a)

All prices include V.A.T. @ 15% B/E – BBC/Electron Postage rates – (a) 50p (b) 75p (c) £1.25



# CARTOONS BY COMPUTER

Create 'film' sequences with Joe Faith's Animator program – then enter your cartoon in our competition

HIS program allows you to generate film sequences of a human figure. It is based on a frame system: 650 frames can be held in memory and replayed at speeds up to 10 frames a second.

On running the program you are prompted to input the screen mode you want to run it in. Select either mode 1 (for around 250 frames) or mode 5 (for around 650 frames of a lower resolution).

You are then presented with a menu. Press Escape at any time to return to this menu (pressing Escape at the menu exits the program).

#### Menu options

1 Show film This prompts for a delay between the frames, in centiseconds. (The computer takes 10cs to simply display every frame, so take this into

account.) Then you are asked whether you want to show the film in single steps, ie, waiting for you to press a key between each frame. After that it asks if you want to see the entire film: entering 'N' will allow you to enter the first and last frames to be seen. Pressing Return on its own in answer to the delay prompt will show the entire film at the fastest possible speed, with no need to enter the other parameters.


2 Edit film This prompts for the frame you want to edit, and displays the number of frames currently in memory. If you choose a frame number higher than the present top, all the frames between the old top and your choice will be made equal to the present top, ie, if there are 90 frames in memory and you choose frame 104 then 91,92,93 and 94 will be made equal to 90. A frame is edited by manipulating one of the

limbs. Press 'L' and then the number corresponding to the part of the body in figure 1. Move the point with the cursor keys, using Shift to accelerate the movement.

From edit mode a number of other features can be selected by pressing the following keys:

I: 'Inbetweening'. This powerful command takes the hassle out of creating smooth sequences. For instance, to create a sequence where the figure goes from having outstretched hands in frame 10 to hands akimbo at 20, set 10 and 20 how you want them; press 'I'; enter 11 for the first frame (since it is the first you want changed) and 20 for the last

C: Copying. Pressing 'C' allows you to copy a sequence from one set of frames (the source frames) to another (the object frames). Answering 'Y' to the

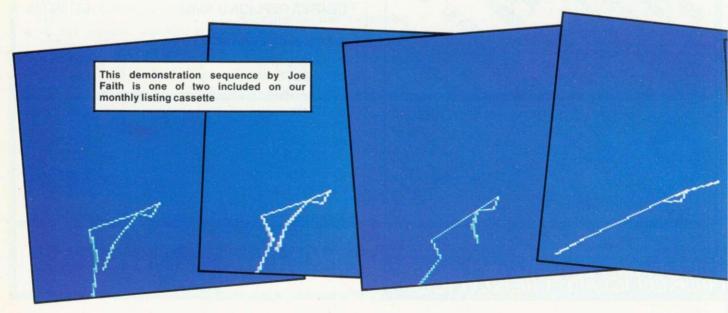

question 'Reverse?' will reverse the order of the object frames – useful for making the figure repeat a sequence backwards.

**S:** 'Saming'. This command simply prompts for a frame number to make the present frame equal to.

3 Load new film Self-explanatory.

4 Save present film Self-explanatory.

#### The display order table

The 24 bytes making up any frame are stored in memory in a certain order. They are also a quarter of the actual screen co-ordinates to be plotted, to allow for one byte per co-ordinate.

The display order table shows in which order the 12 x,y pairs should be plotted: if 100 precedes any pair, it indicates the cursor should be moved, not drawn, to that co-ordinate. The values are offsets from the first byte, so to draw a man:

- 1. The address of the first byte is found.
- 2. The first value from the display order is read.
- 3. If it is 100 move the cursor and get the next value.
- 4. Use this as an offset to read the next X co-ordinate and times it by four.
- 5. Repeat with the Y co-ordinate.
- 6. If all the points have been plotted/drawn END, otherwise go back to 2.

#### General variables

F% = first frame for any effect. L% = last frame.

Q%,W% = general FOR ... NEXT loop counters.

#### Main procedures

PROCset\_up Assembles routine to print man. Called by first setting !&84 to address of first byte in the data for the frame and then calling 'man'.
300-320: sets loop counter to 0.

330-380: increments loop counter and performs OSWRCH 25 (plot).

390-510: if next number in display order table is 100 send a 4 (move) instead of 5 (draw) to OSWRCH.

510-530: get offset from display order table into Y and use it to load A with the next x co-ordinate to be sent.

540-660: multiplies it by four to get the real value and stores it in &8E (high) and &8D (low).

670-690: sends them to OSWRCH.

700-870: increments Y and repeats for the y co-ordinate.

880-910: If that's all the co-ordinates, finish.




Figure 1. Each part of the body has a different number

**PROCset\_var** Sets the main variables: B% (Base): address of first byte of first frame, so B% + X\*24 will give the address of the first byte of frame X.

E% (End): address of first byte of last frame.

N% (Number): number of frames in use.

This procedure also sets up the display order table at &71 on, and the data for the 'standard' man in the first frame. **PROCmenu** Displays menu.

G%: used when Escape is pressed. If it

equals 0 then the program was exited at the menu and it is allowed to end.

PROCshow Shows film.

C%: counter displayed on screen.

F%: first frame to be displayed.

L%: last frame to be displayed.

S%: 2 – film should be shown at fastest possible rate.

1-single step.

0-delay loop should come in.

D%: length of delay.

J%: records colour of man currently displayed.

PROCedit Straight away the main loop is entered, colours are returned to default and screen is cleared.

M%: number of frame being edited. P%: starting address of present frame.

1370: if extra frames are wanted the new ones are 'topped up', filled in with copies of present frame.

1380: S% - current limb being moved.

O% – address of previous frame, for 'shadow'.

1400-1410: X%,Y% – address of coordinates. x%,y% – values of

1420-1430: draw man and shadow.

1460: A% - how fast limb moves, 4 if Shift is pressed.

1470-1550: moves point.

1560-1600: character pressed is ANDed with &DF to get the upper case value and appropriate action is taken.


1610: repeats until 'F' is typed; a new frame is wanted.

**PROCinter** Performs 'inbetweening', smoothing out action.

1%: number of frames to be changed.1800: Q% counts through the bytes making up the frames.

1810: D becomes the difference between points on successive frames. C%: counter.

1820-1850: W% goes through the frames to be changed. C% is incre-

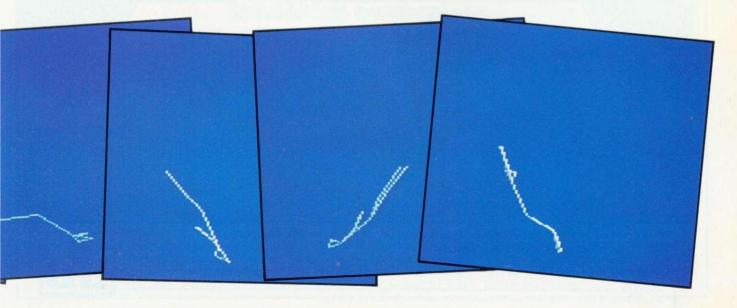

The Concept Keyboard is the ideal alternative to the Qwerty keyboard, developed and tested with teachers over a four-year period, and now making a significant contribution to learning methods in schools and colleges throughout Britain.

Here are some published comments on its First and Middle School applications:

"Immediately I was aware how much concentration is improved when children are not asked to type questions."

"... lends itself to teacher devised programs. allows even teachers who have no knowledge of experience of programming, like myself, to devise their own programs."

"... the increasing number of software publishers now producing software for the Concept

Keyboard only confirms the credibility of this most important of all peripherals for the primary school micro."

"... offers flexibility to the programmer, as any shape, object, word or character can be stuck on the keyboard overlay and assigned to a fixed code."

Originally developed by Star Microterminals Ltd., the Concept Keyboard is now manufactured and marketed in conjunction with A B Electronic Products Group PLC. For further information please complete the coupon below or contact

Conny Lindwall, A B European Marketing, Forest Farm Industrial Estate, Whitchurch, Cardiff, CF4 7YS. Tel: 0222 618336.





To: A B European Marketing, Forest Farm Industrial Estate, Whitchurch, Cardiff CF4 7YS Please send me details of the Concept Keyboard.

NAME\_

\_SCHOOL/COLLEGE\_

ADDRESS

\*Concept Keyboard is a trade mark of Star Microterminals Limited. Registration applied for



mented and the point to be changed becomes equal to the point on the starting frame + (difference\*counter).

PROCsave A\$ holds filename,X% the channel number.

PROCload Ditto.

**PROCcopy** F% and L% equal the end frames of the source sequence, J% and K% the object sequence.

2230: if new frames are being created, N% and E% are suitably reset.

2260: if the object code is to be

reversed, the counter C% is set to -24, otherwise 24, and the starting frame is made equal to the final one.

2270:Q% counts up to the number of frames in the sequences.


2280-2310: W% goes through the points and copies them over. J%, the object frame pointer, is incremented and F% is changed suitably.

**PROCsame** This asks for the frame to be made equal to and then copies it into P% onwards.

**PROClimb** Asks for the new limb to be moved.

FNcaps Returns the uppercase ASCII equivalent of A\$.

The Animator listing is on yellow pages 98-100. You'll also find two demonstration sequences on the monthly cassette

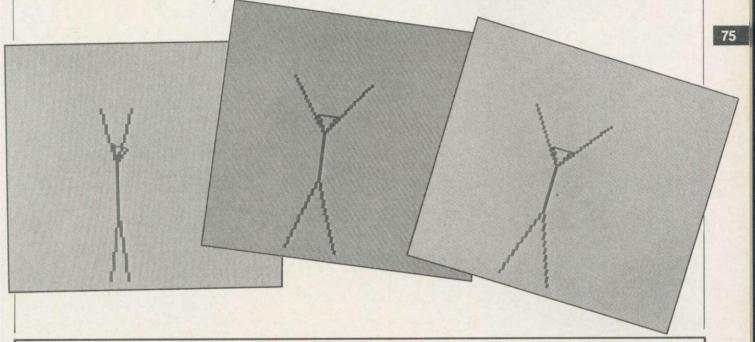





# Competition WIN A PRISM 1000 MODEM

### Three prizes for the best 'film' sequence designed with Animator

IF YOU fancy yourself as an 'inbetweenie' why not enter our competition to produce the best animated 'film' using Joe Faith's *Animator* program? *Acorn User* in conjunction with Micronet 800 are offering three prizes of Prism 1000 modems and communications ROMs each package is worth £89.

The best three entries, in the opinion of the Editor, will each win a modem, and the overall winner will also receive a £16 voucher, that can be offset

against the cost of subscribing to Micronet 800.

The winning entries will appear in Acorn User and on Micronet 800.

Micronet users will be able to download both the *Animator* program and two demonstration sequences after April 25th.

So send in your entries to Animation, Acorn User, 68 Long Acre, London WC2E 9JH, to arrive no later than Friday June 7th. Each animated film sequence must be provided on cassette or disc, and you should include a brief letter describing your entry—also don't forget to supply your name, address and a daytime telephone number if possible.

Your name and address should also be marked on your disc or cassette.

Acorn User cannot undertake to return any submissions or enter into correspondence. The decision of the Editor will be final.

Fully automatic modem at a fiendishly low price of

The DEMON modem

£49.95

plus VAT + p & p



".... simplicity
itself... it performs
as well as – if not
better than – any I
have used... all-in –
exceptional value
for money."
Acorn User, April 1985

#### DEMON ADAPTOR 3.50 + VAT & p & p



Two way split adaptor allows you to plug your phone & modem into the same socket.

# DEVILISHLY CLEVER FEATURES

- \* Auto Dial \* Auto Redial
- \* Auto Answer
- \* Full and half duplex
  - \* European and U.S.A. standards
  - \* Complete with Power Supply, Leads and Manual

\* Full Baud rates.

#### WHY IS IT SO LOW IN PRICE?

The answer is simple, we've taken existing technology and components, no R+D costs and combined them with modern manufacturing and quality control techniques to produce an inexpensive but state of the art product.

#### DOES IT DO EVERYTHING WE SAY?

We've bought BT approved components. We are also giving a 6 month 'no quibble' guarantee. In the unlikely event that you have a problem, simply let us know and we'll send you another machine or refund your money in full.

#### **EASY TO USE?**

You don't need to know anything about baud rates or protocol or 'handshaking' simply plug it in and talk to the world.



Demon Limited 20 Orange Street London WC2H 7ED

### FEATURES OF THE MODEM

#### **Auto Answer**

The Demon answers, then uploads or downloads data into your micro and printer just like a telex.

#### **Auto Baud Rate Scan**

When receiving, the modem can scan the incoming data and select the correct baud rate to receive.

#### Full and Half Duplex

One or two way simultaneous transmission.

# Full U.K., European and U.S.A. standards

V21 and 23, CCITT, Bell 103 and 202.

#### **Baud Rates**

300/300, 1200/75 75/1200 1200/1200 (Half Duplex). Suitable for Micronet, Prestel, etc.

#### Easy to Use

Complete with all leads, power supply, operating and reference manuals. Fits all RS 232/423 interfaces (state machine).

## Software Features on ROM (BBC only)

Electron, Amstrad, Commodore, Dragon, Sinclair and IBM PC to follow.

#### **Auto Dial**

#### **Bulletin Board Facility**

Start your own or contact all information boards throughout the world.

#### PSS

Packet Switching Service lets you dial worldwide databases for the cost of a local call.

#### **Printer Routines**

Allows use of printer while on line, recording data in and out.

#### **Reliable File Transmission**

Popular error correct protocol means you can send, store and receive files with no transmission errors.

#### **Software Commands**

\*Host enables you or your friends to dial and upload and download your programs or data from other modems

\*Timeout allows you to set time limits to callers of your micro. \*Prestel and \*Terminal allow Glass Teletype

"Prestel and "Terminal allow Glass Teletyl and Prestel terminal facilities. All software commands and full control of

All software commands and full control of baud rates can be incorporated into your own software.

#### **HELP LINES**

Technical enquiries 01-930 1612 Credit Card Orders 01-930 3619 Dealer enquiries 01-930 3873

#### PERSONAL CALLERS VERY WELCOME

Visit our premises at 20 Orange St, London WC2. You can save our £3.00 delivery charge by calling in-you'll be welcome from 10.00 am till 4.00 pm, Monday to Friday.

#### **OFFICIAL ORDERS**

We accept orders from all government bodies, schools, universities, libraries, armed forces etc. We despatch within 28 days of an official purchase order. If you can't raise a cheque without an invoice just post or telephone your order and we'll send you a pro-forma by return.

Postcode (Please print)
Address
Name
Signature
I enclose cheque to the value of £ Or debit my Access/Visa/Amex/Diners. Card no
(Qnty) Demon Adaptors at £4.95 (includes VAT and p & p)
State 40 or 80 track
(Qnty) Demon Dial Disks at £4.95 (includes VAT and p & p)
(Qnty) Demon BBC Rom's at £24 (includes VAT and p & p)
£61 (includes VAT and p & p) State Machine
(Qnty) Demon Modems at
London WC2H 7ED Please send me:
To Demon Limited, 20 Orange Street,

Certain Advertising Ltd 01-930 1612

# CAPITAL ROUTINES


# Change lower case letters into upper with Peter Gaunt

NE OF THE annoying little problems with the BBC micro and most others is that upper and lower case letters have different ASCII codes. For example, A has the code 65 while a has code 97. This can cause all kinds of problems with things as diverse as single key selection from menus to sort routines. This article describes two assembler routines, one of which will check each key press, changing all lower case letters to upper case before entering the character into the keyboard buffer; the other will check rapidly through a Basic string changing all lower case letters to upper

At first sight there may appear to be no problem using INPUT, GET or INKEY to detect only upper case letters, since the Beeb's operating system includes an OSBYTE (\*FX) routine to turn Caps Lock on or off. If you enter \*FX202,32 into the computer the Caps Lock light will come on. Similarly \*FX202,16 will turn on the Shift Lock. Surely this should solve the problem - all the programmer has to do is ensure that there is a \*FX202,32 before each INPUT or GET? Unfortunately this is not the case. True, the \*FX command will turn on the Caps Lock, but then the program will sit there waiting for something to be typed in. If, before typing anything, the user inadvertently presses the Caps Lock key, Caps Lock is turned off again!

All sorts of statements can be constructed in Basic to get around this problem when using GET or INKEY but none of them is completely satisfactory, and I know of no way in which INPUT can be made to accept only upper case using Basic. For this reason I have put together two easy-to-use routines which assemble short pieces of machine code to sit in spare memory and take care of all this.

Listing 1 is a routine which intercepts any character about to enter the keyboard buffer. It checks to see if that character is a lower case letter and if it is changes it into its upper case equivalent. It can be turned on or off using \*CODE or \*FX136.

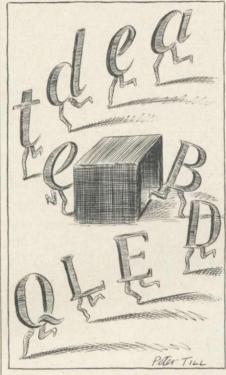

Many of the routines in the BBC micro's operating system are indirected through vectors. For example, when you issue an OSBYTE command the operating system jumps to a routine whose address is held in RAM at addresses &20A and &20B. So the user can direct the program to some new code simply by changing the contents of these vectoring addresses.

Listing 1 uses two of these vectors to check all characters entered at the keyboard. At addresses &22A and &22B is the address of the routine which the operating system uses to insert a character into a buffer. It is known as the insert vector. The routine in listing 1 can change the contents of this vector to point to some new code which checks each character just before it is inserted into the keyboard buffer. If it's lower case then it's changed to upper case before the new code jumps to the routine in the operating system the insert vector originally pointed to.

The other vector used by listing 1 is

the user vector at &200. The vector is used whenever \*CODE or \*FX136 is issued and normally it simply gives a bad command error. The listing changes the contents of this vector to point to the command subroutine in the listing, in effect adding a new command to the operating system. The command subroutine looks at the contents of the X register and decides whether to turn the lower-case checking on or off. If X = 1 (after \*CODE1 or \*FX136,1) then the insert vector is set to point to the checking code, while if X=0 (\*CODE0 or \*FX136,0) the insert vector is set to its default value.

The routine is not intended to be used as an assembly listing within a program, since this would use up too much memory. To use the routine, type in the listing and save it before you run it. Run the program and when it runs without error messages, save the assembled code with \*SAVE CAPS A00+85. If you're using a cassettebased micro then you should change the value of 'code' in the listing to &C00 and when you \*SAVE the program \*SAVE CAPS C00+85. Whenever you want to use the code you should \*RUN CAPS (or from disc simply \*CAPS), to load and initialise the code. Then, if you want all input from the keyboard to be in upper case letters, use \*CODE1 or \*FX136,1. The computer will operate exactly as if the Caps Lock is on regardless of whether it actually is. To turn the effect off use \*CODE0 or \*FX136,0. Pressing Break will disable the code and it will have to be reloaded.

Listing 2 is a routine which will act on a Basic string and change any lower case letters in it to upper case. I wrote it because I was having problems with a sort routine. If you run a sort routine on a list of words which are in a mixture of lower and upper case letters then you'll find that all the words which begin with lower case letters are at the end of the list. This is because the lower case letters have higher ASCII codes than the upper case ones. To get around this problem I wrote a Basic function to check through each string for lower

case letters. This worked fine but slowed the sorting down too much – so I wrote this piece of code to do the checking, using the parameter passing ability of Basic's CALL to tell the routine which string to act on. The routine will check a string of 255 characters, the maximum length which Basic strings can be, in around one-hundredth of a second. The addresses used by this routine don't conflict with those used by listing 1 so both routines can be in memory at the same time.

When one or more parameters are passed to a machine code routine using CALL, a parameter block is set up at &600 giving information about the variables which are passed. In the case of a string the parameter block contains the address at which Basic has stored the information about the string. Listing 2 uses this information to find the address of the end of the string and then works down the string from the end; each time it finds a lower case letter it changes it to upper case.

Type in listing 2 and save it before running it. Run it and, when prompted, enter a string containing lower case letters. The program will then convert all lower case letters to upper case. The

altered string is printed out to confirm this has been done. Simple, isn't it?

PROCupper\_case can be added to any program you like. At the beginning of the program you must call PROC-upper\_case to assemble the code. Any time you want to change a string into capitals simply use CALL upper\_case,X\$ (or whatever the name is).

If you like, you can just save the assembled code as you did with listing 1. To do this load listing 2 and enter PROCupper\_case to assemble the code; then save the code with \*SAVE UPPER A90 + 30. If you do this, to use the code in a program you must put a line at its start reading \*LOAD UPPER followed by another reading upper\_case = &A90. You can then use it exactly as if you had PROCupper\_case incorporated in the program.

The parameter block which is set up when using CALL also contains information about the type of parameters passed, that is whether string or

Peter Gaunt's listings to change lower case letters to upper case are on yellow pages 101-103. numeric variables. This information can be used to check that the sort of parameter expected has indeed been passed. In order to reduce the length of the code this facility is not used by listing 2. If you pass the wrong type of parameter, by for instance using CALL upper\_case, A%, then your program may crash or hang up. Beware!

Listing 3 is an example of how to use the code as part of a sort routine, asking you to enter 10 words which it then sorts into order. You should also type in PROCupper\_case from listing 2 or \*LOAD UPPER if you saved the assembled code. Make sure that some of the words you enter are in lower case and some are in upper case. If you leave out line 270 you'll find that the list of sorted words has all the lower case words at the end whereas if you include this line the words will all be sorted. paying no attention to the case of the letters. If you look at listing 3 you'll see that before comparing two words in the list the words are first put into temporary strings, w1\$ and w2\$. This is necessary to prevent the machine code routine from acting on the actual words in the list; if it were allowed to do this it would leave them all in upper case.



Robots from under £50 that you can interface with your own home micro computer.

JOIN THE

# AMATEUR ROBOT ASSOCIATION

- \* Regular magazine
- \* List of robot manufacturers
- \* News Letters
- \* Huge discounts
- \* Free entrance to exhibitions
- **★ List of Component suppliers**

l enclose £35.00 (Affiliated)
I enclose £16.50 (Associated)
l enclose £4.50 (Individual)


Name \_\_\_\_\_

Address \_\_\_\_\_

Please make cheques payable to: Amateur Robot Association, 5 Queen Street, Haverhill, Suffolk, CB9 9DZ Tel: Haverhill (0440) 707072 (5 lines)

# SAVE ON TURTLES

VALIANT TURTLE £169.95\* SAVE £30
TURTLE plus LOGO £199.95\* SAVE £70
\*includes VAT and post



Your chance to exploit the possibilities of robotics and Logo - and save money

THE Valiant Turtle is a robot which can be controlled from the BBC micro's keyboard. It obeys Logo commands just like a screen turtle. There are no wires connected to the Turtle as it is controlled by an infra-red beam similar to those used for TV sets. The beam comes from a small box which plugs into the Beeb's RS423 socket. Tell it to move, turn – or even draw using its built-in pen – and it will! A great way to learn about robotics and programming

- and fantastic fun.

To find out more about Logo, see Joe Telford's articles in this and April's issues. See last November's *AU* for a review of the Valiant Turtle.

Just fill in the form below and send your cheque made payable to Valiant Designs Ltd for the required amount to: Acorn User Turtle Offer, 68 Long Acre, London WC2E 9JH. The offer closes on July 1, 1985 and is only valid in the UK.

Please send me:
Total cheque value (payable to Valiant Designs Ltd) £
*includes VAT and postage
Name
Address
Post code
Send this form with your remittance to Acorn User Turtle Offer, 68 Long Acre, London WC2E 9JH

# Drives Apart-High Capacity Low Cost Disk Drives for OL and BBC Micro's

With so many disk drives on offer, choosing can be a somewhat confusing and difficult exercise. On the surface they all seem to perform and look the same. Of course that's not the case and what it all boils down to at the end of the day is the data storage reliability and the number of bytes of disk storage you get for every £ spent.

Take the new range of professional 3.5 inch and 5.25 inch disk drive systems from Micro P. They are designed for use with QL and BBC Micros, housed in a rugged metal case, essential for screening from stray electrical fields which can reduce data storage reliability, and have their own power supply so as not to drain precious power from your micro needed for other less sufficient peripherals. Most important of all you get in excess of 452 bytes of disk storage per £ for the QL and 251 bytes for the BBC. A further added bonus of the Micro P drives is that they are available in the new 3.5 inch format which is undoubtedly

Micro P

BBC with PSU

3.5"400 K DS40/80T

DRIVE 1 £159\*

DRIVE 2£139\*

Not only do 3.5 inch drives take minimum space, quite often at a premium for the micro user, but they also use easily transportable pocket sized media and are automatically protected from dust and

> Micro P are one of Europe's largest independant importers of peripherals and combined with their in-house R&D and manufacturing facility you have the assurance of professional after sales back-up. Combined with this you have peace of mind that the drive is manufactured by the largest company in Japan, a name synonymous with quality and reliability.

#### Micro P - QL Disk Drive System

The custom designed interface card, which can be purchased, separately, plugs directly into the QL's expansion port and can support up to 4 floppy disk drives giving a total formatted capacity of 2.88 MBytes of disk storage. It also provides a range of resident commands. Complete systems come with a free

utilities disk. With its superb

Micro P QL with PSU 3.5" 720K DS 80T

DRIVE 1 £159\*

DRIVE 2 £139\*

THE KEYAKI 100% GUARANTEE

Micro P BBC with PSU

5.25"400K DS40/80T

DRIVE 1 £159\*

#### Micro P BBC Disk **Drive System**

The drives, available in a choice of 3.5 inch or 5.25 inch, are based on the standard multibus, same as the QL and connect directly to the BBC Micro fitted with the standard disk drive interface

To: Keyaki, Enterprise House, 44 Terrace Road, Walton-on-Thames Surrey KT12 2SD

Please supply the following:

......off QL D/Disk Drive Interface @ £113.85......

...... off QL Drive 1 - 3.5"+PSU @ £182.85.....

..... off QL Drive 2 - 3.5" @ £159.85.....

...... off BBC Drive 1 - 3.5"+PSU @ £182.85......

...... off BBC Drive 1 - 3.5" @ £159.85.....

..... off BBC Drive 1 - 5.25"+PSU @ £182.85......

...... off BBC Drive 2 – 5.25" @ £159.85......

Name.....

Address.....

Telephone..... Tick box for details of Instant Credit up to £1000

I enclose my cheque no. .....for £.....for

Please charge my Access/Barclaycard No.

facilities. disk & memory editor, this is a must for any serious QL user. The I/F card can also be configured to emulate microdrives meaning that once data and progs. have been backed up to disk there is no need to re-configure. Utilising the disk drives enhances the speed of use, e.g. Quill takes only 6 seconds to load.

\*Prices do not include VAT



**Telephone Credit Card Orders** welcome. Personal Collection welcome.

Open Monday to Saturday -9.00 a.m. until 5.30 p.m.

£1000 instant credit, writtent details on request.



Enterprise House 44 Terrace Road, Walton-on-Thames, Surrey, KT12 2SD Tel: 09322 42777

# CHANGE OF MODE

Tristram Mabbs adapts his colours by interrupts

# program to give you more than one mode on screen

AST month's article covered the use of interrupts to change colours during a screen scan, allowing multiple colours to be used, even if only a two colour mode has been selected. This month I'll describe an adaptation of this routine to provide mode changes at defined intervals on the screen.


Mode changing interrupts are a more specialised use of the Display List Interrupt technique than the simple colour changing routines. This is because you will need to provide your own plotting and drawing routines, or use \*FX calls, to convince the VDU driver that parts of the screen have different numbers of colours.

As for last month's routines, the video ULA is accessed directly by the interrupt software, so a brief description of the mode control register is required. This is located at &FE20 and controls various functions. The top three bits determine the cursor width and so need no detailed explanation here. Bit one selects teletext output (using the SAA5050 CGEN) and is therefore ignored, as assorted hardware interlocks generally prevent mode 7 being mixed with the other modes.

Bit zero selects which of the two flashing colours for any given flashing colour is currently being displayed. This is also irrelevant for the routine except in as much as it necessitates the deselection of flashing colours unless the mode displayed at the top of the screen is the same as the mode selected when PROCsetdlis was called. If this is not the case, the top section

of the screen will flicker at the rate determined by \*FX9 and \*FX10 as the entire ULA control register has to be rewritten to change bit zero. The control register is write only. The other way of preventing this flickering is to use \*FX154,x where x is the value listed below for the mode at the top of the screen. For instance, if the top mode is mode 0, use \*FX154,156 (as 156 = &9C).

Next, bits two and three determine how many characters (note: not bytes) are displayed per line. They form a two



The demonstration program shows modes 0, 1, 2 and 3 on screen together

bit number with zero representing 10 characters per line; 1 represents 20, 2 is 40 and 3 is 80.


Finally, bit four is the important bit to note: this provides the main restriction on which modes are selected during the scan. If this bit is set, a high frequency clock is fed to the 6845 CRTC, thereby allowing the high rate of data access required by modes 0 to 3. If

clear, a low frequency clock is selected, as used by modes 4 to 7. Obviously, this means that all the values written to the CRTC are not portable between these two groups of modes. As it is not possible easily to redefine the CTRC registers during a scan of the screen, modes to be mixed can be chosen from one group or the other but not both. Thus you cannot have mode 0, say, present together with mode 5, although mode 5 and mode 4 is possible.

A point to note here is that as far as this routine is concerned, there is no difference between modes 0 and 3 or between modes 4 and 6. This is because the additional line spacing is provided by the CRTC, not the ULA.

This brings us to the program. The first 28 lines are purely a demonstration. They set up the DLI routine data areas to display mode 0 followed by 1, 2 and finally 3 (or mode 4 followed by 5 and 6), with each mode having its default colours selected. PROCsetdlis is then called before a moire pattern is generated to demonstrate the different modes. Pressing any key other than Escape will then list the program to demonstrate what text looks like without the bits being translated for the different mode formats.

The main part of the program, PROCsetdlis, resides from line 10000 onwards. It requires two parameters, both addresses of blocks of data. The first block consists of a number of three byte entries, terminated by &FFFFFF. The first two bytes contain the next value to be loaded into the interrupt timer (low byte then high) where a

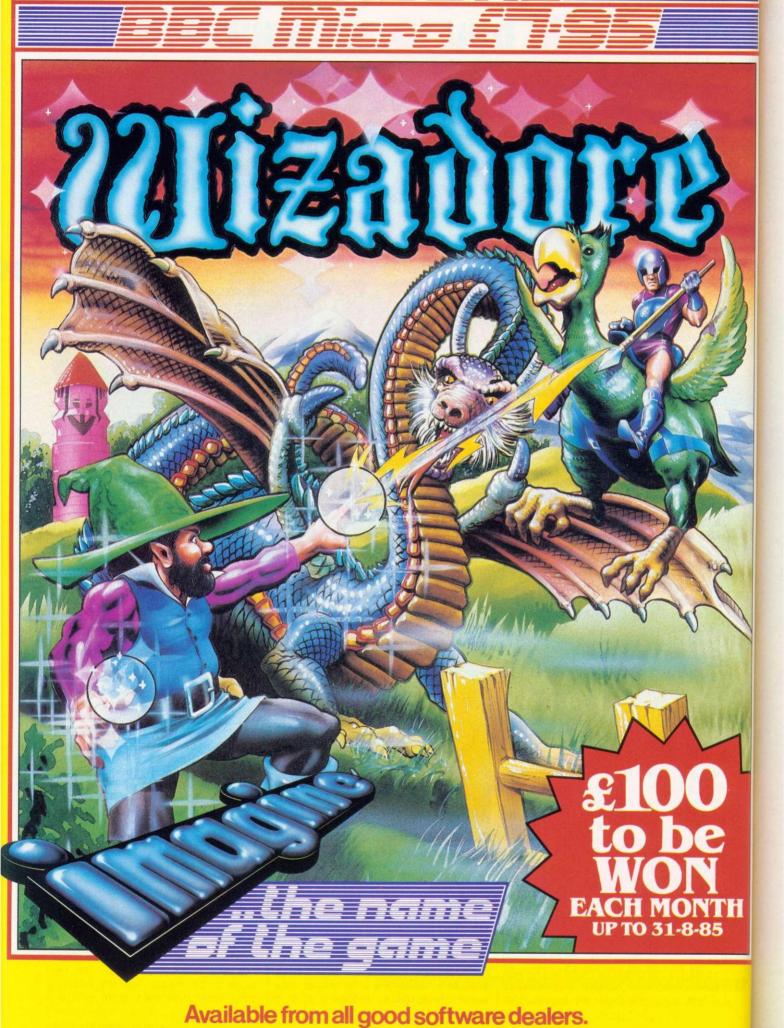

Imagine Software (1984) Limited • 6 Central Street • Manchester • M2 5NS • Tel: 061 834 3939

value of &260 approximately corresponds to one line of text in a 25 line mode. The third byte contains the number of the new mode to be changed to. For speed reasons, no range checking is done on this number.

The second block of data is 22 bytes long. The first two bytes are the physical colours for colour 0 and colour 1 of any two colour mode selected. The demonstration sets these to zero and seven. Then come four bytes for colours 0 to 3 for any four colour mode. Here, the demonstration routine selects colours 0, 1, 3 and 7. Finally come 16 bytes for the colours of mode 2 if selected.

PROCsetdlis itself is not very complex. It simply assembles the machine code, allows for a \*TV call (see below), switches off the flashing colours and returns. The main body of the program is contained within FNassemble. The machine code first identifies the source of the interrupt. If it is a frame sync interrupt, it resets its pointer to the start of the data and calls the DLI routine to actually restore the top of screen conditions. Note that PROCsetdlis modifies the first timer value to account for the area at the top of the screen where no data is displayed. The value added (&6C8: see lines 10060 and 10070) is correct for \*TV0: values for other \*TV values can be calculated from this.

The DLI interrupt selects the appropriate value to write to the ULA control register from the table at line 10700. These values are as follows:

Mode 0 1 2 3 Value &9C &D8 &F4 &9C Mode 4 5 6 (7) Value &88 &C4 &88 (&4B)

Then the appropriate colour setting routine is selected and the default colours set up from the second data table. For an explanation of these colour routines, see last month's article. Finally, the timer is set up ready for the next interrupt.

At the end of the program, two other useful routines are appended: PROC-dlisoff and PROCdlison. These allow the interrupts to be deselected and reselected from within a program if the program needs to extend the DLI data. Note that the DLI data is portable between modes within the same group, but remember the difference between 25 and 32 line modes.

To use a screen where multiple modes are running, you will need to inform the operating system which area of screen you are using, as the OS will assume that all the screen is in the mode selected when you called PROCsetdlis. To do this, you need to alter six bytes in the OS VDU work-

space. The start of this workspace can be determined by using OSWORD with A=174, X=0 and Y=255. This returns the start address LSB in X and MSB in Y. Calling this address A, you will need to alter A+&A, A+&4F and A+&60 to A+&63. These locations should be set as follows, depending on the area of the screen you wish to access:

- &A Number of characters (not bytes) per line -1 (eg 19)
- &4F Number of bytes per character (eg 32: 4 wide × 8 high)
- &60 Number of colours per mode -1 (eg 15)
- &61 Number of pixels per byte -1 (eg 1) or 0 for text only
- &62 Graphics left mask
- &63 Graphics right mask

The two graphics masks contain a pixel set in the highest colour possible in the leftmost (&62) or rightmost (&63) pixel position. For example, for two colour modes, these bytes contain &80 and &01, and for mode 2, &AA and &55. Examples in brackets are for mode 2.

When using the routine, there are a couple of general points to remember. First, you may notice slight flicker when running the program. This is caused by the DLI interrupts not having priority over the OS. To cure this totally, a reentrant DLI and operating system interrupt routine would be required. While this is possible, it makes the software operating system dependent, as calls have to be made into the OS ROM itself rather than through the vectored calls in PAGE &FF. Advanced programmers may like to reduce the problem by disabling interrupts they are not using, thereby reducing the chance of conflict. The flicker becomes more pronounced as more DLIs are added, as the chance of interrupts clashing increases. So select your screen layout with care.

Secondly, if you are running very short of memory, you can use CLEAR to remove all the variables after using PROCsetdlis, then re-dimension the three arrays (the two containing the DLI data and the one containing the machine code: the length of this array is given by FNassemble — 0,&C000). They will then cover the same area of memory as the original arrays and these originals will be preserved, but all other variables will have been deleted.

Finally, here are a few ideas for further experimentation. It is possible to redefine the CRTC registers part way down a screen. This makes mixing of medium (modes 4 to 7) and high (modes 0 to 3) resolution modes possible but more interestingly, allows the 'start of screen memory' pointer to be changed part-way down a screen. This means that the screen data does not have to be one continuous block, so

areas may be hardware scrolled individually, or repetition of data may occur. The latter technique provides considerable memory savings on games, for example, requiring a couple of layers of clouds where one cloud layer may be slightly offset and redisplayed many times.

The way to change the CRTC registers is to trick the CRTC into thinking that its screen is the length of the area of data to be displayed next. The frame sync is configured as a line sync and the new register values are set before the end of the 'frame' so they take immediate effect. Thus the CRTC completes several 'frames' for each complete TV frame.

#### Entering the program

The program can be broken down into three sections: the demonstration section (10 to 280), the DLI core routine and utilities (10000 to 10090 and 10730 to 10760) and the assembly section. To enter the program, first enter the following short routine:

- 10 Data=&4000
- 20 Data1=Data: Data2=Data
- 30 FOR Mode=0 TO 2
- 40 L=FNassemble(0,&4000)
- 50 L=FNassemble(2,&4000)
- 60 B=0
- 70 FOR A=&4000 TD &4000+L-1
- 80 B=B+?A
- 90 NEXT A
- 100 PRINT"Checksum is : "; B
- 110 NEXT Mode
- 120 END

This is the same program as used for the colour DLIs, so if you saved it last month, you can simply re-load it. Then type AUTO 10100 and enter the assembly language section. If you now type Run, three checksums, all 29315, should be printed. If so, you can now delete lines 10 to 120 and enter the remainder of the program. If not, or if an error occurs, check the listing and correct the error. Note that the REM statements at lines 10120, 10180, 10250, 10280, 10340, 10420, 10510 and 10650 are not essential and can be shortened or ignored. Where the REM statement does not start the line, enter the line up to the REM statement before deciding whether to shorten or ignore the message. With the entire program entered, save the program before running it in case an error still exists, as an error in the interrupt routine may corrupt the entire program.

In Colours by Interrupts in last month's issue the three checksums should have read 20203, 21428 and 19413.

Tristram Mabbs' listing for modes by interrupts is on yellow pages 104-105.

# **PRINTERS**

#### DOT MATRIX

All printers have centronic parallel interface unless otherwise stated. All printers have hi-res dot addressable graphic mode. Please send SAE for full details.

**EPSON** 

FX80 160CPS 10" wide friction & pin feed FX100 160 CPS 15" wide friction & tractor feed RX80 F/T 100 CPS 10" wide friction & tractor feed RX80 100 CPS 10" wide tractor feed RX100 F/T 100 CPS friction & tractor feed 8143 RS 23 Interface for FX and RX printers 8148 RS 232 Interface with 2K buffer x on x off Ribbon Cartridge for RX80 FX80 & MX80 Ribbon Cartridge for FX100 & MX100

MP165

165CPS 10" carriage friction and tractor feed

£260 + VAT £299

£5 + VAT £7 + VAT

£347 + VAT £399

£499 + VAT £574 £239 + VAT £275

£385 + VAT £443

£39 + VAT £45 £60 + VAT £69

VAT £229

26

28

£199 +

SEIKOSHA

BP 420 designed for the business world, 420CPS in draft mode, 110CPS in NLQ mode.

£1095 + VAT £1259

SMITH CORONA

Fastext 80: 80 col, 80CPS. Friction feed standard

£149 + VAT £171

TAXAN KAGA

160CPS 10" wide 27CPS NLQ 24 × 16 matrix 160CPS 15" wide 27CPS NLQ 24 × 16 matrix

£269 + VAT £310 £390 + VAT £449

CANON

PW1080A 160CPS NLQ mode, 27CPS, 10" wide friction & tractor feed £299 + VAT £344

PW1156A 160CPS NLQ mode, 15" wide friction & tractor feed

£399 + VAT £459

COLOUR PRINTERS Seikosha GP700A 7 colour 50CPS printer Canon PJ1080A 7 colour 40CPS ink jet printer

£299 + VAT £344 £433 + VAT £499

#### DAISYWHEEL

JUKI 6100/I PRINT

20 CPS Bi-Directional Logic seeking 10 12 15 CP1 PS spacing 2K buffer best selling Daisywheel £324 + VAT £373 Singer sheet feeder unit £182 + VAT £209 Tractor Unit RS 232 Interface £95 + VAT £109 £52 + VAT £59 Spare Daisywheel + VAT £16

**BROTHER HR-15** 

13 CPS Bi-directional 10, 12, 15 CP1 + PS £340 + VAT £399 £139 + VAT £159 £217 + VAT £249 £95 + VAT £109 Keyboard Unit Single Sheet Feeder Unit Tractor Unit

QUENDATA

20 CPS Unidirectional 10 12 15 CP1

£239 + VAT £275

e.q

All our printers have 1 year warranty

7001 High Res Green Screen with sond input £65 + VAT £75

GM1211

GM1211 18 MHZ High Res Monochrome 1441 MS 14\* RGB Monitor with tilt and swivel stand available in green or amber etched antiglare screen SANYO COLOUR (please specify colour £86 + VAT £99 Std Res 14\* £179 + VA

SANYO

DM8112 12" Green screen 18MHZ Hi- Res £86 + VAT £99

DM9112 Hi Res Green Screen with tilt stand £109 + VAT £126

MICROVITEC CUB

1431 MS 14" RGB Normal Res Colour £173 + VAT £199 1451 MS 14" RGB Medium Res Colour £251 + VAT £289 1441 MS 14" RGB High Res Colour £417 + VAT £479

Std Res 14" £179 + VAT £206 Med Res 14" £299 + VAT £344 Hi Res 14" £449 + VAT £517

MICROVITEC FOR QL 1451 14" Medium Res Co

1451 14" Medium Specially designed for Sinclair QL

£239 + VAT £275

# ACORN'R

# SANYO MONITOR

SPECIAL


CM 3125

colour monitor



£179 inc VAT

including free monitor stand

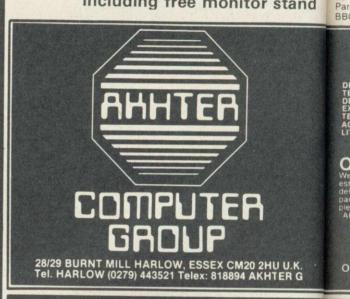

C

S

S S D

D 00 S DOP D

A

p

p


d

IN

S

D:

100% BBC COMPATIBLE MITSUBISHI AND TEAC SLIMLINE DISK DRIVES

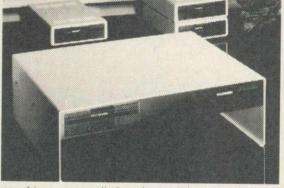

These drives are supplied ready cased with all the necessary cables formatting program and User Guide There are some very useful utilities included on formating disc

\* DISASSEMBLER: This is 6502 machine code disassembler

DUP: To copy and rename a file on disc

\* FORMAT: Formating progam for 40 & 80 tracks

\* FREE: This utility provides a disk usage analysis MDUMP: Enables you to display and modify any part of **BBC** memory

> MERGE: Merge a number of text files into one file RELOCATE: Downloads a basic program to &E00 SDUMP: Screen dump for EPSON In all graphic

> > VERIFY: Verifies every sector on a disk \* MENU: A flexible menu program

# RODUCTS

80			
1	BBC Microcomputer Model B BBC Mod B - disk interface	LUCO I	25
	BBC Mod B - Econet interface	£349 + VAT	£401
	BBC Mod B - disk and Econet interfaces	£409 + VAT	£471
	BBC Compatible 100K disk drive	£112 + VAT	£129
	RBC Compatible dual 800K disk drive	£312 + VAT	£359
200	Acorn Z80	£347 + VAT	£399
	Acorn 6502 Second Processor	£173 + VAT	£199
	Acorn Bit stick	£327 + VAT	£375
	Acorn IEE Interface	£282 + VAT	£325
	Acorn Electron plus 1 interface	£52 + VAT	£60
	BBC Prestel Adaptor	£115 + VAT	£132
	BBC Telext receiver (Aug)	£196 + VAT	£225
	BBC cassette recorder and lead	£30 + VAT	£35
	Disk interface kit (free fitting)	£103 + VAT	£118
	Mod A to Mod B upgrade kit	£70 + VAT	680
	Fitting charge for A to B upgrade kit	£20 + VAT	£23
	16K memory upgrade kit	£30 + VAT	£34
	Games paddles	£17 + VAT	£19
*	User Guide	£15	
	Advanced User Guide	£12.95	
	Econet Guide	£ 7.50	
	Econet interface (free fitting)	£60 + VAT	£69
	Speech interface (free fitting)	£47 + VAT	€54
	BBC disk manual - formating disk	£30 + VAT	£34
	Parallel printer cable	£10 + VAT	£11
	BBC word processor (view)	£52 + VAT	€59

# YOUR CONTACT AT AKHTER Tel: 0279 443521 (12 lines)

			EXT
DEALER/BULK ENQUIRE	S	HAMAYUN MUGHAL	202
TELEPHONE ORDERS .		CARON ANDREWS	210
DEALER ORDERS		JULIA ALLUM	209
EXPORT ENQUIRIES		MOHAMAD EDIB	201
TECHNICAL SUPPORT		ALAN LAFFOLEY	207
ACCOUNTS		JULIE AMBLER	211
LITERATURE REQUEST		JOHN MAULE	201

#### ORDERING INFORMATION

accept official orders from UK Government and Education olishments. Carriage is £2.50 + VAT (UK only) for normal ery if express delivery is required please add £8.00 + VAT per el. We accept telephone orders on Barclay and Access card is ring (0279) 443521 (10 lines), all cheques made payable to



£86 + VAT £99

£312 + VAT £359

N.B. All prices are subject to change without notice and are rounded up to the nearest pound

OPENING HOURS: MON-FRI 9am-6.30pm, SAT 10am-5pm. We welcome callers, no parking problems

# DRIVES

switchable DS

Single drive 100K 40 trks single sided

M	Dual drive 200K 40 trks single sided	£164 + VAT £189
Mo	Single drive 200K 40 trks double sided	£121 + VAT£139
M	Dual drive 400K 40 trks double sided	£239 + VAT £275
MI	Single drive 400K 80 trks double sided	£152 + VAT £175
MIO	Single drive 400K 40 80 trks switchable DS	£155 + VAT £179
Map	Dual Drive 400K + PSU + built-in monitor stand	£260 + VAT £299
M	Dual drive 800K 80 trks double sided	£303 + VAT £349
Min	Dual drive 800K 40 80 trks	

Dual Drive 800K 40 80 trks + PSU £373 + VAT £429 + built in monitor stand All above drives are low power slimline (0 3 A typ at + 12v and 0 4 at + 5v per drive) Normally extra power supply is not required. The BBC Computer power supply is designed to drive to low power drive (IT IS NOT DESIGNED TO DRIVE

SS DD disketts (10 Box) £18 + VAT £20 DS DD disketts (10 Box) £23 + VAT £26

INTERNAL ROM BOARD)

#### COMPLETE BUSINESS PACKAGE

This system is based on 16 Bit 8088 Processor 128K RAM, 2X730K Floppy Disc Drives, High Res Monitor, fast (160cps) Dot Matrix Printer, Wordstar Wordprocessor, Calcstar Spreadsheet Program, complete integrated Accounts package consisting of Sales Ledger, Purchase Ledger, Nominal Ledger, Invoicing, Stock Control, Payroll and mailing list.
Complete turnkey system at an

Complete Turney unbelievable price.
Delivered Only £1495 + VAT £1719
Delivered and Installed plus 1 day training £1595 + VAT £1834

#### **SANYO 550**

16 Bit Micro, 256K Ram, Built in full colour graphics, MSDOS Operating System, Single 16K disc and free Green free software including Wordstar & Calcstar

f749 + VAT = f862

#### SANYO 550-IX

As above but with dual drives 2 x 160K £799 + VAT = £919

#### SANYO 550-360X

As 550 but with dual drives 2 x 360K f899 + VAT = f1034

#### SANYO 550-800X

As 550 but with dual drives 2 x 800K £999 + VAT = £1149

#### **SANYO 550-10MX**

As 550 but with MSDOS 2.11 Operating System and a single 10 Megabyte hard disc and 360K floppy back up.

£1995 + VAT = £2295



#### SANYO PROFESSIONAL COMPUTER

#### SANYO 555

16 Bit Micro, 256K Ram, double 160K disc drives, MSDOS Operating System, free Green Monitor, free software Calcstar, Infastar, Datastar etc.

£999 + VAT = £1149

#### SANYO 555-360X

As 555 but with 2 x 360zk Drives £1099 + VAT = £1264

#### **SANYO 555 800X**

As 555 but with 2 x 800K Drives

£1199 + VAT = £1379

#### **SANYO 555 10MX**

As 555 but with MSDOS 2.11 Operating System and a single 10 Megabyte hard disc and 360K floppy back up.

£2195 + VAT = £2525

#### APRICOT PC

"Portable Executive Computer" 16 Bit Micro. 256K RAM up to 1.44 megabytes flopy disk storage. 3\[ 'Sony disks. Portable brief case styling. Modem with auto dialler (optional) hard disk optional. Vast software library (compatible with Sirius Apricot with Double Drive, Monitor and *Free Printer* £1790 + VAT £2059 with Double Drive, Double & Monitor & Printer £1990 + VAT = £2289 APRICOT XI

As above but with 10MB Winchester Drive and Single 315K Drive plus Superwriter, Supercalc and FREE JUKI 6100 Printer £2995 + VAT £3444

#### COMPLETE SYSTEMS FROM £650 + VAT

BBC 1: BBC Micro Model B. View (or Wordwise) Wordprocessor, Quendata 20 CPS Daisywheel Printer, High Res Green Monitor, Cassette Recorder plus 10 cassettes and all the necessary £600 + VAT = £747.50

Res Green Monitor, Quendata 20 CPS Daisywheel Printer, 1 Box of Disks and all the necessary cables

BBC 4:Same as System BBC 2 but with 400K Drive and JUKI 6100 Daisywheel

BBC 5: BBC Model B + Disk Interface, the necessary cables View (or Wordwise) Wordprocessor 800K Dual Disk Drive (Mitsubishi), High Res Green Monitor, JUKI 6100 Daisywheel Printer, 1 Box (10) of 80 Daisywheel Printer, 1 Bux (10)

Track DS discs and all necessary SAN 6: Same as cables £1095 + VAT = £1260.00 Dual 730K Drives

SAN 1: Sanyo MBC Microcomputer, 256K Ram, Dual 160K drives (2 x 160K), High Res Graphics (600 x 200 pixels in 8 colours), JUKI 6100 Daisywheel Printer, High Res Green Monitor, 1 Box of 10 discs, Wordstar Wordprocessor, Calcstar BBC 2: BBC Micro Model B + Disk Spreadsheet and all the necessary cables £1095 + VAT £1260.00 SAN 2: Same as SAN 1 but with Dual 360K Drives 12 × 360K

£1245 + VAT £1432.00 SAN 3: Same as SAN 1 but with Dual 720K Drives £1295 + VAT £1490.00

£749 + VAT =£862.00 SAN 4: Sanyo MBC 555 Series 16 Bit BBC 3: Same as System BBC2 but with
Microcomputer, 256K Ram, Dual 160K
400K Drive
Drives (2 x 160K), High Res Graphics £825 + VAT = £949.00 (600 x 200 pixels in 8 colours) JUKI 6100 Daisywheel Printer, High Res Green Monitor, 1 Box of 10 discs, Wordstar, Wordprocessor, Calcstar spreadsheet, £925 + VAT = £1064.00 Mailmerge, Spellstar (dictionary) Datastar (database), Reportstar plus all


£1195 + VAT £1375.00 SAN 5: Same as SAN 4 but with Dual 360K Drives

£1295 + VAT £1490.00 SAN 6: Same as SAN 4 but with

£1395 + VAT = £1605.00

If you require High Res Colour Monitor instead of High Res Green Monitor in Sanyo Systems please add £320 VAT = £368 to the above prices.

\*128K RAM Upgrade for all above Sanyo systems (makes a total of 256K RAM) £150 + VAT = £172.50 including fitting.

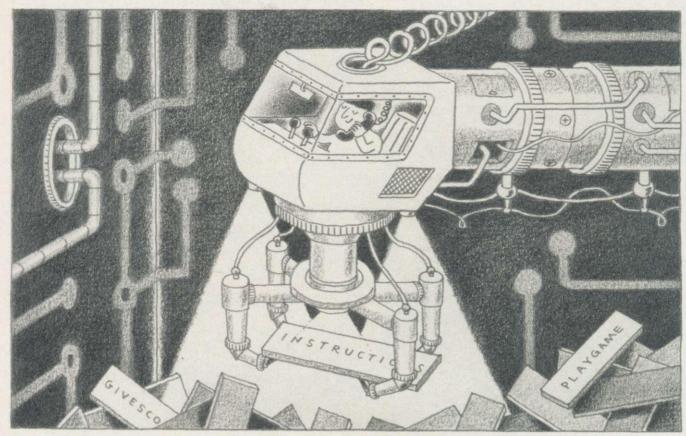

# **PRIVATE FUNCTIONS**

Patrick Quick reveals how to implement programming

# structures not usually available in BBC Basic

N BASIC you can use a 'computed GOTO' or 'computed GOSUB' using the keyword ON. This selects the line number automatically from a list, eg:

ON X GOSUB 560, 670, 345, 8765

This is equivalent to

IF X = 1 GOSUB 560

IF X = 2 GOSUB 670

IF X = 3 GOSUB 345

IF X = 4 GOSUB 8765

This is useful for producing a neat, clear choice of routine but it uses line numbers, which are not very easy to remember. It would be better to have a computed procedure call such as:

ON X PROC instructions, playgame, givescore

which would choose PROCplaygame if X = 2 etc. Unfortunately this is not available in BBC Basic but it is possible to invent a 'computed function call'.

#### What FNon does

The function FNon, described here, picks the chosen function name from a string containing the list of names

separated by commas, eg, "instructions, playgame, givescore". This string is passed as an argument to FNon together with a number which selects the required function from the list, eg:

20 A = FNon(''instructions, playgame, givescore'', X)

This is equivalent to

IF X = 1 A = FNinstructions

IF X = 2 A = FNplaygame

IF X = 3 A = FNgivescore

#### How it works

Version 1 of FNon (listing 1) takes two arguments. The first is a string containing a list of function names separated by commas.

The second argument is a number indicating which one of these functions is required. The chosen function is selected by looking through the string for commas and splitting off the separate function names while counting down to zero (line 1040).

Variable I holds the position of the next comma in the list. This is initialised to zero so that I + 1 always points

to the beginning of the next function name. Subsequent commas are found by the INSTR function on line 1060. This function searches for a given string inside another string. If it is there, the value returned is its starting character position, eg,

INSTR("ABCDEFGHI", "DEF")

gives the value 4.

Line 1060 searches A\$+"," rather than just A\$ when looking for "," with INSTR. This has two advantages. The first, and most important, is that it may be used safely with Basic 1, which has a bug in the INSTR routine. This bug causes trouble when searching in a short string for a longer string (User Guide page 281). A\$+"," is always at least as long as "," so the problem is avoided. (I usually use this trick with INSTR so that my programs will work on all Beebs.)

The second advantage is that the result given by this version always points to the end of the next function name, even when there are no more commas. This makes the rest of FNon simpler to write.

If the count has not yet reached zero and there are still some function names left (line 1070) then the search is repeated and the first name is stripped off the front of the list (line 1050). When it is found, the appropriate function name is put in an EVAL expression at line 1090. This is why you can only use functions - you cannot EVALuate a PROCedure.

(If the routines you are using do not need to return a function value then you must just return a 'dummy' value which can be ignored. In other words, to turn a procedure into a function replace PROC by FN in the definition, replace ENDPROC by = 1 and each time the procedure is called replace PROC thingy by X=FNthingy, where X is some variable you are not using elsewhere.)

This method allows any number of function names to be included (up to the maximum you can fit in a string, ie, 255 characters).

With ON . . . GOTO or ON . . . GOSUB you can pick up illegal values of X by using ELSE (although this reveals another bug in Basic 1 - see User Guide page 309), eg:

ON X GOTO 230, 670, 500 ELSE GOTO 800

If X is not 1, 2 or 3 then the program jumps to line 800. FNon does the same by returning the value FALSE (zero) if out of range (lines 1010 and 1080), while the functions chosen (FNinstructions, etc) should always return a non-zero value.

For another practical example, consider this use of FNon to choose an operation in a wordprocessing program by means of a single key:

100 IF FNon ("insert, delete, edit, finish", INSTR("IDEF", GET\$)) ELSE VDU 7: GOTO 100

Line 100 uses version 1 of FNon to select FNinsert, FNdelete, FNedit or FNfinish according to the key press (I, D, E or F). If some other key is pressed then a beep sounds and the line is repeated.

#### Version 2

This (listing 2) allows the passing of two extra arguments, one string and one numeric (other combinations can of course be used). The parameters must be the same types for each of the selected functions. The parameters (P\$ and P) are included in the definitions of FNon2 and of the chosen functions and are also included in the call of the chosen function (see amended line 1090)

Both of these versions work on Basic 1 and Basic 2.

Note that ON . . . GOTO and ON . . . Listing 2. Version 2 of FNon

GOSUB round down fractional values of the selector. In other words, if X is 2.6 then the second line number is chosen. FNon has been written to give the same effect. If you want to reject fractional values, simply include another test in FNon:

1005 IF A < > INT(A) : = FALSE

```
10 INPUT "Which ? "X
   20 IF FNon("instructions.playgame,
givescore", X) ELSE PRINT "Out of rang
   30 GOTO 10
 1000 DEF FNon (A*, A)
 1010 IF A<1 := FALSE
 1020 LOCAL I:I=0
 1030 REPEAT
 1040 A=A-1
 1050 A$=MID$(A$,I+1)
 1060 I=INSTR(A$+",",",")
1070 UNTIL A<1 OR I>LENA$
 1080 IF A>=1 :=FALSE
 1090 =EVAL("FN"+LEFT$(A$,I-1))
Modules for version 1
 3000 DEF FNinstructions
 3010 PRINT "Press lots of keys quick
1 y . "
 3020 = TRUE
 3100 DEF FNplaygame
 3110 PRINT "ZAP! ZAP! ZAP!"
 3120 =TRUE
 3200 DEF FNgivescore
 3210 PRINT "You lose."
 3220 =TRUE
```

Listing 1. Version 1 of FNon

```
10 INPUT "Which ? "X
  20 IF FNon2("instructions.playgame
, givescore", X, "testing", 6) ELSE FRINT
"Out of range"
   30 GOTO 10
1000 DEF FNan2(A*,A,F*)
1010 IF AK1 :=FALSE
1020 LOCAL I
1030 REPEAT
1040 A=A-1
1050 A $ = MID + (A * , I + 1)
 1060 I=INSTR(A*+",",",")
1070 UNTIL ACT OR IDLENAS
1080 IF A>=1 ;=FALSE
 1090 =EVAL("FN"+LEFT*(A*,I-1)+"(F*)"
Modules for version 2
 3000 DEF FNinstructions(X$,X)
 3010 PRINT "Using first routine"X,X*
 3020 = TRUE
 3100 DEF FNplaygame(X*,X)
 3110 PRINT "Using second routine"X,X
 3120 =TRUE
 3200 DEF FNgivescore(X*,X)
 3210 FRINT "Using third routine"X,X$
 3220 = TRUE
```



New Horticultural Hall Westminster,


**London SW1** 

We are here!

# Reduced prices for School/College Groups

Entry only £1 per student if bookings are made in advance. Send your cheque (made payable to Database Publications) and SAE to:

Electron & BBC Micro User Show 68 Chester Road, Hazel Grove, Stockport SK7 5NY. Tel: 061-480 7863 Valid for a minimum of 10 people.

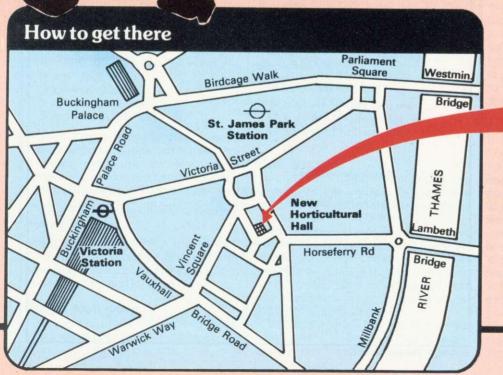

TO COLLEGE

Bigger bargains than ever before **BBC MICRO** at the show that offers the lowest prices possible on all the latest software and hardware for the BBC Micro and Electron



# SOFTWARE Bring a blank cassette and help yourself to software - FREE!

Visitors to the Show will be able to access Prestel and download public domain telesoftware from the vast Micronet database. Take your pick from a wide range of games, utilities and educational programs.

Got a problem? Then call into our micro clinic

Once again our team of experts will swing into action giving their impartial advice on all technical aspects of computing on the **BBC Micro and Electron.** We can't promise to answer all your questions, but we can guarantee you'll enjoy watching us try!

#### SAVE MONEY with our Special Travel Offer . . .

Discounted rail travel offer for visitors to the Electron & BBC Micro User Show. For full details write to:

Travel Offer, P.O. Box 1, St. Albans AL1 4ED with SAE or Telephone: St. Albans 34475 quoting: The Electron & BBC Micro User Show.

This voucher is worth per head!



By handing in this voucher at the door you save £1 off the normal admission price of £3 (adults) and £2 (children).

(Valid for a maximum of 4 people)

10am-6pm, Thursday, 9 May 10am-6pm, Friday, 10 May 10am-6pm, Saturday, 11 May 10am-4pm, Sunday, 12 May

New Horticultural Hall, Westminster, London SW1.


Number attending: 1 2 3 4





# PUT BBC BASIC IN CONTROL **USE THE 6502 2nd PROCESSOR** WITH BIG CONNECTIONS

- CONTROL BASIC extensions.
- Robust INDUSTRIAL NETWORK
- Single Eurocard can stand alone and run BBC BASIC programs.
- Program control applications in BBC BASIC. FORTH, PASCAL or any other language ROM.
- Adds I/O expansion to your BBC via the 6502 Bus connector.
- Tube Interface for fast development.
- Battery backed up Real Time calendar clock.
- Runs BASIC programs in ROM or from battery backed up RAM.
- A full range of Eurocards for use in target applications.
- Ideal for industry, education, research and commerce.

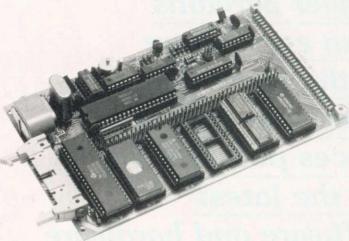

Move over to CMS today

44a Hobson Street Cambridge CB1 1NL (0223) 324141

Cambridge Microprocessor Systems Limited



# ORDER

THE MOST SOPHISTICATED DISC FILING **BBC MICROCOMPUTER OPERATING** 

ALONGSIDE YOUR EXISTING ACORN TYPE SYSTEM 16K ROM EVER WRITTEN FOR THE DFS ROM AND OPENING UP A NEW EXCITING PHASE AS A SUPERIOR OPERATING SYSTEM



- ☆ Fully compatible with any existing DFS and Torch CPN/MCP format.
- Allows 255 file names on a CP/N and CP/M type screen format. CAN'T EXTEND banished for ever. COMPACT redundant as the vacant areas on the disc are gathered together for economic file use automatically.
- Designed to facilitate ease of use vital in the area of business programs on the BBC. Will allow the mix of BBC and Torch CPN programs on the same disc.
- discount.

ONLY AVAILABLE FROM

# COMPUTER USERS CLUB =

69a Hadlow Road, Welling, Kent.

Tel. No. 01-311 2555



Simon Dally sends you searching through our pages for clues that could lead you to our super prize — a 6502 second processor or a Plus 3

# TREASURE HUNT



6502 second processor for the Beeb

#### **JANUARY**

#### **WINNERS**

JANUARY'S competition produced about 300 entrants, about 85 per cent correct. It wasn't an easy one so here are the answers.

Problem 1: 232324 Problem 2: 37

Problem 3: 901 or 28, depending on your view of leading zeroes – we hadn't

Day 1: Alex 2 is for real Day 2: Alex 1 is for real Day 3: Alex 1 is for real

Day 4 was (deliberately) a confusione! The two statements are either both true or both false, which is logically impossible. Either way, whichever one you chose made no difference. Correct answers were 467425 and 465623 as well as the intermediate position of those who insisted they couldn't do anything on Day 4! The equivalent numbers for those who opted for number base 28 in problem 3 (a small minority) were also accepted.

The winners of the Quinkey alternative keyboards have been notified by post and were M Brewster of Birmingham, Lars Guldberg of Norway and Andrew Mitchell of Thetford, Norfolk.

## **BUMPER COMPETITION**

HIS MONTH'S competition is more difficult than usual – but then the prize is more mouthwatering. The winner can choose between a 6502 second processor for the BBC micro or a Plus 3 for the Electron – so please specify which you'd prefer on your entry.

Scattered in a random order through the pages of this month's *Acorn User* are 11 separate problems for you to solve. However, you don't need to be a computer genius to get the answers – some require a little mathematical ability, others a talent with words and others the energy to seek out reference books.

In addition there are two programs you have to decipher which form part of the competition. One of them gives

hints and tips about some of the more obscure clues; the other tells you about how to put the final answer together.


All the problems have an answer (in base 10 arithmetic), and if you find your final, overall answer isn't less than seven figures and exactly divisible by 11 you've done something wrong!

Please send your answers on a postcard to arrive not later than Friday, June 7 to May Competition, *Acorn User*, Redwood Publishing, 68 Long Acre, London WC2E 9JH. Remember to state which micro you own.

Please do not telephone us with queries about the competition. If you are in genuine confusion follow common sense rather than imagine we are being 'clever-clever'. The editor's decision is final.



Acorn's Plus 3 disc interface for the Electron

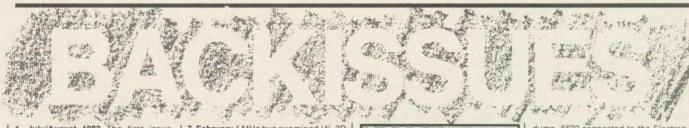

1. July/August 1982 The first issue. Articles on drawing techniques. The BBC Computer Programme. Machine code graphics. Questions & answers. Hints and Tips. Sound. Interfacing scientific instruments. Dumb Terminals for 0.1 machines. Disc drives. Econet in schools.

2. September Ceefax telesoftware. Beeb in business. Mailing list. Simple files. 30-Hour Basic course. Art on a micro. Music. BBC micro as a key-



board. Extra Atom commands. BBC Basic board. ULA design. Teletext graphics. Machine code graphics. Analogue input. Schools training. 0.1 cassette bug patch.

3. October Electron details. BBC TV

series – confessions. Two Epson graphics dumps. Seikosha GP100 dump. Worldwide networking for BBC micro. Garbage handling. Voice ROMs. Sound pitch envelope. Moving graphics. ZX printer for Atom. RGB colour separations for Atom. Biofeedback. Book reviews.

4. November Teletext. Second BBC TV series. Machine code series 1. Programming forum. Trek III. Speeding up graphics. Bomber game listing. 7-tone Epson graphics dump. Atom graphics manipulation. Dumb terminal for 0.1 machine. Firework graphics. Editing tips.



5. December BBC TV in schools. Machine code 2 – registers. Programming forum. Program generators. Carols. Hints & Tips. Logo and Turtle graphics in schools. Introduction to procedures. Software review. Atom word processing. Toolbox review. 16-colour graphics on model A. Sorting. Sound envelope design.

6. January 1983 MEP school launch. \*FX commands for sound. Second BBC TV series. Machine code 3-two pass assembly. Disc drives for the Beeb. Programming forum. Program protection. Micros in schools-new series. Commodore Pet printer used with Beeb. BBC programs written on an Atom. Extra Atom memory.

7. February 1 MHz bus examined (4). 3D Atom graphics (3). Atom BBC Board reviewed (3). Machine code 4—memory (5). BBC Computer Literacy update (1). Atom error handling (2). Micros in schools 2—getting organised (6). Hints and Tips (4). Beeb Forum (3). Reviews of Wordwise (2) and the Amber printer (1).

8. March Chess on the BBC micro (3). Sound on the Beeb (4). Printers for beginners (4). Atom analogue converter (2). Schools 3-micros and maths (6). Machine code 5-indirect addressing (3). DIY lightpen (5). MEP's Microprimer review (2). Atom Ross toolkit review (1). Beeb Forum (2). Assembly language and Pascal book reviews (2).



9. April Hexangle game listing (4). Bach on the Beeb (4). Hints & Tips on disc drives (4). Machine code 6 – the CALL statement (4). Interfacing the 1 MHz bus (3). Schools 4 – young children and micros (6). Graphics listings (2). Printers for beginners 2 (4). Reviews of BCPL, educational software and Atom software (3).

10. May Review of Basic II(1). Graphics listings(1). New \*FX calls in OS1.2(1). Colour mixing on the Beeb(4). Jazz, blues and folk on the BBC(6). Schools 5 – language development(6). DIY Beeb interface box(4). Atom sound board(5). A to Z of printing: how to get going(4). Hints and Tips: PROCs, discs and FNs(5). Printer, software and book reviews.

11. June Techniques series – sorting(2). Hints and Tips: 50p network(5). Drawing techniques and CAD(5). Machine code: interrupts(6). Schools 6 – information technology. Atom Forum. Beeb Forum. Printers – write your own graphics dumps(4). Comparative review of *View* and *Wordwise*(3). Three graphics packages reviewed(3). Test of *Acorn User*'s interface box(4).

12. July Techniques – hash tables(2).

12. July Techniques – hash tables(2). Hints and Tips: logic made easy(5). Recursion and graphics(6). Handling strings(3). Two ideas for passing variables(2). Beeb aids the blind(2). DIY second keyboard(5). Beeb Forum. Sounds on the Atom(2). Hardware, firmware, software and book reviews. Atom Forum.

13. August Printer graphics and dumps(2). Techniques—Tree structures and sorting(2). All the fun of the fair(7). 40/80 disc copier(2). Colour painting(5). Basic II: random access files(2). Screen dumps for Olivetti, Centronics and Seikosha(5). Atom strings(3). Reviews of Tandy CGP115 printer, five educational packs, A to D



14. September Techniques – ink-blots and mazes. Painting by lightpen. DFS space explored. Beeb Forum. Mega



Monsters game listing. Machine code graphics dumps. Atom Forum. Atom cassette recorder check. Reviews of Atom RAM boards, Cumana disc manual, Logofor schools, Hobbit floppy tape and books.

15. October Women and computing.
Techniques - random numbers. Review of Computer Concepts' Beebcalc.



Fractal graphics. 57 files on 40 & 80 track discs. *Vampire* game listing. Beeb Forum. Assembly code controls tab key. Osfile merging. Atom future. Atom verify routine. Reviews of *Vu-Type*, Procyon Atom book, Epson FX80, Teletext adapter, disc drive, software.

16. November Techniques – impossible problems. Contour graphics. Connecting two Beebs together. XREF: sorts & lists variable, function and procedure names. Assembler utilities in Basic II. OS, VDU, \*FX, OSBYTE calls – pull-out poster. Disc overlays. Adding extra Atom commands. Reviews of 7 educational packs, Atom ROM, books, games.



17. December Random graphics. Animated graphics in colour. Techniques—graphs. Hints & Tips, Universal printer

dump. 6522 connected to the Electron. Saving machine code. Beeb Forum. Graphics pull-out poster. Index: July 82–July 83. Forum Extra: EQUS. BBC helps the disabled. Schools – data processing. Transferring data between Beebs, Atoms ... or Pets. Atom block demolition utility. Atom disassembler program. Reviews of software, books, educational programs from Chalksoft.

18. January 1984: Games special issue Techniques – graphs part 2. Stacks and queues, Basic and languages. Hints & Tips. Voice chip revealed. How to write games. Electron interfacing. Beeb Forum. Life graphics routines. Defencecom game listing. The Train Game listing. Machine code graphics. Where to put machine code. Schools – handling data. Juki daisywheel printer examined. Atom Forum and adventure.



Reviews of utilities, software, *Beeline* wordprocessor, educational packages, two chess programs.


19. February: Adventures special issue Techniques – efficient sorts(3). PROC for a numeric keypad on the Beeb keyboard(1). 12 graphics listings(1). Random access filing on disc(5). Locking files(2). MCP40 printer/plotter looked at(5). Hints & Tips(3). Beeb Forum(2). Make discs readable on 40 and 80 track drives(4). Screen memory.



organisation(3). Hints on adventure design(3). Adventure action(4). Adventure ideas in computer language(2). Text compression(2). Word-crunch-


ing(4). VIA chip on Electron to drive a parallel printer(3). Atom Forum(2). Schools – simulation packages(4). Reviews: Disc Doctor, Leasalink's DFS upgrade, Hitachi's microdrive system, Solidisk's sideway RAM board, software

20. March Utility: timing routine. Fractals. Teletext and mode 7 dump. ROMs reviewed. Hints & Tips. Beeb Forum. Add sounds to your games. Learn Lisp



1. Cube graphics. Printer driver for View. Basic II from Basic I. Beeb's ADC chip. Atom Forum. Listing formatter for the Atom. Atom 'bytes free' routine. Schools—test of Factfile. Keyboard skills. Amcom DFS v Acorn DFS. Reviews: Beebpen wordprocessor, Atom expansion system, software, books.

21. April Beeb graphics on TV(3), 6845 chip explored(3). Advanced filing systems(1). Lisp 2(4). Hints & Tips(3). Beeb Forum(4). Choose disc tracks to copy(4). Function key editing(4). Teletext dumps(3). CES scrutinised(3). Passing variables(2). Computer Concepts graphics ROM(4). Schools—simulations(4). Calculating Easter dates(3). Better programming(3). Atom Forum(2). Atom ROM routines(5). Converting BBC to Atom Basic(2). Three printers compared(2). Reviews: software, Aries B20 RAM board, Toolkit, Monitors.



22. May Bitstik graphics system. Hints & Tips. 6502 second processor examined. Lisp 3. Beeb Forum. Disc utility to keep track of available space. Statistics. Pattern graphics. OSWORD explained. 4 colour graphics listings. Second-hand



disc drives. Education - do girls get a fair deal? Atom Forum. BBC to Atom

Basic 2. Reviews: British Micro's Grafpad, *Edword* wordprocessor, 4 sprite generators, Opus microdrive, Beasty, software.

23. June Acorn Z80 second processor(3). Forth(2). Graphics to brighten up your games(2). Soft Pottery graphics(4). Go faster and save memory space(3). Rapid search and load routine for tapes(2). How the Beeb and Electron work 1(3). Business: reviews and how to gently enter office computerisation(4). Education – adult literacy(3). Dumping Atom programs on the BBC(2). Atom Forum. Software copyright laws(2). Hints & Tips(4). Techniques – B-Trees(3). Beeb Forum(2). Reviews of monitors, printers, books, software, adventures, EPROM programmer.

24. July Communications: the future; portable micros; modems & electronic mail. Hints & Tips. First Byte: using your micro. Beeb Forum on Basic. How it works II: slow down the Beeb. Business: Acorn's Z80 software, Starbase ROM. Education: a look at Edfax, how to teach facts. Atom Forum. Converting BBC to Atom Basic. Reviews:



Electron Plus-1, Solidisk's 128k RAM board, three IEEE interfaces, Canon colour and Brother printers, ADE ROM. 25. August Downloading the weather. Teaching tots: keyboard overlays, activity board. First Byte: writing & debugging programs. Hints & Tips. Beeb Forum: 6502 second processor & Tube tips. How it works III: random numbers. Business: Plan software for Z80. Atom Forum, avoiding errors. Reviews: 3 drawing packs, Torch Unicomm, MCP's Interbeeb, software plus for Micronet.

26. September Decoding radio signals, First Byte: getting moving. Hints & Tips.



Education: problem solving. Sprite design and animation part I. Beeb

Forum: fastest dump. Write your own disc formatter. How it works IV: random number generator. Business: Nucleus software for Z80, accounts. Atom Forum, ? and !. Reviews: Torch Unicorn, Quinkey, Parfitt plotter, Turbo compiler, Multi-aid.



27. October The BBC and space. First Byte: noises on the Elk. Hints & Tips. Sprite design and animation part II. Programming the 8271. Sorting techniques. Diagnosing ills in the Beeb. Beeb Forum: NFS update. Education: report on government scheme, review of Microtext. Atom: wordprocessor. Communications: bulletin boards. Reviews: Basic utility ROMs, sideways ROM sockets, Bearsoft's Editor, Watford's Buffer & Backup, Ampersand's Colour module.

28. November Acorn's ABC range. First Byte: drawing. Hints & Tips: 3D-effect printing. Sprite design and animation part III. Floating point variables. ROM juggler. Micro Live. Education: news, Edword in the classroom, school quiz. Atom forum: hardware, the Auto command. Reviews: Six turtles and buggies. Toad's extension socket, Watford's Speech Synthesiser and



Beebfont ROM, BBtype, Romex 13 ROM board, 3 language coaching packs, two graphics tablets.

29. December Guide to bar codes. First Byte: text & graphics windows. Hints & Tips: control codes for Epsons. The Domesday project. Low-cost keyboard for the Beeb. Dumping games' screens. Speed up your micro. DIY database. Education: news. science guiz, review



of the Dudley suite of software. Atom: Forum, build a ROM pager, competition. Reviews: 6 databases compared, part I of lightpens, Acornsoft's Logo and Pascal, best games of 1984.

30. January 1985 Games special: Quadline, Picture Puzzle, musical tunes. Colourfill graphics. Hints & Tips. Operation



Raleigh report. Setting up your own teletext database. Second processors examined. Education: news, activity board revisited. Reviews: 6 wordprocessors compared, three astronomy packs, software for lightpens.

#### Sold-out copies

Eleven issues are not available – July 1982; February, March, April, May, June, July and August 1983; February, April and June 1984. Photocopies of articles are available at 18p a page (minimum charge 50p, inclusive of postage). Orders should be addressed to AU Photocopies, Redwood Publishing, 68 Long Acre, London WC2E 9JH. Figure in brackets indicate the number of pages in each article.

#### **HOW TO ORDER**

Fill in the order form on page 96 and send with your cheque or postal order for £1.25 per issue (made payable to Redwood Publishing) to Acorn User Services, PHS Mailing Ltd, PO Box 14, Horley, Surrey.

# **VELVE**

Acorn User presents 12 titles to captivate, entertain and educate. Could you run a railroad? . . . find out with Trains. Try your hand at swordfencing with Swordmaster. Break into the computer with Hacker 2000. Beat the bacteria in Corpuscle. Face the final frontier in Trek. Try three great games with our compendium. Or see how good your adventuring skills are with Vampire Castle and Flint's Gold. What more could you ask for? All these tried, tested and developed by Micrograf.



94

Make sure you play this adven ture with the lights on. You can almost smell the dank odours and feel the terror around every

corner. £6.95 Cassette, £9.95 Disc (40/ 80) BBC micro only


#### **TRAINS**

This classic game by Peter Balch requires quick wits and clear thinking. Your aim is to manoeuvre a number of trains around a complex network of track, as you pick up fare-paying passengers and deliver them to their destinations

£7.95 Cassette, £10.95 Disc (40/

BBC micro only





#### COMPENDIUM

Three Acorn User games. In HEXANGLE you and the micro take turns in drawing lines between six points. In MEGA MONSTERS you are confronted by waves of aliens while you rescue stranded mutants. VAM-PIRE is a two-player action game £7.95 Cassette, £10.95 Disc (40/ 80) BBC micro only



In the year 2000 only two classes survive, Programmers and survive, Proles A Proles. As a Prole, your only escape from a life of drudgery is to 'hack' your way into the massive Multivax complex in order to change your Brain Scan Report. £7.95 Cassette, £10.95 Disc (40/

BBC micro only




In your search for the legendary Flint's Gold you will sail the Spanish Main to a land of bloodthirsty pirates. £6.95 Cassette, £9.95 Disc (40/

80) BBC micro only

#### SWORD MASTER

SWORD MASTER is one of the few two-player games around, and is designed for joystick or keyboard. It is based on the fencing rules written in 1190 by Herman von Salza for the Deutscritter Order of Teutonic Knights. £7.95 Cassette, £10.95 Disc (40/ 80) BBC Micro and Electron





#### CORPUSCLE

In CORPUSCLE you assume control of the body's defences, journeying into the three-dimensional labyrinth of the human arterial system. Invading colonies of bacteria advance relentlessly and you must destroy as many as you can. £7.95 Cassette, £10.95 Disc (40/ BBC micro only



TREK was the first game to take advantage of voice synthesis on the BBC micro - and uses joystick or keyboard.

Trek puts you in charge of a Starship with the task of wiping out an alien fleet.

£7.95 Cassette, £10.95 Disc (40/ 80) BBC micro and Electron



ACOL	RNII	SFR	SOF	TWA	RE

Please send me:	40/80 disc* (£10.95)	Cassette* (£7.95)	Other title	40/80 disc* Cassette*
Crazee Caverns Mars Mission plus Astro Blas Grafpak plus Maze	ster		***************************************	
Tellscope			Total value of my order is !	E
l enclose a cheque/postal order Please debit my Access/Barclay		dwood Publ	ishing for £	
Account No			Expiry date	
Name		Addre	988	
***************************************			Pos	t code
Signed			Date	
Send this form with your remittance include VAT, postage and packing.	e in an envelop	e to: PHS Ma		

#### **HOW TO ORDER**

You can order all the games on these pages by filling in the order form on the left.

#### DISC EXCHANGE SERVICE

If you've bought Swordmaster or Trek on tape you can now send it to the address on the coupon on the left, together with a cheque for £3.50, and we will exchange it for a disc (which runs on 40 or 80 tracks)



# ACORN USER

Please start my subscription to Acorn User from the next available issue as indicated:



D2: Europe  D3: Middle East  C4: The Americas and Africa  C5: All other countries  E25					
D2: Europe		12 months	24 months		
23: Middle East 230	01: UK	£15 □	€30 □		
04: The Americas and Africa £30 ☐ £60 ☐ 05: All other countries £35 ☐ £70 ☐ Name  Address	02: Europe	€25 □			
D5: All other countries £35 ☐ £70 ☐  Name  Address	03: Middle East	€30 □			
Name Address	04: The Americas and Africa	£30 🗆	£60 □		
Address	05: All other countries	£35 🗆	£70 🗆		
	Name				
		11111	1111		
	Address	Eddin Maria			
			1111		
		11111			

## JBSCRIPTIONS

Please answer these questions to help us improve your magazine.

- 1 Do you use your micro for?:
  - 1 ☐ school 2 ☐ business 3 ☐ hobby
- 2 Do you have, or intend to buy, any of the following?:
  1 □ monitor 2 □ disc drive 3 □ second processor 4 □ printer 5 □ modem
- 3 How many software packages do you think you will buy in the next 12 months?:
  - 1 □ 0-5 2 □ 6-10 3 □ 10 or more
- ☐ I enclose my cheque/postal order/sterling bank draft payable to Redwood Publishing for £
- ☐ Please debit my Access/American Express/ Barclaycard

Account no.							
					10		

Expiry date

Signed. Date Send this form, with your remittance, in an envelope, to Acorn User Subscriptions, Redwood Publishing, 68 Long Acre, London WC2E 9JH

# **ACORN USER**

### BACK DATED ISSUES @ £1.25 per copy

		MONTH	YEAR	
 AU	issue			£
 AU	issue	***************************************		£
 AU	issue			£
			Total	£

### **BINDERS**

In red with silver logo on the spine Holds 12 issues of over 200 pages ONLY £4.75 inc. p&p.

@ £4.75 £ ..... Binders Please add £1.00 each for overseas items. Please allow 28 days for delivery

## **SERVICES**

Name
Address
☐ I enclose my cheque/PO payable to Redwood Publishing for £
☐ Please debit my Access/Barclaycard
Account no.
Expiry date
Signed

Send this form, with your remittance, in an envelope, to Acorn User Services, PHS Mailing Ltd, PO Box 14, Horley, Surrey. All the above prices include postage and packing.

# SOFTWARE



#### 24 HOUR PHONE SERVICE (02937) 72208

Please add £1.00 each for overseas items. Please allow 28 days for delivery.

#### MONTHLY PROGRAM LISTING **CASSETTES**

Please send me a cassette of all major BBC micro and Electron program listings

@ £3.75	Total £
Name	
Address	

☐ I enclose my cheque/PO p	
Publishing for £	

☐ Please deb	/11/11/	y M	cce	331	Da	ICI	ay	Cai	u		
Account no.	-3										

Expiry date	
-------------	--

Signed... ... Date ... Send this form, with your remittance, in an envelope, to Acorn User Software, PHS Mailing Ltd, PO Box 14, Horley, Surrey. All the above prices include postage and packing

# HINTS & TIPS

See 'Hints & Tips', page 39

Listing 1. D Webb's short routine to display teletext codes

10 REM Listing 1
20 FOR N=160 TO 255
30 PRINT"Character "; N; CHR\$(146); CHR\$(N)
40 A=GET
50 NEXT N

```
•
   Listing 2. C J Davies' program to select no filing system
                                                                          .
.
                    10 REM Martin Phillips
                    20 REM Hints & Tips
                                                                          .
-
                    30 REM BBC & Electron
                                                                          -
0
                    40 REM Acorn User May 1985
                                                                          .
                    50 :
                    60 FOR opt=0 TO 2 STEP 2
                    70 P%=&900
                                                                          -
                   80 [DFT opt
                                                                          -
                   90 .ctfs CPY #0:BNE nofs
                   100 .ocfl CMP #0:BNE nofs
                   110 .zacc LDA #0:RTS
                                                                          6
                   120 .nook SEC:RTS
                   130 .vfsc CMP #3:BEQ badc
                  140
                             CMP #6: BCC nofs
                             CMP #7: BNE exit
                   150
                   160
                             LDX #0:LDY #0
                                                                          6
                   170 .exit RTS
                  180 .nofs BRK
8
                   190 ]
                   200 $P%=CHR$&CO+"No filing system"+CHR
                                                                          -
                ±0
                   210 badc=P%+18: $badc=CHR$0+CHR$&FE+"Ba
                d command"+CHR$0
                                                                          .
                   220 NEXT opt
                                                                          0
                                                REM warnin
                   230 A%=6:CALL !&21E:
                                                                          .
                g of changing vectors
                  240 A%=143: X%=15: CALL&FFF4: REM servic
                e call
                   250 :
                                                                          260 FOR I%=&213 TO &21F STEP 2:71%=9:N
                EXT I%
                  270 ?%212=nofs: REM OSFILE -no operati
                                                                          0
                on permitted
                                                                          0
                  280 ?&214=ctfs: REM DSARGS -only able
                to return current FS (=0)
                                                                          0
                   290 ?&216=nofs: REM DSBGET -no operati
                on permitted
                  300 ?%218=nofs: REM OSBPUT -no operati
.
                on permitted
                                                                          -
                  310 ?&21A=nook: REM OSGBPB -no operati
                on permitted (carry set)
                                                                          0
                  320 ?&21C=ocfl: REM OSFIND -no operati
                on permitted
                                                                          0
                  330 ?&21E=vfsc: REM FSCV
                                                -only retur
6
                n O as file handle
```

97

-

9

```
TWO demonstration films are contained on the monthly listings cassette and will also be available on Micronet
```

- 800 towards the end of April. Due to their size and the problems involved in entering data we are unable to present them in this issue of *Acorn User*. However this
- should not prevent you from designing your own films, using the program as instructed.
- The first demonstration is the file "DEMO", which shows a character performing a series of somersaults.

The second file is called "RUN" and depicts the character running.

Because of the size factor, DEMO can only be run in Mode 5 on a disc-based machine. To load RUN for

showing in Mode 1 on a disc-based machine, PAGE must be set to &1400 before loading *Animator*, ie:

0

•

.

0

0

8

-

-

-

0

8

-

0

8

0

6

.

8

0


```
PAGE = &1400
NEW
CHAIN"ANIMATE"
```

Electron Plus-3 users will not be able to lower the setting of PAGE and will therefore only be able to use DEMO and RUN in Mode 5.

When showing a film sequence, the current frame number is displayed in the top left-hand corner of the screen. If you wish to remove this, then simply delete line 1140 from the listing.

```
-
                                             510 LDA &70,X
   10 REM Animator
.
   20 REM Joe Faith
                                             520 TAY
   30 REM For BBC and Electron
                                             530 LDA (&84),Y
.
   40 REM (C) Acorn User May 1985
                                             540 ASL A
   50 :
550 STA &8E
   60 ON ERROR GOTO 2730
                                             560 LDA #0
   70 REPEAT
                                             570 ADC
                                                     #0
   80 CLS: INPUT''"Enter mode(1 or 5)"; M%
                                             580 ASL
   90 UNTIL MX=1 OR MX=5: MODE MX
                                             590 STA
                                                     SBI
-
  100 PROCset_up
                                             600 LDA
  110 PROCset_var
                                             610 ASL A
  120 PROCmenu
                                             620 STA
                                                     &BE
  130 END
                                             630 LDA &8D
  140 :
                                             640 ADC #0
  150 DEF PROCMENU
                                             650 STA &8D
  160 REPEAT: G%=0: CLS
                                             660 LDA
  170 PRINT'''1: Show film"
                                             670 JSR &FFEE
  180 PRINT"2:Edit film"
                                            680 LDA &8D
  190 PRINT"3:Load new film"
                                             690 JSR &FFEE
  200 PRINT"4: Save present film"
                                             700 INY
  210 PRINT'" (ESCAPE): Quit"
                                             710 LDA
                                                     (&84),Y
  220 G%=VAL (GET$)
                                             720 ASL A
  230 IF G%=1 PROCshow
                                             730 STA &BE
  240 IF G%=2 PROCedit
                                             740 LDA
                                                     #0
  250 IF G%=3 PROCload
                                             750 ADC #0
  260 IF G%=4 PROCsave
                                             760 ASL A
  270 UNTIL eternity
                                             770 STA &8D
  280 ENDPROC
                                             780 LDA
                                                     &8E
  290
                                             790 ASL
  300 DEF PROCset_up
                                             800 STA &8E
  310 FOR Q%=0 TO 2 STEP 2:P%=&B00
                                             810 LDA
  320 COPTO%
                                             820 ADC
                                                     #0
  330 .man
                                             830 STA
                                                     %8D
  340 LDX #0
                                             840 LDA &8E
  350 .nextlimb
                                             850 JSR &FFEE
                                             860 LDA &8D
  360 INX
  370 LDA #25
                                             870 JSR &FFEE
                                             880 CPX #18
  380 JSR &FFEE
  390 LDA &70,X
                                             890 BNE nextlimb
                                             900 RTS
  400 CMP #100
  410 BEQ move
                                             910 ]
  420 LDA #5
                                             920 NEXT 0%
                                             930 ENDPROC
   430 JSR &FFEE
                                             940 :
  440 CPX #100
  450 BNE coords
                                             950 DEF PROCShow
  460 . move
                                             960 CLS
  470 LDA #4
                                             970 F%=0:C%=0:L%=N%:S%=2:D%=0
  480 JSR &FFEE
                                             980 REPEAT
  490 INX
                                             990 INPUT'''Enter delay : "A$
                                             1000 UNTIL VAL (A$)
  500 .coords
                                                                 >0
```

```
1010 INPUT "Single step (y/n)";A$
                                                      1500 y%=y%-(C%=139)*A%
                                                                                                              -
1020 IF FNcaps(A$)=89 S%=1 ELSE S%=0
                                                     1510 IF x%>255 x%=255
1030 INPUT''Entire film (y/n)";A$
                                                      1520 IF y%>255 y%=255
1530 IF x%<0 x%=0
                                                                                                              0
 1040 IF FNcaps(A$)=89 GOTO 1100
                                                      1540 IF y%<0 y%=0
1050 REPEAT
                                                                                                              1060 CLS:PRINT ""Number of frames: ":N% 1550 ?X%=x%:?Y%=y%
1070 INPUT "Enter first frame"F% 1560 C%=C% AND &DF 1080 INPUT "Enter second frame"L% 1570 IF C%=73 PROC
                                                       1570 IF C%=73 PROCinter
 1090 UNTIL F%>O AND F%<L% AND L%<N% 1580 IF C%=67 PROCCOPY
 1100 CLS: C%=F%: F%=B%+F%*24
                                                      1590 IF C%=83 PROCsame
                                                                                                              -
                                                  1600 IF C%=76 PROClimb
1610 UNTIL C%=70
1620 UNTIL eternity
 1110 L%=B%+L%*24
                                                                                                              0
1620 UNTIL eternity
1630 :
1150 GCOL 1,J%:!&84=Q%:CALL man
1640 DEF PRODSet var
1650 B%=LOMEM+300:eternity=0:*FX 4,1
170 GCOL 2,J%:!&84=Q%-24:CALL man
180 VDU 19,J%,7,0;0;19,3-J%,0;0;
1790 J%=3-J%:C%=C%+1
1200 IF S%=2 GOLD 1240
 1120 J%=1:VDU 19,J%,0;0;19,2,7,0;0;
                                                                                                              .
                                                                                                              0
                                                                                                              -
 1200 IF 5%=2 GOID 1240
1210 IF 5%=1 A$=GET$
                                                     4: NEXT Q%
                                                     1680 *FX 12,20
                                                                                                              1220 TIME=0
                                                      1690 EX=BX+24:NX=0:D=0:!&84=BX
                                                      1700 A$="XXXXXXXXXX": A$="": *OPT 1,1
 1230 REPEAT UNTIL TIME>D%
 1240 NEXT Q%
                                                       1710 ENDPROC
                                                                                                              0
 1250 PRINT"Press key for Menu";
                                                      1720 :
 1260 A$=GET$:ENDPROC
                                                      1730 DEF PROCinter:CLS
                                                                                                              .
                                                      1740 REPEAT
 1270 :
                                                       1750 INPUT'' "Enter the first frame "F%
 1280 DEF PROCedit
                                                      1760 INPUT "Enter the first frame"
1760 INPUT"Enter the last frame "L%
1770 UNTIL F%<L% AND F%>=0 DR L%>N%
 1290 REPEAT
 1300 CLS: VDU 20
 1310 REPEAT 1780 IX=L%-F% 1780 IX=L%-F% 1320 PRINT'''Number of frames-";N% 1790 F%=B%+F%*24:L%=B%+L%*24 1330 INPUT'"Which frame";M% 1800 FOR Q%=0 TO 23
                                                                                                              .
 1330 INPUT'"Which frame"; M%
                                                      1810 D=(LX?DX-FX?QX)/IX:CX=0
 1340 UNTIL M%>=0
                                                                                                              0
                                                       1820 FOR W%=F%+24 TO L%-24 STEP 24
 1350 P%=B%+M%*24
 1360 IF P%>HIMEM-24 PRINT"NO ROOM!":GD 1830 C%=C%+1
                                                                                                              -
                                                       1840 W%?@%=F%?@%+(C%*D)
0 1330
                                                                                                              0
                                                      1850 NEXT W%
 1370 IF P%>E% PROCtop
                                                      1860 NEXT 0%
 1380 S%=0:0%=P%-24
                                                     1870 ENDPROC
1880 :
1890 DEF PROCsave:CLS
 1390 REPEAT: CLS
                                                                                                              -
 1400 X%=P%+S%*2:x%=?X%
 1410 YX=PX+SX*2+1: YX=?YX
                                                                                                              -
 1410 7%-7%-7%-7%-77%
1420 IF M%>0 GCDL 0,1:!&84=D%:CALL man
1430 GCDL 0,3:!&84=P%:CALL man
1440 PRINT"Present frame-";M%
1450 C%=GET
1870 DEF PROCESAVE:CES
1900 REPEAT
1910 INPUT ' "Enter file name";A$
1920 UNTIL LEN(A$)>1 AND LEN(A$)<8
1930 X%=OPENOUT(A$)
                                                                                                              0
 1460 IF INKEY(-1) AX=4 ELSE AX=1 1940 PRINT #XX,NX
1470 xX=xX+(CX=136)*AX 1950 FOR 0X=8% TO EX+24
                                                                                                              0
                                                      1960 BPUT #X%,?Q%
 1480 x X = x X - (CX = 137) *AX
                                                       1970 NEXT Q%
                                                                                               Continued >
 1490 VX=VX+(CX=138)*AX
                                                                                                              8
```

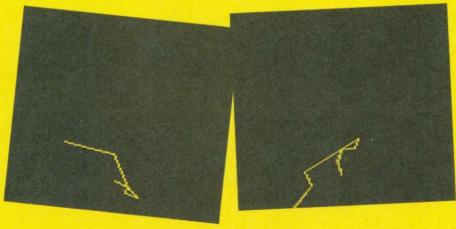


0 0

1980 CLOSE #X% 2360 FOR W%=E% TO P% STEP 24 1990 ENDPROC 2370 FOR 0%=0 TO 23 2380 WX?QX=EX?(QX-24) 2000 : 2010 DEF PROCload:CLS 2390 NEXT Q% 2020 REPEAT 2400 NEXT W% 2030 INPUT'''Enter file name":A\$ 2410 E%=P%: N%=M% 2420 ENDPROC 2040 UNTIL LEN(A\$)>1 AND LEN(A\$)<8 2050 X%=OPENIN(A#) 2430 : 2060 INPUT #X%,N%:E%=B%+N%\*24 2440 DEF PROCsame: CLS 2070 FOR 0%=8% TO E%+24 2450 REPEAT 2460 INPUT'''Enter source frame":F% 2470 UNTIL F%>=O AND F%<N% 2080 ?0%=BGET #X% 2090 NEXT 0% 2100 CLOSE #X% 2480 F%=B%+F%\*24 2110 ENDPROC 2490 FOR 0%=0 TO 23 2500 F%?0%=F%?0% 2120 : 2130 DEF PROCCOPY: CLS 2510 NEXT 0% 0 2140 REPEAT 2520 ENDPROC 2530 : 2540 DEF PROClimb ■ 2150 PRINT'''"Source sequence :" 2160 INPUT "First frame:",F% 2550 REPEAT 2560 INPUT'''Enter new limb to be move 2170 INPUT"Last frame : ",L% ● 2180 D%=L%-F% 2190 UNTIL F%>=0 DR F%<L% d": 5% • 2200 INPUT'"Enter first frame"'"of obj 2570 UNTIL 5%>=0 AND 5%<12 ect sequence",J% 2580 ENDPROC 2210 K%=J%+D%: IF J%<L% GGT0 2160 2590 : 2220 IF B%+K%\*24>(HIMEM-24) PRINT"ND RD 2600 DEF FNcaps (A\$)=ASC (A\$) AND &DF -OM!": GOTO 2030 2610 : 2620 REM Display order 2630 DATA 100,0,2,4,6,8,10,6,12,14 2230 IF N%<K% N%=K%:E%=B%+K%\*24 . 2240 J%=B%+J%\*24:C%=24:F%=B%+F%\*24 0 2250 INPUT "Reverse? (Y/N)": A\$ 2640 DATA 100,6,16,18,100,4,20,22 2260 IF FNcaps(A\$)=89 C%=-24 : F%=B%+L% 2650 : 0 2660 REM Limb co-ords 2270 FOR 0%=0 TO D% 2670 DATA 450,000,450,150,500.200 2680 DATA 500,400,450,500,550,500 2280 FOR W%=0 TO 23 2690 DATA 600,350,500,250,400,350 2700 DATA 500,250,550,150,550,000 2290 J%?W%=F%?W% 2300 NEXT W% 2310 F%=F%+C%: J%=J%+24 2710 : . 2320 NEXT 0% 2720 REM ERROR HANDLER 2730 IF ERR=17 AND G%<>0 PROCmenu 2740 IF ERR=17 CLS : END 2330 ENDPROC -2340 : 2350 DEF PROCtop 2750 REPORT: PRINT ERL 0 . 0 

.

4

.

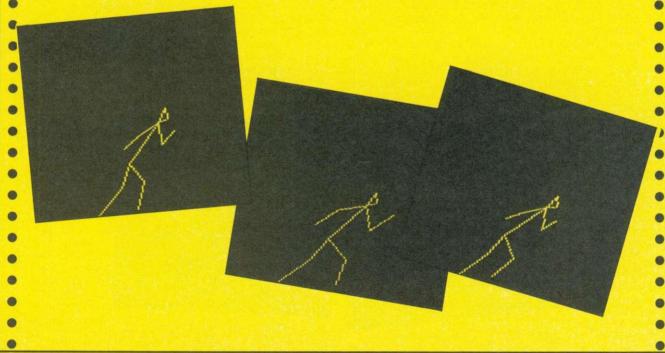

.

0

0

0

8

8

0

0

0

0

0

0

0

0

.

0

-

0

0

0

0

.

0

.

0

0

0

0

0

.

0

0

0

0

0

0

0

0

0

#### Listing 1. The source code for the routine to turn capital letters on and off

- 10 REM Capitals
- 20 REM by Pete Gaunt
- 30 REM for BBC and Electron
- 40 REM (c) Acorn User May 1985
- 50 .

.

.

8

6

0

.

8

-

0

0

.

.

0

.

- 60 store=&74:on=&75
  - 70 bufvec=&22A
- 80 oldbufvec=&230
  - 90 uservec=&200
    - 100 osbyte=&FFF4
    - 110 code=&A00
    - 120 FOR opt=0 TO 2 STEP2
- 130 P%=code
  - 140 COPT opt
  - 150 .init
  - 160 LDA #command MOD &100
  - 170 STA uservec
  - 180 LDA #command DIV &100
  - 190 STA uservec+1
- 200 LDA #0
  - 210 STA on
- 220 RTS
- 230 .command
- 240 BNE end\_com
- 250 CPX#1
  - 260 BNE com2
  - 270 JSR caps\_on
  - 280 JMP end\_com
- 290 .com2
  - 300 CPX#0
- 310 BNE end\_com
- 320 JSR caps\_off
- 330 .end\_com
  - 340 RTS
    - 350 .caps\_on
  - 360 LDA on
  - 370 BNE end\_on
- 380 LDA bufvec 390 STA oldbufvec
- 390 STA oldbufve
   400 LDA bufvec+1
  - 410 STA oldbufvec+1
  - 420 LDA #check MOD &100
  - 430 STA bufvec
    - 440 LDA #check DIV &100
- 450 STA bufvec+1
  - 460 LDA #1 470 STA on
    - 480 .end on
    - 490 RTS
  - 500 .caps\_off
  - 510 LDA on
  - 520 BEQ end off
  - 530 LDA oldbufvec
- 540 STA bufvec
- 550 LDA oldbufvec+1
- 560 STA bufvec+1
  - 570 LDA #0
  - 580 STA on
  - 590 .end\_off
  - 600 RTS
- 610 .check 620 STA store
- 630 PHP:PHA:TXA:PHA:TYA:PHA
  - 640 CPX#0
  - 650 BNE no\_change
  - 660 LDA store
  - 670 CMP#ASC"a"
  - 680 BCC no\_change
    - 690 CMP#ASC"z"+1
    - 700 BCS no\_change

- 710 EOR#32
- 720 STA store
- 730 PLA: TAY: PLA: TAX: PLA: PLP
- 740 LDAstore
- 750 .exit
- 760 JMP(oldbufvec)
- 770 .no\_change
- 780 PLA: TAY: PLA: TAX: PLA: PLP
- 790 JMPexit
- 800 1
- B10 NEXT

#### **PROGRAM POINTS 1**

Listing 1 provides the source code for the routine to turn capital letters 'on' and 'off', avoiding the CAPS LOCK problem. The machine code assembles into the cassette /RS423 input buffer at &A00. Subsequent use of tape or serial port will destroy the code. It can of course be loaded into another area, such as the user definable character buffer at &C00. The assembled code can be saved using

\*SAVE CAPS A00 + 85 (or &C00 + 85 if relocated)

Capitals can be turned on and off in the following ways:

Capitals on: \*CODE 1 or \*FX136,1 Capitals off: \*CODE 0 or \*FX136,0

If you append this listing onto your main program rather than \*LOADing in the machine code then do remember to initialise it by adding a line,

#### CALL init

before using \*CODE or \*FX136

If you wish to adapt the program, the following lines will be of interest to you:

Line 160: set user vector to point to "command" routine

Line 230: direct command depending on setting of X

Line 240: A = 0 if command is \*CODE. If not then no action

Line 270: If X = 1 turn caps on

Line 320: If X = 0 turn caps off

**Line 360:** Check if routine already in operation

Line 380: Save default vector

Line 420: Set vector to point to check

Line 470: Set 'on-flag' to 1

Line 510: check if already off Line 530: restore default vector

Line 530: restore delaun vecto

Line 580: set 'on-flag' to 1

Line 620: character to be inserted is in A – store temporarily

**Line 640:** check that character is destined for keyboard buffer (X = 0)

Line 710: If lower case convert to upper case

Line 740: load A with new character

#### Listing 2. Converts lower case letters in a Basic string to upper case 10 REM Upper Case 0 20 REM by Pete Gaunt 30 REM for BBC and Electron 40 REM (c) Acorn User May 1985 50 : 60 MODES 70 PROCupper\_case 0 90 REM Test routine 100 REPEAT 110 INPUTLINE''"Enter test string"'test\$ 120 CALL upper\_case,test\$ 130 PRINT test\$ 140 UNTIL FALSE 150 160 DEFPROCupper case 170 upper\_case=&A90 180 block=&70:string=&72:par=&600 190 FOR opt=0 TO 2 STEP2 200 P%=upper\_case 210 COPT opt 0 220 LDA par+1 230 STA block 240 LDA par+2 250 STA block+1 260 LDY #0 8 270 LDA (block), Y 280 STA string 290 INY 300 LDA (block), Y 0 310 STA string+1 320 INY 330 INY 0 340 LDA (block),Y 350 TAY 360 BEQ exit 370 .loop 380 DEV 390 LDA (string),Y

400 CMP #ASC"a

420 CMP #ASC"z"+1

410 BCC next

430 BCS next

### 440 EUR #32 ### 450 STA (string), Y ### 460 .next ### 470 CPY ### 480 BNE loop ### 490 .exit ### 500 RTS ### 510 J ### 520 NEXT ### 530 ENDPROC

#### **PROGRAM POINTS 2**

-

.

0

0

.

0

.

0

.

-

.

0

.

0

0

0

0

Listing 2 is the routine to convert lower case letters in a Basic string into upper case letters. To use it just enter:

CALL upper case, X\$

where X\$ (or any other you care to specify) contains the string to be converted.

The listing provides the source code which assembles its machine code from &A90 – above the listing 1 code. Again it's possible to relocate this to suit if you need to.

To save the machine code use:

\*SAVE UPPER A90 + 30

The following program details may be of use to you:

Line 220: get address of the string information block from the parameter block and store in zero page at "block"

Line 270: get address of string from the string information block and store in zero page at "string"

Line 340: get length of string from information block and transfer to Y

Line 360: if null string then exit

Line 370: work down the string from the end

Line 390: load character into A

Line 410: if less than "a" then it's not lower case

Line 430: if greater than "z" then it's not lower case

Line 440: if lower case then convert to upper case

Line 450: store it in place of original character

Line 480: if it's not the start of the string then check the next

character else exit the routine

0

0

0

6

8

-

0

.

-

.

-

0

0

0

0

0

0

0

0


```
Listing 3. A demonstration of the routine
     10 REM Demonstration Program
     20 REM by Pete Gaunt
.
    30 REM for BBC and Electron
40 REM (c) Acorn User May 1985
     50 :
     60 MODES
     70 PROCupper_case
    80 REM If loading code miss out
     90 REM above line and remove the
    100 REM folloing two REM's to leave
    110 REM the commands to be executed
    120 REM *LOAD UPPER
    130 REM upper case=&A90
    140 :
6
    150 items%=10
    160 DIM word$(items%)
    170 FOR N%=1 TO items%
    180 PRINT: "Word no. ":N%". ":
    190 INPUTLINEwords (N%)
    200 NEXT
    210 :
    220 FOR J%=0 TD items%-1
    230 K%=J%+1
    240 FOR I%=K% TO items%
    250 L%=items%+K%-I%
    260 w1$=word$(L%):w2$=word$(J%)
    270 CALL upper case, w1$: CALL upper_cas
.
    280 IF w1$<=w2$ t$=word$(L%):word$(L%)
   word = (J\%) : word = (J\%) = t = t
    290 NEXT
    300 NEXT
    310 :
    320 PRINT "Sorted..."
    330 FOR N%=1 TO items%
    340 PRINTwords (N%)
    350 NEXT
    360 END
    370 :
    380 DEFPROCupper_case
    390 DIM upper case 50
    400 block=&70:string=&72:par=&600
    410 FOR opt=0 TO 2 STEP2
    420 P%=upper_case
    430 COPT opt
    440 LDA par+1
```

460	LDA	par+2
470	STA	block+i
480	LDY	#0
490	LDA	(block),Y
500	STA	string
510	INY	
520	LDA	(block),Y
530	STA	string+1
540	INY	
550	INY	
560	LDA	(block),Y
570	TAY	
580	BEO	exit
590	.100	op qo
600	DEY	
		(string), Y
620	CMP	#ASC"a"
		next
640	CMP	#ASC"z"+1
650	BCS	next
	EOR	
670	STA	(string),Y
680	. nex	<t< td=""></t<>
690	CPY	#0
700	BNE	1 oop
710	. ex	it
720	RTS	
730	-	
740	NEX.	Γ
750	END	PROC
STATE OF THE PARTY	SALES OF THE PARTY	
		والمراسم ومرايستان والمرايستان والمرايسة

## **PROGRAM POINTS 3**

Listing 3 contains the PROCupper\_case coding once again. If you have already entered and saved the machine code generated by listing 2 you can leave out the lines from 370 onwards. However you will need to have the machine code on the same disc or present directly after listing 3 on the cassette tape. If you use the machine code method you should also delete line 70 and enter lines 120 and 130 as commands and not REMs thus:

120 \*LOAD UPPER 130 upper\_case = &A90

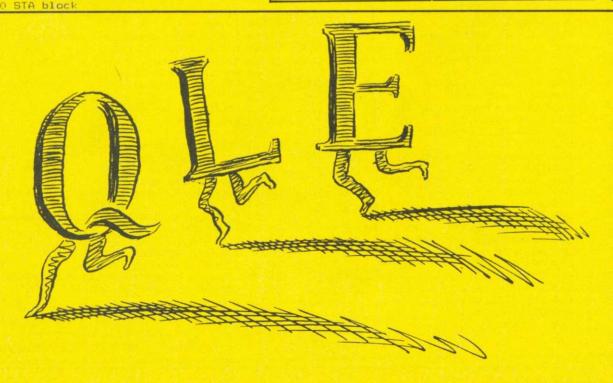

```
104
```

```
Listing 1. Tristram Mabbs' program allows you to have more than one mode on screen at a time
.
                                                                                                 .
                                                   680 PRINT"This is MODE 1"
       10 REM Modes by interrupts
6
                                                                                                 20 REM By Tristram Mabbs
                                                   690 NEXT A
       30 REM For BBC Micro
                                                   700 ENDPROC
0
                                                                                                 40 REM (C) Acorn User May 1985
                                                   705 :
       50 :
                                                   710 DEF PROCcubesdemo
       60 Mode=0
                                                   720 FOR A=1 TO 10
-
                                                                                                 0
       70 DIM DLIs 15, DefCols 21
                                                   730 X=RND(1280): Y=RND(128)+320
       80 Line Val=&260
                                                   740 GCOL 0, (A*3)
                                                   750 PLOT 69, X, Y
       90 :
      100 REM Set up a demonstration
110 FOR A=0 TO 8+3*ABS(Mode<4) STEP 3
                                                  760 PLOT 69, X+40, Y
                                                   770 PLOT 85, X, Y+40
-
      120 A!DLIs=6*Line_Val:?(A+DLIs+2)=(A/3
                                                   780 PLOT 69, X+40, Y
                                                                                                 ) +4*ABS (Mode>3)
                                                    790 PLOT 85, X+40, Y+40
.
                                                                                                 130 NEXT A
                                                    800 GCDL 0, (A*3)+1
      140 A!DLIS=TRUE
                                                    810 PLOT 69, X, Y+40
      150 RESTORE 330
                                                    820 PLOT 85, X+60, Y+60
      160 FOR A=0 TO 21
                                                    830 PLOT 85, X+20, Y+60
0
      170 READ DefCols?A
                                                   840 GCOL 0, (A*3)+2
850 PLOT 69,X+40,Y+40
      180 NEXT A
6
      190 MODE Mode
                                                   860 PLOT 69, X+60, Y+60
      200 .
                                                   870 PLOT 85, X+40, Y
      210 REM This PROC does the work
                                                   880 PLOT 85, X+60, Y+20
      220 PROCsetdlis(DLIs,DefCols)
                                                   890 NEXT A
      230 PROCmode (O)
                                                   900 COLOUR 7
.
      240 PROCtextdemo
                                                   910 PRINT' "Mode 2...."
-
      250 PROCmode (1)
                                                   920 ENDPROC
                                                                                                 260 PROCtextdemo2
                                                   925 :
.
      270 PROCmode (2)
                                                   930 DEF PROCtextdemo3
      280 PROCcubesdemo
                                                   940 VDU31,0,25
.
      290 PROCmode (3)
                                                   950 COLOUR 1
      300 PROCtextdemo3
                                                   960 FOR A=1 TO 6
      310 END
                                                   970 PRINT"This is MODE 3"
      320 REM Data default colours
                                                   980 NEXT A
      330 DATAO,7,0,1,3,7,0,1,2,3,4,5,6,7,8,
                                                   990 ENDPROD
    9,10,11,12,13,14,15
                                                   995 :
0
                                                                                                 340 :
                                                   1000 DATA 79,8,880,2,0,1,7,880,1
0
                                                  1010 DATA 39,&10,&80,2,1,3,3,&88,&11
1020 DATA 19,&20,&80,2,2,&F,1,&AA,&55
                                                                                                 0
      350 DEF PROCmode (mode)
      360 REM Fool MOS-"This is a mode!"
      370 A%=174: X%=0: Y%=&FF
                                                  1030 DATA 79,8,880,2,3,1,0,128,1
      380 vduvars=(USR(&FFF4)AND&FFFF00)/256
                                                  1040 DATA 39,8,840,1,4,1,7,128,1
8
                                                                                                 6
                                                   1050 DATA 19,&10,&40,1,5,3,3,&88,&11
      390 RESTORE (1000+mode*10)
      400 READ value
                                                   1060 DATA 39,8,840,1,6,1,0,128,1
6
                                                                                                 8
      410 vduvars?&OA=value
                                                   1070 :
      420 READ value
                                                  10000 DEF PROCsetdlis(Data1, Data2)
      430 vduvars?&4F=value
                                                 10010 *FX9
0
                                                                                                 8
      440 READ value
                                                 10020 *FX10
                                                 10030 DIM Code FNassemble(0,&C000)
      450 vduvars?&52=value
6
                                                                                                 -
      460 READ value
                                                 10040 A=FNassemble(0,Code)
      470 vduvars?&53=value
                                                 10050 A=FNassemble(2,Code)
-
                                                                                                 0
      480 READ value
                                                 10060 A=?Data1+&C8:?Data1=A
0
      490 vduvars?&55=value
                                                 10070 Data1?1=((Data1?1)+((A AND&F00)/&1
      500 READ value
                                                 00) + 6)
8
                                                                                                 8
      510 vduvars7%60=value
                                                 10080 CALL Vec_Setup
      520 READ value
                                                 10090 ENDPROC
      530 vduvars?&61=value
                                                 10095 :
      540 READ value
                                                 10100 DEF FNassemble(Pass,Adr)
      550 vduvars?&62=value
                                                 10110 P%=Adr: [OPT Pass
      560 READ value
-
                                                 10120 \ Change IRQ1 vector
                                                                                                 8
      570 vduvars?&63=value
                                                 10130 . Vec_Setup SEI
0
                                                                                                 -
      580 ENDPROC
                                                10140 LDA&204:STA Oldirg:LDA&205:STA Old
      585 :
                                                 Irg+1
      590 DEF PROCtextdemo
                                                 10150 LDA#NewIrq AND&FF:STA&204:LDA#NewI
      600 FOR A=1 TO 7
                                                 rg/256: STA&205
.
                                                                                                 0
      610 PRINT"This is MODE 0"
                                                 10160 CLI:RTS
      620 NEXT A
                                                 10170 .OldIrg BRK:BRK
.
                                                                                                 -
      630 PRINT
                                                10180 \ New interrupt routine
      640 ENDPROC
                                                 10190 . NewIrg LDA&FC: PHA: TXA: PHA: TYA: PHA
      645 :
                                                 10200 LDA&FE4D: AND&FE4E: AND#&20
-
      650 DEF PROCtextdemo2
                                                 10210 BNE DLI
      660 FOR A=1 TO 6
                                                 10220 LDA&FE4D: AND&FE4E: AND#2
.
                                                                                                 -
      670 COLOUR A
                                                 10230 BNE FSI
                                                                                                 .
                                                                                 Continued >
                                                                                                 0
```

0

.

8

0

0

0

0

0

0

0

0

0

0

0

6

#### **◄** Continued

.

-

10240 .Irq\_Exit PLA:TAY:PLA:TAX:PLA:STA& 10530 LDA Data2+6,Y:EOR#7:STA Col16base FC: JMP (OldIrq) 10250 \ Interrupts identified 10260 .FSI LDA&FE4E: AND#&20: BEQ Irq Exit 10270 LDA#0:STA ModeCount 10280 \ DLI routine 10290 .DLI STA&FE4D 10300 LDX ModeCount 10310 LDA Data1+2, X:BMI Timer: TAY 10320 LDA ULAdat, Y:STA&FE20 10330 LDA Cols,Y 0 10340 CMP#2: BNE CN2: \two colour modes 10350 LDY#0: . C2\_1 10360 LDA Data2,Y:EOR#7:DRA Col2base,Y 

10350 LDY#0:.L2\_1 10360 LDA Data2,Y:EOR#7:DRA Col2base 10370 LDX#7:.C2\_2 10380 STA%FE21:CLC:ADC#%10 10390 DEX:BPL C2\_2 10400 INY:CPY#2:BNE C2\_1

10410 BEQ Timer 10420 .CN2 CMP#4:BNE CN4:\ 4 colour mode 10690 .Col16base BRK 10700 .ULAdat :]:!P%

10430 LDY#0:.C4\_1
10440 LDA Data2+2,Y:EOR#7:DRA Col4base,Y
10450 STA&FE21:CLC:ADC#&10
10460 STA&FE21:CLC:ADC#&30
10470 STA&FE21:CLC:ADC#&10
10480 STA&FE21
10490 INY:CPY#4:BNE C4\_1

10500 BEQ Timer 10510 .CN4 \sixteen colour mode 10520 LDY#0:.C16\_1

10540 TYA: ASLA: ASLA: ASLA: ASLA 10550 ORA Collébase 10560 STA&FE21 10570 INY: CPY#16: BNE C16 1 10580 . Timer 10590 LDA&FE4B: AND#&DF: STA&FE4B 10600 LDX ModeCount 10610 LDA Data1, X:STA&FE48: INX:LDA Data1 ,X:STA&FE49 10620 INX: INX: STX ModeCount 10630 LDA#&AO:STA&FE4D:STA&FE4E 10640 JMP Irq Exit 10650 \ Assorted data 10660 .ModeCount BRK 10670 .Col2base :1:?P%=0:P%?1=&80:P%=P%+ 2: COPT Pass 10680 .Col4base : ]: !P%=&A0802000:P%=P%+4 : COPT Pass 10700 .ULAdat : ]: !P%=&9CF4D89C:P%!4=&88C 488: P%=P%+7: [OPT Pass 10710 .Cols :1: !P%=&2100402:P%!4=&20402: P%=P%+7: [OPT Pass 10720 1:=P%-Adr 10725 : 10730 DEF PROCdlisoff 10740 ?&FE4E=&20: ENDPROC 10745 : 10750 DEF PROCdlison 10760 ?&FE4E=&A0: ENDPROC



IF KEYING in all these listings gets you down and your fingers in a tangle why not send off for our monthly listings cassette?

It contains all the major programs in this issue and costs £3.75 including postage and packing. You'll find the details about the cassette and the order form on page 96.

Better still, be the envy of your friends and buy a bar-code reader (see our offer on page 113). All the listings in these yellow pages are reproduced in bar code format – send a cheque or postal order for £1.60 plus an A4 sized stamped addressed envelope to Bar Code Listings (May), Acorn User, 68 Long Acre, London WC2E 9JH.

See 'Beeb Forum', page 115

```
.
    Listing 1. C M Ferrington's cursor move routine to use with Colfill
.
       1 REM Cursor Procedures
.
       2 REM by C M Ferrington
       3 REM Beeb Forum
       4 REM (c) Acorn User May 1985
0
       6 DIM B% 15,K%(15)
      41 VDU23,240,32,32,248,32,32,0,0,0
-
      45 VDU23,241,248,248,248,248,248,0,0,0
    5000 DEFPROC Cursor (X%, Y%)
    5002 :
6
    5004 REM ADJUST X% AND Y% SO THAT CENTR
   E OF CURSOR IS AT TRUE GRAPHICS
    5006 REM COORDINATES.
    5008:
    5020
          LOCAL 1%, X1%, X2%
    5030 XX=XX-8: YX=YX+8
5032 :
.
    5034 REM FIND ADDRESS OF BLOCK OF SCREE ES IN BY TO RESTORE SCREEN MEMORY
.
    5036 :
    5040 M%=&3000+(31-(Y% DIV 32))*640+(X% D
.
   IV 16) *8+(255-(Y% DIV 4)) MOD 8
0
    5042 :
    5044 REM SAVE BLOCK OF MEMORY INTO B%
5046 REM SAVE ADDRESSES INTO K%()
0
```

```
5050 X1%=M% DIV 8
5060 FURIX=0TD4: X2X=MX+IX
5070 IF (X2X DIV 8)>X1X X2X=X2X+632
 5080 B%?1%=X2%?0:B%?(1%+8)=X2%?8
5090 K%(I%)=X2%:K%(I%+8)=X2%+8
5100 NEXT
 5102 :
 5104 REM SET BLOCK OF SCREEN TO BACKGRO
UND AND PRINT +
 5106 :
 5110 VDU5,18,0,0,25,4,X%; Y%; 241,18,0,2,8
,240,4
 5120 ENDEROC
 5130 DEFPROC Wipe
 5132
 5134 REM USE ADDRESSES IN K%() AND VALU
 5136 :
 5140 ?(K%(0))=B%?0:?(K%(8))=B%?8
 5150 ?(K%(1))=B%?1:?(K%(9))=B%?9
5160 ?(K%(2))=B%?2:?(K%(10))=B%?10
 5170 ?(K%(3))=B%?3:?(K%(11))=B%?11
5180 ?(K%(4))=B%?4:?(K%(12))=B%?12
5190 ENDPROC
```

0

0

.

-

0

6

6

0

.

0

6

6

0

```
•
                                                                                                        6
0
                                                                                                        0
.
                                                                                                        -
    Listing 2. Demonstration of the cursor move program
.
                                                                                                        0
        1 REM Cursor Demonstration
                                                    234 IF XX>1263 XX=1263
236 IF YX<8 YX=8
238 IF YX>1000 YX=1000
240 PROC_Wait(5)
        2 REM by C M Ferrington
.
                                                                                                        0
        3 REM Beeb Forum
.
        4 REM (c) Acorn User May 1985
                                                                                                        0
                                                    240 PROC_Cursor (X%, Y%)
0
       6 DIM B% 15,K%(15)
10 *LOAD "COLFILL" 1200
                                                                                                        .
                                                        250 UNTIL Q=-1
                                                   250 WATE G
252 *FX21,0
260 MODE3:*FX4,0
270 END
.
       12 Cfill=&1200
.
       20 *TV0,1
       40 MODE1:*FX4,1 5000 DEFPROC_Cursor(XX,YX)
41 VDU23,240,32,32,248,32,32,0,0,0 5020 LOCAL IX
42 VDU24,0;0;1279;950; 5030 X%=X%-8:Y%=Y%+8
                                                                                                        .
0
                                                                                                        .
       43 VDU28,0,0,39,1
                                                       5040 M%=&3000+(31-(Y% DIV 32))*640+(X% D
       44 VDU23;8202;0;0;0;
                                                    IV 16) *8+(255-(Y% DIV 4)) MOD 8
0
       45 VDU23,241,248,248,248,248,248,0,0,0
50 *LDAD "SHADES" 3000
                                                                                                        0
                                                      5050 X1%=M% DIV 8
8
                                                       5060 FORI%=0TD4: X2%=M%+I%
                                                                                                        .
       60 X%=640: Y%=512
                                                       5070 IF (X2% DIV 8)>X1% X2%=X2%+632
.
      200 PRINT"CURSOR DEMO - USE CURSOR KE
                                                       5080 B%?I%=X2%?0:B%?(I%+8)=X2%?8
   YS TO MOVE"
                                                       5090 K%(I%)=X2%:K%(I%+8)=X2%+8
     202 PRINT"SHIFT=FAST - CTRL=FASTER
                                                       5100 NEXT
                                                                                                        Q=QUIT":
                                                       5110 VDU5,18,0,0,25,4,X%;Y%;241,18,0,2,8
0
      210 PROC Cursor (X%, Y%)
                                                      ,240,4
                                                                                                       0
      212 REPEAT: REPEAT
0
                                                       5120 ENDPROC
                                                                                                       -
      214 L=INKEY(-26)*4:R=INKEY(-122)*4:U=IN
                                                       5130 DEFPROC Wipe
   KEY (-58) *4: D=INKEY (-42) *4: Q=INKEY (-17)
.
                                                      5140 ?(K%(0))=B%?0:?(K%(8))=B%?8
                                                                                                       .
     215 FAST=INKEY(-1):FASTER=INKEY(-2)
                                                      5150 ?(K%(1))=B%?1:?(K%(9))=B%?9
.
     216 UNTIL L+R+U+D+Q<>0
                                                      5160 ?(K%(2))=B%?2:?(K%(10))=B%?10
                                                                                                       8
      220 IF L+R+U+D<>O PROC Wipe
                                                      5170 ?(K%(3))=B%?3:?(K%(11))=B%?11
.
     222 F1=1: IF FAST F1=4
                                                      5180 ?(K%(4))=B%?4:?(K%(12))=B%?12
      224 F2=1: IF FASTER F2=8
.
                                                      5190 ENDPROC
     230 X%=X%+L*F1*F2-R*F1*F2:Y%=Y%+D*F1*F2
                                                      7000 DEFPROC Wait(t)
   -U*F1*F2
                                                      7002 TIME=0: REPEAT UNTIL TIME=t
                                                                                                       .
     232 IF XX<8 XX=8
                                                      7004 ENDPROC
•
                                                                                                       0
0
```

106

.

```
Listing 4. This program from Neil MacFadyen allows you to time machine code
      10 REM Machine Code Timer
                                                      350 .stopco%
                                                                                                     .
      20 REM by Neil McFadyen
                                                      360 PHP:PHA:TXA:PHA:TYA:PHA
      30 REM For BBC micro
40 REM (c) Acorn User March 1985
                                                                                                     -
-
                                                      370 SEI:LDA timer1%:LDX timer1%+1:CLI
                                                      380 CMP#3:BCS no adi
0
                                                                                                     .
      50 *K.1 PA.=&E00:MBLD:M
                                                      390 INX
      60 *K.O PA.=%6600!MPROCevaluate:MPA.=
                                                     400 .no adj
                                                                                                     .
                                                     410 LDY#64:STY ier%
  &F00!M
     70 PROCassemble: PROCprint
                                                     420 STA modtime%:STX modtime%+1
                                                                                                     -
80 PRINT"Press f1 to return to main p
                                                     430 LDA vectsto%:LDX vectsto%+1
  rogram": END
                                                     440 SEI:STA IRQ2V:STX IRQ2V+1:CLI
      90 DEFPROCassemble: VDU15
                                                     450 .end%
                                                                                                     .
     100 divtime%=&80:modtime%=&81:vectsto%
                                                     460 PLA: TAY: PLA: TAX: PLA: PLP: RTS
  =&83
                                                     470 INEXT
                                                                                                     .
-
     110 timer1%=&FE64: IRQ2V=&206
                                                      480 ENDEROC
     120 ifr%=%FE6D:ier%=%FE6E:acr%=%FE6B
                                                     490 DEFPROCprint
                                                                                                     .
     130 FOR IX=OTO3STEP3
                                                      500 PRINT"timeron = &": "staco%
                                                      510 PRINT"timeroff= &"; "stopco%
     140 PY=$400
                                                                                                     .
     150 [OPTI%
                                                      520 ENDPROC
                                                                                                     .
     160 .staco%
                                                      530 DEFPROCevaluate
     170 PHP: PHA: TXA: PHA: TYA: PHA
                                                   540 fact1%=29: fact2%=100
                                              550 modtime%=%81:divtime%=%80
560 divno%=(%10000-fact2%)*?divtime%
570 modno%=%10000-?(modtime%+1)*%100-?
                                                                                                     .
     180 LDA#0:STA divtime%
     190 LDA #&40:DRA acr%:STA acr%
     200 LDA #&CO:DRA ifr%:STA ifr%
210 LDA #&CO:DRA ier%:STA ier%
                                               modtime%-fact1%
                                                                                                     0
     220 LDA IRQ2V:STA vectsto%
                                                     580 PRINTTAB(15) "No. of cycles = "; (mo
     230 LDA IRQ2V+1:STA vectsto%+1
                                                                                                     .
                                                   dno%+divno%) *2
     240 SEI:LDA#irco% MOD256:STA IRQ2V
250 LDA#irco% DIV256:STA IRQ2V+1:CLI
                                                     590 PRINTTAB(15) "===============
                                                                                                     .
                                                    ==":ENDPROC
     260 LDA #&FF:STA timer1%:STA timer1%+1
                                                                                                     .
     270 JMP end%
                                                     Listing 3. Alex Whitfield's enhancements to January's
     280 .irco%
                                                                                                     .
                                                     automatic disc file update
     290 LDA&FC:PHA:TXA:PHA:TYA:PHA
     300 LDA ifr%: AND#&CO: CMP#&CO: BNEex
                                                        10*KEY2Q=PA.+87:?Q=?Q+1:Q%=&B00+?&B02
                                                                                                     .
     310 STAifr%:LDX divtime%:INX:STX divti
                                                     : Q%?77=?Q:M:Q%=&BOO+?&BO3:Q%?13=?Q:MSA."
                                                                                                     .
                                                     I.PROGst5"!M
  me%
                                                       20*KEY3LO."I.PROGst2":M
     370 PV
                                                                                                     .
     330 PLA: TAY: PLA: TAX: PLA: STA&FC
     340 JMP (vectsto%)
                                                                                                     .
-
```

```
Listing 5. Produce 256 colours on screen in mode 2 with D Litvin's routine
 10 REM 256 Colours
                                               140 FOR Z=0 TO 1280 STEP 142
20 REM Beeb Forum
                                                                                               .
                                              150 FOR P=(Z+8) TO (Z+134) STEP 4
 30 REM (c) Acorn User May 1985
                                              160 ?&359=B
                                                                                               .
40 :
                                               170 MOVE P, (I+8): DRAW F, (I+105)
50 B=0
                                                                                               -
                                              180 NEXT P
60 REPEAT
                                               190 B=B+1
 70 MODE 2
                                                                                               .
                                               200 NEXT
80 FOR I=1 TO 1024 STEP 113
                                              210 NEXT
90 MOVE 0, I: DRAW 1280, I
                                                                                               .
                                              220 A=GET
100 NEXT
                                              230 CLS
                                                                                               0
110 FOR I=1 TO 1280 STEP 142
                                               240 B=B+64
120 MOVE I,0 : DRAW I,1024: NEXT
                                              250 UNTIL 0
                                                                                               0
130 FOR I=0 TO 1024 STEP 113
```

	Listing 6. Miranda Williams' Wordwise pager		
	10 REM Wordwise Pager	190 IF Z=13 THEN lines=lines+1	
_			
	70 DEM by Misself With Wordwise	200 IF Z=13 AND lines<>25 THEN VDU10,13 ELSE IF Z>31 VDU Z	
0	40 REM (c) Acorn User March 1985		
	50 MODE 7	220 lines=0	
0	60 oscli=&FFF7	230 PROCOSCLI ("SAVE PAGE"+STR\$nopages+	
	70 DIM command 30	" 7000 +400")	
0	80 CLOSE #0	240 UNTIL EDF#ch	
_	90 INPUT ''"Type in the filename. "F\$	250 CLS	
	100 ch=OPENUP F\$	260 CLOSE #0	
-	110 IF ch=0 THEN PRINT CHR\$(133); "File	270 PRINT''CHR\$131"JDB DONE"''" ";	
0	":F\$" does not exist!":CLOSE #ch:STOP	280 END	
	120 lines=0:nopages=0	290 :	
-	130 CLS	300 DEF PROCOSCLI(\$command)	
	140 REPEAT	310 X%=command MOD 256	
	150 nopages=nopages+1	320 Y%=command DIV 256	
	160 CLS	330 CALL oscli	
	170 REPEAT	340 ENDPROC	
	180 Z=BGET#ch		

108

0

0

6

@

0

0

0

-

6

0

8

6

6

0

6

0

0

0

0

```
0
    Listing 1. Paul Beverley's program to set up a voltmeter using the ADC
.
0
     10REM Voltmeter program
                                                    270IF ADVAL1>65500 SOUND 1,-15,200,20
     15REM by Paul Beverley
                                                    280=total%/samples%
.
     20REM For BBC and Electron/Plus-1
                                                    290:
     25REM (c) Acorn User - May 1985
                                                    300DEF PROCinitialise
0
     30:
                                                    310*FX16,1
6
     40scalefactor=1570.8:REM if you already
                                                    320*FX225,128
   know it.
                                                    330PRINT"Put probes across known pd"
@
     50MODE 7
                                                    340PRINT"and enter the value of the volt
     60PROCinitialise
0
     70REPEAT
                                                    350PRINT"or press return to continue"'
     BOV=FNreadADC/scalefactor
                                                    360INPUT: Vref
90PRINT TAB(14,10) CHR$(141);V;" "
                                                    370samples%=64
    100PRINT TAB(14,11) CHR$(141);V;" "
0
                                                    380IF Vref>0 scalefactor=FNreadADC/Vref
    110IF M%=77 PRINT TAB(W%,22);V;" ":W%=W%
                                                    390samples%=16
0
                                                    400CLS
    120W%=W% MOD 40
                                                    410VDU23;8202;0;0;0;
6
                                                    420PRINT TAB(15,8)"VOLTS"
430PRINT TAB(1,20)"MEM 1","MEM 2","MEM 3
    130M%=INKEY(0)
    140IF M%>127 PROCchange
0
    150UNTIL M%=13
                                                  ", "MEM 4"
    160MDDE7
0
                                                    440PRINT TAB (5,16) "PRESS 'M' TO STORE RE
    170@%=10
                                                 ADING"
0
    180*FX225,1
                                                    4500%=$2020A
    190END
                                                    460W%=1
200:
                                                    470ENDPROC
    210DEF FNreadADC
                                                    480:
0
    220total%=0
                                                   490DEF PROCchange
    230FOR N%=1 TO samples%
                                                   500IF M%=128 samples%=samples%*2
6
    240REPEAT UNTIL ADVALODIV256=1
                                                   510IF M%=129 samples%=samples%/2
    250total%=total%+ADVAL1
.
                                                   520IF samples%=2 samples%=4
    260NEXT
                                                   530ENDPROC
0
0
-
```

```
REM ZYLEK DLP EYJK DATXE EZI JMTAK
 10
 20
   REM LTE YL DLR TMPIM
 30 REM KTHIEZYLB LTE BXDMDLEIIP ZIMI
 40
    REM DFTML STL TN FTXMKI
 50
     REM KRHJZTLYF ZDMHTLR
    REM PDLYKZ JMYLFI SYEZ D HYFMT HDRAI
 70
     REM ZIV STMPK BYQI PIFYHDO DLKSIM
     REM EZIR DMI LTE DOO MIP
 90
     REM KEMYJ TNN EZI DHJIMKDLP DLP EMIDE
     SZDE RTX DMI OINE SYEZ DK D PIFYHDO
100
   REM EZYK JXUUOI KIEEIM PTIK LTE OYGI
     YLGIR AIYLB KT LIBDEYQI D NTMFI
```

0

.

6

-

-

.

.

0

0

0

0

6

-

-

8

.

-

.

.

.

-

0

-

0

.

-

.

.

.

-

.

```
10 REM HOW TO GET THE ANSWER
20 TOTAL - 0
30 LET TOTAL - TOTAL; ANNE
40 LET TOTAL - TOTAL; GOALS
50 LET TOTAL - TOTAL; PRIMEANSWER = XSUMANSWER
60 LET TOTAL - TOTAL = DANISHPROBLEM
70 LET TOTAL - TOTAL: (INKEY?MORSE)
80 LET TOTAL - TOTAL = HEXWORDSUM
90 LET TOTAL - TOTAL; FORMAT = UNSCRAMBLEDRATE
100 LET TOTAL - TOTAL; MUSICANSWER
110 LET TOTAL - TOTAL = YEARCHARLESBABBAGEDIED
120 PRINTTOTAL: REM BEST PRINT ON A POSTCARD
130 REM CLAIM PRIZE!
```

4

0 0

.

0

.

.

0

@

0

6

0

4

0

0

.

0

-

-

0

0

0

0

0

0 0 0

## TOP OF THE LIST

GRAHAM JONES from Blackburn was spurred into supplying this month's Top of the List after seeing a program in Beeb Forum, and it earns him £25. Graham's program is a sound compiler – a program that converts a series of sound commands into a machine code usable form. The sound sequences are provided by a Basic program, caught as they are produced by the micro and stored within memory. You certainly do not need to be a machine code programmer to use the program, in fact if you have never dabbled at machine code before this would be a very good time to start. Just enter the listing as you see it and run it!

For the more technically minded reader the program works by intercepting the OSWORD vector and passing all OSWORD based calls into the machine code routine called 'neword'. Sound is produced using an OSWORD call with the accumulator containing the number 7. When an OSWORD call is issued by the MOS it is directed to the machine code here which then tests to see if the accumulator does contain 7. If it does then the command is a SOUND command – if it is not, then the call is handed back to the micro's normal OSWORD

handling routine. If the call is a sound-producing one, then the eight byte parameter block used by the OSWORD call is stored in the eight bytes of memory pointed to by 'block%'. This storage of sound data continues until either the storage memory is filled or the

sound generating program ends.

Using the sound compiler is extremely easy, as the listing shows. Lines 100 to 750 should be included in your own program. All you need do is to add the line:

PROCassemble

0

- at the start of your program and the line:
  - CALL intercept
- before any sound commands are issued. The sound command should be terminated by the line:
  - CALL restore.

0

 When the sound program is RUN the compiler will store the commands at &3000. This location can be changed to suit your needs by adjusting the value assigned to 'block%' in line 130. This is the memory used by the high resolution screen modes, so changing mode after compiling your sound is not advised!

To play back the routine from Basic, the integer variables X% and Y% point to the start address of the sound data, as specified by block%. This is best done using:

X% = block% MOD 256 Y% = block% DIV 256

The sound can then be played with the command:

CALL sound

Playing back the sound from within assembler is executed in a similar vein. The index registers should point to the start of the sound data, which is played with the command:

JSR sound

Once the sound has been compiled it can, of course, be saved as a block of memory. To do this you need to know its start and end address. The start address is found by knowing the values assigned to block% as defined in line 130. The end address is found by typing:

PRINT ~(!&82 AND &FFFF) + 2

If the start and end addresses were &3000 and &3200 respectively, the save command would be:

\*SAVE SDATA 3000 3200

Using this method, libraries of sound data could be compiled. For the real machine code buffs, the sound compiler coding could be saved with the sound data itself, which is fully relocatable as it is just data. Obviously the routine will not compile delay loops. If they are required they can be inserted by using a 'blank note', with a duration from 0 to 255. For example the command:

SOUND 1,0,0,0

would produce a small pause between two sounds on channel 1.

## TOPOFTIHE UST

110

```
10 REM Sound Compiler
 20 REM By Graham M Jones
 30 REM For BBC & Electron
 40 REM (c) Acorn User May 1985
 60 PROCassemble
 70 PROCdemo
 BO END
 90 :
100 DEF PROCassemble
110 :
120 DIM code% 160
130 block%=&3000
140 OSWORD=%FFF1
150 FOR pass%=0 TO 3 STEP 3
160 P%=code%
170 COPT pass%
180 :
190 .intercept
200 LDA &20C:STA &80
210 LDA &20D:STA &81
220 LDA #(newword MOD 256):STA &200
230 LDA #(newword DIV 256):STA &20D
240 LDA #(block% MOD 256):STA &82
250 LDA #(block% DIV 256):STA &83
260 RTS
270 :
280 .newword
290 CMP #7: BNE osword
300 PHA: TYA: PHA
310 STX &84:STY &85
320 LDY #0
330 .copypar
340 LDA (&84),Y
350 STA (&82),Y
360 INY
370 CPY #8
380 BNE copypar
390 LDA &82:CLC:ADC #8:STA &82
400 BNE exit
410 INC &83
420 LDA &83:CMP #&80:BEQ stop
430 .exit
440 PLA: TAY: PLA
450 .osword
460 JMP (&80)
470 :
480 .stop
490 PLA: TAY: PLA
```

```
500 :
510 .restore
                                    0
520 PHA: TYA: PHA
                                    0
530 LDA &BO:STA &20C
540 LDA &81:STA &20D
                                    .
550 LDY #1:LDA #&F0:STA (&82),Y
560 PLA: TAY: PLA
                                    .
570 RTS
580 :
                                    6
570 .sound
                                    .
600 STX &70:STY &71
610 .makesound
620 LDA #7:LDX &70:LDY &71
630 JSR OSWORD
                                    .
640 LDA &70:CLC:ADC #8:STA &70
650 BNE checkend
                                    6
660 INC &71
670 .checkend
680 LDY #1:LDA (&70),Y:CMP #&F0
                                    6
690 BEQ end
700 LDA &71:CMP #&80:BNE makesound
710 .end
720 RTS
730 :
740 1
                                    .
750 NEXT pass%
                                    760 :
770 ENDPROC
                                    0
780 :
790 DEF PROCdemo
                                    0
800 :
810 CALL intercept
                                    0
820 FOR I%=0 TO 255 STEP 4
                                    0
830 SOUND 0,-4,1%,1
840 SOUND 1,-15,1%,1
                                    0
850 SOUND 2,-15,1%,1
860 SOUND 3,-15,255-1%,1
                                    .
870 NEXT 1%
880 CALL restore
                                    0
                                    0
900 X%=block% MOD 256
910 Y%=block% DIV 256
                                    0
920
930 PRINT'" Press any key ...."
                                    0
940 *FX 15,1
950 G%=GET
960 :
970 CALL sound
                                    0
980 :
                                    .
990 ENDPROC
```

0

0

0

0


0

0

.

.



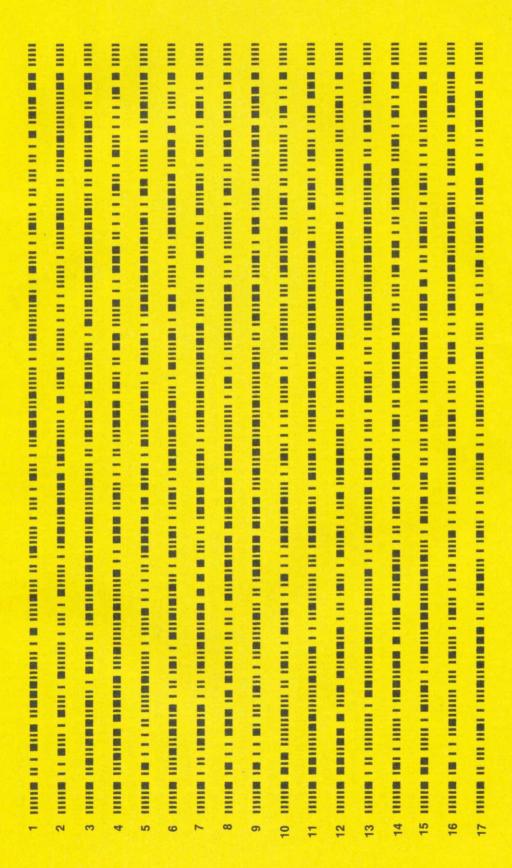





BAR CODES will revolutionise the way we use computers in applications as well as the way we load data. Here is the chance to get experience of this important development by ordering the Addison Wesley/MEP Bar Code Teaching Pack (see our January issue, page 129) direct through *Acorn User*.

These bar code readers are being offered to schools first and versions will not be available to the public in the shops until later in the year – when they will certainly cost more. However, because of its active involvement in the scheme *Acorn User* is able to offer the Teaching Packs direct to readers at the introductory price of £49.95 plus £2.95 post and packing (plus VAT).

Acorn User will be printing some listings in bar code format in each issue and making booklets of bar codes available by mail order.

Book publishers are already printing listings in bar code format, in fact Bruce Smith's latest book *The BBC Micro Machine Code Portfolio* has 13 pages of bar code listings.

So, to stay ahead of the latest development in computers and education, send off for a pack from Acorn User today. See page 105 for offer of magazine listings in bar code format.

The pack includes:

- ★bar code reader
- ★explanatory booklet written by Acorn User author George Hill
- \*software to print bar codes
- ★music program by Joe Telford
- \*bar code stencil

\*disc or cassette of utility software

Note to disc users: the disc supplied is 40 track – however, if you order the cassette, there are instructions on how to transfer the software to 40 or 80 track discs.

Please state disc or cassette version.

All for £60.84 including VAT and £2.95 postage, (£52.90 excluding VAT). Make your cheque payable to Redwood Publishing, fill in the form below and send it to Bar Code Offer, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

Please send me
Name
Address
□ I enclose a cheque/PO payable to Redwood Publishing for £
Signed
Date
Send this form with your remittance to Bar Code Offer, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

## Readers' tips, edited by Bruce Smith, this month concentrate on how to get the best

from your colour graphics

210

#### The vanishing

#### cursor

PETER SANDFORD'S two excellent articles on dot and colour filling have caught the imagination of many of you, to judge by your letters and phone calls. C M Ferrington of South Queensferry has supplied a couple of cursor move routines for use with COLFILL (see AU January). Mr Ferrington writes: The normal way of plotting and erasing (ie, with GCOL 3) is fine if solid colours are involved, and a cursor so plotted will be visible even though its colour will change depending on the colour it overlays. With colour mixtures, however, the cursor sometimes becomes almost invisible.

It was with this in mind that I wrote the two routines PROC\_Cursor and PROC\_Wipe (listings 1 and 2). The procedures require the following in the main program:

- (1) a block of 16 bytes DIM B% 15
- (2) an integer array of 16 elements
  DIM K% (15)
- (3) characters 240 and 241 to be redefined:

VDU23,240,32,32,248,32,32,0,0,0 VDU23,241,248,248,248,248,248,0,0,0


PROC\_Cursor(X%,Y%) works by placing the screen memory associated with the point X%,Y% in B%(0-15), then replacing that part of the screen with a cursor on its own background. It also fills K% with the addresses of screen memory so replaced.

PROC\_Wipe simply replaces the screen memory at X%,Y%, effectively removing the cursor which can then be replotted elsewhere by PROC\_Cursor. It is important that the cursor is not 'plotted' outside the screen area, but I have left it up to the calling program to check that this will not happen.

Line 5110 is the cursor output statement:

VDU5 Write characters at graphics cursor VDU18,0,0 Set colour for 'background' of cursor VDU25,4,X%;Y%; Move graphics cursor to X%,Y% VDU241 Output 'background' VDU18,0,2 Set cursor colour VDU8 Backspace VDU240 Output cursor VDU4 Restore text cursor

The adjustment of -8 and +8 to X% and Y% at line 5030 is needed to ensure that the centre of the cursor is at the graphics position.



Dotfill's 24 patterns – this routine and Colfill have fired your imaginations



#### Save our


#### updates

ALEC WHITFIELD from Maidenhead has suggested a couple of enhancements to the automatic disc file update presented by Dr Borcherd in the January Forum. Alec writes:

In listing 3 the first (line 10) is to rearrange the order a little. By putting the SAVE command at the end, the version number is incremented before the program is saved. This way, the program does not have to be run twice before the auto-update is effected.

Second (line 20), it is not too difficult to add an auto-update LOAD on another function key.

Mozart = 4; Schubert = 8.5; Brahms = 4; Beethoven = ?



#### Escape from the

#### Mouse trap

THE AMX Mouse seems to have broken the peripheral barrier with many of you, and become a firm favourite. Gerald Fitton of Swindon, for one, has come up with an interesting way to design his own backgrounds using the icon design program. Gerald explains the technique:

\*RUN the AMX Art program. Pull down the Options menu and select \*COMMAND. Now \*SAVE ICONSO 4800 + 400. This will save all the icons used by the Art program. Leave the Art program and run the icon Design program. Load your ICONSO in the usual way.

You will find the 32 background textures are in the last eight icons (four textures, one in each quadrant of each icon). Modify these as you please (but don't change the upper left quadrant of icon 31 or you won't have an eraser) and then save them using the *Design* program in the usual way as, say, ICONS1. You will find that each texture is in fact an 8×8 grid of pixels. This gives plenty of scope for variety.

Now press CTRL and Break and do the following:

- \*LOAD ART
- \*LOAD ICONS1 4800
- \*SAVE ART1 1900 + 3400 1903



You're not tied to backgrounds like these with Gerald Fitton's technique

Beeb Forum listings 1 to 6 are on yellow pages 106–107

You can now \*RUN ART1 and it will contain your new 32 background textures, which will be displayed and can be used as the bricks, etc, were before.

If you are an advanced user who wants an alternative text style, I suggest you \*SAVE a block of &400 bytes between &4400 and &4800 in the same way and have a look at it!

#### Beating

#### the clock

IF YOU write machine code for its running speed, you'll obviously be interested in getting some timing results – perhaps of certain subroutines to see where sections of code are not particularly efficient. Neil McFadyen of Birmingham provides just such a timing routine (listing 4) to seek out these stragglers. Neil says...

The program utilises the user VIA with timer 1 running continuously. An interrupt is generated when the timer reaches zero and the service routine increments a single-byte counter at location &80. This means that up to 2<sup>24</sup> cycles can be timed (approximately 17 seconds at the VIA clock rate).

A maximum precision of two cycles is possible as the VIA runs at half the speed of the CPU. Accuracy is lost when timing long routines as the 6502 performs other tasks for the MOS; however, this does not reduce the usefulness of the program.

The code in this version assembles to &A00 and the program should be loaded with PAGE = &6600 in mode 7. On assembly, two addresses are given, one for the routine which starts the count and the other to stop it.

The source code to be tested should be loaded at \*&E00. It's also helpful to insert the following line at the beginning:

timeron = &A00: timeroff = &A65

Now, to use the timer, insert the following lines in the source code at the required points:

JSR timeron JSR timeroff

Ensure that both these commands are actually processed, otherwise the computer will lock-up.

Run the program and on completion, press f0 for the result.

The variable fact2% was intended to account for the number of cycles added by the program and OS interrupt handlers, but the accuracy after 65000 cycles is not high enough to make the effort estimating it worthwhile.

#### 25

#### The key to even more colours

CHIGWELL in Essex evidently has some colourful characters: one of them, D Litvin, has found a way of producing 256 colours in mode 2. Mr Litvin explains: It should be possible to mix two colours on the screen, in order to produce a number of new ones. Memory location &359 holds the current graphics foreground colour. If you type in the following:

MODE 2 ?&359 = &12 DRAW 1000,1000

a line of blue and red dots is plotted. This is because location &359 can store two colours instead of one (it is treated like a byte from mode 2 screen memory). Figure 1 shows how the two colours are stored in &359. So to use cyan and magenta you must type:

?&359 = &39

B Gabel's article in the November issue has a table showing the number applying to each set of colours. Using this, it should now be quite easy to shade a region with a set of colours, thus making a new colour. This is demonstrated in the program listing 5, which displays some of the possible colours available. For a new set, press any key.

It is possible to change the mode and the program will still work. Even in a two-colour mode, there are a large variety of shades available.

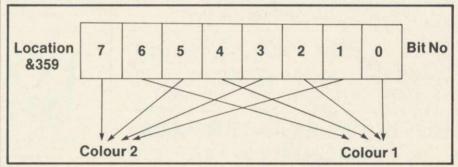


Figure 1. How two colours are stored in &359

#### Novel Wordwise line-up

A USEFUL program that allows you to type in pages of text in *Wordwise*, and then access them as separate mode 7

In the computer football league, all played all once. No match produced the same score as another.

				Goals	
	W	D	L	F	A
Acorn	2	0	1	5	1
Sinclair	2	0	1	3	5
Commodore	1	0	2	5	6
Atari	1	0	2	4	5

How many goals were scored when Acorn played Atari?

pages has been sent in by Miranda Williams of London (listing 6). Colour and double height characters can be added using a suitable Teletext editor.

To use the program:

1) Type in the *Wordwise* text as normal. 2) Set the left margin to LM2 to provide space for the teletext control characters.

3) Set the line length to LL36.

4) Insert any other formatting commands, such as JO for justification and BP to force a new page. For fully formatted text use EP, PL25, PP, DH and DF as you wish.

5) Spool the text using option 8.

6) Load and run the program, supplying the necessary filename.

The file is split into 25-line blocks which are \*SAVEd as PAGE1 to PAGEn, with each page being one mode 7 screen. These pages can be loaded in and edited as required. Basic II users can omit the PROC from line 230 and use OSCLI direct. Lines 300 to 340 can also be omitted.

Beeb Forum is a platform for ideas, tips and applications relating to the BBC micro and the Electron, intended for experienced programmers to share their thoughts. For every reader's tip published we pay £5 – or more for something special. Contributions should be typed or printed, with substantial listings on cassette. WRITE TO Beeb Forum, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

## Electronequip

(Authorised Torch Dealer and Full Unix Advisory Centre)

ACORN DISC UPGRADE
Now in stock £115.00 inc VAT

#### **Starter Packs:**



#### **BBC Starter Pack**

ANBOI/ANBSP £399.00 inc VAT

#### **Disc Starter Pack**

ANBS 001 £499.00 inc VAT (BBC 'B' + DFS + Microdrive + 3 games)

#### **BUSINESS STARTER PACK**

ANBS 002 £899.00 + VAT

BBC 'B' + DFS + Disc Drive, Monochrome Monitor, Dot Matrix Printer, Word Processing, Spreadsheet and Database

#### **Electron Starter Pack**


ALAOI/ALASP £229.00 inc VAT

#### **Networking Torchnet/Econet**

Advanced connection techniques used on our networks considerably reduce joint resistance ensuring lower end to end resistance than by any other method.


All our BBC's and Torches are networked together. Are yours:

If not phone 0329 230671.

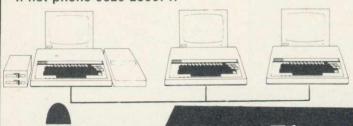

#### NORDMENDE

14" TV/Monitor £199.00 + VAT



Remote version £219.00 + VAT Offer includes RGB/BBC cable.

Buy this superb TV/Monitor from the original distributors (since Sept '82)

#### TAXAN/KAGA KP810

£260.00 + VAT



51.7

Printer price includes paper and BBC interface cable. Screen dump rom available for £11.50

#### TORCH Disc Pack Mar SPECIAL OFFER RB

Only £659.00 + VAT

(Free fitting available if required).

3" Micro Disc £59.95 (inc. VAT)

Disc Interface & Drive £174.95 inc. VAT)

Micro Disc Drive for the BBC Micro



The Micro disc drive offers a method of low cost quick access to programs. The drive is essentially a small version of a  $5\frac{1}{4}$ " disc drive and offers similar features to the larger drive. The data is stored on a 3" disc, this is enclosed in a protective hard plastic cassette which features a write protect switch. The micro drive requires the standard Acorn disc interface, but a new disc filling system rom. Acorn DFS may be exchanged for the micro DFS for £2.30. The new micro disc filling system can read and write to Acorn DFS discs.

Thus if a 5¼ inch and a micro floppy were connected on the same cable files could be transferred between them.

Capacity: 80.64 K bytes Transfer Rate: 125k bit/s.

#### **BRANCHES**

MAIL ORDER: 36-38 WEST STREET FAREHAM, HANTS. (0329) 230670 SHOP/TECHNICAL: 59 WEST STREET FAREHAM, HANTS. (0329) 230671

KINGS LYNN: 17 TENNYSON AVE. (0553) 3782

Electronequip

TORCH

59 West Street, Fareham, Hants (0329) 230671

## Electronequip

(Authorised BBC Micro Dealer, and Econet service centre)

ALL ITEMS THIS PAGE - MAIL ORDER OFFICE ONLY

#### SOFTWARESALE

most ACORNSOFT £2.99 inc VAT most OTHERS £1.99 inc VAT

#### BBC SPARES/ROMS

	Phone comprehe catalog
\$/ULA's etc. 4.92 120 4.23 60	OTHERS Keyboard Keyboard swt Cass Relay
	UPGRADES Acorn DFS Econet Speech Memory 16-32K Analogue input Printer port Serial

arconi **B2** 

DEWISE

MCKER BALL

1.74 + VAT

Acorn DFS 100.00
Econet 60.00
Speech 47.80
Memory 16-32K 23.00
Analogue input 14.00
Printer port 15.00
Serial 13.00
OTHERS
Keyboard 52.38
Keyboard swt 2.60
Cass Relay 2.20
BBC Power Supply 52.92

Phone for
comprehensive
catalogue

ROMS	
1.2 MOS Rom	. 6.00
BASIC II Rom	26.00
Caretaker	28.00
Communicator	59.00
Termi rom	28.00
Disc Doctor	28.00
DNFS Rom	17.91
Exmon II	25.22
Graphics Rom	28.00
Gremlin Rom	28.00
Help Rom	21.74
Printmaster	28.00
Screen Dump Rom	13.00
Sleuth	25.22
Spellcheck II	26.96
Toolkit	23.45
View Rom	52.00
ViewSheet	52.00
Wordwise Plus	49.00
Wordwise Rom	39.00



£78.82 + VAT





lo soldering required

#### **MODEMS**

TELEMOD II . . £60.83 + VAT TELEMOD III £152.17 + VAT **NIGHTINGALE** 

£139.00 + VAT


#### **VOLTMACE JOYSTICKS** \*10% off list prices



	Discounted price inc VAT
BJVOLT 14	Voltmace Delta 14B Joysticks
BJVOLTAD	Voltmace 14B/1 Adaptor Box
BJVOLT3T	Voltmace Delta 3B Twin Joysticks 17.99

#### \*EPSON

RX-80FT £212.00 + VAT FX-80 £315.00 + VAT



Printer Pack includes paper & BBC cable £7.00 + VAT Screen dump rom available for £10.00 + VAT

#### JUKI 6100


£325.00 + VAT Sheet feeder £189.00 + VAT








**PENMAN PLOTTER** only £217.00 + VAT





DISC BUXES	)
30 Disc Box	6.00
40 Disc Box	12.00
45 Disc Box	16.48
90 Disc Boy	22.00

#### MUSIC 500

Acorns music synthesiser only £173.04 + VAT

DUST	COVERS
RX80	F/T
FX80	

RX80 F/T	.4.65
FX80	4.60
KP810	4.00
BBC Micro	
Microvitec	5.30
PW 1080A	.4.00

#### LISTING PAPER

11 × 9.5" with micro perferations. £6.52 per 1000

Postage 40p Securicor 4.26 (per parcel) Please add 15% VAT to all prices & carriage

Prices subject to variation without prior notification

All Offers subject to availability TRADE, EDUCATIONAL & HMG ORDERS (Phone for discounts)

Large Stocks - 24 Hour Despatch

MAIL ORDER ENQUIRIES TO BELOW OFFICE



Electronequip

11.95

36-38 West Street, Fareham, Hants (0329) 230670



BJVOLT3S Voltmace Delta 3B Single Joystick

## BETASOFT presents:

#### **BATTLE OF BRITAIN**


for BBC Model B
- any operating system

#### Features Include:

- Mode 2 full colour graphics
- Realistic sound effects
- 3D visual effects
- Choice of skill levels
- Authentic settings and aircraft
- Full briefing
- Total mission score/high score
- Tips to improve your game
- Fuel; Oxygen; Ammunition
- Pilot's log (disc version)

#### **SEA WARFARE GAMES**

for BBC and Electron

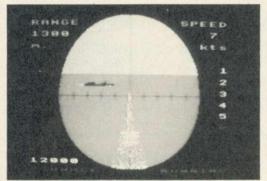


#### **BLOCKADE**

Realistic submarine warfare game. Use your torpedoes to prevent the enemy ships reaching port with their valuable cargo. Have you the skill and judgement to sink them all and maintain the Blockade?

#### SUBHUNT

Aboard a destroyer in the Atlantic, protecting our convoys from the U-boats. Seek the enemy with your ASDIC, then destroy him with your depth charges – before he gets you!

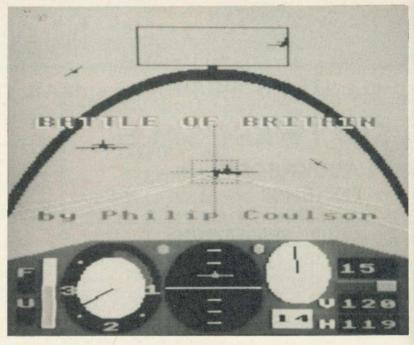

#### Now you can fly with the Few!

Scramble your Spitfire and climb through the clouds to intercept the enemy raiders. Ground Control will guide you, but accurate flying is a must, and will score you extra points.

"Tally-ho!" The sky is suddenly full of planes. You get a Heinkel 111 in your sights and have to use all your skill to hold him there as he jinks and weaves to avoid the devastating fire power of your eight Browning machine guns. Your aim is good, and he explodes in flames, strewing wreckage in your path.

Watch out! Your mirror tells you there's an Me109 on your tail. You see the flashes and hear the chatter of his guns. You dive steeply away, and manage to shake him off. A Hurricane fills your sights and you almost open fire on him. That could have cost you a lot of points! Planes zoom towards you and climb and dive around you as you seek out your next target. A slow-moving Stuka falls easy prey to your guns and with your low ammo warning light flashing, you carefully aim your last few rounds at a fleeing Junkers 88.

You throttle back to conserve your dwindling fuel supply and set a course for home. From time to time, clouds blot out your view of the horizon and you are dependent on your instruments. With the airfield in sight you lower your flaps and gear and side-slip gently to line up with the runway. Although you have survived another mission, you cannot afford to relax yet, and the quality of your landing can win or lose you points.

If all this sounds too much in one go, you can opt to concentrate on just one phase of the game – interception, combat, approaches and landings – or just enjoy some stomach-churning aerobatics!

\* 24 hour despatch

★ Full guarantee

\* Retail/Distributor enquiries welcome

#### SPECIAL OFFERS!

- A. Both Sea Warfare games for BBC – 2 tapes for only £9.95.
- B. All three games on one disc for BBC only £22.50
- C. Both Sea Warfare games on 1 tape for Electron – £8.95

Unbeatable value from BETASOFT

#### ORDER FORM: Please print clearly and send to: BETASOFT, 5A St. Stephens Road, Cold Norton, Chelmsford, Essex CM3 6JE

Please		Tape				51	40 Tr.	80 Tr.		
send me:	Qty	Price	P&P	Total	Qty	Price	P&P	Total	Name and Address	
Battle of Britain	A GAS	£9.95	30p			£14.95	35p			
Blockade	1/11/	£6.95	30p		/	/				4-176
Subhunt	A DY	£5.95	30p		/					
Offer A		£9.95	40p							
Offer B						£22.50	35p			
Offer C	HIES	£8.95	30p						T. F.	
I enclose che	eque/PO for:	45,000	£		919 20		£	V		



After looking at ways of measuring electrical resistance, Paul Beverley now describes the construction of an analogue port input voltmeter

## HIGH VOLTAGE

F WE have a means of measuring voltage we can then go on to use the computer to calculate current, assuming that we can tell the computer the value of the resistance across which the voltage is being measured.

The voltages we want to be able to measure are going to be too large to be applied directly to the ADC input, which can only measure up to about 1.8 volts, so I have provided a circuit which cuts down the input voltage and also gives some degree of protection against excessively large voltages.

#### Voltage probe hardware

The voltage probe (figure 1), which was designed by two colleagues, Nigel Eames and Geoff Osborne, will allow you to measure voltages up to 30 or 35 volts dc and 20 to 25 volts ac, depending on the exact reference voltage in your computer. The probe circuit consists of a potential divider formed from two pairs of resistors (R1 + R2) and (R3 + R4).

The transistor TR1 gives over-voltage protection to the ADC inputs, and the diode D1 both protects it against reverse voltages when measuring dc, and acts as a rectifier for ac measurements. Capacitor C1 reduces the amount of noise pick-up on the input line to the computer and also acts as the reservoir or smoothing capacitor for ac measurements.

The top half of the potential divider has been made up from two separate

Paul Beverley's program to run the Voltmeter is on yellow page 108 resistors for a number of reasons. First, by connecting the diode D1 at the junction of the two resistors we enable it to perform the dual functions of protection and rectification. The only disadvantage of doing this is that the input impedance of the probe is lowered when measuring ac. However, it is still considerably higher than most moving coil meters and more than adequate for most purposes.

Secondly, from a purely practical point of view, it is easier to obtain high stability components with lower resistance values, and it is the long-term stability of these components rather than their actual tolerance which is the important factor. Thirdly, the very fact of having two components on the circuit board instead of one is a safeguard in itself. In the event of one of the components becoming short-circuited, either by component failure or by a wiring error, the ADC input is still protected by the other resistor together with the protection network.

Remember that you could be connecting anything up to about 30 or 40 volts across this circuit and protection for the computer must be maintained at the highest level. For this reason it would be best to mount the circuit board inside an insulated box so that there is no possibility of a high voltage point on the circuit under test touching the sensitive ADC input. The prototype was made on a piece of printed circuit board and mounted in an old toothbrush box. There is no reason, though, why you shouldn't mount the components on stripboard (such as Veroboard) and put the board in an ordinary plastic box, using flying leads both for

the 15-way plug and for the connections to the circuit under test.

The lower half of the potential divider is formed by the resistors R3 and R4 in series. The base-emitter junction of TR1 is placed across R4 and the collector-emitter connections across both R3 and R4. When the probe is applied to an unknown voltage, a very small current – only about 3 microamps at maximum – flows through the whole of the resistor chain. As this current passes through R3 and R4, a voltage is produced which is proportional to the voltage at the probe tip. This is the voltage which is applied to the ADC input.


The transistor TR1 is normally switched off (ie, has a high resistance between collector and emitter) and does not affect this voltage. However, if the voltage applied to the probe becomes too high, the voltage developed across R4 will be sufficient to start current flowing in the base-emitter junction. This tends to turn the transistor on and decreases the collectoremitter resistance. The circuit is designed so that the transistor does not start to switch on until the input voltage gets above the measurable range, otherwise this would affect the linearity of the measurement. However, the design is such that even if the input voltage rises to as much as 100 volts, the voltage applied to the ADC input never rises above 3 volts. And even this is still somewhat less than the absolute maximum that you can safely apply to the input (5 volts).

When measuring dc, the diode D1 is normally reverse biased and does not affect the operation of the circuit. However, if the connections to the probe are

#### SYSTEMS

View	£58
ViewSheet	£57
WordWise	£32
WordWise Plus	£49
StarBase	£69
Gemini Data	£115
PrintMaster	£29

BBC&DDFS £379 £349 BBCB £399 BBC BD



£69 Termi **Disk Doctor** £29

Pace Modem including software £135

Communicator £23

BBC includes (5) games FREE

#### Sanyo 555 Q 256k Ram £999

IBM compatible 2 x 360 Drives Price includes:

Wordstar Mailmerge Info-Star

Calc-Star

Basic+DOS Mono monitor




#### PRINTERS

Brother HR 15	£389
Juki 6100	£379
Juki 2200	£249
Epson RX80 FT	£269
Epson FX80	£379
Cannon 80 COL	£299
Cannon 156 COL	£399



#### DISKETTES in packs of 10



SS40tk.....£ 19.90 DS 40tk ..... £ 20.00 DS 80tk......£ 26.00

HIGHEST QUALITY YOU CAN BUY

## NOW FOR A REAL BARGAIN

Prices include VAT

#### **UDM DRIVES**

200K-400K-800K plus new 31/2" range



100K single unit £79 200K dual unit £150 200K single unit £125 400K dual unit £205

400K single unit £160 800K dual unit £259 All 80TK drives are switchable 40/ PS unit .....+£20

UDM DDFS £95 £79 \* with Disk Drive

Rom Expansion including FREE software

£55.00

#### MICOVITEC MONITORS

£189 Medium resolution High resolution £249 Extra High resolution £399 AP=+£25

Sanyo/BMC 12"HC £110 Philips 12" Hi.Res..... £95





Disk storage boxes £15.00 | takes 35 | Disk storage boxes £20.00 | takes 80 |

BBC Stands **Dust covers** Itor 880 **Drives** and



637, Holloway Road, London N19 5SS

ON 67, Westow Street, Upper Norward 01-771 6373

MIDLANDS 14, Charles Street, Hanley, Stoke-on-Trent [0782] 269 883

Name

Address

Signed

#### Prices include VAT

+£10 for delivery, £2.50 software and diskettes Product Price Total

ORDER FORM

CREDIT CARD No.... TOTAL SUM ENCLOSED

All products are brand new and are offered with full manufactures warranty

reversed, the diode becomes forward biased, conducts and therefore prevents the ADC inputs from becoming more than a fraction of a volt negative. When making ac measurements, the diode conducts on the negative half cycles and thus only allows the capacitor C1 to become positively charged.

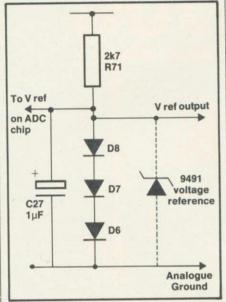


Figure 2. ADC voltage reference circuit showing extra voltage reference diode

#### Calibration

While the accuracy obtainable with this simple circuit when measuring ac is not as good as from electronic meters, it is perfectly acceptable if care is taken when calibrating. The best accuracy on ac is obtained from a calibration point

of 10 volts, ie, about half scale. Under these conditions, the readings were at worst only about four per cent out at the ends of the scale (0-20 volts). When measuring dc, the results were much better. From a calibration point of 15 volts, the readings were within one per cent of those given by a commercial digital voltmeter.

Remember, though, that the voltage standard within the computer, against which we are measuring, is not a very accurate one - hence the need for calibration. You need to use high stability resisitors for the probe so that variations of the component values over a period of time are minimised. Even so, you will find there is a good deal of drift in the accuracy of the voltmeter as a whole. If you apply a constant voltage from a stabilised power supply to the probe input you will find that as the computer warms up, the measured voltage varies by something like five or six per cent. After an hour or so this should stabilise a little, assuming that the room temperature is not varying too much, and the variation should be less than about one per cent.

This is quite adequate for most purposes, but for the highest accuracy you could, in a school or college laboratory, use a Weston standard cell connected to one of the other ADC inputs and calibrate the probe relative to that. It is perfectly safe to apply one of these cells directly to the ADC. Because the voltage is only just over one volt, it will not damage the ADC input, nor will it harm the cell since the impedance of the ADC input is about 10 megohms.

Probe Component list R1 4.7M R<sub>2</sub> 470k 100k 470 nF Polyester or similar C. 100 volts working 0A202 D. TR, BC 182 ALL R's Metal film high stability low noise 0.5 w  $\pm$  5% Pin 5 TO ADC1 TR<sub>1</sub> TO Pin 8

Figure 1. Voltage probe hardware

If you want better accuracy, and do not have a Weston cell available, you will have to use some other voltage reference source. One possibility is the 9491 low current band gap reference diode which gives a reference voltage of 1.22 volts. Since this is less than the 1.8 volts of the internal reference, you can simply solder one of these reference diodes into the 15-way plug between pins 11 and 5 or 14 and 8. You could, in theory, mount it on the circuit board with the other components, but it is important for the correct operation of the ADC that you have the reference voltage as close to the chip as possible. Best of all, therefore, would be to go inside the computer and solder the reference diode directly across the three diodes (D6, D7 and D8) that form the voltage reference (see figure 2).

However, it is not a good idea to start doing anything inside your computer unless you are reasonably good at soldering and know how to read circuit diagrams, and you should realise that doing so would obviously void the warranty on the computer. If you are sure you know what you are doing, you should refer to figures 3 and 4 which should help you to work out exactly where to solder the diode. But it is difficult to give exact instructions as to how to do this because the component layout is different on the different issues of the printed circuit board. If you have a board layout which is different from those illustrated, you will have to sort out for yourself exactly where to solder the diode.

Having done some tests with a single 9491, I have discovered that by reducing the reference voltage I substantially increase the amount of noise generated by the ADC chip, which is bad enough as it is. It would be better, therefore, to use a higher voltage reference. You could for example, as I did, use two 9491s in series, but as this gives a voltage (2.44 volts) which is higher than the existing voltage reference you would need to disconnect the existing diodes.

You do not need to remove them altogether. It is quite sufficient to cut carefully through one of the diode leads with a pair of side cutters. The two 9491s could then be soldered inside the computer across the existing diodes in the same way (figures 3 and 4) as for a single diode. However, it is *not* a good idea to mount these diodes in the plug itself. If you did, removing the plug would leave the ADC chip with no voltage reference device and therefore +5 volts would be applied to its Vref input.

#### Voltmeter software

The program to run the voltmeter (listing: page 108) gives a display of the voltage and also allows you to record

on the screen up to four voltages in case you want to remember them for purposes of comparison. To put the most recent voltage value into one of the four memories, simply press the M key. To escape from the program, just press Return. If the voltage reaches the top of the range that the ADC input can measure, a sound is emitted to warn you that the input voltage is getting too big.

The program starts by asking for a calibration voltage. At this stage, if you press Return, it assumes the calibration factor in line 40 and carries on with the measurement. If, on the other hand, you do wish to change the calibration, you apply the probe to the calibration voltage, type in the value of the voltage, then press Return. If you wish to maintain this new calibration for future use, you stop the program by pressing the Return key again and then

#### PRINT scalefactor

You can then put this new value into line 40 and save the program again. If

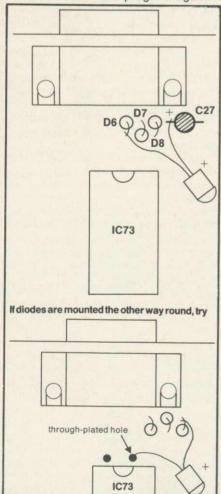


Figure 3. Fitting a 9491 voltage reference diode inside the computer on PCBs issue 2 and 3. (If two diodes are to be used in series, cut through the lead of diode D7)

you want to work to the highest possible accuracy, you should allow the computer to warm up for at least half an hour before you do this calibration.

If you want to be able to resolve small differences in voltage, you will need to use longer averaging times because of the noise inherent in the ADC chip. Function keys f0 and f1 are programmed to double and halve, respectively, the averaging times for the measurements. Statistical theory tells us that in order to halve the random variation you have to average four times as many readings.

The program consists, after initialisation, of a loop in which the voltage is measured and scaled (line 80), the value is printed out (90, 100) and if the M key is pressed, the most recent value is printed out in one of four positions at the bottom of the screen, and the position is incremented by 10 (line 110). If the position has reached 40, ie, off the edge of the screen, line 120 restores it to zero so that the next time M is pressed, the voltage will be recorded in the first position. Line 130 looks for another key having been pressed, and if it is a function key, the averaging time is changed (140), but if it is Return (150), the program is exited.

The reading of the ADVAL value is done with averaging (210-280). The number of samples is set by the value of samples%. At line 270, a sound is generated if the input voltage reaches the top of the measurable range. The initialisation procedure (300-470) allows the user to choose to calibrate the probe against an external voltage source and sets up the screen reading for the voltage display.

#### Modifications and applications

It is possible to measure higher voltages than 30 volts. If you put two more 4.7M resistors in series with R1 and R2. you could measure up to about 60 volts, but I don't think it's wise to use the computer to measure voltages much higher than that. You may disagree, but that is up to you to decide. If you wanted to use more than one range and have a range switch, you might think of using a push button on the probe to short out the extra resistors you had added. If the components are mounted in a separate plastic box, you could include a rotary switch to select any number of series resistors for different ranges.

If you have a second set of contacts on the switch, you could use a separate potential divider to feed a voltage back to the second ADC input so that the computer could sense the switch position. However, making this kind of modification increases the likelihood of accidentally damaging your computer, so I have not given any circuits.

If you use the higher voltage reference of the two 9491s with the component values given in figure 1, you will find that the range has increased up to about 40 volts. If you want to bring the range back down to more like 30 volts.

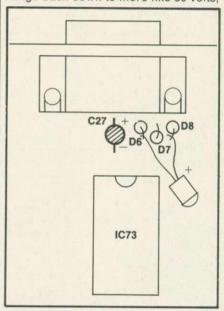


Figure 4. Fitting a 9491 voltage reference diode inside the computer on PCBs issue 4 and 7. (If two diodes are to be used in series, cut through the lead of diode D7)

change R3 to 680k. Also, at the top end, as the input voltage rises towards the 2.44 volts of the reference, the transistor will begin to switch on, thus reducing the linearity. To stop this happening, you should reduce R4 to 82k.

Once you can get the computer to measure voltage, there are all sorts of applications that you could try. For example, you could do some quite complex automatic testing of components and circuits by making up four probes, one for each of the ADC inputs. Or it would be very simple to test a circuit for resonance by generating a square wave out of PB7 on the user port, and using the probe to measure the voltage across the resonant circuit.

One last thing that is important to realise is that the voltage you are measuring is with respect to the zero volts line of the computer. Therefore, you must be very careful not to measure voltages on a circuit that has, like many older television sets, a 'live' chassis. Also, if you are going to be using more than one probe, you must always be measuring with respect to one particular point in the circuit under test usually the zero volts line of the power supply. If you do need to measure voltages with respect to different points. you will have to use two probes applied to the two points between which the voltage is to be measured, and get the computer to calculate the difference between the two voltages.

# Rock steady vision at a rock bottom price



The only thing that seems to stand still on some colour monitors is the price. But at Opus we've now made our RGB High Resolution colour monitor even more affordable — it's down to just £199.95, and the picture quality is as rock steady as ever. What's more we deliver within 48-hours and give you an unrivalled warranty plan to guarantee your peace of mind for the next two years. And if that's not enough our price includes carriage, VAT and connection leads.

Our JVC monitor (580×470 pixels) has received ample praise from the computer press. Acorn User said:

"... gave steadier pictures than the Microvitec Cub, and the colours were rather better."

Personal Computer News added:


"There is no doubt that the JVC range of ECM colour monitors is excellent value for money. . . there is no loss in quality of picture after long periods . . ."

The unit has a 14" screen and is suitable for use with the BBC Micro, Electron, Sinclair QL, Lynx, Oric, Apple, IBM, Amstrad and RML 480Z and most other leading micros.

Simply post the coupon below to: Opus Supplies Limited, or telephone us quoting your credit card number.

To: Opus Supplies Ltd, 55 Ormside Way, Holmethorpe Indu	ustrial Estate, Redhill, Surre
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAG	GE)
High Resolution colour monitor(	s) at £199.95 each (inc. VAT)
I enclose a cheque for £	or please debit my
credit card account with the amount My Access Barclaycard (pleas	etick) no. is:
My computer is	

Name	
Address	
Telephone	The state of the s
Opus.	55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.



#### Magic on the micro, a plaintive plea for help, an assembler label bug and a disc controller modification – Mike Barwise brings you them all

25

124

#### Find the lady

THIS month we open our proceedings with a short listing for 'Find the Lady', the invention of David Hambly of Essex, who bought his Atom recently for less than £20! He is a professional magician, a member of the International Brotherhood of Magicians and author of the ZX-81 based book *Computer Magic*.

I have polished Mr Hambly's program slightly (see listing below), but I think his listing is a pretty good effort as he tells me he has only had his Atom for six weeks. Nevertheless, I gather that the Atom is already in use in his professional magical work, and that he is converting his existing Spectrum material to run on the Atom – a demonstration of confidence in our machine if ever there was one!

#### Ignorance

#### isn't bliss

I RECEIVED the following plaintive letter from A Bolton of London...

Some months ago I bought an Atom

because (a) I wanted to learn 6502 machine code and (b) it was cheap. Or possibly vice versa. Having got the hang of it, I've become quite enamoured of the machine and I've run into a major hurdle: I don't really know anything about the thing.

The Atom manual mentions a Technical Manual, which I don't have. I don't know anything about the extension bus or the VIA connector. Inside, chips IC1, IC2, IC3, IC4, IC5 and IC50 are missing, together with another chip also apparently labelled IC2, which I suspect is the extension ROM.

I haven't the foggiest how to hang a printer on the thing, and it doesn't have an RS232 so it can't even talk to any of my other computers. Who can supply me with information? And are there any people/companies still supplying software/hardware for the Atom?...

The Technical Manual is mainly for those who bought their Atoms as kits long ago (1980). It does not tell you very much that you can't find elsewhere, except how to build the kit. The chips you need for the printer port are:

IC1 6522 IC50 74LS244

A 26-way right-angle connector should also be fitted in position PL5. A BBC micro printer cable will then connect the Atom to a Centronics interfaced printer, and CTRL-B and CTRL-C turn the print stream on and off.

To set up the extension bus, you will eed:

IC2 & IC3 81LS95 or 74LS465 IC4 8304 IC5 74LS30

IC4 is getting quite rare, so it would pay to find one soon if you are contemplating future expansion. Again, a connector would be needed for the expansion bus, but its type and fitting depend on the end use. There are also technical limitations and requirements for busfitted devices, which I will be discussing in future issues, so watch this space before diving in headlong.

The user VIA port addresses are given in *Theory and Practice*, page 169, but programming the 6522 is a study in itself. I recommend 6502 Assembly Language Subroutines by Leventhal and Saville (publ. Osborne/McGraw-Hill 1982) for the serious machine code enthusiast

Finally, Vector Marketing or Acorn itself should be able to put you in touch with people still handling the Atom.

#### Crystal connection

FURTHER to my recent comments on disc controllers for the Atom (*March issue*), I have investigated a bug in the system, reported by several users.

Some disc users have found that the Acorn FDC card with the on-board crystal oscillator (and the early or user-constructed CUBE FDC card) occasionally seems to lock up and fail to work on power-up. I have had this problem once or twice, and found that the only way out was power down and try again. I think I have now found the answer.

The problem seems to be due to an unstable crystal oscillator. When I put a 'scope on the oscillator during such a lock-up, I found it happily running at 8MHz instead of 4MHz – twice its expected speed. The theory behind this is quite complex, but suffice it to say that the 8271 cannot service a 5<sup>1</sup>/<sub>4</sub> inch disc at the double clock speed.

The crystal oscillator consists of a pair of inverters (7404 or 74LS04) con-

10 REM THREE CARD MONTE

20 REM by DAVID HAMBLY

30 REM ATOM FORUM MAY 1985

40 ;

100 @=1;P.\$12

110 P. "\*\*\*\*THREE CARD MONTE\*\*\*\*"

120 P. "\*\*\*\*BY- david hambly\*\*\*\*"

130 P. '''

140 A=ABSRND%3+1

150 F. X=1T05

160 P. " XXXX XXXX XXX

170 N.

180 P." >1( >2( )3(")

190 IN. "FIND THE LADY. 1,2 OR 3"Z

200 IFZ=A;G. 230

210 P. ' "wrong IT WAS "A" ( TRY AGAIN"'

220 G. 240

230 P. "well done" "HAVE ANOTHER GO"

240 F. X=0T0150; WAIT; N.

250 RUN

David Hambly's 'Find the Lady' listing

nected in series via a capacitor. Each inverter has a resistor connected across it, and the crystal is connected across the whole thing (figure 1). The resistor values have to be increased to 1000 ohms, and a small capacitor (22pF) added between each leg of the crystal and ground, to keep the oscillator stable at its proper frequency (figure 2). The capacitors are a standard modification to the later CUBE cards, but they alone still do not entirely eliminate the problem.

The capacitors should be fitted to the reverse of the board (the opposite side to the other components), and grounded to any convenient ground track. The green resist coating can be carefully scraped away to reveal a small area onto which they can be soldered. The capacitors should be of the tubular polystyrene type, and must *not* be tacked down with superglue: they will dissolve in it. Also, soldering time must be kept short, or they will overheat and melt.

Please note that you should not carry out this modification unless you have the lock-up problem and you are pretty familiar with soldering and PCB tracing. Unless you are fairly skilled you can damage the board while removing the old resistors, and if the FDC is working properly anyway, there is no point in fiddling with it.


#### **Assembler**

#### label bug

PLAYING recently with my Atom assembler, I was called upon to use a very large number of labels (about 200). For clarity, I decided to allocate a different array name to each major subroutine and dimension a dozen or so labels for each. This is in general good practice, as it is immediately apparent which section of the program a JSR, JMP or longish branch goes to.

While writing this mammoth program, I found a horrible bug which is not documented anywhere, as far as I know. While it is obvious to any assembler programmer that the Atom variables A, P, X, Y should be reserved to avoid confusion in fact the only variables it is essential to reserve are A and P. X and Y are discriminated syntactically from the X and Y registers of the 6502 during assembly. This makes sense when you realise that the assembler is only writing machine code, not running it.

P, of course, is modified as assembly proceeds, and the assembler cannot discriminate in, for example, ASL A whether you are requesting a shift of

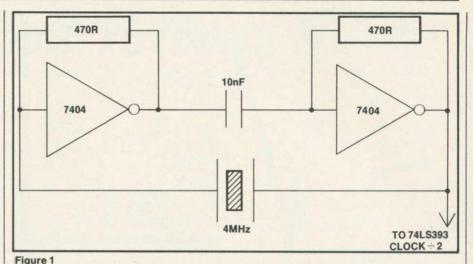

1Ko
1Ko
1Ko
1Ko
1Ko
1Ko
1Ko
1Ko
7404
7404
7404

ANY CLOSE GROUND POINT

Figure 2

the accumulator or of memory location A. X and Y as operands modify the selected OP code, and as variables hold values. They can therefore serve the dual purpose, although with loss of clarity.


However, to our bug ... Atomic Theory and Practice states that 'any of the array variables AA-ZZ may be used as labels in the assembler ...' (page 171 and elsewhere). Be warned! The Atom seems totally unable to accept the label AAx as the parameter for the JSR or JMP OPcodes with forward references. In any case, a label used for such a forward reference should be equated with P outside the assembler two-pass loop, but for some reason the label AAx is not assigned by this procedure.

The principle behind the error result when using any other array label is very simple. An unassigned assembler label may point to any address. If by chance it points to a zero page address,

the Atom throws it out if the OPcode is a JSR or JMP, as JSR or JMP to zero page are disallowed in Atom assembler. The presetting of the label to any arbitrary value which is not zero page prevents the error terminating the assembly.

I can see no obvious reason for the special case of AAx. Even a trace of the assembly process has not shown anything up. Any readers who have had this problem, or who would like to experiment and establish why it occurs, are invited to send in their findings. A good answer with documentary proof could win you some nasty little chocolate coins (or nearest equivalent).

A tip for those without the urge to investigate: if you have used AAx in this manner and you keep getting Assembler Error (156) at the relevant point, try changing the label name before despairing and assuming you can't type.

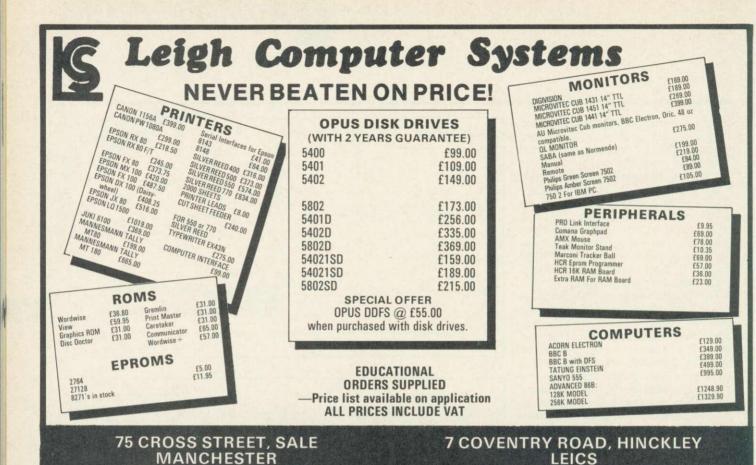

CONTEX BBC Computer Fast delivery Professional Software MK IV SPREADSHEET

Telephone: 061-905 2144

- Evaluate financial & statistical models over 1,000 cells in size
   Versatile and friendly
   Extensive disc overlays

- 9 digit accuracy
- Variable column widths and decimal
- places
  4-way scroll; heading stay on screen
  Programmable scripted input & printed
  output
  Word processing interface
  Save, restore and merge from disc or tape
  Full instruction manual

The quick brown fox jumped over the The quick brown fox jumped over the

Much, much more

MK IV SPREADSHEET on disc £14.99 inc MK III on cassette (a few less facilties) £9.99 inc

#### TYPING TUTOR

- Quickly learn to touch type

- Quickly learn to touch type
  Over 90 smoothly graded lessons
  Word scan line checking system
  Free format option
  Clock, audio key click, metronome
  Target WPM and percentage correct
  Revise target facilities
  May add own lessons for specialised
  training
- training

Disc £11.99 inc Cassette £9.99 inc

or time is 26 words per minute have made no errors CONTEX COMPUTING Tel: Cardington (02303) 347 15 Woodlands Close, Cople, Bedford MK44 3UE

Enc: £	Please supply SPREADSHEET/TYPING TUTO CASSETTE/DISC 40th/DISC 80th
Name	
Address	

A5

#### EMS PROGRAMMING PROBLEMS WITH METRIC OR SI UNITS?

Telephone: 0455 612139

PROBLEMS WITH METRIC OR SI UNITS?

The METRICATOR suite of programs for the BBC-B and ELECTRON may be your answer. Can convert ANY unit into ANY other compatible unit eg. KM/LITRE into MILES/GAL or BTU/HOUR/FT2 into JOULES/SEC/M2. "SI" may be specified and the correct SI equivalent automatically calculated. 15 UNIQUE routines designed for EASY insertion into YOUR program give instant access to many thousands of combinations of units. "Used at home and abroad in College, University and Industry; and by Accountants and Consulting Engineers. A popular and invaluable system. Includes FREE programs for immediate conversions and printing tables." versions and printing tables."

LEARNING NAVIGATION?

LEARNING NAVIGATION?

NAVREC helps you learn the lights of sea going vessels, the shapes of buoys, signal code flags, marks and morse code. Altogether eight programs giving full graphic illustrations including simulated views of ship's lights at night. Questions and answer tests included. This suite is great value for money and would please any nautical man. Or send for the details of many more programs including the developing "ENGPAC" for engineers.

MATHPAC – A suite of advanced routines including a very fast linear equation solver with unlimited size plotter.

WANTED! more utilities and educational/scientific/mathematical/engineering programs and routines. Write for terms. Machine compatible Pascal now accepted.

Prices (Inc. p&p.)

Prices (Inc p&p)
METRICATOR Tape version £6.95. 40 track disc ...... 

equations solver and plotter.



C.B.C.S. 161 DENTON ST **DENTON HOLME** CARLISLE

Tel: (0228) 25355

BBC Model BD	£425.00
BBC Model B	£360.00
Acorn Electron	£120.00
Electron +1 Interface	£51.00
Electron +3 Interface	£220.00
FX 80 Printer	£399.00
RX 80 FT Printer	£269.00
FX 100 Printer	£520.00
Juki Daisy wheel	£389.00
BBC Grafpad	£120.00
ATPL Sidewise ROM Board	£43.00
Cumana CSX 100	£105.00
Cumana CSX 200	£139.00
Cumana CSX 400	£165.00
Cumana CS 400	£179.00
6502 2nd Processor	£189.00
Z80 2nd Processor	£345.00
Prestel Adaptor	£112.00

Send stamped addressed envelope for full price list. To order any of the above items send cheque to cover full amount + £2.20 p&p.

ALL PRICES INCLUDE VAT

#### Starter pack based on *View*

A STARTER pack for businessmen to introduce them to standard software and techniques is set for release from Acornsoft

Included on the disc will be cut-down versions of the company's own wordprocessor, spreadsheet, database and desk diary, with examples of what can be done, such as holiday wall charts.

The idea was tried out on the Beeb in 1983 in a package designed to introduce local government officials in the country's town halls to computing. This was a much larger set of software covering a wide range of applications and has been a success, producing a 'surplus' (they don't make profits) for the local authorities behind it.

Acornsoft's pack will cost £52 (plus VAT). The wordprocessor will be based on *View*, which comes in ROM for £60. The mini version will be loaded in from disc and only runs in modes 6 or 7 with just a third of the functions normally available.

The spreadsheet will be a similar version of *Viewsheet*.

Spreadsheets for

small companies

## **Acorn reviews ABCs**

THE future of Acorn's range of business computers, the ABCs, is to be decided this month. Elserino Piol, who masterminded Olivetti's deal with Acorn, has said there will be no product overlap, and will undoubtedly want a say in Acorn's strategy.

Under the new management at Acorn the range will be switched into the scientific and technical division under Jeff Tansley, formerly leader of the 32016 project team.

Alex Reid, the company's acting chairman, described this as 'refocusing', but it appears more fundamental

than that. The setting up of a chain of business centres has ground to a halt and production machines have yet to appear.

The business division in Acorn will handle the Communicator, due to appear in the summer, and Chain, a communications terminal based on the Electron.

Both these products will be sold to other companies to put their own badges on, so there will be no Acorn launch as such, although the Communicator is seen as having a future in the home.

The Communicator is a 16-


bit computer with built-in communications, LCD screen, disc or micro cassette storage and software. The general approach of the machine is similar to that adopted by ICL with the One Per Desk based on Sinclair's QL.

The Chain terminal consists of an Electron with an intelligent modem, extra memory and communications software. British Telecom's Merlin division is to market this under the snappy title of M2105, initially as part of a communications system for the health service known as Healthnet

#### Computer guide

THE Computer Users' Year Book is a guide to computers, peripherals, services and suppliers. According to the publishers, this past year has seen the biggest ever changes in content.

Copies can be ordered from Booksales Dept. Computing Publications, 52-55 Frith Street, London W1A 2HG, tel: 01-439 4242, at £57.25 plus £2.20 P&P.

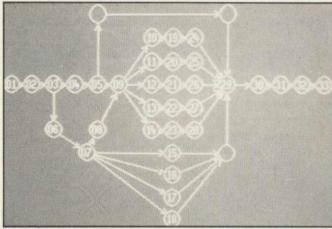

A typical network of timed activities

#### **Critical path software**

INTEGRATED accounting packages whereby data can be passed between all the different parts of the system – sales, purchasing, invoicing, etc – appear to be the flavour of the month.

Three systems ranging in price from £115 to £500 have appeared recently, all of them claiming to do similar jobs, although the way they perform the tasks, and to what depth, will be the deciding factors in choosing one.

Gemini's suite is the most expensive at £99.95 for each of the five modules. These cover purchase ledger, nominal ledger, invoicing and sales ledger, stock control and payroll.

Double disc drives are needed to make the best use of the software. The company also runs a back-up service for £12 a year and will supply printed stationery for use with the software.

Next is Diamondsoft's system which has been upgraded with a database and covers five tasks. Each part costs £30 and will work from a single, 40-track disc.

Finally, DTCTrader is designed to cope with day-to-day bookkeeping, and balance sheets can be extracted from it. It costs £115 and runs from one disc. DTC is at 145 Thorney Leys, Witney OX8 7NS.

All the above are available on either 40 or 80 track disc formats.

CRITICAL path analysis is a technique used to calculate the minimum time needed to complete a given project. Now there is a piece of software designed to do the job which can be run on a BBC micro using either a Z80 or a 6502 second processor.

A simple example is the Sunday lunch, where the critical path is through the cooking of the roast and the making of the gravy (assuming the meat juices are needed for the gravy) – everything else can be done while these two tasks are underway.

With more complex jobs the important factors are much harder to analyse, and that's where the computer comes in.

The ICPA software is used to build up a network of activity paths on the screen, each of which has an estimated time. From this the software will give the latest start and finish time for the activities and identify the critical path.

Networks are entered on the screen with a joystick. Data is entered by selecting an activity and calling up a text window containing prompts for the necessary information.

ICPA was scheduled for release at the start of April at an estimated cost of £150 (plus VAT).

It comes on either 40 or 80 track discs and is marketed by Cats Ltd at 5 Treeview, Broadfield, Crawley RH11 9QH. Tel: (0293) 548068.

ANNE (base 8) - ANNE (base 5) = ANNE (base 7) ANNE (base 10) =?

A LOW COST DISC BASED

#### PROFESSIONAL **ACCOUNTING PROGRAM**

For The BBC Computer

" Micro-Trader "

#### INTEGRATED SALES PURCHASE AND NOMINAL LEDGERS

Designed for business use by a business man. " Micro-Trader " is a fully integrated program in which all Sales and Purchase Ledger Transactions are automatically updated to the Nominal Ledger.

Micro-Trader offers full Sales and Purchase Ledger facilities including SALES INVOICE and STATEMENT PRINTING with a capacity of 450 accounts and 3000 transactions per month in each Ledger

Normal Income, Expenditure, Assets, Liabilities & Journal Posting in the Nominal Ledger with full Reporting for individual accounts, Audit Trail, Trial Balance, Profit & Loss and Balance Sheet.

Micro-Trader " is certified by Customs and Excise for VAT extraction. A V.A.T. Return produced in 2 minutes !!!!

STOCK CONTROL and MAILMERGE programs can be added

PHONE TODAY FOR A FREE FACT SHEET

#### MEADOW COMPUTERS

HEBREWS MEADOW, LOWER EVINGAR ROAD, WHITCHURCH, HANTS

Telephone: Whitchurch (025682) 2008

#### BIZZELL COMPUTERS **★ EDUCATIONAL SOFTWARE ★**

Send for our extensive list of educational software from pre-school tots to A level Teens

(SAE appreciated).



- ★ FP 215 FLATBED PLOTTER £399 (rrp £699)
- ★ MIDWICH DISC DRIVES 400K Double Sided Single £184 40/80T Switchable Dual £333

ONLY

- PRINTER/PLOTTER LEAD £12
- UCHIDA DWX 305 Daisywheel printer

Walnut Tree House, Forncett Saint Peter, Norwich NR16 1HR. Telephone: 095 389 592

#### FLOPPY-WISE ROM



The most sophisticated disc utility ever! 14 new commands for disc users. Featuring:

AUTOSAVE: For automatic program saving during development. CLONE: The most sophisticated protected disc copier ever.

CONVERT: 40-80 track conversion on single disc. MCOPY: Copy any number of selected files in one operation (menu driven)

PROTECT: Make your own discs copy proof.

RCOPY: Rename files on transfer.
ROMS: A sideways ROM management system. Also includes - Ascii, Compare, Derrors, Dspace, Format, Prepare, Verify.

FULLY TUBE COMPATIBLE





SOFTWARE SERVICES, 65 South Mossley Hill Road, Allerton, Liverpool L19 9BG. Tel: 051-427 7894.



#### PERIPHERAL BARGAINS FROM COMLEX

Mannesmann

£199.00

f219 00

£249.00

f365 00

£299.00

£209.00

£359.00

£373.00

£574.00

£834.00

£210.00

£13.00

Tally MT80

Epson RX 80

Epson FX80

Quen Data Daisywheel

Juki 6000

Juki 6100

Epson RX 80F/T

Canon P1080A

Silver Reed 500

Silver Reed 550 Silver Reed 770

Cut Sheet Feeder

for 550 or 770

Printers

2000 sheets

Listine Paper

Canon PW 1156 £399.00 Silver Reed 400 £316.00

Free Lead + Paper with all

OPUS DRIVES WITH 2 YEAR GUARANTEE

5400	£105.00
5401	£112.00
5402	£145.00
5802S	£162.50
5401SD	£149.00
5402SD	£185.00
5802SD	£199.00
501D	£235.00
5802D	£349.00
corn DFS	£95.00

.....

SPECIAL OFFER Opus DDFS £55.00 (When purchased Opus Drives) with

Cumana Disk 96TPI £16.00 (Box of 10)

MONITORS

Philips 7502 Green Screen £79.00 Philips 7512 Amber Screen £85.00 Philips 7513 IBM £95.00 Microvitec 1431 £185.00 Microvitec 1451 AMX Mouse £77,00

Silver Reed Typewriter EX43N


£275.00

2764 £4.95

**EPROMS** 27128 £10.50

All prices include VAT + Delivery

COMLEX, Unit 7, Fife Street, Nuneaton, Warwickshire, CV11 5PR. Telephone: (0203) 371371.

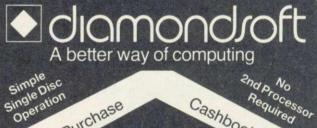

Simple Disc Operation

Purchase

Required Cashbook £27.50

Sales

per module Nominal

Business Software of the BBC microcomputer

The complete disc based package: Sales / Purchase / Nominal Ledgers

- Cashbook
   VAT Accounting
- Full double entry system
- Trial Balance
   Age Analyses
- Built in Database subsystem
- Fully supported

Requires the Control Module to operate which includes documentation, system and data discs on either 40 or 80 track and Database system.

Send for full details to:-

Diamondsoft Ltd., FREEPOST,

Cheadle Hulme, Cheshire SK8 5YB Tel: 061-485 8705





# THE WORD ON ON MEMOPLAN

#### Edward Brown assesses the Z80's wordprocessor

THE FREE software provided with the Z80 second processor includes the wordprocessing package MemoPlan. This is a cut-down version of a larger package consisting of wordprocessing, document processing and print processing programs. The MemoPlan package supplied by Acorn omits the document processing program and some features of the wordprocessing one.

Also, the configuration program CONFIG.COM has been modified to omit many of its features, but some of these can be replaced, and later in this article you'll find how to do this. The files supplied by Acorn for *MemoPlan* on the Z80 second processor are shown in figure 1. At this stage it's best to take a copy of your *MemoPlan* disc if you wish to follow the examples in this article.

The booklet supplied with the *Memo-Plan* package is a general introduction and is good to get you started but does not cover all aspects of the package. Before going on to discuss the programs in more detail I'll look generally at the way *MemoPlan* works.

#### How it works

MemoPlan consists of an editing and a printing program that work together to produce a wordprocessing facility. When MemoPlan is entered by typing MEMO the program MEMO.COM is loaded into memory and executed. This program uses a file called MEMO.SWP to keep a temporary record of the files that it is editing. The file that you were last editing is displayed on the screen and the text that you enter is stored in the temporary file MEMO.SWP. This means that if at any time MemoPlan should crash (eg, CTRL Break instead of CTRL f9), you will have lost very little text. Running RECOVER will get back

all except the last few characters for

You can save the file you are editing at any time by writing it to disc. Many documents can be loaded into Memo-Plan at the same time. When you change from one to another you are automatically put at the position you were when you last selected that document. The print option allows you to do this painlessly from within MemoPlan by chaining to MEMOP.COM which prints the file for you. Alternatively, you can print using MEMOP.COM directly from the CP/M command level. Of the other two programs, RECOVER.COM allows you to create and repair MEMO.SWP, and CONFIG.COM allows you to select the type of printer you wish to use.

#### Command line program options

The three programs MEMO, MEMOP and RECOVER all have CP/M command line options which can be very useful but are not well documented in the *MemoPlan* booklet. I'll look at these

options in more detail and examples of each are given in figures 2, 3 and 4.

#### **MEMO**

The 'normal' way to enter the editing mode of *MemoPlan* is to type the command MEMO by itself. The wordprocessor starts working and presents its screen ready for you to edit. However, if you type MEMO followed by a file reference, *MemoPlan* will load the file specified into its main document area overwriting whatever document is there. The main document area is the one you were presented with the first time you entered *MemoPlan* – it may not be the one you were editing last. This facility is useful when editing programs.

In addition there are two options, —W and —P, for controlling the entry into MemoPlan. —W will wait before clearing the screen after the title screen. This means that information on the screen can be read before the screen is cleared and is useful if MemoPlan is used as part of a SUBMIT command. —P must be followed by a file reference and instructs MemoPlan

A>DIR A: MEMO OVL : MEMO COM : MEMOHELP TXT : MEMOP COM A: MPP OVL : RECOVER COM : CONFIG COM : CONFIG DAT A: ACTIONS DEF : MEMO SWP

**MEMO.COM** The main section of code for *MemoPlan* editing program

MEMO.OVL Extra code for MemoPlan, loaded into memory when needed

MEMOP.COM The main section of code for the MemoPlan print program

MPP.OVL Extra code for MemoPlan print program, loaded into memory when needed RECOVER.COM The MemoPlan text recovery program, used to create a swap file and recover data when MemoPlan has crashed

CONFIG.COM The MemoPlan configuration

program, used to set up MemoPlan

**MEMOHELP.TXT** The file containing the help messages displayed by the *MemoPlan* help facility

CONFIG.DAT The file containing the predefined printers and terminals, and the configuration information set up by CONFIG. COM

MEMO.SWP The file used for temporary storage of text being edited

ACTIONS.DEF The file containing the list of possible actions in MemoPlan

text. Running RECOVER will get back | Figure 1. The files supplied by Acorn for MemoPlan

PRINTERS Dot Matrix	Ex VAT	Inc VAT & Carriage	
Epson RX80 (100cps)	189.00	221.95	
Epson RX80 F/T (100cps)		255.25	
Epson FX80 (160cps)	315.00	366.95	
Epson P40 (thermal)	67.95	81.95	
Epson LQ1500 (200cps)	943.00	1098.00	
Taxan Kaga KP810		288.75	
Taxan Kaga KP910		389.95	
Daisywheel			
Quen Data	219.95	257.50	
Juki 6100		369.95	


#### FREE WITH EVERY PRINTER LISTING PAPER + BBC LEAD (Phone for other leads)

.50 15.60
40 19.50
.51 44.29
00 83.95
50 107.50
9.00 198.95
.00 443.95
9.95 199.95
5.95 264.45
95 252.95
.95 225.45
4.65 124.95
1.00
6.39 149.9
2.50 1463.38
4.84 654.17
7.00 783.22
700.22

#### 46 MIDDLE STREET, BLACKHALL, HARTLEPOOL, **CLEVELAND TS27 4EA**

Tel: 0783 872430 CALLERS BY ARRANGEMENT ONLY NOTE: ALL PRICES INCLUDE VAT AND CARRIAGE

		Ex VAT	Inc VAT & Carriage
	CUMANA DISC DRIVES		
	BBC CSX (Excluding PSU)		
	CSX100 40 Track Single Side (100k)	94.95	113.85
	CSX200 80 Track Single Side (200k)	118.95	141.45
	CSX400 80 Track Double Side (400k)	138.95	164.45
	With PSU		
	CS100 40 Track Single Side (100k)	114.95	136.85
	CS200 80 Track Single Side (200k)	138.95	164.45
	CS'400 80 Track Double Side (400k)	. 158.95	187.45
	Dual Drives (with PSU)		
	CD200 2 × 40 Track Single Side (200k)	203.95	239.20
	With 40/80 Switch		
	CD400S 2 × 80 Track Single Side (400k)		302.45
	CD800S 2 × 80 Track Double side (800k)	305.95	356.50
	MEDIA		
	Cumana Diskettes 5.25" boxed in 10's wit		
	40 Track SS SD		16.50
	40 Track DS DD	13.50	16.50
	80 Track SS SD	13.50	16.50
	80 Track DS DD	13.50	16.50
	HEAD CLEANING KITS		
	3M Standard		15.90
	De-Luxe	15.60	19.50
	EPROMS		
	2764	5.60	7.40
	ANCILLARIES	27.05	24.05
	Acorn Data Recorder	27.95	34.95
	Sanyo DR101	28.95	35.95 45.30
	Sanyo DR202	36.95	
	Teletext Receiver		215.35
	Speech Interface Kit		55.50
	6502 Second Processor	1/3.50	202.17
	Z80A Second Processor	308.95	357.95
	ATPL ROM Board	37.95	44.95
	UTILITIES	21.70	27.50
	Wordwise	30.7	37.50 46.75
	Wordwise Plus		
	View Word Processor	22.21	
	Printmaster	A7 21	
	Communicator	47.30	30.38
	(VI 100/52 Terminal Emulator)	17 /	5 21.25
	Help	20.11	
	Ultracalc II	50.43	00.00
8	A STATE OF THE PARTY OF THE PAR	CANADA STREET,	And in case of the last of the



**BBC DISC INTERFACE** 

Inc. VAT and Carriage.


- Acorn compatible, single density (10 sectors per track).
- Double Density (18 sectors per track). Runs protected software (Elite, Mini-
- Office, etc). 16K ROM includes FORMAT.
- Manual and simple fitting instruc-

#### NEW! PENMAN PLOTTER


- · Can be used as a plotter, mouse or turtle
- 3 colour graphics and text.
- · Plots on any flat sheet of paper, A4 or larger
- Uses BBC's RS432 interface
- Easy to drive in BASIC or LOGO.

  ONLY £249.95 inc VAT & carriage

## P(+)IMF

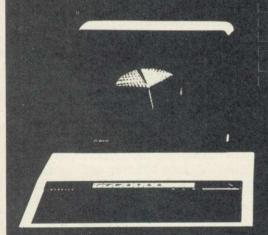

PLOTS AND PRINTS USING BBC GRAPHICS COMMANDS CONNECTS DIRECT TO BBC MICRO USER PORT OWN INTEGRAL POWER SUPPLY SUPPLIED AS A COMPLETE READY TO USE SYSTEM RUGGED, IDEAL FOR SCHOOLS INTERFACE MODULE AVAILABLE FOR LINKING TO OTHER MICROS - APPLE, RMZ ETC.



**GRAPHICS** LANGUAGE OPTIONS HEWLETT-PACKARD, SWEET-P, WATANABE A4 DRAWING AREA

FOR LESS THAN £300 A SUPERB DRAWING COMPANION FOR YOUR BBC MICRO



For further information ring: MARION POLLETT on (0702) 541664 or write to: LINEAR GRAPHICS LTD., 28: PURDEYS WAY, ROCHFORD, ESSEX SS4 1NE.

to start printing the file specified while editing is in progress.

−PORT and −P are options to MEMOP and MEMO respectively which do produce output. They are not supported by Acorn and are given in the article for completeness. Try them with your copy of the MemoPlan disc to see the results.

#### **MEMOP**

The normal way to enter the printing mode of *MemoPlan* is through the print command in MEMO, which will print the document you are currently editing after asking for any options. The document is then transferred to a temporary file called MEMO.F\$\$ and MEMO chains to MEMOP via the MEMO.OVL overlay and prints the file. It's also possible to enter MEMOP followed by a

MEMO Will put you into MemoPlan
MEMO TEST.TXT Will put you into
MemoPlan and overwrite the main document with the file TEST.TXT

**MEMO** – **W** Will put you into *MemoPlan* but wait before clearing the screen

MEMO - P TEST.PRN Will put you in MemoPlan and print the file TEST.PRN

Figure 2. CP/M command line options for MEMO

MEMOP -5 LETTER.TXT -P -DEV DiabloPS Will print five copies of the file LETTER.TXT on the device DiabloPS (a proportionally spaced Diablo printer) and pause between each page to allow sheets of paper to be inserted

MEMOP DRAFT.TXT -T "draft copy"
- O DRAFT.PRN - L10 Will place the formatted text into a file called DRAFT.PRN with a left margin of 10 characters and a title of 'draft copy' on the top of each formatted page

MEMOP TEST2.TXT -NP -Q -NH -NM -PAGE 3 Will print TEST2.TXT starting at page 3 without pausing for sheet insertion, without putting messages on the screen and with no header or margins

MEMOP TEST3.TXT - PORT CONSOLE - R 55 - TAB 8 Will print TEST3.TXT on the printer connected to the console output port with a right margin of 55 and tabs every 8 character positions

#### Figure 3. CP/M command line options for MEMOP

RECOVER Will recover as much text as it can link to a document

**RECOVER** — **ALL** Will recover every piece of text whether sensible or not

**RECOVER** – **CREATE 100 5** Will create a new MEMO. SWP file of 100 pages containing five documents

Figure 4. CP/M command line options for RECOVER

file reference and options on the command line. The options described below are equally valid on the command line and in MEMO.

- nn Where nn is the number of copies that you want

P Pause after printing each page.
 Used for single sheet feeding

- NP No Pause after printing each page. This is the default setting

- PAGE nn Start printing at page nn of the document

 Q Quiet mode. This does not display the page count and messages on the console

-O file Online spooling to the file name. This puts the output formatted with page breaks to the file specified

- DEV device Device selection. This tells MEMOP to use the device specified instead of the default device

- NH No header. Omit the standard header on the output

NM No margin. Omit left and right margins

- T title Title. Use the quoted string following the - T as the title to be put at the top of the document

-L nn Left. Position the left margin at column nn

- R nn Right. Position the right margin at column nn

-TAB nn Tab. Position tab stops at every nn column

- PORT port Port. Redirect the output to another output port (see above).

#### RECOVER

The usual way to use recover is to type RECOVER by itself on the CP/M command line. This will check the MEMO.SWP file to see if it is corrupted and if so, it will try to recover any text that has been lost. If it has not been corrupted the program will verify it. In addition, it's possible to give the following command line options.

 CREATE nn m Create a new swap file containing nn pages and divided into m documents. A page is roughly 1000 characters

-ALL All recovers all text in the MEMO.SWP file and places it in documents for your access. Using the -ALL option will recover deleted text and in some cases garbage. The following procedure should be adopted when using the -ALL option: run RECOVER normally, check and save all documents by using the write option, run RECOVER -ALL, extract and save what text you require, run RECOVER -CREATE nn m, read in the document you want to edit.

#### Commands in MEMO

To edit in MEMO, use the function and cursor keys. In addition, there are other

- 10 10 11 11 11 11 11 11 11 11 11 11 11	
CTRL @	Repeat command, requires count and a command
CTRL A	Repeat last command or character
CTRL B	Document object
CTRLC	Close text
CTRLD	Delete object forward
CTRLE	Edge of line object
CTRLF	Set direction forwards
CTRLG	Next document
CTRLH	Move backwards
CTRLI	Tab
CTRLJ	Line feed
CTRLK	Previous line
CTRLL	Line information
CTRLM	Carriage return
CTRLN	Sentence object (to next
Management of the	carriage return)
CTRLO	Open text
CTRLP	Position information
CTRLQ	Adjust paragraph
CTRLR	Redisplay screen
CTRLS	Search for string
CTRLT	No command
CTRLU	Undelete
CTRL V	Move up screen
CTRL W	Word object
CTRLX	Main menu
CTRL Y	Delete object backwards
CTRLZ	Abort

Figure 5. Summary of what the keys do in MEMO

keys that have special effects and these are summarised in figure 5. Here I'll deal with a few of the more interesting options.

COPY Will repeat the last command or character typed

CTRL @ Will prompt ESC, enter a number followed by a command or character and it will be repeated the specified number of times

CTRL D or CTRL Y Will put you in delete mode. Using the cursor keys will then delete by character, word, line, paragraph or document forward or backward

CTRL X Will put you into the main menu. Experiment with this and learn more about *MemoPlan*.

#### Improving MemoPlan

It's common to want a dedicated wordprocessing disc which, when you turn on the machine, runs straight away. In Appendix J of the CP/M 2.2 manual it explains how to provide this using a BOOT.COM or BOOT.SUB file.

The easiest way of doing this is to type REN BOOT.COM = MEMO.COM. Now, whenever the machine is turned on or CTRL Break is pressed with the disc in drive A, *MemoPlan* will run. However, if you try to print from MEMO, you will get an error saying that the file MEMO.COM is missing. This is because MEMO chains to MEMOP to print and then MEMOP chains back to MEMO to continue editing. To be able to use MEMO as a BOOT.COM file it's

## micro FAST

#### mono MONITORS



Sanyo 8112		
18 MHz	£86 + VAT = 9	
	ex VAT i	nc VAT
Amstrad GT64	£51.30	£59
ISL 20 Swivel 80 col.		
20 MHz Tilt + Swivel		
Base	£68.70	£79°
Zenith 12"		
15 MHz	£66.96	£77

#### **PROCESSORS**

DDC Model D



DDC INCUCI D	rocessor £338.26 £389 £157.40 £181	
	ex VAT	inc VAT
.BBC 'B'	P.0.	A.
BBC 'B' with DFS	P.0.	A.
Acorn Z80 Ext. Processo	r £338.26	£389
Amstrad CPC464	£157.40	£181
5v power + UHF	£24.36	£28
DEC 11/23 + 40 MB	£6086.97	£7000
DEC 11/73 + 170 MB	£10434 79	£12000

PNA

APRICOT		
Fi inc. Monitor	£1126	£129
PC (2 × 315K)	£1300	£149
PC (2 × 720K)	£1465	£168



	ex VAT	inc VAT
Acorn DFS	£84.35	£97
NEW Acorn DNFS kit (ring for availability)	£89.57	£103

#### MODEMS

Selection of Acoustic Couplers and Mini Modems in stock.

ex VAT inc VAT Minor Miracle WS2000 £129.57 £149


#### Special Business Offers with TORCH ZEP-100 £260.00 ex VAT

ZEP-100 **ZDP-240** 

£608.00 ex VAT\*


These upgrades for the BBC B(DFS) micro open the door to the world of serious computing. Using the proven Z-80 processor, they provide 64K extra RAM, CPN™ operating system and, three professional software programmes; Perfect Writer® with Speller, Perfect Calc® and Perfect Filer®. CPN™ gives access to the vast range of software written for all CP/M® micros.

#### colour MONITORS



Microvitec 1451 BBC	£242	.bl
	+VAT=	
	ex VAT i	nc VAT
Amstrad CTM640	£146.97	£169
Microvitec 1431	£169.58	£195°
1431 (RGB/PAL/AUDIO)	£204·35	£235
Microvitec 1451/QL	£230.43	£265
Microvitec 1451	£242.61	£279
1451 (RGB/PAL/AUDIO)	£291-30	£355
Microvitec 1441	£433.92	£499
Taxankaga Vision III		
(BBC/APPLE/IBM)	£326.09	£375


#### DISK DRIVES



100K 40T	£86	-
Single	ex VAT	inc VAT
100K ALPS 40T	£86.10	£99°
100K Chicon 40T OPUS	£112.17	£129
200K Sanyo 3 OPUS	£130.43	£150
400K Mitsubishi 40/80T OPUS	£152.17	£175 /
Double		-
800K Mitsubishi		
40/80T OPUS	£320.87	£369

#### All our Disc Drives come complete with:

2 Year guarantee Disc Formatter Disc Verifier Screen Dump Program for Epsons Information program on DFS commands All cables required for connection to BBC Disc and DFS handbook Dual Disc Drives include power supply Power supply available for single Drives Single Drives available in dual drive cases

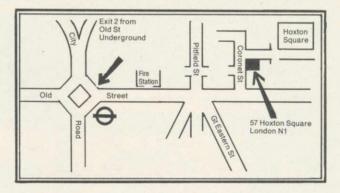

#### **ACCESS & BARCLAYCARD WELCOME**


Prices shown are correct at time of going to press in MARCH

\*LIMITED OFFER WHILE STOCKS LAST. MAIL AND PHONE ORDERS ACCEPTED Carriage—add £10 for Hardware and £1.50 for Software

OPEN 9-6 Monday to Saturday

57 Hoxton Square, London N1 Tel: 01-729 1778

#### **DOT MATRIX**



Epson RX80 F/T +

+ VAT = £255

£373.04 £429

£320 75


Ring for details of NLQ option

ex VAT inc VAT KDC FT 5001 (Epson £164.35 £189 Comp) Epson RX80 £192.17 £221 Epson RX80 F/T + £221.74 £255 Kaga Taxan 810 (NLQ) £277.39 £319 Kaga Taxan 910

#### DAISYWHEE

(NLQ 132 col)

Interior



JUKIDIUU	LULD	. 10
	+ VAT =	£379
Brother HR15	£329-75	£379
Juki 6100	£329.75	£379
Daisy Step 2000	£230.43	£265
Uchida DWX305	£226.09	£260
Serial Interface Conversions		
(fitted free)		
8143—Epson	£26.10	£30
8148-Epson (2k buffer		
XON/XOFF protocol)	£56.53	£65
KDC	£56.33	£65
Daisystep	260.88	£70
Canon	£69.58	£80
JUKI	£47.84	£55
BBC cables from	£10.44	£12
QL Centronix cable	£33.91	£39

#### **VARIOUS**

Desk Stacking Unit

(Lockable version available)

ex VAT Inc VAT Torch Ext. Processor £260.00 £299 + Software Torch Ext Processor + twin drives Computer Concepts ROMS £27.84 £32 from Acorn Business Software £20.88 £24.95 Acorn Data recorder £27.84 Opus Desk Model 10 with draw £130.44 £150 £20.00

CPN is a trademark of Torch Computers Ltd Perfect Software is a trademark of Perfect Software Inc. CP/M is a trademark of Digital Research Inc. IBM is the registerst trademark of International Business necessary to patch (alter) the code in MEMO.OVL. This procedure is shown in figure 6.

The program CONFIG.COM supplied with MemoPlan allows you to select a default printer from a set of predefined printers. However, by applying the patches shown in figure 7, CONFIG can be extended. This gives greater control over the way MemoPlan works by allowing you to set the speed at which messages appear, how quickly the text is saved, and even the print area of your printer.

```
CONFIG.COM is loaded into memory
from 100 to 5700
```

- 2 List location 8E3 onwards in 8080 assembly code
- 3 Select 8EC onwards to be altered
- Alter JMP 091C (jump command) to three NOP (no operation)
- List again 5
- Display locations 93A to 952 in hex and ASCII
- Change N to Y to give terminal menu
- 8 Change N to Y to give Default Formatting Parameters menu
- 9 Display again
- 10 Return to CP/M command level
- 11 Save the file (86 decimal is 56 hex, top part of NEXT - PC)

Non-shaded areas are system responses

```
A>B:DDT CONFIG.COM
DDT VERS 2.2
NEXT PC }1
  NEXT PC
5700 0100
-L8E3
08E3 C4
08E6 C4
08EC J1
08E7 L1
08F2 PL
08F3 L1
08F4 PL
                                          0DCE
1051
4AF4
091C
                          CALL
                          CALL
                                           H, 0000
                          LXI H,0953
PUSH H
CALL 3DC5
POP D
08F7
08FA
08FB
-58EC
08EC C3
08ED 1C
08EE 09
08EF 21
                                                        -(5)
                            CALL ØDCE
                           CALL
CALL
NOP
NOP
                           NOP
```

```
B: DDT MEMO. OVL
DDT VERS 2.2

NEXT PC

6D00 0100

-D437A 4385

437A 2D 63 68 61 69 6E

4380 20 6D 65 6D 6F 20
memo
 439F 6F 54
43A0 20 ...
-D43CC2, 43CD
43C2 2D 63 68 61 69 6E 20 6D 65 6D 6F 20 -chain memo
-$43C9
43C9 6D 42
43CA 65 4F
43CB 6D 4F
43CC 6F 54
43CD 20 ...
-D43C2, 43CD
43C2 2D 63 68 61 69 6E 20 42 4F 4F 54 20 -chain BOOT
-D43E3, 43EE
43E3 2D 63 68 61 69 6E 20 6D 65 6D 6F 00 -chain memo.
                                                                                                                          7
                         13E3 2
-843EA
 43EA 6D 42
43EB 65 4F
43EC 6D 4F
 43EC 6D 4F

43ED 6F 54

43EE 00 -

-D43E3, 43EE

43E3 2D 63 68

-D4468, 4478

4468 2D 63 68

4470 65 6D 6F

-S446F

4446 6D 42
                         68 61 69 6E 20 42 4F 4F 54 00 -chain BOOT.
                         68 61 69 6E 20 6D -chain m
6F 00 2D 6E 68 20 2D emo.-nh
 446F 6D 42
4470 65 4F
4471 6D 4F
4472 6F 54
4473 00
 -D4468,4478
4468 2D 63 68
4470 4F 4F 54
                               61 69 6E 20 42 -chain B
00 2D 6E 68 20 2D 00T.-nh
 A>SAVE 108 MEMO.OVL ——
A>REN BOOT.COM=MEMO.COM
  1 MEMO.OVL is loaded into memory
                                                                 7 Repeat for the remaining chain com-
  from 100 to 6D00
                                                                  mands
```

- 2 Display locations 437A to 4385 in hex and ASCII
- Select 4381 onwards to be altered
- 4 Alter memo to BOOT
- End alteration
- 6 Display again

- 8 Return to CP/M command level
- 9 Save the file (108 decimal is 6C hex, top part of NEXT - PC)
- 10 Rename the file so that it will auto boot

Non-shaded areas are system responses

08EE NOP 08E7 LXI H,0000 08F2 PUSH H 08F3 LXI H,0953 08F6 PUSH H 08F7 CALL 3DC5 093A 43 75 73 74 6F 6D Custom 0940 20 54 65 72 6D 3A 4E 20 44 6F 63 75 50 6C 61 6E Term:N DocuPlan 0950 3A 4E 00 :N. 0940 20 54 0950 3A 4E -5946 0946 4E 59 0947 20 --5951 0951 4E 59 0952 00 --D93A, 952 -093A 43 75 0940 20 54 0950 3A 59 >(7) (8) \_(9) 74 6F 6D Custom 72 6D 3A 59 20 44 6F 63 75 50 6C 61 6E Term:Y DocuPlan :Y. 10 A>SAVE 86 CONFIG.COM -

Figure 7. Patches to extend CONFIG

## STARdataBASE

#### The database



for the BB

STARdataBASE ......£86.25 inc VAT Post & Packing ......£1.75 inc VAT



GCC (Cambridge) Limited 66 High Street, Sawston, Cambridge CB2 4BG Telephone: Cambridge (0223) 835330/834641 Telex: 81594 SAWCOM

of extension and applications software on disc and a comprehensive manual. STARdataBASE was designed by a chartered electronics and software engineer to meet a defined need for a high specification, disc-based random access system. The database program and extension software is "Menu Driven", particularly user-friendly, quick to use, but extremely powerful and totally flexible. It is absolutely ideal for use in schools, clubs, colleges, small businesses and in

- menu driven tinougnout. True random access will locate a single record in under 2 seconds typically. File size is the capacity of a single disc (double sided if applicable) minus 5K.
- Maximum number of fields 69.
- Maximum number of characters in a field 255 (subject to an overall maximum of 920 in a record).
- Up to 4096 records
- Records are displayed and input on a "Card Screen" principle. Layout of fields and headings are built entirely by the user by "Painting" on the screen (colour can be used)

  Direct and rapid entry of data into all or selected fields.
- Search criteria include =, <>, >, <, a wildcard "anywhere in the field", and "nowhere in the
- Unlimited and rapid sequential searching and selecting.

  All or selected records can be sorted to a depth of 5 fields, each in ascending or descending
- order, using the super-fast Shell-Metzner routine.
  Instant print or display review of file, giving breakdown of record size, number of records

- Instant print or display review of file, giving breakdown of record size, number of records possible and space used, etc.

  Address and label printing (up to 8 across the page).

  Selected whole or part field-content printing with left and right justification, tabbing, and embedded printer control codes possible. Can be mixed with text for invoices and form letters
- Can be configured for any printer (including £ character definition).
- Continuous or paged printout with page heading and pause at each page end, with "New Page" prompt.
- Repeat printing for multiple copies.
  Percentage and arithmetic operations to specified decimal placing.
- Field statistics giving totals, mean and standard deviation, variance and squares. Optional password lock.
- Full documented routines (in Basic) which can be spooled onto user-written tailor-made file management and interrogation programs.

STARdataBASE meets and even exceeds professional standards found on large installations. It unique in speed, flexibility, and ease of use.



Trade and local authority enquiries welcome. Prices correct at time of going to press.



## RIMROM15

#### The Sideways RAM & ROM Expansion Board for the BBC

The GCCIRAMROM 15 board adds to the BBC Micro another eleven sideways ROM sockets plus the necessary hardware for sideways RAM.

#### **FEATURES**

- Fully buffered board.
- Rechargeable battery backup for RAMS provided as standard. Recharging circuitry is included.
- The board can be powered by an external 5 Volt power supply, available as an optional extra.
- The unit comes in a case of its own and resides outside the BBC Micro, giving easy access to the resident ROMS
- \* For those involved in development work, most of the 6502 processor signals are made available outside the BBC Micro.
- Priority or selection can be assigned to either RAMS or ROMS.
- \* ROMS can be used in RAM positions simply by changing two push-on links.
- \* Simple installation NO soldering.
- Can be installed together with most other BBC add-on boards.
- ZIF-sockets available as optional extras. Up to 15 may be housed on the RAMROM 15 at any one time.
- \* All socket positions are software selectable.
- Free Utilities Disk supplied.
- Comprehensive User Manual included.

RAMROM 15 ......£129.95 inc VAT (P&P £3.50 inc VAT) EXTERNAL PSU ...... £5.75 inc VAT (P&P £1,73 inc VAT ZIFSOCKETS ......£9.00 inc VAT Free P&P with RAMROM)





Trade and local authority enquiries welcome Prices correct at time of going to press





GCC (Cambridge) Limited 66 High Street, Sawston, Cambridge CB2 4BG Telephone: Cambridge (0223) 835330/834641 Telex: 81594 SAWCOM

#### **Spreadsheets**

#### revisited

'Quickcalc', Beebugsoft, BBC B, £13 (cassette) or £15 (40/80 track disc)

THE FIRST thing I liked about this package was the stout box it came in. This was quickly followed by the pleasure of finding a disc which operates on both 40 and 80 tracks.

The manual is excellent in content and presentation, although the function key strip is rather amateurish. My main criticism is a familiar one - because it works in mode 7 you can only see a small part of the sheet in memory. The actual input of data is guite logical and easy to remember.

Applying the same tests to Quickcalc. as to the spreadsheets reviewed in the February issue (pages 137 to 142) revealed a few minor problems. Because it is limited to 50 rows, my long resource allocation program would not fit, but this would not matter to most users of a home-based system. In any case, the program has the useful capability of increasing the number of rows up to 100, but at the expense of the number of columns.

Some other good features are a very simple numerical grid reference which was sufficient to identify slots (eg. 30. 30 rather than AD, 30) and there is a constant 'bytes free' reminder at the heading to reduce the risk of running out of space.

Another excellent feature is the ability to vary individual column widths between 4 and 36 characters, only otherwise found in Ultracalc 2. It is capable of changing from calculation in the usual column order to row order.

Where then does Quickcalc fit into the range of spreadsheets? It offers many more facilities than Vu-Calc and, since it is about the same price, must be judged the better buy for those with a limited range of needs.

**Roger Carus** 

This information will help you compare Quickcalc with the spreadsheets reviewed in our February issue. Marks are out of 10.

Size of matrix 3 Labelling 9 Making entries 4 Replication 5 Commercial uses 5 Scientific uses 4 Statistical uses 4 Display 4

Graphics 1 **Printing** 5 Wordprocessing linkages 0 Speed 4 Ease of use 5 **Documentation** 5 Overall value 5

Comments Good cheap sheet for home use. It has 20 columns, 50 rows, a matrix size of 1000 cells with a default cell size of 9 characters. Its window size is 4 columns × 19 rows = 76 cells.

## CP/M Edward Brown and Richard CORNER a new column

IN THE February issue Robin Newman presented a method of performing a warm start of BBCBasic in the CP/M environment. This method will work for CP/M with a 1.20 BIOS and a 1.20 Z80 ROM, however it will not work for other versions of BIOS or ROM. A better method is shown in the box.

To understand how this method works it's necessary to explain briefly how the Console Command Processor (CCP) loads and runs a program. When a command is typed to the CCP it first checks to see if it is a built-in command, and if so it is executed.

If it is not then the disc is searched for a file with the command name and a COM extension. If this file is found, the CCP loads it at location 100H onwards. When the file is loaded it calls location 100H and the program starts executing.

When the command WSBasic is typed, the first 100H bytes of BBCBasic in RAM are overwritten with the patched version. Then control is passed to location 100H which initialises the stack pointer to the area used by BBCBasic and then control passes to the warm boot location. Using this method BBCBasic can be warm booted after a Break or Ctrl Break. Once the file WSBasic has been created then the Break key can be defined to enter the commands automatically pressed

In addition, we can take advantage of the way the CCP runs programs to rerun programs. To do this type SAVE 0 GO.COM in response to the CCP prompt. Now run a program such as-STAT. When it is finished type GO and the program will now run again.

STAT shows us another way that we can take advantage of the manner in which the CCP works. You will notice that when STAT finishes running it does not access the disc to perform a warm boot. This is because it does not corrupt the CCP or BDOS, so it uses a RET instruction to return to the CCP rather than the time-consuming warm boot. Any application can do this but care must be taken with the stack, as the CCP allocates a 16 byte stack which can easily overflow. This is the reason for initialising the stack as the first instruction of the BBCBasic warm start.

## Clement launch

Enter BBCBasic and immediately type \*CPM or \*BYE to return to the A > prompt. Then use the following procedure with the file DDT.COM on the disc in drive B. Shaded areas are system responses.

A>SAVE 1 WSBASIC.COM

A>B: DDT WSBASIC. COM

DDT VERS 2.2

NEXT PC

0200 0100

-L100,105

0100 JMP 012A

0103 JMP 0197

0106

-A100

0100 LXI SP, 3A00

0103

-G0

A>SAVE 1 WSBASIC.COM

A>BBCBASIC

Now load a Basic program and list it. Press Break; and when you get an ' prompt type CPM and you will return to the A > prompt. Now type WSBA-SIC. You will return to BBCBasic and a list will show the old program again. The break key can be programmed to enter these commands automatically by using the \*KEY command while in BBCBasic. Remember to re-enable the Escape key once in BBCBasic as it is disabled by the Z80 ROM.

If you're a CP/M user with problems, or have hints you'd like to pass on, then write to CP/M Corner, Acorn User, Redwood Publishing, 68 Long Acre, London WC2E 9JH.

#### Dynamic duos

#### for businesses

'BuSIness Duo Sales & Purchase Ledger Program' and 'BuSIness Duo Stock Control & Invoicing Program', Systematics International, BBC, £89 inc VAT each

THESE two new packages come as a welcome development and go a long way towards showing what can be done with elegant procedures designed for the busy businessman.


Each consists of a single standard disc available in a variety of formats.

The Sales and Purchase Ledger Program consists of a suite of 11 files running to 67k on two discs, while the Stock Control and Invoicing Program has nine programs taking up 39k, again on two discs. Each disc is accompanied by a loose-leaf folder in a strong cardboard box containing the operating instructions, with illustrative examples which are clear and concise.

My main criticism is the limitation on the amount of data which can be handled, and the introductions are very frank about this. The Sales and Purchase Ledger will 'cater for 400 customer master records showing account number, name, address, etc. and 750 transaction detail records of receipts, invoices, credit notes, adjustments; and 400 supplier master records showing account number, name, address, etc, and 750 transaction detail records of payments, invoices, credit notes and adjustments.' The Stock Control and Invoicing Program can handle 'up to 1000 stock lines; and integrated invoicing.

It is for the individual to judge whether this is sufficient for his purpose. The number of customers and stock lines permitted should be enough for most purposes, but I should think the scope for transactions might cause problems. It could be sufficient by using short accounting periods or a subdivided system of accounting for different parts of a business, but I suspect that only a business dealing with items of a high unit cost could maintain a whole year's records on one set of files. This makes it fine for a home-based mail order dealer, an estate agent or a functions caterer but not much use for a corner shop

It is, however, important to realise that this is not a fully integrated package – such as the Acornsoft business suite (reviewed in *Acorn User*, June 1984, pages 103-108 and September 1984, pages 117-118) – that is, the data related to one disc does not transfer to the others in the series. Thus the *Stock Control and Invoicing Program* is quite

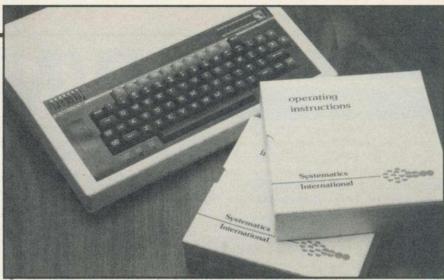

A nice suite of programs from Systematics

separate and distinct from the Sales and Purchase Ledger Program package, so you cannot sit down and produce a full set of accounts and records from one set of data. In theory this sounds like a serious defect, but after considerable thought I can think of very few examples where it would matter. If a business had a large number of transactions with the same few firms, it would necessitate the transfer of data between the two sets of files which could lead to mistakes.

One basic thing that puzzles me is the absence of provision within the menus of either disc for an identification of drive numbers. The result is that the operator spends an inordinate amount of time changing discs as the prompt instructs.

Taking the Sales and Purchase Ledger Program first, let's look at the stages in using the program. With a Booted start you go straight to the Outer Menu which gives a choice of either the Sales Ledger or the Purchase Ledger programs. If you pursue the former through the menu, you arrive at the Master Menu for Sales. This gives a choice of (1) Updatings/ Postings, (2) Reports/Setups, Copy Data Files and Exit. As you are starting, you take (2), only to find a further menu requesting Old or New Files for loading. Having none, you choose 'New' and are prompted to insert a blank formatted disc, which loads - and stops! Always impatient, I began again, and reached for the manual. In fact, there is a wait of almost a minute and then it starts to create six files ready for your data. There is nothing wrong with this, but it would have helped if either the manual or the prompt warned you of

At this point you begin to personalise the accounts and I must say that I grasped what was going on fairly quickly. There are a few niggles, such as the limited space in each line for company names and addresses. In fact, I had great difficulty in finding advertisers in *Acorn User* whose names conveniently fitted the 20 spaces without abbreviation. It seems quite difficult to go back and amend entries without producing printouts, checking them and then making compensating adjustments. More annoyingly there seems to be no browse facility to let you look at the Day Book by scanning through the entries. On the other hand, there is an excellent Password requirement which ensures security.


The Sales Ledger program lets you adapt the presentation to your own company, keep regularly updated details of customer accounts, enter transactions, print ledger cards, statements and a variety of reports, and close accounts keeping all debts in age order – and that meets most requirements.

The other programs are comparable and feel rather better, particularly *Purchase Ledger and Stock Control*, although that could be because I came to them later or am more at home with their terminology. I could find no faults in their logic and would have every confidence in using them.

The printing facility works very well with my daisy-wheel printer and quickly produces very acceptable, if basic, statements, stock lists and reports on continuous stationery. There is a facility to use company paper with headings which I did not test but I suspect that setting it up might be awkward. My only complaint about the printing is the large number of dotted lines used which is noisy and slows down production.

In conclusion the *BuSIness Duo* is a nice suite of programs which perform well within the limitations of the system. You must, though, look carefully at the nature of your intended use to assess whether it has the capacity to meet your requirements.

Roger Carus



AMX Mouse: children love it

#### Mouse heading for schools

NF OF the most versatile and interesting packages to come on to the market recently is the AMX Mouse - a means of communicating with the computer via a small roller unit which sits on the workspace next to the machine (see the review in the April issue). As the mouse is moved, so the cursor will move about the screen, performing various functions according to the icon mode selected

What are icons? They are small pictures - graphical representations of operations that the computer can perform which are printed around the border of the screen. By moving to the relevant icon and pressing the execute button on the mouse the mode, be it drawing, spray painting, fill, circle drawing or whatever, may be selected. If you have seen the Macintosh in operation you will have witnessed a very similar facility on that machine.

Try to see a mouse in operation if you are interested in the production of graphic materials for use in the classroom, or indeed for use by the children who take to it with great enthusiasm and alacrity. You will not be disappointed!

#### First readers


A SERIES of first readers in computing entitled 'Data Log' has just been published by Collins. There are books with questions to be answered, pictures to be drawn and programs to be written into the space provided. They are priced at £2.95 and deal with a wide range of computers including the BBC micro.

Commentary by

Nick Evans.

who welcomes

reader feedback



#### **Choosing the right Logo** for your classroo

LOGO USERS are now having difficulty in choosing which version to use in their classrooms because of the number of products available.

How to choose is always a problem and the usual rule holds true in this case - see it before you buy, if possible.

The main factors involved in deciding on which Logo version to buy are related to ease



of use, flexibility and speed. In terms of the language itself an indication of how wide-ranging the package is can be seen by the number of 'primitives' (standard commands) that are available to the user. Also the editing facilities should be easy to use and clear. The speed of operation should enable the user to create complex programs which will still run smoothly and at an acceptable pace.

List processing should be available so that advanced programming may be undertaken and there should be room for the user to grow and not be limited by the facilities.

Acornsoft Logo The reviewed in this and the

December 1984 issue of Acorn User fulfils many of these objectives and represents a comprehensive and wellstructured version of Papert's original vision.

Others are available however-notably Logotron, which is marketed through Tecmedia (see page 65). This has, much to Acornsoft's chagrin, proved to be a much faster implementation of the language with benchmark tests showing vast advantages in speed over the Acornsoft version. Added to this there is a sprite board now available for Logotron which enables children to program machine-code style 'actiongraphics'. A further advantage for those who use their micro for many purposes is that Logotron comes on a single 16k chip whereas the Acornsoft implementation comes on two chips, which either means the use of an expansion board or no wordprocessor, Disc Doctor etc.

But don't despair if you have purchased already Acornsoft version. Logotron and Acornsoft are at the moment the leaders in the field and each has its own advantages. The lack of speed in the Acornsoft Logo is well compensated for by the range of extensions with abilities to 'hatch' up to 32 multiple turtles, drive printers of different types, interface with a variety of floor turtles and communicate with other external peripherals. The breadth of primitives is also remarkable - well over 200 of them. Doubtless battle will develop the between these two companies with software spin-offs from both sides to entice or placate the users.

See Joe Telford's comparison of four Logos on page 65.

#### Acorn to set up schools hotline

S THE national leader in the supply of computers to schools, Acorn is following up its 'Micros in Schools' scheme with more support to the many Acorn users in education.

A Suppliers' Forum has been set up 'where educationalists can present their needs - new types of equipment, new software etc - to the industry as a whole, all working together to help make schools make the best use of their resources

An Educational Hotline is also to be created which will supply information and help about projects and problems within the education field. And finally, attractive price deals are to be set up for 'financially hard-pressed schools' to themselves more equip speedily.

One just hopes that the recent changes at Acorn will have no effect upon these proposals since they will be welcomed by schools and colleges (most of which generally consider themselves to be hard-pressed' financially these days) if they come to

#### **Network system** from Richmead

A NETWORK system which interfaces up to 16 BBC micros to a single RML 380Z is available from Richmead Micro.

Many schools started microcomputing with the 380Z which then became redundant with the advent of the Beeb. However, when a proposal is made for a network within a school, this leads to the expense of another micro to act as the main terminal for disc and printer access.

If the 380Z is available, then, at £275 plus £20 per BBC station, this network offers considerable financial advantages over the other options currently on offer. Disc access is slower than normal but is much quicker than tape and the system is totally compatible with popular BBC micro programs such as Wordwise and View.

Contact Richmead Micro, 29 Easby Way, Lower Earley, Reading RG63XA, tel: (0734) 665771.





+ £1.25 p&p + VAT

Softlife

#### **NUMERIC KEYPAD**

#### **BBC MICRO**

Any BBC user will be aware that entering numeric data on the BBC keyboard, whether for business, educational or scientific purposes, is a slow and inefficient process. The Softlife Numeric Keypad changes all that. Speedy entry of numeric data is now possible—as n many more expensive computers.

N-Key rollover

\* N-Key rollover

\* Only connection to user port

\* High quality keys

\* Hand held, or free standing

Software provided on eprom
 Simple selection command
 Standard mode uses no user RAM — optional fully programmable mode also available
 Maximum software compatibility

Also available

Also available
SOFTLIFES NEW IMPROVED EPROM PROGRAMMER (now 7 times faster) with software on Eprom and documentation – price held at £56+£1 p&p+VAT. 2764 Eprom (250ns) –£5.50+50p+VAT. 27128 Eprom (250ns) –£17.25+50p+VAT. UV Eprom eraser –£19.95+£1+VAT. User part extension –£9+75p+VAT IMHz Bus extension –£11+VAT. Please phone to check postage costs for multiple orders.

All products and data available from

SOFTLIFE LTD

7 Rose Crescent, Cambridge CB2 3LL Tel: (0223) 62117

PORTCOM

This powerful port control module connects to the user port of your BBC Micro and can form the basis of a computer control system for use in the home or in schools

User port still available.

Mains outputs, rated at 2.5A, 625W, optically isolated and zero voltage.

b209v. uputenty switch DC loads, rated at 3A, 28V DC, SPCO.

2 DC outputs can be used for rapid switching, rated at 5A, 50V. 50W max.

2 x 8 LED displays to monitor the user port and output devices.

Mains powered, regulated 5 and 12V supplies available to the user.

Many input and output modules available. Further modules soon to be released.

Demonstration software including a teaching program supplied on cassette or disc. All connecting leads and user manual supplied.

£126.50

REAL TIME CLOCK

REAL TIME CLOCK
This product can form the basis of calendar type programs, desk diaries etc. Useful in control situations. The clock has its own battery back up and never forgets the time. Connects to the user port. Supplied with user manual and software demonstrating its

Real time clock

BBC – ZX PRINTER INTERFACE
Still available, this popular product allows a ZX Printer to be used by the BBC Micro for listings, program development etc. Complete with user manual and fully relocatable

machine code printer driver software.

BBC – ZX Printer Interface ......

SPEECH SYNTHESIS

An almost infinite vocabulary can be produced by simple software. The unit contains its own amplifier, loudspeaker and volume control. Connects to the user port. Supplied with user manual and demonstration software.

Speech synthesis

Speech synthesis

1MHz BUS TO USER PORT ADAPTOR Not enough user ports? Then you need this adaptor. Generates 2 more user ports from the IMHz bus. Jumper links inside the unit allow the user to select the address of the ports. Mains powered. Complete with user manual.

1MHz bus to user port adaptor £51.7

1 MHz bus buffer unit £28.75 1 MHz bus decoding unit £32.20 User port monitor

Cheques, PO's to:

W.D. INTERFACES 12 Leabank Avenue Garforth, LEEDS, LS25 2BL Tel: (0532) 864328

Prices include VAT, Postage and packing. All products guaranteed S.a.e. for further details

> **Dealer Enquiries** Welcome

#### MACH1

MACHINE CODE MADE EASY! Assembler/disassembler as reviewed in Acorn User, March 1985. Features include unique single-pass symbolic assembler which already recognizes all the system variables like OSBYTE etc., has many additional pseudo-operands and comprehensive single stepping routines for debugging programs. Features unrivalled facilities for the COMPLETE disassembly of programs into editable source code (VIEW compatible) which can be saved to disc for incorporation into other programs. Powerful automatic disassembly mode takes much of the hard work out of disassembly. Second processor (2P) compatibility for examining all ROMs and memory both sides of the tube. Allows development of 8 and 16K ROMs with code and source code all in RAM at once. Available in 16K EPROM for £39.95 or on disc only for sideways RAM and 2P users for only £19.95. A utility disc, manual and a HI version for 2P use are included.

#### DAP2

FLEXIBLE DATA ANALYSIS PACKAGE. Particularly suitable for educational, scientific or laboratory use. Suite of three programs for the analysis and display of experimental data, sketching of mathematical functions and curve fitting with power law and polynomial functions. Input data files have a simple structure and are easily generated from your own programs allowing DAP2 to be interfaced easily to other programs. Can handle 9 sets of data and 1024 datapoints at one time. Includes DATA EDITOR for editing, scaling and transforming data and an ARCHIVE facility to file numerous data sets under one filename. Fully annotated graphs, histograms etc. can be dumped to EPSON compatible printers from Mode 0 display. DAP2 is supplied on disc for £25. DAP3 is a version making full use of the 6502 2nd Processor capabilities at £30 and DAP1 is a tape-based program at only £14.

Please state whether 40 or 80 track discs required. Further details supplied on request.

### GNOMONICA

2 STABLE COTTAGES, PLEYSTOWE, RUSPER ROAD, CAPEL, DORKING, SURREY RH5 5HE

\*\*\*\*\*\*\*\*\*\*\*\*

## New applications for the Beeb please Acorn


ACORN is naturally delighted by the number of 'adventurous applications' the BBC micro has been put to -Domesday Book, Telesoft-Operation Raleigh (which is using a lab of Beebs to monitor the progress of the expedition), as well as experiments in satellite communications and a proposed environmental database in proposed partnership with the World Wildlife Fund.

Another major venture that is nearer home for most of the readers of this column is The Times Network for Schools (TTNS), which is based on the Telecom Gold system of communication provided by British Telecom. Normally quite expensive, although very flexible, this makes the Gold system available for schools to use at a fraction of the normal price.

A comprehensive database is being created about curricular and extra-curricular subjects, and careers advice is on offer as well. Inter-school communications are also available, allowing the exchange of information between groups and for administrative purposes in the school.

There is a once-only charge of £125, then it costs £69 per term per mailbox, which is a huge discount on normal rates. Included in this price comes all the hardware and software necessary, as well as a Tutor program and operating manual.

Education authorities are taking the initiative on these offers and schools should contact their micro-electronics advisers or the education offices direct to find how the scheme is administered in their area.

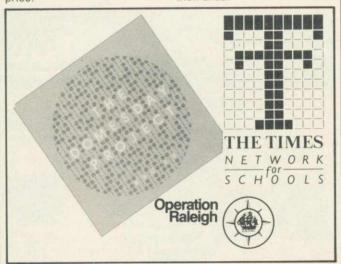


## Toad leaps to the aid of Wordwise users

HAVE YOU ever been frustrated by the 'Disc full' message when using Wordwise and Edword, knowing there's still loads of room left? The user is limited by the Beeb's filing system, which allows only 32 files per disc, but Toad Educational Computing has come up with the Wordwise Menu Disc, which allows up to 52 files and provides a catalogue of the files on screen with a description of the contents of

each. No more file searching because you can't remember what was in 'GVN3/12'!

Toad also supplies a timetable administrator package and school database. Toad Educational Computing, 8 Westbourne Grove, Sale M33 1RP, tel: 061-969 4740 (Prestel as phone number without the first 0).

84 66 79 78 84 66 84 73 84?

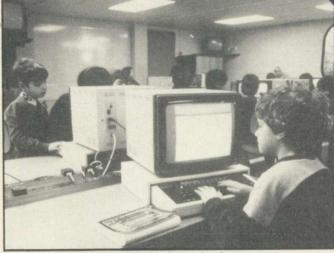

Computalab: already installed in four schools

## Look out for ready-made computer classrooms

FOR SCHOOLS with the money and the will to get ahead of the field, it may be worthwhile investigating the purpose-designed Computalab. This facility offers 12 workstations and a teaching station – all Beebs – linked together by Econet.

The teaching station includes a file-server, dual disc drive and an ink-jet printer, plus two large overhead monitors to give clear visibility for demonstration work. All of this is housed in a prefabricated building of attractive design which requires only basic ground preparation.

Naturally, the price is high but the compensations are great. How many schools have their computers ill-organised in ordinary classrooms with workspace cobbled together by the staff on a makeshift basis? The problems of wandering leads and extensions and the vagaries of the power supply running from dubious extensions all pose not only difficulties but also dangers within the computer room.

This is the ideal solution – already being used in four schools and probably more by the time of going to press. If your school or LEA is interested contact Elliot-Medway Ltd, FREEPOST, Glebe Court, Peterborough PE28BR, tel: (0733) 52151.

#### Schemes at your service

MAINTENANCE can be a nightmare in schools or colleges with many micros. Servicing is expensive and so is consequently often undertaken by staff, who are already hardpressed for time. Now several servicing schemes have come into existence and I'll document three of them here.


Cumana, the suppliers of many of the disc drives used in schools, has opened a servicing branch in Daventry. This deals not only with drives but also with computers and all associated peripherals. As an example of prices the minimum charge for a BBC B is £18 and £16 for dot matrix printers. Bear in mind this is simply a repair service and not a servicing scheme.

Simnett Computers offers a similar service with comparable prices.

The Micro Repair Club

offers an insurance scheme whereby, for an annual premium, the poorly micro will be repaired free of charge. One year's membership is £24.95, with a renewal charge of £14.95 per year after that. Schools must pay the full charge for the first four micros but thereafter will pay £19.95 per micro. The only additional cost is the price of postage to the repair centre. If premiums are paid for two or more years in advance there is an additional discount.

Full details are available from: Cumana, Daimler Close, Daventry NN11 5QJ, tel: (03272) 79494. Simnett Computers, Unit 14, St George's Industrial Estate, Kingston KT2 5BQ, tel: (01) 541 1495. Micro Repair Club, Swan Court, Mansel Road, Wimbledon SW19 4AA, tel: (0990) 28102.

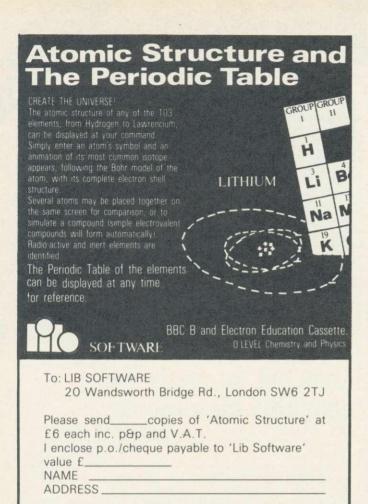

### Protect and Lockitor secure your lose it. valuable equipment.

Tidybase Housings, Covers, Locking Systems for Computers, Disc Drives, Monitors, Printers. Video Recorders etc.

Features include unique new Locking System (patents pending) with optional alarm back-up giving protection without restricting normal operation.

Standard specialised systems available.

Range includes Turntables and computer based Work Stations for the handicapped.




3 Over Links Drive, Poole, Dorset BH14 9QU. Telex: 418297



V.A.T. No. 227 4253 73

#### Superframe

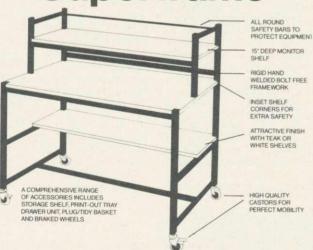

The Klick range of school furniture has an application in all areas of the school from computers and AVA's to storage equipment and OHP's. Please contact us for our current product catalogue.

Store Stock Systems, Unit 2B, Stag Industrial Estate, Atlantic Street Altrincham, Cheshire WA14 5DD Telephone 061-928 5388 Telex 667416

#### **Educational Software**





**BBC Micro** Electron Tapes, 40/80 track discs. Econet compatible. Commodore 64 ZX Spectrum unexpanded Vic **ZX 81** Apple Dragon (book only) All software for the

above computers

MICRO ENGLISH (BBC, Electron). Complete English Language self-tuition and revision course, to O'level, of 24 programs. Includes "speak-and-spell" with real voice (no extras required). £24.50.

MICRO MATHS 24 program revision or self-tuition course to O-Level. £24.50 (except ZX81 £12.00).

PICTURE PUZZLES WITH LIGHT PEN (BBC, Electron). Educational tests for infants, using light pen to select colour 3D pictures. £6.50 (Light Pen

ANIMATED ARITHMETIC Teaches using moving colour pictures (not words). Ages 3-8. £6.50 (discs £7.50)

BRAINTEASERS Book of IQ tests and puzzle programs £5.95

"Excellent". EDUCATIONAL COMPUTING.

Department A

26 Avondale Ave.

Staines, Middx.

Tel: 0784 58771

\*Immediate dispatch Micro Maths, Micro English and Master Maths. Phone or send orders or requests for free catalogue (200 programs) to:

World leaders in educational software (distributors in 24 countries)





TRADE, ENQUIRE ABOUT HOT LINE

\*AS SEEN ON\*

#### 141

# SOFTWARE GUIDE

Our list, compiled by Nick Evans, will help you track down the educational software you're looking for. Turn to page 153 for the publishers' addresses.

TITLE	PUBLISHER	STATE OF THE PARTY	MACHINE	COMMENT	KEY	TITLE	PUBLISHER
1914	Camb Micro Soft	£15	BBC B	Sec,	h,s	BelBase	BelTech
3D Transformation	Muse	£10	BBC A	Sec,	gg	Bell	Muse
Accidents Datafile	RoSPA	£5	BBC B	Factfile,	u	BelPlot	BelTech
Accounts	Heinemann	£14	BBC B	Sec,	d	Bestfit	Greenwoo
Acoustics	Longman	£14	BBC B	Sec,	р	Beyond Basic	BBC
Action Science	Franklin Watts	£11	BBC B	Jun/Sec,	i,p	Bio Wood	Solent
Action of the Heart	Garland	£11	BBC B	Sec,	b,s	Biology	Longman
Additional Fun	Shiva	£14.95	BBC A	Inf/Jun,	a	Biology	Nelcal
Advanced						Biology	Tom Ship
Programming	Addison-Wesley	£10.30	BBCB	Sec.	1	Biology Revision	Abacus
Adventure Story	ESM	£11	BBC B	Jun.	е	Biomass	Longman
Adventure Storywrite			BBC B	Inf.	е	Bioscience	IRL Press
Airport	Gibsoft		BBC B	Sec.	dd.cc	Blockbuster	Argus Pre
Algebra 'O'	Ampalsoft		BBC B	Sec.	m	Blood Circulation	Garland
Algebra Progs	Acornsoft		BBC A	Sec.	m	Blood Sugar	Longman
All Fingers Go	NEC		BBC A	Jun.	t	Body Processes and	Longman
Alphabet	Opalsoft		BBC B	Inf.	V	The Fate of Protein	Garland
	Sulis	The second second	BBC B	Inf.	V	Brainteasers	LCL
Alphachopper				Sec.	S	Break-in	Highlight
Aluminium Plant	Longman		BBC B		S	break-in	підпіідпі
Amplification	Mega Sci Cal	£12	BBC/	Sec		D. L. Land	Familiant
		04.05	Electron			Bridges	Fernleaf
Anagram	Edsoco		BBC A	Inf/Jun,	е	Britain	Datapen
Angle	Chalksoft		BBC A	Jun/Sec,	m	British Cities	Schoolsof
Angle Tutor	Pee Bee		BBC A	Jun/Sec,	m	Bstar	MUSE
Angles	Garland	٤7	BBC B/	Jun,	m	Business Games	Acornsoft
		and the	Electron				
Animal, Veg, Min	Bourne	77.70.70.70.70	BBC B	Jun,	q	C Rules	Ed Soft
<b>Animated Arithmetic</b>			BBC A	Inf,	a	CAD	Heinemai
Answer Back (Junior)	Kosmos	£10.95	BBC B/	Jun/Sec,	q	Calculus 'O'	Ampalsof
			Electron			Call Your Bluff	Square
Answer Back (Sen)	Kosmos	£10.95	BBC B/	Sec,	q	Campaign	Longman
			Electron			Can You Make It?	Fernleaf
Answer Back						Capacitor	Longman
Sports Quiz	Kosmos	£9.95	BBC/	Sec,		Capital Letters	Chalksoft
			Electron			Capitals	Chalksoft
Approx, Estimation	Heinemann	£14.38	BBBC B	Jun/Sec,	m	Capitals	Square
and Standard Form						Capitals 1	Ed Soft
Arithmetic	Schoolsoft	£12	BBC B	Inf.	a	Caravan Trek	Pee Bee
Arithmetic 'O'	Ampalsoft	£5.13	BBC B	Sec.	a	Carousel	Schoolso
Arithmetic Plus	Daco	£5.95	BBC B	Jun/Sec.	a	Cartesian	Flite
Astronomy	BBC Soft		BBC B/	Sec,	Z		
Autonomy	000 0011		Electron			Cat and Mouse	Kingfishe
Astruct	MUSE	£7	BBC B	Sec.	р	Catchapple	Kingfishe
Atoms	Weaversoft	-	BBC B	Sec.	p	Census Analysis	Longman
Attack on the Somme			BBC B	Sec.	h,s	Chemical Analysis	Acornsoft
	SESS	£8	BBC B	Special,	e e	Chemical Calculation	
Audio	ESM	£30	BBC B	Jun/Sec,		Chemical Collisions	
Author					jj	Chemical Comstons	Software
Aztec & Masterword			BBC B	Jun/Sec,	٧	Chaminal Flamont	
B/Tec Record Keeper		£15	BBC B	Teacher,	dd	Chemical Element	Longman
BBC Logo	Logo Software	£59	BBC B	Inf/Jun,	0	Chemical Equations	Gariand
			ROM			Chemical	
Ballard	Ed Soft	£3	BBC A	Jun,	a,q	Simulations	Acornsoft
Balloon	Englefield		BBC B	Jun,	V	Chemical Structures	
Balloon Lander	Gibsoft		BBC B	Inf/Jun,	X	Chemistry	Garland
Bar and Pie Charts	Tom Shipman	£7.99	BBC B	Jun/Sec,	u	Chemistry	Micro Po
Barrage	Micro Power	£7.95	BBC B	Sec,	p,s	Chemistry Revision	Abacus
Basic Sound and						Chemistry Software	Pitman
Graphics	Addison-Wesley	£10.30	OBBC B	Sec,	i	Children from Space	ASK
Basic Statistics	Arnold		OBBC B	Sec.	S		
Bearings	Bryants		BBC B	Sec.	g	Choicemaster	Wida
Beat the Bus	Solent	83	BBC B	Jun,	s,ee	Chords	Aztec
Beebshop	COTOTIC	20	5505	3011,	0,00	Chromosome	
	Alpha Computer	£25	ввс в	Jun/Sec,	1	Mapping	Garland
(Barcodes) Beeline			BBC B	Jun/Sec,	w	Circuits-diodes	Garland
Decille	Cambs. Ed. Comp					Circuits-aiodes Circuits-switches	Garland
Beep-beep	IJK	CAEO	BBC B	Inf/Jun.	k		

LE	PUBLISHER	PRICE	MACHINE	COMMENT	KEY
Base	BelTech	£18	BBC B	Jun/Sec,	dd
ell	Muse		BBC B	Jun/Sec.	p,s
Plot	BelTech		BBC B	Sec.	m
estfit	Greenwood	£5	BBC B	Sec.	m,p
	BBC		BBC A	Sec.	i
yond Basic		£9	BBC B	Jun/Sec.	
o Wood	Solent				b,s
ology	Longman	£20	BBC B	Sec,	Ь
ology	Nelcal		BBC B	Sec,	b
ology	Tom Shipman		BBC B	Sec,	b
ology Revision	Abacus		BBC B	Sec,	b
omass	Longman		BBC B	Sec,	b
oscience	IRL Press	£19.95	BBC B	Sec,	b
ockbuster	Argus Press	£8.95	BBC B	Inf,	X_
ood Circulation	Garland	£11	BBC B	Sec,	b,s
ood Sugar	Longman	£14.50	BBC B	Sec,	b
dy Processes and					
e Fate of Protein	Garland	£10	BBC B	Sec	b
ainteasers	LCL	£5.95	BBC B	Jun/Sec.	q
eak-in	Highlight	£7.95	BBC B/	Inf/Jun,	V
			Electron	CARRY STORAGE	
idges	Fernleaf	£9 95	BBC B	Jun	a
itain	Datapen		BBC B	Sec,	g,q
itish Cities	Schoolsoft	83	BBC B	Jun/Sec.	g,q
tar	MUSE	£7	BBC B	Inf/Jun,	n
isiness Games	Acornsoft		BBC A	Sec.	d
isiliess dailles	Acomson	L3.30	DDO A	000,	u
Rules	Ed Soft	C5 05	BBC A	Inf.	е
AD			BBC B	Sec.	bb
	Heinemann		BBC B	Sec,	
alculus 'O'	Ampalsoft				m,q
all Your Bluff	Square	£7	BBC B	Jun/Sec,	e,q
ampaign	Longman		OBBC B	Sec,	h,s
an You Make It?	Fernleaf		BBC B	Jun	
apacitor	Longman		OBBC B	Sec,	p,s
apital Letters	Chalksoft		5BBC B	Inf,	W
apitals	Chalksoft		BBC B	Inf,	W
apitals	Square	£7	BBC B	Jun/Sec,	g,q
apitals 1	Ed Soft		BBC A	Inf/Jun,	w,q
aravan Trek	Pee Bee		5BBC A	Jun,	S
arousel	Schoolsoft	£5	BBC B	Jun,	k
artesian	Flite	£24.90	OBBC B/	Sec,	m,u
			Electron		
at and Mouse	Kingfisher	£6.90	BBC B	Jun,	a
atchapple	Kingfisher	£6.90	BBC B	Inf/Jun,	a,q
ensus Analysis	Longman	£37.50	OBBC B	Sec,	u
nemical Analysis	Acornsoft	£10.20	OBBC B	Sec,	C
nemical Calculation	Ardsoft	26	BBC B	Sec,	C
nemical Collisions	Camb. Micro				
	Software	£15	BBC B	Sec,	C
nemical Element	Longman	£14.50	OBBC B	Sec,	C
nemical Equations	Garland	£9.57	BBC B	Sec.	C
hemical					
mulations	Acornsoft	£13.80	OBBC B	Sec,	c,s
hemical Structures			OBBC B	Sec.	C
hemistry	Garland		5BBC B	Sec,	C
hemistry	Micro Power	CE 95	BBC B	Sec,	C
hemistry Revision	Abacus		5BBC B	Sec.	C
hemistry Software			5BBC B	Sec.	C
All and the second seco	Pitman		BBC B/		
hildren from Space	MON	19.93		Jun,	e,v
hala anna atau	Mida	COF	Electron	Tonchar	11
hoicemaster	Wida	£25	BBC B	Teacher,	jj
hords	Aztec	10.50	BBC B	Jun/Sec,	m
hromosome	0 1 1	040	DDCD	0	-
apping	Garland	£10	BBC B	Sec	b
rcuits-diodes	Garland	£11	BBC B	Sec,	p,s
ircuits-switches	Garland	£11	BBC B	Sec,	p,s

Fight C								
Circular Flow of	PUBLISHER	PRICE MACHINE	COMMENT	KEY	TITLE Discounted Cash	PUBLISHER	PRICE MACHINE	COMM
Income Classmaster	Longman Logical	£14.50BBC B £20 BBC B	Sec, Teacher,	d dd	Flow Discovery	Social Science Learnwell	£15 BBC B	Sec,
Claws	Bryants	£5.10 BBC B	Jun,	n,q	Discovery	Learnweil	£9.50 BBC B/ Electron	Jun/S
Cleverclogs Climate	Computertutor CET	£6.50 BBC B £14.38BBC B	Jun, Sec,	e,q g	Disraeli Distances	Longman Micro-aid	£14.50BBC B £4.95 BBC B/	Sec,
Climate	Heinemann	£12.50BBC B	Sec,	g,cc		WICTO-aid	Electron	Jun,
Clock	Solent Addison-Wesley	£8 BBC B £29.95BBC B	Inf, Jun/Sec.	X	Dominoes	Garland	£6.95 BBC/ Electron	Jun,
Clown	Englefield	£6.25 BBC B	Jun,	e,v	Dnumb	MUSE	£8 BBC B	Inf/Ju
Cloze Procedure	GED Bryants	£4.50 BBC B £5.10 BBC B	Jun/Sec, Jun/Sec,	V	Drawing Drumkit	BBC Quicksilva	£10 BBC A £9.95 BBC B	Jun/S Jun/S
	Garland	£7 BBC B/			Dynamic NMR	Microwave	£9.50 BBC B	Sec,
Co-ordinates and		Electron	Jun,	m	Early Language Early Learning	SESS BBC	£8 BBC B £10 BBC A	Speci Inf.
ADDRESS OF THE PARTY OF THE PAR	Garland	£7 BBC B	Jun,	m	Early Reading	ESM	£9.50 BBC B	Inf/Ju
Collector's Catalogue Collisions	Acornsoft Longman	£10 BBC B £14.50BBC B	Jun/Sec, Sec,	dd p,s	Early Series Early Years 1 and 2	H&H Orion	£6.50 BBC B £7.95 BBC B	Inf, Inf,
Colour	MUSE	£6.50 BBC B	Jun/Sec,	x,gg	Earlynum	Bryants	£5.10 BBC B	Inf/Ju
Colour Matching Colouring Book	SESS Addison-Wesley	£10.35BBC B £9.95 BBC B/	Inf, Jun,	x,gg gg	Earthquake Easiplot	Soft Warehouse Synergy	£9.95 BBC B £15.95BBC B	Inf, Teach
		Electron		99	Ecology	Garland	£16.50BBC B	Sec,
Communication	Clares Britannica	£4.95 BBC B £75 BBC B	Inf, Jun/Sec,	x,gg e,ee	Economics Economics	Longman Sigma	£14.50BBC B £25 BBC B	Sec.
Communitel	IT Consultancy	£45 BBCB	Sec,	dd	Edfax	Tecmedia	£23.88BBC B	Jun/S
	Arnold Shumwari	£15 BBC B £24.95BBC B	Sec, Sec,	b dd,ff	Edmaster Education	RH Electronics Simonsoft	£12.95BBC B £6.95 BBC B	Jun/Se
Compounds	Longman	£14.50BBC B	Sec,	C	Educational	Golem	£8 BBC B/	Inf/Ju
Comprenez Computer	Heinemann	£14 BBC B	Sec,	I,q	Edword	Clwyd Technics	£15 BBC B	Sec.
Application	Addison-Wesley	£39.95BBC B	Sec,	i,s	Egg Production	Crystal	£25 BBC B	Jun/S
	MacDonald Darwood	£3.95 BBC B £8.50 BBC A	Jun/Sec, Sec,	ee	Election Programme	Chalksoft Social Science	£9.25 BBC B £39.50BBC B	Sec, Sec,
Computer			000,				Disc	060,
Programme Computers Infor-	BBC Soft	£10 BBCB	Sec,	i	Electrical Impedence Electronic News	Longman Notts.Ed.Supp.	£14.50BBC B £15 BBC B	Sec, Jun/S
mation, Awareness	Pitman	£17.95BBC B	Sec,	1 - 1	Electrons	MUSE	£6.50 BBC B	Sec,
	Greenwood Micro Power	£6.50 BBC B £6.95 BBC B	Special, Sec.	z	Electrostatics	Garland Garland	£11 BBC B	Sec,
Construction	Ampalsoft	£6.95 BBC B	Sec,	m	Elementary Stats	Gariano	£7 BBC B/ Electron	Jun,
	Ampalsoft ESM	£5.13 BBC B £10.95BBC B	Sec, Jun/Sec,	V	Elements and	Carland	C11 BBC B	0
Corn Cropper	ccs	£6.99 BBC A	Sec,	d,s	Compounds Energy Crisis	Garland Social Science	£11 BBC B £15 BBC B	Sec,
Cost Benefit Analysis Coucapcur	Longman Ed Soft	£14.50BBC B £4.95 BBC A	Sec, Jun,	e g,q	Engines English Literature	Arnold Wheaton	£6 BBC B	Sec,
Count	Clares	£4.95 BBC B	Inf,	a a	Enzkin	Akadimias Arnold	£9.95 BBC B £15 BBC B	Sec,
Count with Oliver	Mirrorsoft	£7.95 BBC B/ Electron	Inf,	а	Estimation	Hodder & Stoughton	£30 BBC B	Inf/Jui
	AVC	£3 BBC B	Inf/Jun,	a,q	Euclidean Geometry	Impact	£9.95 BBC B	Sec,
	Longman MUSE	£14.50BBC B £5.50 BBC B	Sec, Inf/Jun,	p a	Europe Rally European Geography	Tom Shipman	£7.99 BBC B £6.95 BBC B	Jun/S
Counties	Bryants	£5.10 BBC B	Jun/Sec,	g	European Studies	Aztec	£6.50 BBC B	Sec, Sec,
Counting	Garland	£8.65 BBC/ Electron	Inf	а	Evolut Examiner	Arnold Acornsoft	£15 BBC B	Sec,
	Hewson	£7.95 BBC B	Sec,	g	Exploration	Heinemann	£9.95 BBC B £33 BBC B	Teach Jun,
Cranky	ASK	£8.65 BBC B/ Electron	Jun,	n	Eye Eye for Spelling	Longman ESM	£14.50BBC B £8.95 BBC B	Sec,
Creative Graphics	Acornsoft	£9.95 BBC A/	Jun/Sec,	gg	Facemaker	ASK	£9.95 BBC B/	Inf, Inf/Jui
Crocodiles	Bryants	£5.10 BBC B	Inf.	n	Factfile	Camb. Micro	£15 BBC B	Jun,
Crossed Words	Aztec	£6.50 BBC B	Inf/Jun,	е		Software		
Cruiser	Learnwell	£4.99 BBC B/ Electron	Jun,		Factors and Fractions Fairshare	Ed Soft Griffin	£5.95 BBC B £7.35 BBC B	Jun, Jun/Se
	Greenwood	£5 BBC B	Inf/Jun,	а	Farmer	Longman	£14.50BBC B	Sec,
	Jacaranda Wiley Mega Sci Cal	£14.95BBC B £9.95 BBC/	Jun/Sec Sec,	S	Female Reproduction Field Line Simulation		£12 BBC B £11 BBC B	Sec, Sec,
		Electron			Find the Lady	Fernleaf	£9.95 BBC B	Jun/Se
	Garland AUCBE	£16.50BBC B £13 BBC B	Sec, Jun/Sec,	b	Find the Question Find your Bearings	Fernleaf Solent	£9.95 BBC B £9 BBC B	Jun/Se
	Chalksoft	£9.25 BBC A	Sec,	I,q	Firefight	Highlight	£7.95 BBC B/	Inf,
	Pitman Bryants	£19.95BBC B £4.85 BBC B	Sec, Jun/Sec,	q	First Steps with the		Electron	
	Optima	£9.95 BBC B	Jun/Sec,	У	Mistermen	Mirrorsoft		Inf,
	Chalksoft Shiva	£9.25 BBC B £14.95BBC B	Jun, Inf,	a e	Fixed exchange		Electron	
Deliver the Message	Fernleaf	£9.95 BBC B	Jun/Sec		Rates	Longman	£14.50BBC B	Sec,
	Acornsoft Thomas Nelson	£11.90BBC B £23.50BBC B	Jun, Sec,	p s,g	Fizz-buzz Flags	Bourne Micro-Aid	£4.50 BBC B £4.95 BBC B/	Jun/Se
Dictionary	Daco	£13 BBC B	Jun,	е			Electron	Jun/36
	Aztec CUP	£6.50 BBC B £13.95BBC B	Sec, Sec.	I,q ff	Flanders Fletcher's Castle	Focusplan Fernleaf	£7.95 BBC B £9.95 BBC B	Teach
Dieting	Garland	£11 BBC B	Sec,	ff	Flight Path	Storm	£17.65BBC B	Jun/Se
Digital Logic Functions	Mega Sci Cal	£12 BBC/	Sec.		Floater	Camb. Micro . Software	£15 BBC B	Sec,
		Electron			Flower	Longman	£14.50BBC B	Sec,
Directed Numbers	Garland	£7 BBC B/	Jun,	a	Flowers of Crystal	4mat	£18.40BBC B	Jun.

## )\\()\SS

#### OF ACTION, LEISURE OR LEARNING

ANSWER BACK Sports Game £9.95 (ages 14 and over) Challenge the KOSMOS team at football or tennis. But be warned, we on tiose easily...

NEW RELEASE
Whatever your sport,
this program probably
knows a lot more than

vou do

#### ANSWER BACK Junior £9.95

c9.95
(ages 6 to 11)
Defeat the dragon and
save the princess of
KOSMOS Castle...
- a superb program
with vast potential... (A
& B Computing,
November 1984)



ANSWED BACK Senior

69.95
(ages 12 and over)
Outwit the KOSMOS robot and destroy the alien

superb program. (Personal Computing Today, October 1984) IDENTIFY EUROPE £7.95 (for all ages) Solve the European


jigsaw puzzle by land or

sea...
- NEW RELEASE Discover Europe without leaving your home!

The IDENTIFY EUROPE program provides a fascinating way of discovering and learning the geography of Europe. The program will provide hours of amusement for all the family and everyone is sure to benefit from it.

The ANSWER BACK series needs little introduction. Each program combines a massive wealth of information with a fascinating and compelling game. The Senior and Junior quizzes each contain 750 questions and 3000 optional answers on General Knowledge. The Sports program is even larger containing a mind-bending 800 questions on Sport and two high-speed machine code games - Football and Tennis. But that's not all. For quiz fans, full facilities are provided for creating and saving new quizzes or modifying those supplied - and you don't need to be a programmer!

KOSMOS SOFTWARE LTD 1 Pilgrims Close, Harlington, DUNSTABLE, Beds. LU5 6LX Tel. (05255) 3942



Mr/Mrs/Miss

Dealers, contact Lightning, Microdeal, Proteus or Tiger,

Please supply the following programs for the BBC/Electron computer

ANSWER BACK Sport @ £9.95 ANSWER BACK Junior @ £9.95 **IDENTIFY EUROPE** 

@ £7.95 ANSWER BACK Senior @ £9.95

Address ...

Orders are normally despatched within 48 hours

KOSMOS SOFTWARE LTD. 1 Pilgrims Close, Harlington, DUNSTABLE, Beds. LU5 6LX Tel. (05255) 3942


#### ADMINISTRATOR'S FRIEND

#### MODULAR COMPUTER ASSISTED SCHOOL ADMINISTRATION

- 1. BASIC PACKAGE LISTS/OPTIONS ETC
- 2. EXAM ENTRIES/PUPIL DATABASE
- 3. TIMETABLING

Excellent print outs in a variety of formats further information/sample print outs/order form.

Please Contact: JOHN CALLAGHAN



**EDUCATIONAL ADMINISTRATION SOFTWARE** SOMERVILLE HOUSE BRUNSWICK ROAD MANCHESTER M20 9GA Tel: 061-445 1379

#### SUPERB HARD COVERS for your BBC Micro & Electron

- Engineered in top quality high impact ABS very tough.
- Super textured finish in cream to tone with your BBC Micro.
- Looks good in the home.
- Gives excellent protection.
- Ideal for schools and colleges.

BBC Cover: £10.95 (+£1.55 p&p) Electron Cover: £8.95 (+£1 p&p)





Send cheque/PO to: Dept. MU2 **Grange Close** Sandbach Ches. CW11 9ET Tel: (09367) 3098

#### RESOURCE FACILITIES

Specialist Academic, Educational & Business Software for the BBC microcomputer. Northern Distributor for Viglen Computer Supplies. Official Acorn dealer.

PANEL (8k ROM) — This powerful and versatile utility has been designed for the serious assembly language and machine-code programmer. It is the ideal complement to the on-board assembler. All the options of 'front-panels' on other educational micros together with many extra features, including: "Register and memory display and modification. 'Disassembler. 'Single-stepping and break points. 'Offset calculator. 'Intelligent block moves.

 $\begin{array}{l} \textbf{MICROBA} - A \text{ biology adventure game in which you can wander around the blood,} \\ \text{respiratory system, urinary system and alimentary canal of a typical human being.} \\ \text{Cassette £6.00. Disc £7.00} \end{array}$ 

 ${\bf CATB-'Computer\ Assisted\ Tables\ Bingo'.\ A\ novel\ and\ enjoyable\ way\ of\ learning\ multiplications\ tables.\ Class\ set\ of\ 30\ bingo\ cards\ plus\ program.\ Cassette\ \pounds10.00.\ Disc\ \pounds11.00}$ 

REGRESS – 'Lines of Best Fit' Regression analysis. A powerful graphical program. Linear/ Logarithmic/Inverse scaling. Up to 58 points. Remove the worst point. Print results. Cassette £8.00 Disc £9.00

ORDER – A graphic display of 8 major sorting routines: Bubble, Decrementing-wave Ripple, Cocktail-shaker, Straight Insertion, Delayed Replacement, Shell-Metzner, Heapsort, Quicksort. Incorporate procedures in your own programs. Cassette £6.00. Disc £7.00

DISKIT - STAT: a detailed report on the program size and status of each surface of your discs. Clear single screen display. Print option. EZICOPY: single copying of all programs from catalogue – menu-driven. RENAME extensions. Disc £5.00

 $\begin{array}{l} \textbf{RESMAN} - \text{A resources-management package. An ideal disc-based filing system for all} \\ \text{your resources. Helps you keep track of what you should have.} \end{array}$ 

VIEW Printer-driver: Juki 6100, Sample 2000, Quendata DWP, Epson FX/RX/MX3/DX Canon PW, KAGA Taxan KP, Brother HR15. Disc £5.00

16 + ALGEBRA - A suite of 10 programs to assist in the teaching and learning of Algebra at O level & 16+. An excellent revision aid. Written by an experienced schoolmaster

SIMPLE SENSORS for the A-D port. Simple unit plus notes on application and programs.

Light £12.00, Sound £13.00, Temperature £11.00, Touch £11.00

N.B. In addition to our software for the BBC microcomputer, we also stock a comprehensive range of Hardware, Media and Accessories: Viglen disc drives, Monitors, Printers, Discs, ROMS, Expansions, Filing systems.

ALL PRICES EXCLUDE VAT & CARRIAGE. Minimum carriage & packing £1.00.

Telephone (0422) 65935 for best prices on quality HARDWARE, FIRMWARE, SOFTWARE, MEDIA & ACCESSORIES.

RESOURCE FACILITIES, MASTERS LANE, HALIFAX HX2 7DX

ACORN USER MAY 1985



#### MOSAIC

Maths with a difference - bringing creativity to your classroom computer



A simple design program that enables the creative exploration of basic mathematical concepts. It is very flexible and can be used for producing complex designs and tesselations as well as to introduce five year olds to making simple shapes and patterns.

BBC "B" and ELECTRON

Disc (specify 40/80)

£11.50

and user guide

inclusive

£9.50

Teachers' notes and planning sheets

0.50p

Other titles available on request.


Hilditch Software, 4 Church Road, Felixstowe, Suffolk IP119 NF. Tel: Felixstowe (0394) 271747

#### BCSSP -

#### the dynamic system simulation language for BBC computers

- · describe systems by block diagrams and simulate their operations interactively
- applicable to differential and difference equations
- high resolution graphical/numerical output
- suitable for engineering, physics, economics, applied mathematics, electronics etc.
- use in education to bring differential equations alive

Example response: Van der Pol Oscillator.

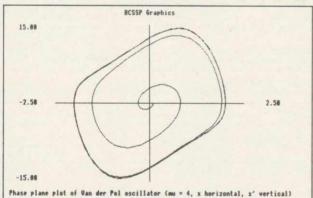

Write or phone for detailed brochure. Demonstration system available at £20 inc. manual and tutorial.

#### **Engineering Applications Software**

Centre for Advanced Technology, Chilworth, Southampton, Hampshire SO9 1XB Telephone (0703) 768956

THE ANSWER TO FINDING GOOD OUALITY SOFTWARE FOR YOUR BBC/ELECTRON



BRAIN TRAIN CLUB

SOFTWARE FOR THE FAN

FOR ONLY £3 PER YEAR MEMBERS RECEIVE

Regular newsletter with full catalogue • Discount prices on all tapes & discs • Information and advisory service • Free postage for 3 or more titles • No obligation to purchase minimum number of tapes • Rapid Delivery

#### SPECIAL OFFERS THIS MONTH:-

#### **EARLY LEARNING**

**COUNT WITH OLIVER** Tremendous graphics on this MIRRORSOFT cassette provide an excellent introduction to learning maths for 3-7 YEAR OLDS.

BBC/ELECTRON — Normal price £7.95 **MEMBERS PRICE £5.45.** 40 Track Disc £8.45.

OLLIE OCTOPUS' SKETCH PAD This neat little graphics package from STORM should provide hours of creative enjoyment for 4.8 year olds

hours of creative enjoyment for 4-8 year olds. BBC only — Normal price £6.95 **MEMBERS PRICE £5.95.** 40 Track Disc £9.95.

LOOK SHARP Sharpending the powers of observation is great fun with another offering from MIRRORSOFT with three programs for the VERY YOUNG and one on the second side to amuse and educate children UP TO THE AGE OF ELEVEN.

BBC/ELECTRON — Normal price £7.95 MEMBERS PRICE £6.45. 40 Track Disc £9.45.

ANSWER BACK QUIZZES from KOSMOS should provide hours of fun whilst teaching general

knowledge.
Answer Back Junior Quiz for 6-11 YEAR OLDS
Answer Back Senior Quiz for 11 YEAR OLDS
Answer Back Sports Quiz for ALL AGES.
BBC/ELECTRON — Cassette only. Normal price £9.95 **MEMBERS PRICE £8.45**.

SWINDLER An inspiring program from INTERFACE ASSOCIATES to teach mental arithmetic to 7-14 YEAR OLDS, who have to avoid being short-changed by shopkeepers on a shopping trip. BBC only — Normal price £7.50 MEMBERS PRICE £6.30. 40 Track Disc £8.30.

BERT BOOT Squashing insects may not sound the most pleasant way to learn multiplication and division but this program from HIGHLIGHT SOFTWARE for 8-12 YEAR OLDS really is most enjoyable and rewarding.

BBC/ELECTRON — Cassette normally £4.95 MEMBERS PRICE £3.95. 40 Track Disc £5.95.

PENGUIN STUDY SOFTWARE A most useful series of programs for those studying Shakespeare at '0' or 'A' Level to assist understanding of the texts. Titles available:—Merchant of Venice/Julius Caesar/Romeo & Juliet/Twelfth Night/Henry IV Part I/ Macbeth.

BBC/ELECTRON — Cassette only. Normal price £7.95 MEMBERS PRICE £6.95.

QUICK THINKING imaginative games from MIRRORSOFT to sharpen mental arthimetic skills with a wide range of difficulty levels, making it suitable for ANYONE OVER 7 YEARS OLD.

BBC/ELECTRON — Cassette normally £6.95 MEMBERS PRICE £5.45. 40 Track Disc £8.45.

NOTE INVADERS This program from CHALKSOFT for 7 YEAR OLDS and over, provides entertaining practice at learning note recognition on the bass and treble clets. BBC/ELECTRON — Cassette normally £9.95. **MEMBERS PRICE £7.95.** 40 Track Disc £10.95.

**DECIMALS** A more serious program from CHALKSOFT, teaching and practicing the principles of the decimal system suitable for 9-15 YEAR OLDS.

BBC only — Cassette normally £9.25. **MEMBERS PRICE** £6.45. 40 Track Disc £10.95.

Annual Membership Fee of £3.00 if new member

#### To: BRAINTRAIN CLUB, NORTHINGTON HOUSE,

59 GRAY'S INN RD, LONDON WO	C1X 8TL.		
Mr/Mrs/Miss			
Full Address			
Post Code Mem	n. No		
TITLE	BBC/ ELECTRON	TAPE/ DISC	PRICE

TITLE	ELECTRON	DISC	PRICE
		N. I	

Annual Membership Fee of £3.00 if new member

P&P @ 50p per tape (Free if 3 or more ordered)

PAYABLE TO FIRST BYTE COMPUTERS LTD

Non-members are welcome to buy at RRP **100** 

AU5


followme	PUBLISHER Edsoco	€5.95	MACHINE BBC A	COMMENT Jun,	KEY q	Henry IV part 1	Publish Pengui
	Heinemann	£33	BBC B	Jun,			
STATE OF THE PARTY	AVC	£3	BBC B	Sec,	С	Here & There with Mr	
	Longman Acornsoft		BBC B	Sec, Jun/Sec,	c	Men	Mirrors
orui	Acomson	10.00	Electron	Julii 000,		Heredity	Longm
our in a Row	Dial	£6.50	BBC B	Jun,		Hide and Seek	ASK
	Tecmedia		BBC B	Sec,	а	1111	
The second secon	Shards	£6.95	BBC B	Jun/Sec,	a	Highway Code	Bryant
7.77.70	MUSE GED	£4	BBC B	Jun/Sec, Jun,	a	Highway Code Highwire	Englefi
	Garland	27	BBC B/	Jun,	a	Hill and Doon	MUSE
			Electron			Hills	Longm
	Heinemann		BBC B	Jun,	a	Hisdata	Scorby
French French	Acornsoft AVC	£11.05	BBC B	Sec, Jun.	1	History Quiz History Revision	Abacus
French	Micro-aid		BBC B	Sec,	1	Homes	Heinen
French Connections		£15	BBC B	Sec,	1	Homogenous	
	Software	07.05	DDC D/	Can	1-	Equilibrium Hooked on Numbers	Longm
French Mistress A	Kosmos	17.35	BBC B/ Electron	Sec,		Hot line Quiz	Chalks
French Mistress B	Kosmos	£8.95	BBC/	Sec.		Hue-men	Clares
			Electron			Hulk	Brains
rench Tutor	Salamander	9.95	BBC B	Sec,	1	Human Blood Groups	
French Vocab	Hargreaves		BBC B	Jun,	1	Human Body Human Energy	Garlan Longm
Frequency Response	Mega Sci Cai	£12	BBC/ Electron	Sec,		Hunt the Thimble	Ginn &
Fun to Learn	Shards	£6.95	BBC B	Inf/Jun,		Hydraulics	Databa
Fun with Numbers	Golem	83	BBC B/	Inf,	a	I-spy	Learny
			Electron				
Fun with Words	Golem	83	BBC B/ Electron	Inf/Jun,	е	I.T.in Business Identify Europe	McGra
Fun/sums	Kosmos	64 95	BBC B	Jun,	a	identity Europe	Rosino
					u	Images	Miga S
G-Plot GB Geography	Solent Primasoft	£18	BBC B	Sec, Jun/Sec,	g		
GB Ltd	Simon Hessel		BBC B	Sec,	d	Inheritance	Garlan
Games of Deduction	Fernleaf		BBC B	Jun/Sec,	q	Inheritance Inkosi	Chalks
Gas Chromatography			BBC B	Sec,	c,cc	Inorganic Analysis	Garlan
Gas Laws Gaseous Diffusion	Longman Longman		BBC B	Sec, Sec,	C p	Into the Unknown	Tresse
Gases Dillusion	Garland	£11	BBC B	Sec.	C	Intro	Clares
Genetic Code	IRL		BBC B	Sec,	b	Intro Map Skills Introducing Science	CUP
Genetic Code						Introductory Algebra	
Mutation	Garland	£15	BBC B	Sec,	b	Introductory Genetics	
Geography Geography	Corona Tutorial	£5	BBC B	Sec,	g g	Invisible Man	Chalks
aeograpny	rutoriai	L11.00	Electron	000,	9	Investigation Marks	Caraar
Geography 'A'	BBC	£11	BBC B	Sec,	g	Irregular Verbs	Carson
Geography Revision			BBC B	Sec,	g	Italy	Corona
German Master A	Acornsoft Kosmos		BBC/	Sec.	1	Janeplus	Longm
German Master A	Kosilios	11.33	Electron	360,		Jars	Acorns
German Master B	Kosmos	£8.95	BBC/	Sec,		Jeu des Menages Jigsaw	CUP
			Electron			Jigsaw	Golein
German Sentence	Educated Owl		BBC B	Sec, Jun.	1	Jigsaw/Word Puzzles	Promo
Getset Glass	Griffin MUSE	£1.35	BBC B	Sec.	n bb		Artwor
Glycolysis	Garland	£15	BBC B	Sec.	b	Journey's End	Fernle
Gobledegook	Chalksoft	£9.25	BBC B	Sec,	е	Juggle Puzzle	ACOTTIS
Gold Dust Island	Jacaranda Wiley		5BBC B	Jun/Sec	S	Jumbles	Bryant
Gore Point Grammar Tree	Garland Sulis		BBC B	Sec, Sec,	ii,s e	Julius Caesar	Pengui
Granny's Garden	4Mat	£10.5	BBC B	Jun,	e		0-14
Graph	Micro-aid	£7.95	BBC B	Sec,	u	Jungle Maths Junior Hangman Play	Scisoft
Graph	Oxford Microware		5BBC B	Sec,	u	Junior Maths	Aztec
Graph-capers	Gem	£8.50	BBC B	Jun/Sec, Sec.	u	Junior Maths	Micro I
Graph-plotter Graphs	Garland Bryants		BBC B	Sec,	u	Junior Pinball	Impact
Graphs 'A'	Salamander		BBC B/	Sec,	u	Junior Word Splits	Sulis
			Electron			Just a Mot Keyrecog	Edsoco
Graphs 'O'	Ampalsoft		BBC B	Sec,	u	Kidney	Garlan
Graphs & Charts	Acornsoft	£9.95	BBC A/ Electron	Sec,	u	Know Your Own	
Gravity	Longman	£14.5	OBBC B	Sec.	р	Psi-Q	Mirrors
Guided Discovery	Etna Software		5BBC B	Jun,	i,ee	Know Your Own	
Hangman	Micro-aid		ввс в	Inf/Jun,	е	Personality	Mirrors
Hangman Player	Square	£7.93	BBC B	Jun,	e	. or acriainty	
Happy Letters	Bourne		BBC B/	Inf,	x	Kon-tiki	Golem
		0.	Electron	1-5	<b>SIL</b> 15	V	0
	Bourne	£8.95	BBC B/	Inf,	X	Kopfjager	Cambr
Happy Numbers			Electron				
	Bourne	£8 95		Inf.	V	L	ATM
Happy Numbers Happy Writing	Bourne	£8.95	BBC B/ Electron	Inf,	٧	L La Princesse	ATM
	Bourne LTS GSN	£14.9	BBC B/	Inf, Jun/Sec, Sec.	y gg kk	The second second second	


		1112	1	
	EL	DUCA	4 0	
			Y	
				SO ON
TITLE Henry IV part 1	PUBLISHER Penguin	PRICE MACHINE £7.95 BBC/ Electron	COMMENT Sec,	KEY
Here & There with Mr Men	Mirrorsoft	7.95 BBC/ Electron	Inf,	
Heredity Hide and Seek	Longman ASK	£14.50BBC B £8.65 BBC B/	Sec, Jun,	b v,w
Highway Code Highway Code	Bryants Tectel	£5.10 BBC B £1.95 BBC B	Jun/Sec, Jun,	1
Highwire Hill and Doon	Englefield MUSE	£6.25 BBC B £6 BBC B	Jun, Sec.	m a,n
Hills	Longman	£14.50BBC B	Sec,	g
Hisdata	Scorby	£9 BBC B	Jun/Sec,	dd,h
History Quiz History Revision	Acornsoft Abacus	£12.65BBC B £12.95BBC B	Sec, Sec.	h h
Homes	Heinemann	£33 BBC B	Jun,	The second of
Homogenous Equilibrium	Lanaman	£14.50BBC B	Sec,	c 145
Equilibrium Hooked on Numbers	Longman Acornsoft	£14.50BBC B £9.95 BBC B	Sec, Inf,	c n
Hot line Quiz	Chalksoft	£11.25BBC B	Jun/Sec,	q
Hue-men Hulk	Clares Brainstorm	£5 BBC B £29.90BBC B	Inf, Sec.	X CC
Human Blood Groups		£12 BBC B	Sec,	b
Human Body	Garland	£9.57 BBC B	Sec,	b
Human Energy Hunt the Thimble	Longman Ginn & Co	£14.50BBC B £17.50BBC B	Sec, Jun.	b
Hunt the Thimble Hydraulics	Ginn & Co Database	£17.50BBC B £5.50 BBC B	Jun, Sec,	р
I-spy	Learnwell	£4.99 BBC B/ Electron	Jun,	q
I.T.in Business Identify Europe	McGraw Hill Kosmos	£180 BBC B £7.95 BBC/ Electron	Sec, Jun,	i,d
Images	Miga Sci Cal	£9.95 BBC/ Electron	Sec,	
Inheritance Inheritance	Garland Simon Hessel	£20 BBC B £4.39 BBC B	Sec, Sec,	b
Inkosi	Chalksoft	£6.95 BBC B	Jun,	d
Inorganic Analysis	Garland	£11 BBC B	Sec,	c
Into the Unknown	Tressell Clares	£9.50 BBC B £7.95 BBC B	Sec, Jun,	0
Intro Map Skills	Cup	£18 BBC B	Jun/Sec,	g
Introducing Science	CET	£7 BBC B	Jun,	
Introductory Algebra		£19.95BBC B £15 BBC B	Sec, Sec	m b
Introductory Genetics Invisible Man	Chalksoft	£6.95 BBC B/ Electron	Jun,	q
Irregular Verbs	Carsondale	£15.99BBC B	Sec,	
Italian Italy	Acornsoft Corona	£11.05BBC B £5 BBC A	Sec, Jun/Sec,	g
Janeplus	Longman	£14.50BBC B	Sec,	g a,n
Jars	Acornsoft	£15.35BBC B	Sec,	m
Jeu des Menages Jigsaw	CUP Golem	£15 BBC B £7.95 BBC B/	Sec, Inf/Jun,	
Jigsaw/Word Puzzles		Electron £14.50BBC B	Inf/Jun,	99
Journey's End	Artwork Fernleaf	£9.95 BBC B	Jun	h
Juggle Puzzle	Acornsoft	£9.95 BBC B/ Electron	Inf/Jun,	q.gg
Jumbles Julius Caesar	Bryants Penguin	£5.10 BBC B £7.95 BBC/	Jun, Sec,	е
Jungle Maths	Scisoft	£7.50 BBC A	Inf/Jun,	m
Junior Hangman Play	Square	£7 BBC B	Jun,	e
Junior Maths	Aztec	£3 BBC B	Jun,	m
Junior Maths Junior Pinball	Micro Power Impact	£6.95 BBC B £9.95 BBC B	Jun, Jun,	m a
Junior Word Splits	Sulis	£9.95 BBC B	Jun,	е
Just a Mot	Sulis	£9.95 BBC B	Jun/Sec,	1
Keyrecog Kidney	Edsoco Garland	£4.95 BBC A £12 BBC B	Special, Sec.	x,q b
Know Your Own Psi-Q	Mirrorsoft	£9.95 BBC/	Sec,	
Know Your Own Personality	Mirrorsoft	Electron £9.95 BBC/	Sec,	
Kon-tiki	Golem	Electron £12.95BBC B/	Jun/Sec,	
Kopfjager	Cambridge Micro	Electron		
	Software	£15 BBC B	Sec,	1
La Princesse	ATM Aztec	£10 BBC B £6.50 BBC B	Jun/Sec, Jun/Sec,	m,q
Lake Web Language	Solent	£9 BBC B	Jun/Sec,	b,s
Development	LTS	£9.50 BBC B	Jun/Sec,	e l

STATE OF THE PARTY	. W					
	TITLE	PUBLISHER	PRICE MACHINE	COMMENT	KEY	TITLE
	Laser Letters	Shards	£6.95 BBC B	Inf/Jun,	е	Micro-Prolog
7	Lasermaths Learn About Words	Logical Dorling Kindersley	£7.50 BBC B	Jun, Inf/Jun,	m v	Microprimer Micro-technology
	Learning	AVC	£2 BBC A	Jun/Sec,	i	Microtext
	Learning Maths	Garland	£7 BBC B	Jun,	m	Mine
	Leaves Lenses	Heinemann Heinemann	£10.93BBC B £14 BBC B	Jun/Sec, Sec,	b,x p	Missing Signs Mmaths
	Let's Count	ASK	£8.65 BBC B/	Inf/Jun,	a	Molecular Behavio
	Letterbugs	Highlight	£7.95 BBC B/	Inf/Jun,	V	Momentum Money Box
			Electron			Money Target
	Letters	Chalksoft Aztec	£11.25BBC B £6.50 BBC B	Inf, Jun/Sec,	W	Monster Maths Monster Maze
	Library-Dewey Lift	Cambridge Micro	£15 BBC B	Sec,	У	Morse Code
	The second secon	Software				Motion
	Lingo Linreg	Complete Garland	£12.95BBC B £11 BBC B	Jun/Sec, Jun/Sec.	e	Motion Geometry
146	Lisp	Acornsoft	£16.85BBC B	Jun/Sec,	i	
1-10	Littoral Zonation	Garland	£10 BBC B	Sec	ii	Motorway Unit
	Living on a Low Budget	Ed Tech	£24.95BBC B	Sec,	d	Moving Molecules Mr T Alphabet
	Local Viewdata	ISMeC	£19.95BBC B	Sec,	dd	Mr T Measuring
	Logic Logic	RJE Shiva	£7.95 BBC B £14.95BBC A	Sec, Inf/Jun,	i	Mr T Money Box Mr T Number Gam
	Logo	Logotron	£59.95BBC B	Inf/Jun,	0	Mr T Tells Time
	Logo Challenge	Addison-Wesley	£14.95BBC B	Jun,	0	Multi-Choice Test
	Logo2 Longitudinal Waves	Computer Concepts Heinemann	\$£10 BBC B £14.38BBC B	Jun, Sec.	O p	Muscle Contractio
	Look It Up	GED	£4.50 BBC B	Jun,	e	Music Tutor
	Look Sharp	Mirrorsoft	£7.95 BBC/	Jun,		Music Editor
	Ltrace	SESS	£8 BBC B	Special,	w	Music Maestro
	Macbeth	Penguin	£7.95 BBC/	Sec,		Music Processor
	Machine Code	Interface	Electron £34 95BBC B	Sec.	i	Music Quiz
	Magic E	Highlight	£7.95 BBC B/	Inf.	V	Music System
			Electron			Musical Numbers
	Magic Numbers Making Ends Meet	Tom Shipman Cambridge Micro	£7.99 BBC B	Jun,	а	Myself Name the Square
	making Lifus Meet	Software	£15 BBC B	Sec,	d	Name the Square Nectarine Logo
	Malthus	Longman	£14.50BBC B	Sec,	d	Newton
	Map Rally	Bourne	£8.95 BBC B/ Electron	Jun,	g	Night Sky Nightmare Maths
	Map References	Logical	£7.50 BBC B	Jun/Sec,	g	Note Invaders
	Map Skills Markbook	CET Carvells	£13.95BBC B £5 BBC B	Sec, Teacher,	g	Nouns
	Markbook	Beebsoft	£15 BBC B	Teacher,		Nucleic Acid
	Market Stall	Fernleaf	£9.95 BBC B	Jun	100	Structure
	Mary Rose Mass Spectrometer	Ginn & Co Longman	£32.50BBC B £14.50BBC B	Jun/Sec, Sec,	h,s p,s	Number Balance Number Chaser
	Masterbard	Sulis	£14.50BBC B	Sec,	p,s e	Humber Chaser
	Mastercab	Bryants	£5.10 BBC B	Jun,	e,q	Number Gulper
	Masterfile Mastermind	Beebugsoft Mirrorsoft	£5.75 BBC B £9.95 BBC/	Admin, Sec,	dd	Number Painter
		1,11,13,130,1	Electron			
	Mastermind	Mirrorsoft	CS OF PRO	Sec		Number Puzzler
	Quizmaster	WIITOISOIL	£5.95 BBC/ Electron	Sec,		Number Rally
	Matching	Clares	£5.95 BBC B	Inf,	х	Number Skills
	Mathematics 1 Maths	Acornsoft Golem	£12.65BBC B £8.05 BBC A	Sec, Inf/Jun,	m m	Numberbonds Numberfun
	Maths 'O'	Ampalsoft	£11.05BBC B	Sec,	m	THE PROPERTY OF THE PROPERTY O
	Maths 'O' Level I	Shield	£10.95BBC/	Sec,		Numbers
	Maths 'O' Level II	Shield	£10.95BBC/	Sec,		Numbo Numbond
			Electron			Nuts!
	Maths 1	Tutorial	£11.95BBC B/	Sec,	m	OS Oute
	Maths Adventure	ATM	£10 BBC B	Jun/Sec,	m	OS Quiz Ogles
	Maths Examine 'O'					Open Sesame
	Level	Shield	£10.95BBC/ Electron	Sec,		Optics
	Maths Revision	Abacus	£12.95BBC B	Sec,	m	Optics Options
	Maths Topics	Cambridge Micro	£13.95BBC B	Sec,	m	Options-Timetable
		Software	£5 BBC B	Sec.	m	Organic Analysis Organic Synthesis
	Maths Translations	Corona	20 0000		m	
	Maths Translations Maths with Micro	Corona Heinemann	£21.28BBC B	Jun/Sec,	111	Oscilloscope
	Maths with Micro Mathsman	Heinemann GED	£4 BBC B	Jun,	m	Osprey!
	Maths with Micro Mathsman Measurement	Heinemann				Osprey!
	Maths with Micro Mathsman	Heinemann GED	£4 BBC B	Jun,	m	
	Maths with Micro Mathsman Measurement Measuring Price Elasticity Merger	Heinemann GED Britannica Longman Longman	£4 BBC B £75 BBC B £14.50BBC B £14.50BBC B	Jun, Inf, Sec, Sec,	m m,ee d,s d	Osprey!  Painting Paraffin File Parity Detection
	Maths with Micro Mathsman Measurement Measuring Price Elasticity Merger Metabolic Pathways	Heinemann GED Britannica Longman	£4 BBC B £75 BBC B £14.50BBC B	Jun, Inf, Sec,	m m,ee d,s	Osprey!  Painting Paraffin File Parity Detection Pascal
	Maths with Micro Mathsman Measurement Measuring Price Elasticity Merger	Heinemann GED Britannica Longman Longman	£4 BBC B £75 BBC B £14.50BBC B £14.50BBC B	Jun, Inf, Sec, Sec,	m m,ee d,s d	Osprey!  Painting Paraffin File Parity Detection
	Maths with Micro Mathsman Measurement Measuring Price Elasticity Merger Metabolic Pathways Metmap-Weather	Heinemann GED Britannica Longman Longman Longman	£4 BBC B £75 BBC B £14.50BBC B £14.50BBC B £14.50BBC B	Jun, Inf, Sec, Sec, Sec,	m m,ee d,s d b,s	Osprey!  Painting Paraffin File Parity Detection Pascal Passit Geometry

TITLE	PUBLISHER	PRICE MACHINE	COMMENT	KEY
Micro-Prolog	LPA	£45 BBC B	Inf/Jun,	0
Microprimer	Tecmedia	£9.80 BBC B	Jun,	
Micro-technology	BBC	£7 BBC B	Sec,	i
Microtext Mine	Acornsoft	£36.85BBC B £14.50BBC B	Teacher, Sec.	jj
Missing Signs	Longman Acornsoft	£8.83 BBC B	Jun/Sec.	J m
Vimaths	Ed Soft	£4.95 BBC A	Jun,	m
Molecular Behaviour	Ardsoft	£6 BBCB	Sec,	р
Momentum	Longman	£14.50BBC B	Sec,	p,s
Money Box	Bryants	£4.85 BBC B	Inf/Jun,	n
Money Target	Fernleaf	£9.95 BBC B £6.95 BBC B	Jun Inf/ lun	***
Monster Maths Monster Maze	Shards Kingfisher	£6.90 BBC B	Inf/Jun, Jun,	m
Morse Code	Aztec	£3 BBC B	Jun/Sec.	1
Motion	Mega Sci Cal	£9.95 BBC/	Sec,	
		Electron		
Motion Geometry	Garland	£7 BBC B/ Electron	Jun,	m
Motorway Unit	Longman	£14.50BBC B	Sec,	g
Moving Molecules	CUP	£13.95BBC B	Sec,	c,s
Mr T Alphabet	Ebury	£12.95BBC B	Inf,	٧
Mr T Measuring	Ebury	£12.95BBC B £12.95BBC B	Inf, Inf,	a
Mr T Money Box Mr T Number Games	Ebury	£12.95BBC B	Inf.	n n
Mr T Tells Time	Ebury	£12.95BBC B	Inf/Jun	X
Multi-Choice Test	Social Science	£8.50 BBC B	Teacher	q
Muscle Contraction	IRL	£19.95BBC B	Sec,	b
Music	BBC	£10 BBC B	Sec,	k
Music Tutor Music Editor	Garland SYSTEM	£9.96 BBC B	Inf Sec.	k
Music Editor Music Maestro	Promotional	ra ppc p	Sec,	,
Music Maestro	ArtWork	£12.50BBC B	Sec.	k
Music Processor	Quicksilva	£14.95BBC B	Jun/Sec,	k
Music Quiz	Acornsoft	£12.65BBC B/	Sec,	k,q
		Electron		
Music System	Island Logic	£12.95BBC B	Sec,	k
Musical Numbers	Bryants	£4.85 BBC B	Inf/Jun,	а
Myself Name the Square	Heinemann Fernleaf	£33 BBC B £9.95 BBC B	Jun, Jun	
Nectarine Logo	Foulsham	£29.95BBC B	Inf/Jun,	0
Newton	Arnold	£15 BBC B	Sec.	p
Night Sky	Bridge	£9.90 BBC B	Sec,	Z
Nightmare Maths	Logical	£7.50 BBC B	June,	m
Note Invaders	Chalksoft	£9.95 BBC/	Jun/Sec,	
Nouns	Sulis	£7.35 BBC B	Coc	
Nucleic Acid	Sulls	17.33 BBC B	Sec,	е
Structure	IRL	£19.95BBC B	Sec.	b
Number Balance	Acornsoft	£11.90BBC B	Jun,	n
Number Chaser	ASK	£9.95 BBC B/	Inf/Jun,	a
	101/	Electron	Indi Iron	
Number Gulper	ASK	£9.95 BBC B/ Electron	Inf/Jun,	n
Number Painter	ASK	£9.95 BBC B/	Inf/Jun,	a,n
		Electron		
Number Puzzler	ASK	£9.95 BBC B/	Inf/Jun,	a
Jumb on Daller	Lanaman	£9.95 BBC B	Inf(lun	
Number Rally Number Skills	Longman Longman	£9.95 BBC B	Inf/Jun, Inf/Jun,	a n
Numberbonds	Bryants	£5.10 BBC B	Inf/Jun,	n
Numberfun	Griffin	£7.35 BBC B/	Jun,	a
		Electron		
Numbers	MUSE	£9 BBC B	Inf/Jun,	n
Numbo Numbond	MUSE MUSE	£7 BBC B £5.50 BBC A	Inf/Jun, Inf/Jun,	n
Nuts!	Creative Sparks	£7.95 BBC B/	Jun/Sec.	a
	oroanto oparno	Electron		
OS Quiz	Arnold Wheaton	£6 BBC B	Sec,	g
Ogles	Games Machine	£8.95 BBC B	Jun/Sec,	X
Open Sesame	Sulis	£9.95 BBC B	Inf/Sec	е
Optics	Hutchinson	£16. BBC B	Sec,	p
Optics Options	MUSE SYSTEM	£6.50 BBC B	Sec, Admin,	p dd
Options Options-Timetable	AJ	£14.95BBC B	Admin,	dd
Organic Analysis	Longman	£14.50BBC B	Sec,	C
Organic Synthesis	Longman	£14.50BBC B	Sec,	С
Oscilloscope	Garland	£15 BBC B	Sec,	р
Osprey!	Bourne	£9.95 BBC B/	Sec,	S
Dalating	DDC	Electron	lun/Con	00
Painting Paraffin File	BBC BP Ed	£10 BBC A £11.95BBC B	Jun/Sec, Sec,	gg
Parity Detection	Darwood	£4.65 BBC A	Sec,	
Pascal	Chalksoft	£6.95 BBC B	Jun/Sec.	m
Passit Geometry	Ed Soft	£5.59 BBC B	Sec,	m
Pathfinder	COIC	£12 BBC B	Sec,	kk
Payslip	Pitman	£39.50BBC B	Sec,	d
Peeko-Computer	Acornsoft	£9.95 BBC B	Sec,	i

NOVACAD
Computer Aided Draughting for the BBC Micro






more easily.

All you need is a BBC Micro Model B fitted with an Acorn DFS system and a disc drive.

If you have a 6502 2nd processor and a dual disc drive system then NOVACAD's capabilities are further enhanced.



#### **MAIN FEATURES**

- \* Very user friendly with all controls and commands from the keyboard.
- \* Special windowing techniques make available to the user almost one million dots allowing a lot more details to be put on the drawing that one would normally expect the BBC to be capable of. (Mode O screen displays only 1/6 the number of dots). The drawing can be 4 screens across and 5 screens up.
- \* Libraries of user defined shapes such as electronic symbols can be created easily and edited even in the middle of drawing another diagram. Even whole sections of diagrams can be defined as shapes.
- \* Shapes can be called by name from a library into any part of the diagram and can be moved, enlarged, reduced, rotated in 90° steps and have mirror images made before being finally positioned.
- \* A zoom facility allows the user to magnify any section of a drawing by upto 50 times to make it easier to insert details.
- \* User definable grid helps the user set his own scaling for the drawings.
- \* Upto 8 'levels' can be used to produce multi layer drawings, and then user can decide which levels are to be displayed. This can be particularly useful in pcb drawings, architectural drawings with details of the services behind the walls displayed only when required and many other such applications.
- \* Text can be added at any position vertically or horizontally.
- Powerful delete facilities allow deletion of single lines or whole sections with minimum of key presses.
- \* Printer dump for Epson compatible printers incorporated in the software which allows a full or a sectional screen dump.
- \* An optional plotter utility will allow output to a range of popular plotters for high quality diagrams.



NOVACAD will prove to be an invaluable teaching aid in technical schools and colleges and for anyone involved in draughting it will be an ideal labour saving tool.

The NOVACAD package comes with a 16K ROM, Utility disc and a comprehensive manual. All for only £79 + £2 p&p + VAT.



#### TECHNOMATIC LTD

Tel: 01-208 1177 Telex: 922 800

MAIL ORDERS TO: 17 Burnley Road, London NW10 1ED SHOPS AT: NW London: 15 Burnley Road, London NW10 1ED

( O Dollis Hill 2 mins walk, ample car parking space)

West End: 305 Edgware Road, London W2. Tel: 01-723 0233 (Near Edgware Road ⊕ ) For fast delivery telephone your order quoting VISA or Access card or official order number.



#### POWERFUL NEW ROMS

#### FOR THE BBC

Never before has there been such a range of powerful but easy to use ROMS for the BBC

#### ENIGMA DISC IMAGER

Enigma Disc Imager is a 16K ROM which will give you 29 additional powerful disc commands. Some of which are: Enigma will IMAGE ANY DISC, Copy sectors, Repair bad tracks, Read deleted or special sectors, Dumps roms to disc, Loads roms from disc to sideways ram, Moves a programme up or down in memory, Unlocks locked tapes, Locks your tapes, Dumps cassette to disc, Global or selective renaming of directories, Writes deleted or special sectors to disc, Track and sector ID editor facilities, Selective file copier, Formats discs to be 40/80 track compatible (requires an 80 track drive with this command), Special disc editor to cope with protected discs, Special formatter to format discs with non standard tracks, Inserts new files into the catalogue, Enigma makes easy work of editing, copying, repairing, etc., of both standard and non standard discs.

#### ENIGMA DISC IMAGER IS TUBE COMPATIBLE ALTRA PROBE

Altra Probe is a 16K ROM which will give you 59 additional powerful machine commands. Some of which are: Altra Probe will list a basic programme straight from file, Formats basic assembler text output, Dissembles, Unpacks, Super Packs, Relocates, Edits memory, Switches off roms, Lists roms, Copies roms to specified address. Calculates free memory, Copies screen text to printer, Lists all specific types of basic variables and values, Graphics dump for Epson or NEC printers, Calculates and details free space on a disc, On board formatter which will automatically format a dual disc, Onboard formatter and verifier. Repairs bad tracks, Disc sector editor, Turns the tube on and off. These are only a few of the commands available from Altra Probe. Altra Probe makes easy work of editing, programme development, etc.

#### ALTRA PROBE 2 IS TUBE COMPATIBLE

#### BASIC ED

Basic Ed, is on 8K ROM which contains 21 additional commands. They are: \$ search, List matches, Number matches, Global replace, Selective replace, Bad programme relink, Copy lines from one part of a programme to another, Format a listing, Move, Super pack, Renumber, Table line references, Unpack, Variables X ref, List entire programme, Keyboard immediate mode, Printer on/off, Paged mode on/off, List match lines, Concatenate, Strips rems, spaces etc. Altra Basic Ed. is an essential helpful tool for the Basic / Assembler programmer. Altra Basic Ed. is available in two versions. Basic Ed. 1 and Basic Ed. 2.

### ALTRA BASIC ED. 2 IS TUBE COMPATIBLE FIRST AID 1.1

First Aid 1.1 is an 8K ROM which contains 19 additional commands. They are: Machine code dissembler, Hex and ASCII dump. Sideways rom to ram copier, Function key predefined facilities, Variable table listing, Memory space free calculator, Checksum calculator, Rom lister, String search, Define function keys with strings, Rem and space Stripper, Bad programme fixer, Clear all variables, Clear ram from &0400 to &8000, Machine code monitor, First Aid 1.1 as a language, Lists 0.S. calls with their vectors, Lists the first 24 control codes. Altra First Aid 1.1 was designed to assist the Basic / Assembler programmer and the sideways rom user.

#### PICTURE ANIMATOR

Picture Animator is a mode 7 disc based high quality text and picture editor which lets you compose very sophisticated moving pictures. An ideal tool for the person who wishes to exploit the BBC micros teletex mode. The software is easy to use and your work can be saved to tape or disc.

#### MUSIC MAESTRO

Music Maestro is a superior and comprehensive disc based sound and music composer. All the sound facilities in the BBC are Utilised. Envelope composition is displayed graphically to assist you in determining the wave form required. Almost any musical instruments voice can be created and reproduced from the BBC. Music Maestro is simple to use and will save your symphony or tune to cassette or disc.








☐I enclose my order for the above products.	
☐ Please send information sheet on	S.A.E. enclosed
Name	
Address	

Telephone orders please ring: 0532 451508 Send order to: ALTRA ROMS, 209 North Street, Leeds LS7 2AA.

Please send me:	
PICTURE ANIMATOR_	@£19·00
MUSIC MAESTRO	@£19·00
E.D.1.	@£49·00
PROBE 1	@ £49·00
PROBE 2	@£59·00
F/AID 1.1	@£25·00
BASIC-ED	@£29·00
BASIC-ED 2	@£35·00
I enclose the sum of	TOTAL £
Cheque, P.O. or Credit Ca	ard Number

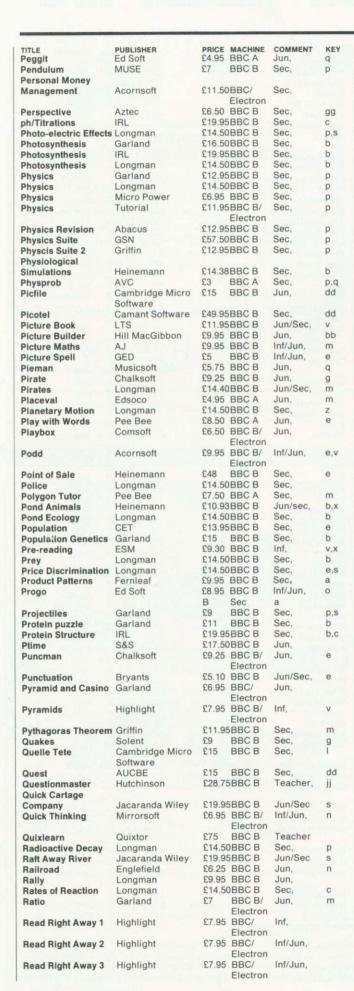


			-	N. A.
				V
TLE	PUBLISHER	PRICE MACHINE	COMMENT	KEY
lead Right Away 4	Highlight	£7.95 BBC/ Electron	Jun,	
eadability	Arnold-Wheaton	£6 BBC B	Teacher,	V
eading Music rade 1	Ardsoft	£31 BBC B	Jun/Sec.	k
eading Skills	Macmillan	£12.95BBC B	Inf,	V
eadlevel	Daco	£12 BBC B	Teacher,	V
eadwell elationships	Daco BBC Soft	£18.50BBC B £17.20BBC B	Inf/Sec, Sec.	v b.s
epondez	Heinemann	£14 BBC B	Sec,	1
esearch Trail	Fernleaf	£9.95 BBC B	Jun/Sec	Short I
esistor eversals	RJE Chalksoft	£4.95 BBC B £9.25 BBC B	Sec, Jun/Sec	p w
eversals hythm and Pitch	Chalksoft	£14.25BBC B	Sec,	k
ice	Longman	£14.50BBC B	Sec,	g,d
oad Safety	Bryants	£5.10 BBC B	Jun,	f
oad User Insurance oadcraft	Notts C C Highlight	£11 BBC B £6 BBC B	Jun/Sec, Inf/Jun,	d,s f
obotic Sums	GED	£4.50 BBC B	Inf/Jun,	a
omeo and Juliet	Penguin	£7.95 BBC/	Sec,	
ounders	Britannica	£75 BBC B	Jun/Sec,	
ım Safety	Argus Press	£9.30 BBC B	Inf,	f
alde	MUSE	£6.50 BBC B	Sec,	m
cales	Heinemann	£14.38BBC B	Sec,	m
cavenger Hunt	Jacaranda Wiley GSN	£14.95BBC B £14 BBC B	Jun/Sec, Jun/Sec,	s dd
cience	Shards	£6.95 BBC B/ Electron	Sec,	uu
ea Cliff Erosion	Cambridge Micro	£15 BBC B	Sec,	g
ed Germination	Software Garland	£16.50BBC B	Sec.	b
ntence Builder	ESM	£9.30 BBC B	Sec, Inf/Jun,	e
entence Sequence	Acornsoft	£10 BBC B	Jun,	e
entence Shaker	GED	£4.50 BBC A	Jun,	е
entence Starter	Ed Owl	£9.50 BBC A	Jun,	е
entence	SESS	£8 BBC B	Special,	e
enstruction entence	JEGG	LO DECE	Special,	0
onstruction	Darwood	£4.95 BBC A	Jun,	е
entences	Ardsoft	£6 BBC B	Jun/Sec	٧
entences	Sulis	£7.35 BBC B £8 BBC B	Sec, Inf/Jun.	e
equence equences	Solent Chalksoft	£8 BBC B £6.95 BBC B	Jun/Sec.	e a
erpent's Lair	Comsoft	£4.95 BBC B/	Jun/Sec,	g
		Electron		
ets	Garland	£7 BBC B/	Jun,	a
ets and Operators	Shiva	Electron £14.95BBC A	Inf/Jun.	a
ape	Learnwell	£8 BBC B/	Jun,	a
nape Logic	Solent	Electron £8 BBC B	Inf/Jun,	x
nape up	ASK	£10.95BBC B	Jun,	m
hapes	GED	£8 BBC A	Inf,	IDE I
neepdog	Longman	£9.95 BBC B	Inf/Jun,	6
eep Dog Trial ipshapes	Jacaranda Wiley Argus Press	£14.95BBC B £7.95 BBC B	Sec, Inf,	S X
nipsnapes	Logical	£7.50 BBC B	Jun,	e
oot	Soft Centre	£6.90 BBC B	Jun,	m
gns	Acornsoft	£11.95BBC B	Inf/Jun,	
milies	AVC	£3 BBC A	Jun/Sec,	e
xgam kybaby	Pitman Stellar	£28.75BBC B £12.50BBC B	Sec, Sec,	e z
ick!	BP Ed	£11.95BBC B	Jun/Sec,	S
olfatu	MUSE	£9 BBC B	Jun/Sec,	k
ortout	Highlight	£7.95 BBC B/ Electron	Inf/Sec,	V
pace Recognition	GED	£4.50 BBC A	Inf	x
panish	Acornsoft	£11.05BBC B	Sec,	1
oanish Tutor A	Kosmos	£7.35 BBC B/	Sec,	
oanish Tutor B	Kosmos	£8.95 BBC/	Sec,	
pecial Products	Impact	Electron £14.95BBC B	Sec,	m
peechparts	Bryants	£5.10 BBC B	Sec,	е
peed and Light	Acornsoft	£11.90BBC B	Jun,	р
pellbound	SESS Sulis	£8 BBC B £9.95 BBC B	Special, Inf/Jun,	e e
pellbound pellcheck	Ed Soft	£4.95 BBC A	Jun/Sec,	e
pelling	Garland	£8.65 BBC/		
	0.00	Electron		е
pelling	Soft Centre	£6.90 BBC A	Jun/Sec,	e
pelitest plashdown	Bryants Highlight	£5.10 BBC B £7.95 BBC B/	Jun/Sec, Inf.	e,q v
idalidowii	, nginight	Electron		_
		Liection		
loosh	Highlight	£7.95 BBC B	Inf,	v

CATION

TITLE Squeeze	PUBLISHER	PRICE MA		COMMENT Inf/Jun,	KEY m	TITLE Titrations	PUBLISHER SYSTEM	PRICE £13	MACHINE BBC B	COMMENT Sec,	<b>KEY</b>
			ectron	100		Top of the Pops	Chalksoft		BBC B	Jun/Sec,	
queeze	Acornsoft	£9.95 BE		Jun,	m	Topomap II	Solent	£25	BBC B	Sec,	gg
Stable	Englefield	£6.25 BE		Jun,	е	Towers	Bryants		BBC B	Inf, Jun/Sec.	
Starseeker	Mirrorsoft MUSE	£9.95 BE	BC B	Sec, Jun/Sec,	z e	Towns of GB	Aztec Silverlind		BBC B		g
Starspell		£14.50BE		Sec,	u	Towntest Traditional Board	Silveriina	10.50	DDC D	Sec,	g,q
Statistics	Longman	£9.95 BE			u	Games	Garland	CC OF	BBC/	lun	
Statpack	Micro-aid Chalksoft	£7.95 BE		Sec, Jun,	e	Games	Gariand	10.95	Electron	Jun,	
Story Story	Daco	£14.50BE		Jun,	e	Transpiration	Garland	£10	BBC B	Sec,	b
Story	H&H	£7.50 BE		Inf.	e	Transpiration	Longman		DBBC B	Sec,	b
Storybuilder	Bryants	£5.10 BE		Jun.	e	Transverse Waves	Heinemann		BBBC B	Sec.	p
Storyline	Daco	£7.95 BE		Jun,	e	Travel	Heinemann	£33	BBC B	Jun.	P
Structured	Daco	27.00 DE	000	ouri,		Treasure	Fernleaf		BBC B	Jun,	a
Programming	McGraw Hill	£5.95 BE	BC B	Sec.	i	Treasure Islands	Ginn & Co	£25	BBC B	Jun/Sec.	-
Stspell	MUSE		BC B	Sec,	е	Treasure Hunt	Kingfisher		BBC B	Jun,	m
Studentdata	ESC		ВСВ	Admin,	dd	Tree of Knowledge	Acornsoft		BBC B	Jun/Sec.	dd
Submarines	GED		BC A	Jun,	m	Tree of Shapes	Bryants		BBC B	Jun/Sec.	m,de
Sulphuric Acid	Longman	£14.50BE		Sec.	С	Triangles	Chalksoft		BBC B	Jun/Sec.	m
Sum up	Learnwell		BC B/	Jun.	m	Trig Basics	Impact		BBC B	Sec,	m
1100			ectron		****	Trigonometry 'O'	Ampalsoft		BBC B	Sec.	m
Super Hangman	IJK	£4.50 BE		Jun,	q	Tstar	MUSE	£7	BBC B	Jun,	m
Supermarket	COIC		BC B	Sec.	kk	Ttest	SESS	83	BBC B	Special,	n,q
Superplot	Beebug	£7.50 BE		Sec.	U	Turtle Graphics	Acornsoft		BBC B	Jun/Sec.	0
Superspell	Aztec	£5.50 BE		Jun,	e	Turtles	AVC	26	BBC B	Jun,	0
Survey	Greenwood		BC B	Jun/Sec.	dd	Twelfth Night	Penguin		BBC/	Sec.	
Survival	SYSTEM	£14.95BE		Sec,	ee	I Wellal Hight	, enguin	21.93	Electron	560,	
Swindler	Interface	£4.95 BE		Inf.	a	Type Invaders	Carswell	£6.95		Jun/Sec.	t
Symbols	Britannica		BC B	Inf.	m.ee	Typeasy	Carswell		BBC/	Juli Jec,	
Symbols to Moles	Heinemann		BC B	Sec.	C	Typeasy	Carswell	10.55	Electron	Sec	+
Symmetry	Garland		BC/	Jun/Sec.	· ·	Umziehen	CUP	£15	BBC B	Sec.	ì
by minotry	Garrano		ectron	our root,		Unistat	University	£85	BBC B	Sec.	u
Synth	Musicsoft	£8.75 BE		Sec.	k	Urban Growth	Longman		DBBC B	Sec.	e,s
T-Squared	York House		BC B	Admin,	dd	Urban Welfare	Longman		DBBC B	Sec.	e
Tables	AVC		BC B	Jun.	m	Utility	Longman		BBC B	Sec.	e
Tables	Bryants	£5.10 BE		Jun	m	Vectors	Salamander		SBBC B/	Sec.	m
Tables Adventures	ASK	£8.65 BE		Inf/Jun,	m	***************************************	Guidinaridor	211.00	Electron	000,	
			ectron			Vectors	CUP	£15	BBC B	Sec.	m
Tables Teacher	Dr Soft	£6.95 BE		Jun.	m	Verbs	Sulis		BBC B	Sec.	î
Tables Wizard	Hill MacGibbon	£6.95 BE		Jun/Sec.	a	View	Acornsoft		BBC B	Sec.	aa
Tablesums	Griffin	£7.35 BE		Jun.	m	Viking England	Fernleaf		5BBC B	Jun/Sec.	h.s
		Ele	ectron			Vu-file	Psion		BBC B	Sec.	dd
Take it Away	Arnold Wheaton	£6 BE	BC B	Inf/Jun,	a	Wage Theory	Longman		DBBC B	Sec.	е
Target	MUSE	£5.50 BE	BC B	Jun,	a	Water on Land	Longman	£14.50	BBC B	Sec.	g,s
Tasmath	Tasman	£5.95 BE	BC B	Sec,	m	Watts	CUP	£13.95	BBC B	Sec,	p
Teacher in the						Waveform Analysis	Garland	£11	BBC B	Sec,	р
Custard	Pee Bee	£8.50 BE	BC A	Inf/Jun,	m	Waves	BBC Soft	£17.20	BBC B	Sec,	p,s
Teeth and Dental						Weather	Heinemann	£33	BBC B	Jun,	g
Care	Garland	£14.50BE	BC B	Inf/Jun		Weather Station	Arnold Wheaton	£17.50	BBC B	Sec,	g
Telebook	4mation		BC B	Jun,	e,aa	Whatsit	Ed Soft	£4.95	BBC B	Jun/Sec,	q
Telem-Nantes	Hodder	£17.25BE	BC B	Sec,	I,dd	Where?	Micro Power	£6.95	BBC B	Jun/Sec,	g,q
Temperature Control	Acornsoft	£9.95 BE	BC B	Sec,	b,s	Which Salt	Micro Power	£6.95	BBC B	Sec,	С
Tense French	Sulis	£9.95 BE	BC B	Sec,	1	Winds	Longman	£14.50	BBC B	Sec,	9
Terrible Tales	Longman	£9.95 BE		Jun,		Wonderwords	Tom Shipman		BBC B	Jun,	е
Tess	H&H	£8.50 BE		Jun/Sec,	m	Word Hunt	Acornsoft	£10	BBC B	Jun/Sec,	е
Tessellations	Cambridge Micro	£25. BE	BC B	Jun/Sec,	m	Word Mover	BBC Soft	£9.95	BBC B/	Jun/Sec,	aa
	Software								Electron		
Tex-Print	Ephagy		BC B	Jun/Sec,	gg	Word Sequencing	Acornsoft		BBC B	Jun,	е
Text	MUSE		BC B	Sec,	е	Word Skill	Chalksoft		BBC B	Jun/Sec,	е
Textfill	Carsondale	£9.95 BB		Sec,	1	Word Tray Wizard	Hill MacGibbon		BBC B	Jun/Sec,	е
The Argonaut	Ajax Computing		BC B	Jun,	ee	Wordchaser	Tom Shipman		BBC B	Jun,	е
The Cross number	Darwood	£4.65 BB	BC A	Inf/Jun,	m	Wordflash	Edsoco		BBC A	Inf/Jun,	е
puzzle						Wordfrog	Ed Owl	£7.50	BBC B	Jun,	е
The Establishment	Logical	£7.50 BB		Jun,	е	Wordgames	Griffin	£7.35	BBC B	Jun,	е
The Garden	Clares	£6.95 BB		Inf/Jun,	е	Wordhang	Bourne	£8.95	BBC B/	Inf/Jun,	е
The Jarl	Fernleaf	£9.95 BB	BC B	Jun/Sec,	h,s				Electron		
The Merchant of						Wordline	Aztec	£3	BBC B	Jun,	е
Venice	Penguin	£7.95 BB	BC/	Sec,		Wordmaster	RH Electronics		BBC B	Jun/Sec,	е
			ectron			Word Matching	Garland	£8.65	BBC/	Inf,	V
The Method	BeeBinEd		BC B	Sec,	q				Electron		
The Move	Fernleaf	£9.95 BB	BC B	Jun,	h,s	Wordpower	Sulis	£9.95	BBC B	Jun/Sec,	е
The Perfume Hunter	Fernleaf	£9.95 BB	BC B	Jun,		Words and Pictures	Chalksoft	£9.95	BBC B	Jun,	е
The Raiders	Fernleaf	£9.95 BB	BC B	Jun,	h,s	Words Words Words	ASK	£8.65	BBC B/	Jun,	е
The Saxons	Garland	£11.50BE	BC B	Jun,					Electron		
hermal Equilibrium		£11 BB	BC B	Sec,	p	Wordskill	Chalksoft	£12.25	BBC B	Jun/Sec,	V,Q
ime Traveller	Sulis	£9.95 BB		Jun/Sec,	h,q	Wordspell	Griffin		BBC B	Jun,	е
Time Man 1	Bourne	£8.95 BB		Inf/Jun,	х	Wordsquare	Garland		BBC B/	Jun/Sec,	е
			ectron						Electron		
Time Man 2	Bourne	£8.95 BB	BC/	Jun/Inf,		Wordsquares	MUSE	63	BBC B	Jun/Sec.	е
			ectron			Wordsworth	Ian Copestake	£10	BBC B	Sec,	aa
	A 4	00 00	000	Inf/ lun	400					150000	
Fimes Tables	Aztec	£3 BB	BC B	Inf/Jun,	m	Wordwise	Computer Concep	ts£40	BBC B	Sec,	aa

a—Arithmetic, b—Biology, c—Chemistry, d—Economics, e—English, f—Road skills, g—Geography, h—History, i—Computer studies, j—Engineering, k—Music, l—Languages, m—Maths, n—Number bonding, o—Logo, p—Physics, q—Quiz or test, r—Rote, s—Simulation, t—Typing, u—Statistics, v—Reading, w—Writing, x—Recognition, y—Library, z—Astronomy, aa—Word processing, bb—Design, cc—Analysis, dd—Database, ee—Topic based, ff—Food and nutrition, gg—Graphics, hh—Self assessment, ii—Ecology, jj—Authoring, kk—Careers, Sec—Secondary, Jun—Junior, Inf—Infants.

# Our family now run faster



on the Tube®



# The industry standard MACRO ASSEMBLER - DEBUGGER - EDITOR.

Used entirely by Island Logic and System to write 90K of m/c for The Music System! Version 2 has been significantly enhanced to include local labels, any number of output files, enhanced arithmetic expressions. With a SECOND PROCESSOR there is an **80 column** version of the powerful ADE macro EDITOR and the option to assemble to memory for a really fast assembly.

£60 inc vat

Please specify 40T or 80T utility disc

#### System

and all good computer stores.





(0742) 682321 Please ring for upgrade prices

Dept. G 12 Collegiate Crescent Sheffield S10 2BA

Tube® is a registered trade mark of Acorn Computers Ltd.

#### The ASSEMBLER that professional software writers use.

All the superb features of the ADE macro assembler version 2.

£35 inc vat

Please specify 40T or 80T utility disc



The most comprehensive and cost effective of all DEBUGGING / DISC UTILITY ROMs.


The SECOND PROCESSOR compatible version can now SPY into either side of the Tube® or into any ROM. Rated by many reviewers as the best disc utility EPROM on the market.

Telex: 8954958.


£30 inc vat

Exclusive Scandinavian distributors

Dataforum
Oslo 5 02-371440





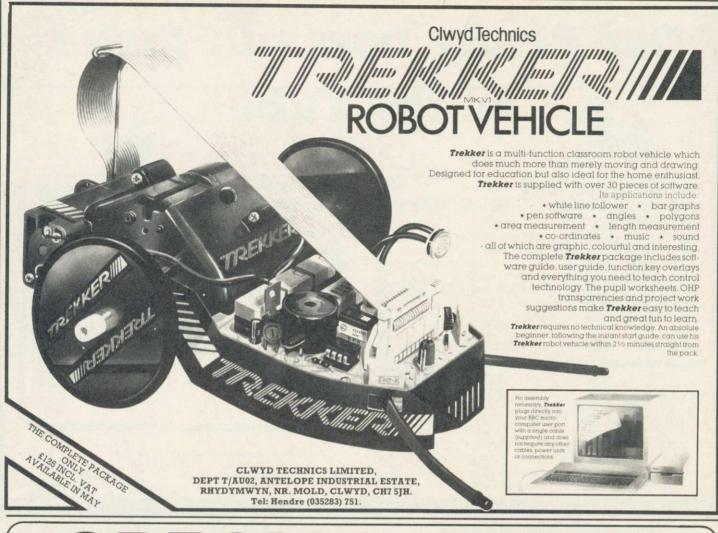

# SPECIAL OFFER

**EDWORD** 

#### WORD PROCESSOR HOME PACK

The pack contains:- ★ 1EDWORD word processor 16K ROM chip

- ★ 1 user Reference Guide
- ★ 1 Keyboard Insert
- ★ 1 disc/cassette for printer configuration

You have heard of EDWORD, the educational word processor for the BBC microcomputer, now you can use it in your home at a price you really can afford. Send letters, compile reports, write books, poems, short stories . . . Take advantage of EDWORD's exceedingly user-friendly editing facilities to give your work the professional look, and never retype or use liquid paper again. Even the children can user EDWORD. BUT HURRY – this very special offer is available only while current stocks last. Send off the order form below or quote reference number EWPAU02.



Please send me:-

- EDWORD Home Pack(s) disc 40T/80T (please delete as appropriate)
- EDWORD Home Pack(s) cassette

At the total special offer price of ONLY £39.95 including delivery and including V.A.T.

Date \_\_\_\_\_\_ Tel: \_\_\_\_\_\_\_

PLEASE SEND THIS ORDER TO:-



**CLWYD TECHNICS LIMITED** 

Dept EWPAU02, Antelope Industrial Estate, Rhydymwyn, Mold, Clwyd.

Tel: Hendre (035283) 751

# **EDUCATIONAL SOFTWARE PUBLISHERS**

Abacus 21 Union Street, Ramsbottom, New Bury, Lancs

Acornsoft Betjeman House, 104 Hills Road, Cambridge CB2 1LQ, tel: (0223) 316039

Addison-Wesley Ltd Finchampstead Road, Wokingham, Berks RG11 2NZ, tel: (0734) 794000 AJ Software 61 Jeddo Road, Lon-

don W12 9ED Ajax 57 Rowley St, Walsall, West Midlands WS1 2AZ

Akadimias University College of North Wales, Bangor, Gwynedd

Alpha Computer School Ebernoe House, 33 Chesswood Road, Worthing, Sussex BN11 2AA, tel: (0903) 210701

Ampalsoft 31 Woodbridge Road, Darby Green, Blackwater, berley, Surrey, tel: (0252) 876677 AUCBE Chiltern Computing Endymion Road, Hatfield, Herts tel: (07072) 65443

AVC PO Box 415 Birmingham Ardsoft Educational Software 20 Castle View, Leeds LS17 5BY,

tel: (0532) 693859

Argus Press 1 Golden Square,
London W1R 3AB, tel: 01-437 0626

Arnold 41 Bedford Square, London WC1B 3DO

Arnold-Wheaton Ltd Parkside Lane, Dewsbury, Leeds LS5 TD ASK London House, 68 Uppe Richmond Road, London SW15 2RP, tel: 01-874 6046 ATM Kings Chambers, Queen

Street, Derby DE1 3DA BAKsoft 34 Humberstone Road,

Cambridge BBC-Beebsoft Room 107, 35

Marylebone High Street, London W1M 8AA, tel: 01-580 5577

BeeBinEd The Coach House

Hunsdonbury, Ware, Herts SG12 8PW, tel: (0920) 870508

Beebug PO Box 109, High Wycombe, Bucks, tel: (0727) 60263

Beltech College House, St Leo-Bourne Educational Software
Bourne House, The Hundred,
Romsey, Hants SO5 8BY, tel: Romsey, Har (0794) 523301

Brainstorm 103a Seven Sisters Road, London N7 7QN, tel: 01-263 Bridge Software 36 Fernwood.

Marple Bridge, Stockport, Cheshire SK6 5BE

Bryants 1 The Hollies, Chalcraft Lane, North Bersted, Bognor Regis PO21 5SX

Busco 16 Colwill Walk, Mainstone, Plymouth, Devon

Camant Software Services 8 Graigstewart Crescent, Alloway, Ayr KA7 4DB, tel: (0292) 43492 Cambridge Micro Software

Carswell Computers Farringdon Oxon SN7 8JN, tel: (036 787) 238 Carvells 3-7 Bank Street, Rugby

CCS 14 Langton Way, London SE3 7TL

CET-Council for Educational Technology 3 Devonshire Street, London W1, tel: 01-580 7553 Chalksoft Ltd PO Box 49, Spald-

ing, Lincs PE11 1NZ Clares Micro Supplies Providence House, 222 Townfields

Clwyd Technics Unit 4B, Ante-lope Industrial Estate, Rhydym-Mold. Clwvd. tel: (0352)

COIC Software Mannower Services Commission, Moorfoot Sheffield S14PQ, tel: (0742) 704563

32-38 Osnaburgh Complete Street, London NW1 3ND, tel: 01 387 9503

Computer Concepts 16 Wayside Chipperfield, Herts WD4 9JJ, tel: (09277) 69727

Computercat 224 Chapel Street. Leigh, Lancs Comsoft 7 Roman Drive, Leeds

lan Copestake 23 Connaught Crescent, Brookwood, Woking, Surrey, tel: (0486) 74755

Corona 73 High Road, South Woodford, London

Creative Sparks Thomson House, 296 Farnborough Road, Farnborough, Hants GU14 7NU,

tel: (0252) 543333 CUP—Cambridge Press Edinburgh Building, Shaftesbury Road, Cambridge, tel: (0223) 312393

DACC 23 Waverley Road, Hindley, Lancs
Daco 59 Mackenzie Road, Mose

Birmingham, tel: 021-449 2253 Database 27 City Road, Stoke,

Staffs

Datapen Kingsclere Road, Over-

Dial Software 72 Downend Road, Downend, Bristol, Avon

Doctor Soft 258 Coneygree Road, Peterborough, Cambs, tel: (0903) 206076

Dorling Kindersley 1-2 Henrietta Street, London WC2E 8PS, tel: 01-240 5151

Ebury Software National Magazine Co, 72, Broadwick Street, London W1

Tech Services The Barn Thorney, Peterborough PE6 0GA, tel: (0733) 270805

Ed Soft 76 Woodville Road, Exmouth, Devon, tel: 0395 275741 Educated Owl 62 Airedale Avenue, Tickhill, Doncaster, S Yorks Englefield High House, Mill Street, Buxton, Norwich, Norfolk
Ephagy Software 125 Corporation Road, Grimsby, South
Humbs DN31 1UR, tel: (0482)

ESC 50 Pope Road, Bromley, Kent, tel: (01) 464 7890 ESM Educational Software for

Microcomputers Duke Street, Wisbech, Cambs, tel: (0945)

Etna Software 58 Weelsby Road, Grimsby S Humbs, tel: (0472) 77215

4mation Linden Lea, Rock Park, Barnstaple, Devon EX32 9AQ, tel: (0271) 45566 Fernleaf Educational Software

Fernieal House, 31 Old Road West, Gravesend, Kent DA11 0LH, tel: (0474) 59037 Filte Conway, County Donegal,

Focusplan Focus House, Westgate, Cleckheaton, W Yorks Foulsham Educational Yeovil Road, Slough, Berks SL1 4JH Yeovil

Franklin Watts 12a Golden Square, London W1R 4BA, tel: 01-437 0713

Garland Computing 35 Dean Hill, Plymouth, Devon PL9 9AF, tel: (0752) 41287

GEM Software 1 Oswald Road, Leamington Spa. Warwicks GED 70 Stoke Road, Bletchley,

Milton Keynes, Bucks Gibsoft 38-42 Peveril Street, Nottingham, Notts

Ginn & Co Prebendal House, Parsons Fee, Aylesbury, Bucks Golem 77 Qualitas, Bracknell, Berks RG12 4QG, tel: (0344)

Greenwood, J G Seal, Greenwood Cottage, Lower Bock-hampton, Dorchester, Dorset DT2 8PZ

Griffin & George 285 Ealing Road, Alperton, Wembley, Middx HA0 1HJ, tel: 01-497 3344

GSN Educational Software 214 Stamford Street, Asthon-under-Lyme, Lincs OL6 7LR, tel: (061)

GT Software 8 Bull Street, Potton. Sandy, Beds

H & H Software 53 Holloway Runcorn, Cheshire J Hargreaves Updown, Pewley Way, Guildford, Surrey

Heinemann Computers in Edu-cation 22 Bedford Square, Lon-

don WC1 3HH, tel: 01-637 3311 don WC1 3HH, tel: 01-637 3311

Simon Hessell Software 15

Lytham Court, Cardwell Crescent Sunninghill, Berks

Hexagon Software 17 Straits

Road, Gornal, Dudley, W Mid-

lands

Highlight Software 36 Sherbourne Close, Barry, S Glamor-gan CF6 5AQ, tel: (0446) 745482 Hill MacGibbon St Bartholomew House, 92 Fleet Street, London

Hodder & Stoughton Mill Road, Dunton Green, Sevenoaks, Kent Hopesoft Hope Cottage, Winter bourne, Newbury, Berks

Hutchinson Education Hutchin son House, 17-21 Conway Street, London, tel: 01-387 2811

IJK Software 9 King Street, Blackpool, Lancs Interface 9-11 Kensington High Street, London W8

IRL Press PO Box 1, Evnsham, Oxford OX8 1JJ

Island Logic System, 12 Collegiate Crescent, Sheffield S10

ISMeC Westminster North Hinksey, Oxford OX2 9AT

IT Consultancy Notting Dale
ITEC, 189 Freston Road, London

Jacaranda Wiley Software Baf-fins Lane, Chichester, Sussex PO19 111D

Kansas City Systems Unit 3, Sutton Springs Wood, Chesterfield, Derbys

Kingfisher Computer Services Durley Lane, Keynsham, Bristol, Avon

Software 1 Pilgrims Close, Harlington, Dunstable, LCL 26 Avondale

Staines, Middx, tel: (0784) 58771 Learnwell 152 Westmorland Road, Wyken, Coventry, WarHouse, Bridge Street, Sandiacre, Notts, tel: (0602) 394000 Logo Software 316a Richmond

Road Twickenham, Middx TW1 2PD, tel: 01-891 0989

Logotron Ryman House, 59 Markham Street, London SW3

Longman Group Longman House, Burnt Mill, Harlow, Essex CM20 2JE, tel: (0279) 26721 LPA 10 Burntwood Close, Lon-

don SW18 3JU, tel: 01-874 0350 LTS Learning and Training Systems Ltd, Haydon House, Systems Ltd, Haydon House, Alcester Road, Studley, Warwicks, tel: (0386) 792617

MacDonald Educational Maxwell House, 74 Worship Street, London EC2 2EN, tel: 01-377 4673 McGraw-Hill Book Co Shoppen-

hangers Road, Ma Berks, tel: (0628) 23432 Maidenhead. Mega Sci Cal Software PO Box 6,

Birkenhead, Merseyside 6XH, tel: 051-652 3139 Micro-aid 25 Fore Street, Praze,

Camborne, Cornwall Micro Power 8-8a Regent Street, Chapel Allerton, Leeds, W Yorks Microwave 24 Belford Road, Stretford, Manchester

Mirrosoft Mirror Group Newspapers, Holborn Circus, London EC1P 0DQ, tel: 01-353 0246 MJP Earth Science Software, Freepost, PO Box 23, Faversham, Kent, tel: (0795) 534690 MUSE PO Box 43, Hull HU1 2HD Musicsoft 12 Fallowfield, Amp-

thill, Beds, tel: (0525) 402701 NEC - National Extension College 18 Brooklands Avenue, Cambridge, Cambs

Nelcal Nelson Nelson House, Mayfield Road, Walton-on-Thames, Surrey KT12 4BR Notts Ed Suppliers 17 Ludlow Hill

Road, Melton Road, West Bridg-ford, Nottingham NG2 6HD

Notts CC Trent Bridge House, Fox Road, Nottingham NG2 6BJ, tel: (0602) 824824

Opalsoft 112 Arterial Road, Eastwood, Leigh-on-Sea, Essex

Orion Software 11 Buttercup

Close, Romeighs Park, Harold Wood, Essex RM3 0XF Optima 68 Chester Row, Hazel-grove, Stockport, Cheshire SK7 5NY

Oxford Microware 52 St Giles, Oxford OX1 3LU, tel: (0865) 54505 Pee Bee 8 Beechwood Road,

Chippenham, Wilts Penguin Study Software 536 King's Road, London SW10, tel: 01-351 2393

Pitmansoft 128 Long Acre, London WC2, tel: 01-379 7383 Primasoft 2 Spinney Close, Glos-

sop, Derbys Promotional ArtWork Systems 9 Mayo Close, Leeds LS8 2PX

Psion Ltd 2 Huntsworth Mews, Gloucester Place, London NW1

Quicksilva 13 Palmerston Road, Southampton SO1 1LL, tel: (0703) Quixtor 7 Haslemere Avenue

Hale Barns WA15 0AU RH Electronics Chesterton Mill, French's Road, Cambridge CB4

RJE Software 143 Montague

Road London E11-3EW RMK Electronics Hinton House, Station Road, New Milton, Hamp

RoSPA-Royal Society for the Prevention of Accidents The Priory, Queensway, Birmingham B4

Salamander Software 27 Ditchling Rise, Brighton, Sussex BN1 3AA, tel: (0273) 771942

S & S Schofield and Sims, Dogley Mill, Fenay Bridge, Hudders-field

Schoolsoft 19 Shadwell Grove, Radcliffe-on-Trent, Nottingham,

Notts Shards Software Ltd 189 Eton Road, Ilford, Essex Shield 55a Leatherhead Road,

Chessington, Surrey KT9 2HN, tel: 01-397 4524 Shiva Publishing Ltd 64 Welsh

Row, Nantwich, Cheshire CW5 5ES, tel: (0270) 629440 Shumwari Associates 12 Marlin

Court, Marlow, Bucks SL7 2AJ Silverlind 156 Newton Road, Burton-on-Trent, Staffs, tel: (0283) 63987 Simonsoft 25 Tatham Road,

Abingdon, Oxon OX14 1QB SESS Specialised Education and Software Services

Software Services Central Trading Estate, 275-277 Bath Road, Bristol, tel: (0272) 710103 Social Science Software Free Birkenhead. Mersevside

Soft Warehouse 285 Oldbury Worcester, Worcs, tel: Road, Wor (0623) 25307

Square Software 12a Uplands Terrace, Swansea, W Glamor-Stellar 84 Dudsbury Road, Fern-

down, Wimborne, Dorset, tel: (0202) 575234 Storm Newbury Court, High Street, Gillingham, Dorset

Superior Software 69 Leeds Road, Bramhope, Leeds, W Yorks Synergy 7 St Andrews Close,

Slip End, Luton, Beds SYSTEM 12 Collegiate Crescent Sheffield S10 2BA, tel: (0742)

Tasman Software 17 Hartley Crescent, Leeds, W Yorks, tel: (0532) 438301

Tecmedia 5 Granby Street, Loughborough LE11 3DU, tel: (0509) 230248 **Tectel** Telford ITEC, Halesfield 14, Telford, Salop, tel: (0952)

581738 Tom Shipman PO Box 406, Brentwood CM13 3QE

Tressell 139 Carder Avenue, Brighton, Sussex, tel: (0273)

Tutorial Software Freepost, Wirral, Merseyside L61 1AB Unilever PO Box 68, Ur House, London EC4P 4BQ Unilever University Software 29 St Peter's Street, London N1 8JP, tel: 01-359

0978 Weaversoft 22 Lodge Drive, Moulton, Northwich, Cheshire CW9 8RQ

Wida Software 2 Nicholas Gardens, London W5 5HY, tel: 01-567

6941 York House 33 West Street, Oundle, Peterborough, Cambridge-shire PE8 4EJ

# A NEW BREED OF KEYBOARDS

Has the qwerty keyboard had its day? Chris Drage

#### outlines some of the alternatives on the scene

THE FACT that just about every micro sold has a qwerty or type-writer keyboard is really something of a historical accident. In the days of mechanical typewriters this rather illogical arrangement of keys was necessary to separate the most frequently used keys which, if placed together, tended to jam the mechanism, and this layout has persisted.

With computers finding a niche in both primary schools and the home the question arises: should we present young children with so many bizarre symbols and expect them to cope?

However, there is an increasing number of alternative keyboards available for the BBC micro, and so it's worth having a look at what three of them offer.

The Concept Keyboard from Star Microterminals, the Presfax 100 Keypad from Schofield and Sims and the Touchmaster from Touchmaster have one thing in common—they present the user with an array of touch-sensitive pads which may be programmed according to his or her

needs. This feature opens the way to a vast range of applications. Each keypad uses overlays which are individual to a program. Thus, only the inputs essential to each piece of software are presented, in a form appropriate to the experience or ability of the user. In addition, overlays are not restricted to a two-dimensional format elaborate 3D ones can be constructed involving, for example, a model farm, a park or a supermarket, and actual models can then be moved over the board. The variety of arrangements is endless. Once the unnecessary features of the normal keyboard are removed, life certainly becomes easier for the child.

**Concept Keyboard** 

The Concept Keyboard has been available in its familiar A4 size for over a year now and, at the time of writing, A3/128 and A3/256 boards are available. A2/128 and A2/256 boards are to be launched soon. Each is constructed from a wipe-clean, scratch- and chemical-resistant polycarbonate surface,

mounted in an aluminium case. The keyboard is linked to the Beeb via a 1100mm ribbon cable to the user port. In addition to the 128 or 256 pads there are a number of larger, specialised pads at the top of the board. These comprise a user pad, a repeat pad, a 'bleep' on/off pad and a shift pad (the latter on 128 boards only). Of these, the shift pad is probably the most significant as it allows the 128 cell models to produce 256 different signals. The bleep key provides a soft note to confirm the press of a keypad.

The 128 board has its 128 touch sensitive areas arranged in a  $16 \times 8$  matrix while the 256 board uses a  $16 \times 16$  array. Any key or group of keys can be assigned by the user to any character, word, numeral, shape, etc. The documentation describes routines and procedures to build into your programs to enable the Concept Keyboard to communicate with the computer. Anyone with some programming experience would find this a straightforward exercise. Remember, the program must have space and be listable.

PRODUCTS AND PRICES

	Concept Keyboard	Presfax 100 Keypad	Touchmaster	
Dimensions	A4 Board 227 × 315 × 25.4mm (overlay 210 × 297mm) A3 Board 315 × 435 × 25.4mm (overlay 297 × 420mm)	360 × 360 × 3mm	350 × 330 × 30mm (Overlay 210 × 297mm)	
Cable length	1100mm (user port)	1000mm (analogue port)	1500mm (RS423 port)	
Peripherals		Perspex 100 square overlay + pegs (£9.50 + VAT)		
Price	A4/128: £90+VAT A3/128: £114+VAT A3/256: £156+VAT	£79.50 + VAT	£149.99 inc VAT plus £4.99 inc VAT for BBC micro interface	
Software supplied	Starset (disc)	Introductory user pack £5.50 + VAT (cassette) £8.50 + VAT (disc)	Multipaint (cassette)	
Review copy obtained from	Star Microterminals, 22 Hyde Street, Winchester, Hants SO23 7DR	Schofield & Sims, Dogley Mill, Fenay Bridge, Huddersfield HD8 0NQ	Touchmaster, PO Box 3, Port Talbot, West Glamorgan SA13 1WH	

155

REVI

I received a draft of the new manual, and its author has made this extremely detailed document readable and understandable to the inexperienced user.

I suspect many teachers will want to adapt existing programs for use with this keyboard. Star Microterminals are well aware that few teachers have the time or inclination to write their own software adaptations, so they have thoughtfully provided an excellent software package called *Starset* to take the hard work out of this.

All that you have to do is draw up the actual overlay (see picture). I found a piece of stout tracing paper is the only aid necessary.

The Concept Keyboard is a well designed and manufactured unit. Features like the keyboard's strength of construction, its reliability and its sensitive response over the entire matrix area all add up to what can only be described as an excellent product and a most valuable addition to a school's computer resources. With an increasing number of software houses now providing Concept Keyboard software, I unhesitatingly recommend this unit for primary and special schools.

The Presfax 100 Keypad has 100 touch-sensitive squares arranged in a  $10 \times 10$  matrix. It measures  $360 \times 360 \times 3$ 

Included in the package are the keypad, a handbook and a connecting lead. An introductory software pack (including four overlay sheets with locating pegs) is available on cassette at £5.50 or disc at £8.50. Included in the review sample was a clear perspex peg board with locating pegs and wooden counting pegs; this is available at an additional cost of £9.50.

#### Presfax 100

The Presfax 100 is connected via a 1000mm, 6-way ribbon cable to the analoque port on the BBC micro. Assembling and connecting up the system proved to be a very quick and easy process. Before the Presfax 100 can be used, however, it must be calibrated because each keypad generates slightly different signals. A program called Calibrate takes the grind out of this operation and in turn produces a file which may then be transferred to any disc containing Presfax software, the idea being to boot this program up from disc at the start of each session. For cassette users this is a rather tiresome task as it all takes valuable time. Once the driver file is in place you are ready to start.

A substantial software package is



Home-made overlays make the Concept Keyboard a versatile tool



The Junior Counting Board package in action on the Presfax 100

available at an additional cost. It comprises Actfax, Facefax, Sketchfax, Askfax (on disc version only), Getfax (on disc version only), Preskel and Junior Counting Board.

For me the star of this package is the Junior Counting Board. This suite of seven programs enables children to explore number relationships through the medium of a 100-square peg board. The programs vary in difficulty from simple counting games to activities involving multiples and the discovery of prime numbers. As my class of 10year-olds had just embarked on a study of factors, products and multiples I thought this would be an excellent opportunity to introduce the less able of them to the Junior Counting Board. Using the perspex overlay and the coloured wooden pegs, it took even the weakest child no time at all to arrive at

the prime numbers using the Sieve Of Eratosthenes method. Much discussion took place concerning the patterns created by the multiples of various numbers, and the activity provided an excellent springboard for further work. I do, however, have a criticism of the level of the language in the programs, much of which is unnecessary anyway. I would have preferred to see an on-screen 100-square confirming the squares in use and a provision for teaching routines to help the child.

The 20-page handbook is well written and describes both setting up the Presfax 100 and the software in some detail. There is a useful section describing how to adapt the user's own programs with the help of the *Preskel* program.

Undoubtedly, the Presfax 100 will find a place in primary schools, and I'm certain Schofield and Sims will ensure

		EY SCORE	
Touch Pad:	Concept Keyboard	Presfax 100	Touchmaster
Design	4	3	3
Construction	5	4	3
Strong enough for use in	schools, industry, laboratory	schools, home	home
Cable length	4	4	5
Handling characteristics	5	3	3
Ease of use	5	4	2
Software provided	4	4	3
Documentation	5	4	3
Range of applications	wide	education	entertainment
Value for money	4	4	2


that software support is not thin on the ground. The first generation software provided with the keypad has promise of better things to come.

#### **Touchmaster**

The Touchmaster pad comprises a grey plastic case measuring 350 × 330 × 30mm with an A4 size, black plastic touch-sensitive membrane in the centre. Also included in the package are a mains transformer, connecting lead, graphics stylus, user guide and an applications program called *Multipaint* plus an overlay.

The Touchmaster has both parallel and serial ports for connection to various micros. The Beeb version uses the BBC micro's RS423 port (data transfer is at 9600 baud). Power is obtained from a remote 6v PSU. A power indicator LED is provided to remind the user that the unit is ready for use. There is no grid of touch-sensitive pads, but instead the whole 210 × 297mm area is pressure sensitive, giving 256 × 256 resolution and a total of 65,500 individual co-ordinates. In this configuration the Touchmaster seems to lend itself to graphics applications. Without having any other software provided for review, it was difficult to ascertain how areas may be defined for the multiple 'key' input necessary for young children.

The 11-page user guide is a model of brevity, and useful information is conspicuous by its absence. An eight-line Basic program is listed and this is supposed to demonstrate how the Touchmaster works with the computer. It enables the computer to read coordinates from the Touchmaster, scale and display them on the screen. No information or help is offered on how to adapt the user's programs to work with



Touchmaster: limited applications

#### **KEYPAD HINTS**

Here are some tips for readers considering buying a touch-sensitive keypad.

- Where possible cover all overlays in clear plastic laminate. You then only need to wipe the overlay with a damp cloth to remove grubby finger marks.
- Don't use sellotape to fix the overlay to the keypad. A bit of Blutak in each corner does a far better job.
- If you have an A4 Concept Keyboard and are thinking of purchasing an A3 model you may wish to convert your existing overlays to use with the larger model. Enlarging on a photocopier does not produce a correct A3 overlay. The only way to achieve this satisfactorily is to trace the A3 keypad and mark those pads which correspond to the A4 overlay. The tracing can then be transferred to a new (blank) overlay. Star Microterminals provides special transfer sheets for this purpose.
- As a safety precaution for the host micro, don't clip the connector to the Concept Keyboard socket. Should the keyboard be knocked to the floor (as happens in a busy classroom), then the plug simply pops out. The alternative can result in the micro also being pulled and possibly damaged.

the Touchmaster. No doubt experienced programmers could cope, but beginners are left high and dry.

The Multipaint program is included to demonstrate the Touchmaster's capabilities. It is a graphics package which enables simple pictures and designs to be created with the help of a plastic stylus. The overlay provides a menu from which a range of options may be chosen. This method of creating graphics is almost identical to that using a light pen, the only difference being that the Touchmaster replaces the screen. As my class are accustomed to using light pens in this way I decided to let them do the reviewing of this program.

All the expected features are included in Multipaint - free-hand drawing, lines, simple regular polygons, circles and points. Line-drawing is provided with a 'rubber-band' line to aid accurate fixing. In addition, there are five brush types and nine brush widths which, used in combination, provide some attractive effects. 'Blobs' and 'free dots' also give rise to some interesting patterns. The fill routine is extremely fast. Screens may be saved and loaded with specified filenames. Not unexpectedly, the program uses mode 2 with its full complement of 16 colours.

However, as is often the case with first generation software of this type, here are a number of small bugs and not a few shortcomings. At times it is necessary for the children to exert a good deal of pressure to elicit a response from the Touchmaster. Several facilities are sadly missing from this package - erasure of an error immediately after its execution, and the ability to input text on the picture are essential elements in a serious graphics program. Also, there is no option to dump a screen to a printer. Overall, Multipaint is rather disappointing and does not live up to the claim that it has 'many serious applications'.

With the software presently available, it's difficult to see how the Touchmaster could be used in a productive way. At £150 it appears overpriced and limited compared with the other keypads reviewed. Perhaps when more software appears on the scene the range of applications may increase and make it a more viable proposition. However, I am still not convinced that the Touchmaster represents value for money.

At the moment the software support for the Presfax 100 and Touchmaster is thin on the ground but there are some very good educational software packages available for the Concept Keyboard. I'll look at some of this software in the next issue.

# Increase your fire power!

#### More than just a joystick—a system

▲ Nylon encased—Steel shafted joystick with ball and socket joint.

▲ Fast sprung return to centre.

▲ Graphite wiper linear potentiometers.

▲ 12 Months Guarantee.

▲ 7 day Money back Guarantee (on Hardware).

#### Complete control at your fingertips

A superb joystick and a keypad for the price of either one. Plus the software to integrate it into the computer's system. One handset will work on it's own in the A/D port as a joystick and two fire buttons. Joystick is immediately compatible with ACORNSOFT and similar software.

The interface joins together the analogue and the user ports to use the full keypads giving a total of 24 user definable keys. The interface can also be used as a splitter for the A/D port to take two items at the same time, e.g. joystick and lightpen.

DELTA DRIVER on cassette or disc: Two programs on each cassette or disc. One converts machine code programs from the keyboard to the joystick or keypad, with adjustable sensitivity on the joystick and will run on any O.S. The second program (needs O.S. 1.0 or later and an interface) duplicates any keyboard keys on the keypads, in the operating system, so that it can become a numeric keypad or will take on the

function keys.

Numerous stockists nationwide or direct from us.

SAE for more detailed information.



Made in England

DELTA 14b HANDSET £14.95
DELTA 14b/1 A/D/USER PORT INTERFACE £14.85
DELTA DRIVER CASSETTE £5.95 or DISC £9.95
Prices include VAT and P&P.

**Voitmace** delta 14b

Access

V/SA

VOLTMACE LTD PARK DRIVE BALDOCK HERTS SG7 6EV Tel: (0462) 894410

UNIT 14. PEERGLOW INDUSTRIAL ESTATE, OLD'S APPROACH, TOLPITS LANE, WATFORD, HERTS. TELEPHONE: 0923 777155

DON'T RUY EXTRA DISK DRIVES

WHY NOT BUY OUR DISK DRIVE SHARERS? DUAL

\* two micros to one disk drive.

@ £113.85d

@ f69 00d

\* 4 micros to one disk drive.

Both units Colour Finished honey beige

#### **COMPUTER PRINTER SELECTOR**

- ★ 26 pin as BBC
- ★ 1 micro to 6 printers
- ★ 6 micros to 1 printer
- \* colour finished honey beige @ £75.90 incl. VAT

#### DUALPOWERSUPPLY UNIT FOR DISC DRIVES:

- \* Colour finished to match BBC
- \* Comes complete with moulded mains lead.
- ★ 6 pin BBC outlet or Dual power leads for disc drives. (Please specify when ordering)

#### POWER RATING:

\*Standard Version

Suitable for use with TEAC & TEC Drives.

\*High Rated Version

Suitable for use with Mitsubushi, Tandy, Canon etc (Please ring factory for other makes)

Price Each

Standard = 35.65b Inc VAT High Rated = 37.95b Inc VAT

#### MAKE YOUR TEAC & TEC DRIVES SWITCHABLE

(40/80 Conversion assembly) 200K & 400K Drives only

TEAC Version @ 5.75c Inc VAT @ 7.36c Inc VAT TEC Version

#### **READYMADE LEADS:**

#### RIBBON

@ 6.67c Inc VAT Disc drive single @ 10.12c Inc VAT Disc drive dual Printer @ 7.82c Inc VAT Parallel 26 pin @ 8.74c Inc VAT

OTHERS: RGB 6 pin DIN @ 2.99c Inc VAT RGB 6 pin to 7 pin DIN @ 4.14c Inc VAT RGB 6 pin to SKART @ 7.82c Inc VAT BBC to single disc @ 3.45c Inc VAT BBC to Dual disc @ 4.60c Inc VAT @ 12.88c Inc VAT Serial 25 pin "D"

We can make up any combination of cable assy. Please contact Factory for details.

#### FLOPPY DISCS: Boxed in 10's

3M's Single sided Double Density @ 16.10c 3M's Double sided Double Density @ 25.99c Fuji Double sided Double Density @ 25.99c





Don't run the risk of damaging your ROMS/ EPROM or your BBC micro. Whenever you want to remove ROMS/EPROMS from your BBC. Fit our Low Profile Rom Module System and save your collection of ROMS/EPROMS in our specially designed cartridges.

CARE LOW PROFILE The YSTEM

Has been designed not to take any power from your BBC Micro and allows you unlimited ROMS/EPROMS.

#### ★The Low Profile system is a sideways mounting flush fitting unit.

#### **★Unlike other systems:**

★Won't get in the way when using the Keyboard.

★Stops damage caused by shortcircuit due to metal objects e.g. paperclips falling inside.

★Prevents damage caused by dust.

\*Edge Card Socket which takes all the wear, Gold Plated for extended life.

★Manufactured entirely in the UK.

#### **★Each System Contains:**

★1 Low Profile Assv. ★1 Rom Cartridge. ★5 Blank Labels. ★1 Library Rack 6way.

#### Prices include VAT.

★Complete Module System @ 17.25d

★Spare Cartridge @ 3.68c

★Library Rack to store 6 Cartridges @ 1.84c


★5 Cartridges @ 17.25c ★10 Cartridges @ 32.20c

#### **DON'T BUY A COLOUR MONITOR!!** VE YOUR 14" & 16" PHILIPS, PYE or FERGUSON TX COLOUR TV CONVERTED TO A TV/MONITOR

REMOTE AND STANDARD TV'S @ 52.90a

**RGB CONVERSION KIT** 

- @ 41.40d
- Resolution better than 585 × 450 pixels.
  Image clarity comparable to leading monitors.
  Includes RGB lead for connecting with BBC.
  Conversions carried out at our workshops within 2/3 days.
  Please write or telephone for other makes.



#### **HOW TO ORDER:**

By Post. Enclose your Cheque/P.O. made payable to: CARE Electronics.

Or use your ACCESS. Allow 7 days for delivery. Please add carriage.

**OPEN** 9am-5pm MON-THUR 9am-4pm FRI/SAT


a) @ 8.00

b) @ 5.00 d) @ 2.00



#### Menu-driven

#### meals



'Comp-u-cater', Shumwari Associates, 12 Marlin Court, Marlow SL7 2AJ, tel: (06284) 5751, disc £24.95

A DATABASE dedicated to recipes and their ingredients, Comp-u-cater enables the user to create a menu chosen from the wide range of dishes held on the disc, find the correct recipe for each, annotate the quantities of ingredients required, scale the quantities according to the number of people eating and then produce a shopping list.

As with all programs dedicated to a specific purpose and containing a great deal of data, this one takes some getting used to. There are many options to choose from and you need to play with the program for a while before you feel confident enough to use it. The program contains a wide selection of possible ingredients, classified as to use and also by measurement type.

The hardware needed for this program is quite extensive as it requires a printer and, being disc-based, a disc-drive.

Not only may the in-built menu database be accessed, but there is also an opportunity for the user to create his/ her own database with editing facilities to alter existing recipes. The whole structure is the familiar tree with the branches going out from the main menu page to the following:

Savouries, starters and soups 36 choices; Main dishes 96 choices; Vegetables 36 choices; Accompaniments 24 choices;

Desserts 36 choices.

These subsequently lead to further sub-divisions into the categories under each main heading.

The flexibility of this program allows the computerised cook to program his/her way to culinary success, either within the confines of the author's recipes or by substituting new ones. **Nick Evans** 



#### **Building up to**

#### **O-levels**

'Construction', Ampalsoft, PO Box 19, Knutsford, Cheshire WA16 OHE, tel: 056 589 3563, £6.95

AMPALSOFT don't undersell themselves in their blurb - 'A brilliantly designed series of action-packed exercises that skilfully eliminate the traditional drudgery from maths examination revision' - but their documentation leaves a good deal to be desired and these are demonstrations, not exercises. The four page booklet with this cassette does not tell you in any detail about what is included in the program, where it is to be found or how the construction may be done. Everything relies on the program, so you can't check halfway through a complex construction how one of the more minor constructions was performed.

Having said that, the presentation is very clear and quite methodical in its exposition – except for the main menu which is unreadable (why do people insist on using yucky green on white?). There is no testing facility, however, since the program is designed to be solely instructive. The only interaction is pressing 'c' or 'Space' to step the program on.

One comment made to me by a teacher was how did this differ from a text book? I replied that it was dynamic – it showed the construction developing – but when all is said and done, it's simply the machine drawing arcs, bisectors, tangents and loci slowly, and in a text book these would be printed, usually with tests too.

This may be useful as a demonstration tool for groups in the classroom and as a revision aid, but the language is simply that of text book geometry and there seems to be little advantage for the less able O-level student using this. It's quite clear and well presented – if you already know what you are doing.

Nick Evans

#### Thinking things

#### through



'Games of Deduction', Fernleaf Educational Software, Fernleaf House, 31 Old Road West, Gravesend, Kent DA11 0LH, tel: (0474) 59037, £35.95 (disc or tape)

LOGICAL reasoning programs have been quite popular in the educational market although they have tended to lack direction. This suite of four programs from Fernleaf is intended to 'help foster some aspects of the logical thinking process', and all the problems are of a remarkably similar nature but with slightly differing objectives.

'The Perfume Hunter' engages a group of children in a search through a grid for a given number of bottles, using a tracker dog. The group must develop its own strategies for finding the maximum number of bottles in the minimum number of moves in order to move up the league table of difficulty.

'Deliver the Message' also entails planning your way through a grid in the swiftest fashion, avoiding traps and guards by seeking out friends who will inform you about the location of the perils. Logical thought is needed.

In 'Find the Lady' you must study another grid filled with pictures and analyse clues as to her whereabouts. Three or four squares around the Lady's position are described and then the sequence is repeated for the squares immediately above or below.

Finally, 'Name the Square' has yet another grid – this time to be filled with colour. The players are told how many squares of each colour are present, and they may then either ask questions or make statements in order to fill the grid. One simple rule applies – the same colour may not be on horizontally or vertically adjacent squares.

These games are very good ideas with much educational thought and clear documentation, but whether the market is willing to pay the high asking price remains to be seen. **Nick Evans** 



# TOAD EDUCATIONAL COMPUTING

#### SCHOOL DATABASE

A random access menu driven disc database that is purpose-designed by school administrators that contains many specialised routines. Up to 50 fields and 500 records. Userdefined record layout; full search facilities with alphabetic, numeric and date sorts; calculations on combinations of fields: user-defined printout format; global insert and delete; etc. Also Form 7 printouts; mailing labels; chronological age routines and auto insertion of data into wordwise documents.

40 or 80 track discs with manual. Two copies of system disc supplied as backup.

£39.95

#### ROM EXTENSION SOCKET

The original rom extension system that sits in the "ashtray" area of your micro to allow roms to be dropped in when required. Fitted in ten minutes — no soldering. Complete with high quality ZIF socket, instructions and cover.

Unbeatable price of £14.95

#### TOP QUALITY DISCS

DS/DD (48 tpi) - £17.3

As supplied to
Education Authorities —
please enquire for super
education prices.

#### PIXEL PLOTTER

Complete teletext screen designer/editor package. Single key access to all mode 7 graphics and text facilities. Full on-screen edit and printer dump plus option to save screens as basic programs.

User manual and function key strip supplied. 40 or 80 track disc for 0.5, 1.0 or later.

#### TIMETABLE ADMINISTRATOR

Save many days work with this timetable management program. It doesn't do the timetable for you (most people don't seem to want this anyway) — but it handles all printouts of staff, class and room timetables plus cover notes, etc. Has to be seen to be believed! 40 or 80 track disc. Send for more details, sample printouts, etc.

£57.50

#### WORDWISE/ EDWORD MENU

"Not only will this

super utility allow you to load your files at one key press from a menu straight into a working Wordwise or Edword, it will allow you to add a full onscreen description of what you put on the file."

(Educational Computing Magazine)

Permits full catalogue of files on a disc and allows up to 52 files on a 40 track disc. Only one ever bought — back ups can be made for own use. Gone are the days of lost files on disc! 40 or 80 track disc. State edword or wordwise.

£6.95


Educational orders and trade enquiries welcome.

All prices include V.A.T. and p & p.

Send s.a.e. for more details.

Dept. AU5 8 Westbourne Grove Sale, Cheshire M33 1RP 061-969 4740

£9.95



#### Riding the crest

#### of a wave

'Waves', BBC Soft, BBC Publications, Schools Orders Section, 144 Bermondsey Street, London SE1 3TH, 40 track disc £14.95

DEVELOPED in conjunction with the BBC Schools Television Science Topics series, this package consists of a suite of programs supplied on two 40-track single-sided discs. Wave propagation and reflection are dealt with on one disc; reflection, interference and diffraction on the other.

A 40-to-80 track conversion program is included but a 40 track drive is still required to make the initial backup of the original discs. With this available, we found no difficulty copying both discs on to the two sides of an 80-track disc and then modifying the menu to access both sides.

Waves illustrates most of the wave properties that can be demonstrated on a school ripple tank and is best considered as a supplement to this rather than a substitute. The package is designed with the emphasis on simplicity. Parameters such as wave speed, wavelength and angle of incidence are chosen by single keystrokes from a menu or by using the function keys.

The animated graphics are bold and straightforward – wavefronts are shown as white lines on coloured backgrounds with different backgrounds for various wave speeds. Close up the animation is irritatingly jerky, but on stepping back from the monitor I discovered that, with the exception of the green background used for the slowest wave speed, the display was easily visible from the back of the classroom and movement appeared quite smooth.

Other choices available are: plane or circular wavefronts, plane or curved reflecting surfaces (reflection), plane or curved medium boundaries (refraction), wavelength and slit separation

(interference), and slit width (diffraction). There are several facilities including the ability to freeze and to single-step the wave motion.

There is also a facility to print the screen on an Epson printer. This is a wonderful idea to anyone who has ever had to draw an interference pattern by hand, but why does the screen dump insist on sending both a CR and LF at the end of each graphics line? The inclusion of the line feed requires that the Epson's response to this character be switched off at the printer to avoid double spacing.

Refraction is always difficult to demonstrate convincingly with a ripple tank and this is one area where the package can usefully fill some gaps. I was especially impressed with the ability to exceed the critical angle and to show the onset of total internal reflection. On the other hand, it's a pity that the program cannot cater for a pair of medium boundaries to demonstrate prisms and lenses.

Put to the classroom test, this well-documented package proved to be one of the few computer teaching aids that really works, where the micro becomes an efficient but unobtrusive tool.

**Tony Merrett** 

#### Story-telling

#### tales


'Story', H & H Software, BBC B, £6.50, disc £7.25.

THIS menu-driver program enables children to write stories and illustrate, save and print them. Old stories can be reloaded and altered.

The tape or disc includes a threepage story called WALK, and the instructions for loading this and making alterations to it form the basis of the first part of the 16-page handbook. Changes can be made by using the cursor control keys and overtyping, or by using the Delete key.

Automatic wraparound is provided, and if the story is more than four lines long the text size shrinks to make room for up to seven lines. It's also possible to add pages to the story, up to a maximum of seven.

The pictures can also be added to, using either the suite of 64 pre-programmed pictures, or the 'draw your own' option. Access to the suite of pictures is quite easy. A list is scrolled across the bottom of the screen and when the required picture is spotted the pupil presses the space bar, then types in the name of the picture. This then appears at the bottom left of the screen. The cursor control keys are



then used to position it on the drawing area.

Once completed the story can be saved to cassette or disc and can also be printed out. Included in the program are routines to work with Seikosha and Epson FX and RX printers, and memory space has been set aside for other printer routines to be added.

I was attracted to *Story* as a means of enabling slow-learning pupils to write and illustrate short stories. On first viewing the program it seemed to have potential in this area, but subsequently I began to have doubts.

The program allows up to seven pages for each story. If the text is up to four lines long it's printed in double height. The inclusion of a fifth line causes the text to revert to single size, and up to seven lines may be accommodated. I found that text being entered on a new page was only printed in double size if the picture had been drawn first, even though text and graphic space was already allocated on the screen. This may seem a minor point, but the sequence in which individual children work through a storywriting exercise should not be predetermined in this way.

The remainder of the text handling facilities are reasonably easy for children to understand, and there are options of overwriting or deleting text. This is quite adequate as an introduction to wordprocessing and more complex editing facilities would make the program too difficult for the children it's aimed at.

The picture-drawing facilities are the weakest part of the *Story* package. They are too sophisticated for all but the brightest pupils in its target age range. The 'draw your own' option is obviously intended for older children but for them the text handling part of the program would be limiting.

On the whole I think the package is a reasonable attempt to combine simple wordprocessing with a graphic element, its main disadvantage being the lack of simple controls for the graphics.

B Steeper

#### R.S.D. CONNECTIONS Gard Edge 10-way £1.20 14-way 14-way -16-way £1.60 20-way £1.90 26-way £2.40 34-way £3.10 40-way £3.85 60-way £4.80 .00 .25 .40 .70 .00 .15 .30 .45 36-way plug 36-way socket D CONNECTORS PRINTER LEADS COMPUTER LEADS £10.25 .95 £1.50 £2.40 BBC BBC serial AMSTRAD MEMOTECH EINSTEIN IBM PCC SPECTRUM interface RIBBON CABLE (Price per ft) £9.75 Pin DIN plug to 5 pin DIN plug to 5 pin DIN plug to 5 pin DIN Plug to 3 pin DIN plug and 2.5mm Jack plug £2.25 £10.75 1 to Centronics CENTRONICS to Pin DIN plug to 7 Pin DIN plug N plug £2.25 Domino Plug to 5 pin mino plug DIP HEADERS Domino Plug to 5 pin Domino plug £1.95 hono Plug to Coaxial TV Aerial plug 950 90p £1.00 £1.40 £3.95 £2.15 EDGE CONNECTORS match ONLY £12.95 +£2.30 p&p 2x23-way (ZX81) 2x28-way (Spectrum) 2x6-way VIC20/64 TELEPHONE CONNS JOYSTICK for BBC MICRO. Fits directly into BBC Micro DOUBLE SIDED PLUG BOARDS ZX81 23-way Spectrum 28-way £3.75 £2.50 £4.25 £1.85 48p MONITOR LEADS £4.95 £2.95 £4.95 £1.25 a SPECTRUM EXTENSION LEADS £12.95 6 inch extension calbe M to F 6 inch M to 2 F's 12 inch extension cable 14 cable M to F Other convigura Write or ph Free p&p C.W.O. or use **ENQUIRIES** WELCOME

#### FAST REPAIRS FOR THE BBC MICRO BY



THE ACORN APPROVED SERVICE CENTRE 191 FRESTON ROAD LONDON W10 6TH PHONE: 01 968 9214

- SPEEDY REPAIRS ON CUMANA/ACORN DISC DRIVES & MICROVITEC MONITORS
- ALL REPAIRS FULLY GUARANTEED
- EXTENDED WARRANTIES AVAILABLE ON ALL YOUR EQUIPMENT
- ANY UPGRADE OR MODIFICATION CARRIED OUT BY EXPERIENCED ENGINEERS
- BBC COMPATIBLE CUMANA DISC DRIVE DEALERS
- AUTHORISED ECONET SYSTEM INSTALLERS AND SUPPLIERS
- VARIOUS ACORN PERIPHERALS ALSO AVAILABLE FROM MICROFIX

RING 01-968 9214 AND ASK FOR MARK DUFFILL OR DEREK MULLINGS

# \* ASTRONOMY \*

'SKY-BABY' is a highly sophisticated scientific program running on BBC-B (cassette loading). It caters for astronomers ranging from complete beginners to advanced amateurs and aspiring professionals, and for educational institutes.

'SKY-BABY' 's many features include:


- ★ Colour and brightness coded display of stars, planets, sun and moon in selected area of sky
- ★ View from any position on earth, any date and time specified by user
- \* A library of all stars down to magnitude 4.0 (i.e., 469 stars) including coordinates, magnitudes and names
- ★ Orbital parameters of planets: sun and moon positional formulae
- \* Star sizes plotted to indicate brightness; sun, moon and planets colour coded
- \* Moveable 'space probe' to identify name and details of any object displayed on screen
- ★ Details of current position, rising and setting times of any selected object: provision for an additional user-specified object, e.g., known comet, galaxy, radio source, etc.
- ★ Detailed User Guide: sections on program use, astronomical nomenclature and positional astronomy, formulae used, fully annotated expanded program listing, etc., etc.
- \* Auxiliary program to analyse and list contents of stellar library
- ★ Unhindered access to Author by phone most times; callers welcome

**'SKY-BABY'** package, consisting of C10 Cassette containing three files (program itself, stellar library, auxiliary program), and 35-page User Guide **£12.50** inclusive


Instructions for disc running, and running on Electron available on request.

payable to:

STELLAR ENTERPRISE, 84 Dudsbury Road, Ferndown, Wimborne, Dorset, BH22 8RG Phone Bournemouth (0202) 575234





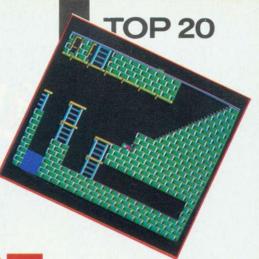

163

# SOFTWARE

PUBLISHER PRICE MICRO REVIEWED

1 (-)	Castle Quest	Micro Power	£12.95 (£14.95)	В	March '85
2 (1)	Elite	Acornsoft	£14.95 (£17.95)	B/E	October '84
3 (3)	Blockbusters	Macsen	£7.95	B/E	
4 (5)	3D Grand Prix	Software Invasion	£9.95 (£11.95)	В	February '85
5 (4)	Sabre Wulf	Ultimate	£9.95	В	
6 (2)	Frak!	Aardvark	£8.90	В	September '84
7 (8)	Pole Position	Atarisoft	£9.99	В	February '85
8 (9)	Football Manager	Addictive	£7.95	В	March '85
9 (10)	Manic Miner	Soft Projects	£8.95	В	May '85
10 (6)	Scrabble	Leisure Genius	£12.95	В	
11 (7)	Eddie Kidd's Jump Challenge	Martech	£7.95	B/E	March '85
12 (-)	Combat Lynx	Durrell	£8.95	B/E	
13 (re)	Mr Ee	Micro Power	£6.95 (£9.95)	В	March '85
14 (17	Chukkie Egg	A&F	£7.95	B/E	September '84
15 (12	Jet Pac	Ultimate	£7.95	В	
16 (re)	Aviator	Acornsoft	£14.95 (£17.95)	B/E	May '84
17 (20	Snooker	CSM/Visions	£8.95	В	
18 (19	) Hobbit	Melbourne House	£14.95	В	

B=BBC. E=Electron. re=re-entry. Prices in brackets are for disc version.

Database

Dr Soft

#### **BUBBLING UNDER**

19 (re) Micro Olympics

20 (re) 747 Simulator

Emerald Isle Gold Digger Swag Chartbuster Level 9 Firebird Micro Power Alligata Challenger Mini Office Music System

B/E

B


£5.95 (£7.95)


£7.95

Mastertronic Database Island Logic

Compiled by RAM/Computer

#### MSX-AMSTRAD-SPECTRUM-ELECTRON-BBC

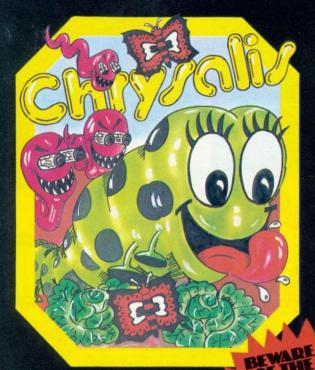

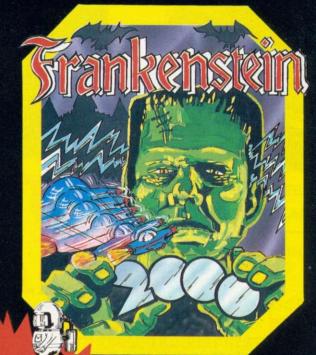

#### CHRYSALIS..

Super smooth full colour classic arcade action.

BBC...£7.95 Electron...£7.95 MSX...£6.95 Spectrum...£5.95

# BUG-EYES


#### FRANKENSTEIN 2000...

Multi-screen fantasy micro voyage through monsters body. BBC...£7.95 MSX...£6.95 Spectrum...£5.95 Amstrad...£6.95



#### CONTRAPTION...

Zany Hi-res all action arcade extravaganza
BBC...£7.95 Electron...£7.95 MSX...£6.95 Spectrum...£5.95

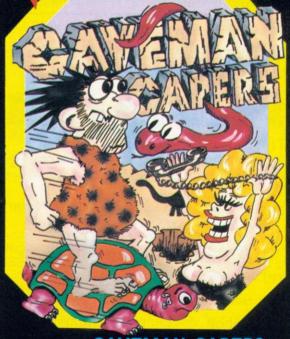

#### CAVEMAN CAPERS.

Addictive smooth scrolling fast action arcade fun. BBC...£7.95 Electron...£7.95 MSX...£6.95 Spectrum...£5.95

Available from most major stockists, all good computer shops or direct from us.

To order direct from us:
Send cheque or P.O. payable
to ICON or quote your
Access No.
VAT/PP
Incl.

Tel: (091) 2846966




#### SOFTWARE


65 HIGH STREET, GOSFORTH, TYNE & WEAR, NE3 4AA.



#### SOFTWARE REVIEWS







Use cursor keys to move The key: graphics cursor around select using the number or letter specified above Tab to test Return to analyse **Finishing point** Screen title Conveyor belt left and right moving Slide Ladder . Trampoline Graphics cursor **Bricks** 

#### Eating your way out of trouble

#### 'Magic Mushrooms', Acornsoft, £12.95

A GAME that encourages you to swap screens with your friends can't be all bad, especially when it's this latest stunner from Acornsoft.

The hero of this fungoid adventure is a Harry Sinclair look-alike sprite, whom you must guide around a series of obstacles picking or eating (I'm not sure which) mushrooms as you go and advoiding the red meanies who scamper to and fro with a mind of their own.

Magic Mushrooms is a platform game, the sort where you need to climb and ramble all over the screen as you collect points, avoid death, and work your way back to the starting position, all within a hectic 100 seconds time limit – phew!

There are nine screens and you can choose which you want to play around with. They have titles such as Fairground Fun, Non-stick Nightmare and even the Curse of the Lemmings.

This game's originality lies in the fact you can design and edit your own screens. Using one of the ready-made screens, you can move the 'part' cursor to the desired position and select the part you wish to insert from the graphic menu of 15 items at the top of the screen. You get a good assortment too. Standard bricks are easy, but slippery customers will appreciate the ice - Torvill and Dean are in no danger with my rendition of Bolero, but our hero can cope with the aid of some nifty key controls. One of my favourites is the conveyor belt - it's slow going, rather like walking up an escalator the wrong way but if you ease up you're shot off in the opposite direction!

Getting onto higher levels is not always easy either. Ladders help but that's too simple a solution; try the trampoline – it's a classic.

Moving downwards can be undertaken in a variety of ways. There's the gravity-assisted method – not to be advised, though, as you end up loosing one of your three lives. However, the superb judder you get on crashing to the floor is almost worth it. It's possible to construct slides, but they are slow and meanies can stroll over and wait at the bottom for you.

The rocking platforms are quite nauseating, as is the thin ice which disappears as you walk on it.

Once you have designed your screen you can give it a test drive. Pressing TAB makes random mushrooms appear, then off you go, using just three keys

Too hard or too easy? Just re-edit to the desired result, save it and post it to your mates.

What's magic about mushrooms? A lot. It's great stuff; go and buy it – you won't be disappointed. **Bruce Smith** 

165

# Access a world of Information WITH YOUR BBC MICRO

Today, there are literally hundreds of databases worldwide which can be accessed by your BBC micro. These include Prestel, Micronet, Homelink, Telecom Gold, various 'Bulletin Boards' and massive American data bases such as 'The Source' and 'DIALOG'. The equipment can also be used to send telex messages. The Pace range of inexpensive communications products are designed to provide accurate data exchange whilst being extremely flexible and easy to use.

#### ΠΙ<u>ΘΗΤΙ</u>ΠΘΑLE -The Modem



In order to use a versatile modem like Nightingale to its fullest potential, you will require equally sophisticated software. This is where Pace can offer you a total solution — Commstar, unquestionably the most comprehensive communications software available for the BBC.

Commstar is currently the only package for the BBC micro which offers easy access to Prestel (and other viewdata services), together with user to user communication and exceptional file transfer capabilities.

Supplied on Eprom, Commstar is instantly accessible, simple to use and extremely flexible. Just look at the possibilities:- access Prestel, Micronet, Viewfax, Homelink and Telecom Gold, rummage through bulletin boards and chat to literally thousands of other computer users, but there's more. Commstar's versatility enables the BBC to be used as an inexpensive work station for a main frame or mini-computer.

The complete Nightingale/Commstar package for the BBC micro including the modem, cabling and the Commstar Eprom and manual is just £139 plus V.A.T.

Nightingale is available separately for the BBC and other computers at £119 plus V.A.T. and Commstar is £29.57 plus V.A.T. Further details are available, please telephone or write for comprehensive fact sheets.

Nightingale is by far the most versatile modem available, at the price, for either home or business use. It offers Prestel/Viewdata baud rates (1200/75 & 75/1200) alongside 300/300 baud full duplex for communication between the BBC and other computers, including bulletin boards.

Nightingale has a built-in expansion capability, allowing the addition of auto-answer and auto-dial with battery back-up. The state-of-the-art modem chip technology employed in Nightingale requires minimal support circuitry resulting in low power consumption, low cost, high quality and extreme reliability.

Nightingale being 'hard wired' is not subject to the noise interference errors common to outdated acoustically coupled devices. In addition Nightingale features a simple self-test facility for easy installation.

Nightingale utilises a fully buffered RS 423/232 serial interface and is supplied complete with a lead suitable for connection to the BBC micro, other leads are available on request.

#### COMMSTAR-The Software





PACE, 92 NEW CROSS STREET, BRADFORD. BD5 8BS Tel. (0274) 729306 Telex 51564

"Bringing tomorrow a little closer"





50% discount off standard
one to one is an electronic message service
capabilities of a telex and contracts, and
telexes, letters, reports our cap produce
send them in seconds and contracts, and
country feelings of the seconds of any destination.
Discount of the seconds of any output of the seconds of

#### Setting out on

#### the right track

'Gateway to Computing' Books 1 and 2, lan Stewart, Shiva Publishing, 64 Welsh Row, Nantwich, Cheshire CW5 5ES, £4.95 each

THERE are plenty of Basic tutors on the market and another one might seem unnecessary, but close inspection of lan Stewart's offering dispels such thoughts.

Targeted at the teenage market, this series aims to give the young computer owner the 'kick in the pants' needed to get started with Basic. The text ranges from the mildly amusing to the hilarious, with serious instruction on how Basic keywords operate wrapped up in a mixture of goonish-cum-Kenny Everett humour.



Several characters accompany you on the journey of discovery, with such unlikely names as Ivan Nokyablokov and Carlton Q Cashsnitcher. Sherlock Holmes and Dr Watson are your guides to debugging and their conversations cleverly present the user with an accurate and logical picture of the way programmers speak to each other while debugging programs.

The explanations are very clear, and there are summary blocks at regular intervals reminding you of what has been said, and tests involving either program creation or problem solving. Most of the programs are essentially frivolous, but they are intended to be simple, quick and effective examples, rather than to undertake tasks, which is not the purpose of these books. Any young person would be hard-put *not* to learn about Basic from working through them.

I have my doubts about using them in the classroom as in Book 1 the user is instructed to print 'get stuffed!' as part



of a program. One person to whom I showed the book objected, saying that she would never buy it for her child solely because of this. Extreme? Well it depends what you are looking for, but it did seem to lower the tone of an essentially good set of books.

As far as the actual programming content is concerned it really can't be faulted – one minor criticism is the constant use of LET which is an irrelevant keyword in BBC Basic. Otherwise, everything from STEP to STOP and DIM to DATA is covered in a thorough fashion.

Presented in a large format and clearly printed, these books represent excellent value for the teenage computer buff.

Nick Evans

#### For new DFS

#### users only

'Disk programming techniques for the BBC microcomputer', Michael Coleman, Prentice Hall International, £7.95


THIS book is aimed strictly at new users of the disc filing system, particularly the Acorn DFS, though two others are mentioned. Anyone accustomed to using and programming with the DFS will find little, if any benefit in it and this is my main reservation. Its useful lifespan will be one reading as it contains little you might refer to again.

The first half is an expansion of the DFS 'User Guide' and the sections on Basic handling of files in the main 'User Guide' – these books are much quicker and clearer reference sources. The author does, however, explain and expand on the various commands in a clear and amusing style, but it's a pity that he's made some mistakes.

Perhaps the worst omission is not to stress that a file called 'NAME' is the same as 'name' or 'NaMe' etc. I lost several programs this way in the early

days when changing from tape to disc. A simple Basic program relocator is provided but there is no mention of the simple trick of changing PAGE to a lower value before loading.

The chapters on data files are more useful with descriptions of serial and random access; how they differ, when to use them, and some tricks such as linked records. However, once again errors creep in, particularly on just what the various Basic commands do. Obviously Mr Coleman didn't read my article in Acorn User trying to put the record straight! The oddest is about how to extend random access files (though for some reason he doesn't expect them to need expanding). It's really very simple; push the pointer PTR£ past the end of the file, and lo and behold it's bigger! The only problem is lack of space on the disc. Making an artificially long file with \*Save or

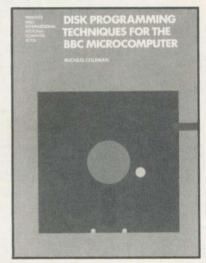


writing lots of dummy records makes the use of EXT# and EOF£ pointless.

The second half of the book consists of seven case studies, giving examples of ways in which the disc system can be used. These are well documented and could be used as a basis for more useful and user-friendly programs. The most helpful are the database programs, though the author insists on using \*Save to create the file and thus limit its length. How are you supposed to know how big to make a file for data which may increase?

A disc with all these programs on is available separately along with a useful database of articles on the BBC micro. This is 40 track only, and contains at least one silly error (listed correctly in the book).

In summary, I was disappointed. In the early days of the BBC micro books understandably contained errors and omissions. Surely enough is now known, and indeed published, to expect a book to contain accurate and complete information.

Richard Harris

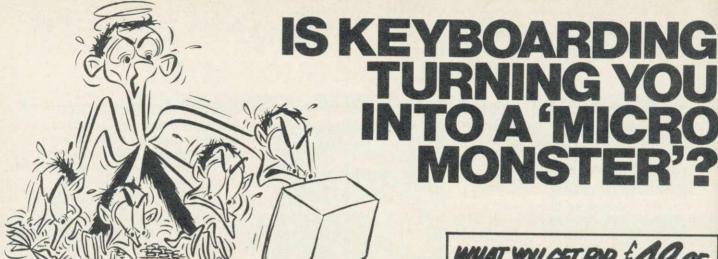

Let's face it, your BBC Micro is a demanding creature. Powerful it may be, but using the keyboard is probably a lot harder on YOUR system than you expected - and it's all because you're forced to 'hunt and peck' amongst 74 keys, on a keyboard that's a hundred years old! It's no wonder you feel like the many-headed hydra! With your eyes being torn from document to keyboard, then to the screen for checking, and back again. Errors and bugs are bound to creep in.

Master your BBC Micro overnight with QUINKEY.



QUINKEY PERLACES EVERY CHARACTER, COMMAND AND FUNCTION ON YOUR' BBC (EXCEPT EREAK), AND SIMPLY PLUOS INTO THE ANALOGUE PORT AT THE BACK.



YOU CAN TOUCH TYPE IN LESS THAN ONE HOUR WITH QUINKEY'S SIX KEYS USING THE FAMOUS MICROWRITTER' TECHNIQUE PROVEN BY THOUSANDS OF USERS.



QUINKEY-AND THE LONG LEAD ALLOWS YOUTO SIT BACK, RELAX AND CONCENTENTE ON WHAT'S REALLY IMPORTANT-YOUR WORK.



ACCURACY AND SPEED COME NATURALLY BECAUSE YOU'RE TOUCH TYPING YOU CAN DEVOTE ALL YOUR CONCENTRATION TO READING ACCURATELY FROM THE SCREEN OR DOCUMENT.

Microwriter Ltd., 2 Wandle Way, Willow Lane, Mitcham, Surrey CR4 4NA Tel: 01-685 0300

microwriter



WHAT YOU GET FOR \$49.95

pressed in easily remembered combinations, give all inputs except Break. Can be used in conjunction with BBC keyboard or as entire replacement.

Four-channel connector for up to four Quinkeys.\*



SELF-TEACH GUIDE

Contains everything you need to know. Instantly learned, simple mnemonics based on widely used technique of Microwriting ensure you're touch-typing in under an



PROG & WP SOFTI

Supplied on cassette (User Guide shows how to transfer to disk).

PROG merges easily with applications programs. WP enables Quinkey to be used with word processing packages such as Wordwise, View and Edword.



TECH SPEC — When invoked using CHAIN "WP" or CHAIN "PROG", loads at the current PAGE value and moves PAGE up by 768 bytes. No zero-page locations required. Interrupt service vector IRQ2V, correctly

TESTED COMPATIBILITY — BBC model "B" OS E.I BASIC I or BASIC II (except when using INKEY with negative argument), DFS 0.90. View A1.4, Wordwise 1.17, Edword.



So confident are we of our claims that we offer a 14 day money back guarantee. So act now by sending the coupon below.



To: Microwriter Ltd., 2 Wandle Way, Willow Lane, Mitcham, Surrey CR4 4NA Tel: 01-685 0300

I would like to take advantage of your special money-back guarantee and realise that I can return


the pack(s) undamaged within two weeks of delivery if I am not fully satisfied for a complete refund.

Please send .... Quinkey pack(s) @ £59.95 (£49.95 plus VAT & p&p) £ ★Tick box ☐ More information about the educational pack of 4 Quinkeys and software for schools

I enclose a cheque made payable to "Microwriter Ltd" for £ or debit my Visa/Access credit card No.

Please allow up to 28 days for delivery. Reg. No. 1374069

#### HARDWARE REVIEWS

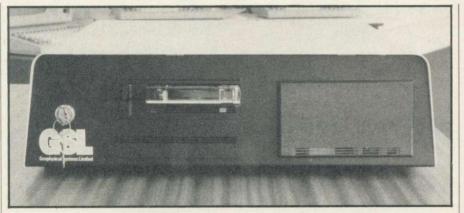

#### **Sophisticated**

#### system

GSL hard disc and net package for schools, Geophysical Systems, Westport Way, Andover, Hants SP10 3SG, tel: (0264) 59633, prices on request

IF YOU are using BBC micros in a school, or are interested in the use of hard (Winchester) discs with the BBC, our experience at Seaford College may be of value to you.

We teach computer studies at O and A level and all fourth formers have a weekly computer lesson. Until last year we used Level 1 Econet with our Beebs, a cumbersome system fraught with problems. We seem to have found a solution in the GSL system which gives you a reliable network as well as 5 to 20 million bytes of storage.

You use the normal Econet hardware in each station of the net and replace the Econet ROMs with E-net ROMs (£15 each). You install a fileserver ROM (£155) and connect that micro to the hard disc via a single cable from the 1 MHz (not disc, which is the same size) interface connector.

PAGE is set to &1900 in a BBC B (or &1400 in a model A) with floppy interface (not &1B00 as with Econet). You do not have to boot FS.

You can use the fileserver BBC almost as if it were not doing anything else. Anyone can send things to a printer connected to any station on the net. The default printer server is station 0 – this must be the fileserver. The station with the printer can be used almost normally while others are using the printer.

We no longer lose discs and things that we save to our backing store are still there the next time we try to load them. (Data on the hard disc can be backed up on floppy discs. More sophisticated backup devices are to be released shortly.)

I'll explain the file structure of the hard disc. If \*CAT listed every file on the

hard disc, you would soon be in trouble; the solution is a hierarchical file structure. There is a main catalogue, and from that you can go (or are automatically taken) to sub-directories, which in turn can lead to lower levels. Typically, each user would have a sub-directory of his own. Once logged on (an easy process) to his or her sub-directory, it would be difficult for the user to know if he or she was talking to a floppy or a part of the hard disc.

Having the hard disc – and the fileserver that comes with it – is like having a servant at the old Econet floppy drive to change discs for users. Users type \*GOTO 23 to 'put disc 23 into the drive.' After that \*CAT, SAVE, LOAD, etc work as if the user were connected to a floppy.

What about data privacy? Will Jones swipe Smith's program, or worse, \*DELETE it? Not if Smith and Jones are peers. The system supervisor assigns passwords and priority codes to anyone who may save things on the system. Each user has one or more 'discs' of their own. Only senior (high priority) users may alter the contents of someone else's disc. You can't even see what's on someone else's disc unless your priority is greater than theirs.

What if you want someone else to see one of your programs? You must change the program's access code. \*ACCESS PRGM 9 would make PRGM 'visible' (and loadable – but not deletable) to anyone with a priority of 10 or higher. This is useful for teachers – a file's priority can be set so that the file can be read by pupils but cannot be tampered with.

It's not necessary to give every user a password. Pressing 0/Break will give anyone read only access to any file with a priority of 0. \*AUTO 8 will do what Shift/Break does with a floppy that has been configured to auto-boot. (The 8 says which 'disc' from the hard disc's surface will be booted.)

The manuals supplied are comprehensive and well organised. There is a user's guide for the general public, and a supervisor's guide which goes into such things as assigning passwords.

Our system is all contained in one room, but a 500m network is possible. So far we are only using the disc to replace our floppies, which doesn't exercise all the features of the system. It is provided with versatile \*VIEW, \*REMOTE, etc commands for a larger installation, or for more control, supervision or help by the teacher. Messages can be passed back and forth over the network between client stations and the fileserver.

Some calculations comparing the costs of floppy and 10 Mb GSL based-systems indicate that in terms of cash the break-even point comes at about 15 stations. Building a system around a hard disc saves you most of the trouble associated with floppies – no more missing discs, mysterious deletions, vulnerability to dust. The GSL hard disc's network must also count as a major benefit in choosing this option – the costing exercise did not include a printer for each station.

In favour of the floppy option, one could point out that if the hard disc were to go down, the calamity would be proportional to the number of stations attached to it. We are keeping some floppies for backing up work and emergencies. As long as the 'discs' of the hard disc look like floppies (size, filenames, number of files), one can \*BACKUP from the hard disc to a floppy, and the data can be restored on to the hard disc as easily. At the moment, the floppy server must have the Amcon DFS in it, but GSL are working on this and the Acorn DFS will be acceptable soon.

As far as alternative hard disc systems are concerned, SJ Research are building something which is more hardware intensive but more expensive. Torch do a hard disc, but to access it each of your Beebs must be fitted with over £300-worth of gear to make what comes out look like CP/N, (which is or is not CP/M depending on who you ask).


There are a few problems with the GSL. Catalogues are not in alphabetic order but this may be rectified in a later revision of the software. Until the fileserver doesn't require the Amcon DFS, there isn't a simple way to transfer data files from floppy to hard disc. The next version of the disc utilities (available to the supervisor only) should allow \*COPY from an Acorn DFS floppy to the hard disc, I believe.

GSL has been unfailingly courteous and thorough in dealing with questions that have arisen. We have found that pupils learn the essentials of saving and loading files with a 15 minute lecture to the whole class and the supervisor can master his powers easily. **Tom Boyd** 

#### BBC Microcomputer in the NORTH

CTECH Computers Telephone:061-366-8223/7794

Free Vouchers for up to Travellers Cheques on certain models

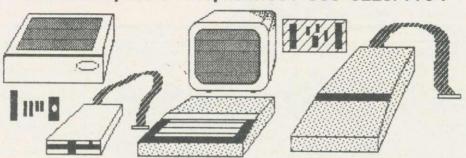

Computers	£ p
BBC Model B	227.39
BBC Model B with DFS	346.96
BBC Model B with DFS & Econet	414.35
BBC Model B with DFS & Wordwise	379.96

**BBC Model B** with DFS & 100K disc drives only £433.91

	Acorn Equipment	f n
	6502 2nd Processor	£173.04
	Z80A 2nd Processor	£346.95
es	Teletext Adaptor	£199.00
	Electron Computer	£112.17
	Electron Plus One	£47.78
Mos	t add-ons include free fitting and installation.	

All computers come with Free Cassette Lead.

Monitors Ferguson Hi Res Green Screen Ferguson High Res Amber Screen Microvitec Medium Res Microvitec Normal Res Philips TV/Monitor Fidelity TV/Monitor	£ p 69.00 74.00 260.00 199.00 £199.00
Light Pens and Joysticks R. H. Electronics Light Pen Joystick Pairs Hi-Fi Extension Cable Atari-type joystick for BBC	39,50 17,35 5,17 10,39
Components and Cables 2764 Eprom 27128 Eproms 8271 Disk Controller BBC to Centronics Printers 1/2m BBC to serial printer Disk Drives Datacable Disk Drives Power Cable R.G.B. Cable BBC to Ferguson Monitor Cable Cassette Leads TV Leads	6.52 17.35 POA 11.26/13.00 8.65 2.57 3.44 3.44 4.78 2.57

# DISKETTES

Boxes of 10 diskettes XIDEX s/s d/d £15.22 XIDEX d/s d/d £16.09 XIDEX diskettes £15.22 Control Data d/s d/d 96 TPI £19.91 Control Data s/s d/d 96 TPI £14.74

'Storage boxes' £2.17

Printer Ribbons
Epson FX80/RX80/MX80 £4.34
NEC/Imagewriter Ribbons £5.21
Canon PW 1080A/KP 810 £7.82
Brother HR15 Multi-Strike £4 34

Starbase Special Offer Gemini datagem

Addons LVL/Computer Village ROM/RAM board HCR Electronics Eprom programmer OEL 200 Prestel Terminal Acorn Speech Synth Chip Chat Speech Synth Pace Grapevine LVL Music Keyboard	39.50 49.00 59.00 47.83 26.04 POA 85.90
ROM Software Wordwise Graphics ROM Print Master View 2.1 Ultra-Calc 1.2 O.S. Disk Doctor BCPL Termi Commstar Viewsheet Beebugsoft Toolkit Spellcheck ALL Beebug titles now in stock	34.74 28.65 28.65 52.09 56.48 10.00 28.65 86.09 28.65 30.39 52.09 23.48 17.35
Ctarbase	50.00

59 00

85.95

#### THIS MONTH'S BEST BUYS AT C-TECH.

SHUGART	40A 100K FULL HEIGHT 40T SINGLE-SIDED DISK DRIVE £69 + VAT
TEAC	55F 400K 40/80T SWITCHABLE DISC DRIVE £149 + VAT
FERGUSON	MM02/MM06 26 MHZ BAND WIDTH GREEN/AMBER MONITOR £69/£74+VAT
STAR	SG10 PRINTER NEAR LETTER QUALITY, EPSON RX80FT IBM COMPATIBLE
CANON	PW 1080A PRINTER NEAR LETTER QUALITY, EPSON FX80 COMPATIBLE P.O.A.

NO MAIL ORDER RISK WITH US (see below)

#### PRICES ...

All our prices are constantly moving, so please ring us to check the latest price.

All prices plus VAT

#### **FREE DELIVERY TODAY** (Orders over £90)

If you are in Greater Manchester, Cheshire, Lancashire, Midlands, Merseyside, West Yorkshire or South Yorkshire, if you ring us now we can send one of our highly trained staff to install your computer equipment today.

(Pay only when you receive your goods)



## COMPUTERS

184 Market Street, Hyde, Cheshire **SK14 1EX** 061-366 7794 061-366 8223

#### Saving the

#### human race

'Robotron: 2084', Atarisoft, BBC and Electron, £9.99

IN Robotron: 2084 your task is to kill all sorts of nasties and save your fellow humans from the robots.

These robots attack in waves, and on the first, there are fifteen. You soon realise they are programmed to kill, and will simply come straight for you! Fortunately, you have a powerful weapon system—a rapid fire laser gun—and the first few screens are little problem. After the eighth, you can get into real trouble, however. There are so many different types of nastie coming at you, such as the red discs which take great delight in distributing what look like little bullet-throwing gravestones, and the brains which . . . well, see for yourself on level five.

Once you have exterminated everything that is killable on a level, you proceed to the next. If, in all the chaos, you manage to rescue some humanoids, there are large bonuses available which go a long way to a good score. Bonus lives are awarded every 20,000 points – you'll need them!

The graphic quality of *Robotron* is very good. There are many different aliens, and my greatest praise is for the sheer speed of operation, especially when you consider how much is going

on at once. Almost everything moves, and the action is smooth. Sound is fairly good, too; there is a wide variety of noises and they are well implemented.

As usual in Atari's games, there are many options available to the player. You can choose a one- or two-player game and the sound can be switched off. It's also possible to start on any of the first nine levels, and to freeze the game. You can control *Robotron* by keyboard or one or two joysticks; the keyboard option is a little hard to get to grips with, as there are eight keys

used - the two-joystick option may be leasier for some.


Altogether, a fast action game, very difficult in later stages, with good graphics and sound, and which gives you a real feeling of achievement when you master the controls! A worthy addition to any shelf.

Stuart Menges

#### Going

#### underground

'Manic Miner', Soft Projects, BBC, £8.95



ONE OF the best known Spectrum games, Manic Miner, is now available for the BBC micro. The idea is to guide Willy the miner around a series of screens, collecting a set of objects, before his air-supply runs out. Once all the objects have been picked up, the exit begins to flash, and our hero moves onto the next screen. Usually, you pick up keys, but coins, bananas, etc are also found on some levels.

Once the game is loaded, a security code must be entered from a large number of combinations. If you wait, a demo runs, so you can see each screen in turn.

Controlling the character is simple, there are only three keys to worry about – Z and X move you, and you use < Ret > to jump.

As far as sound goes, there is an annoying tune, playing all the time, but the other sound effects are acceptable. Fortunately, Q will kill the tune but not the rest of the sound. Graphics are better, but not outstanding, and the movement is smooth. Some of the animation on later levels is very good – spinning triangles, mutant telephones, and, perhaps best of all, a bouncing cheque!

Each screen is well presented and designed, and has its own problems. The key to success is forward vision and precise timing. *Manic Miner* is already established on the best sellers list for the Beeb. At £8.95, it's on the expensive side but not too much above the inflated average. **Stuart Menges** 

#### A-maze yourself

'Maze', Acornsoft, Electron version £9.20, BBC version £9.95 (disc £11.50)

SOME games, like *Snapper* and *Frogger*, have staying power. Another sure to join the ranks of the stayers is *Maze* from Acornsoft.

You have just entered a top-secret installation of a rival company with the aim of stealing some secret information. The baddies are robot guards who will, of course, shoot you on sight.

Your mission, should you decide to accept it, is to locate three secret keys scattered around the randomly-drawn 3D maze, and place them in the indestructable iridium box (what else?). Then you can take the new key within, work your way back to the lift and elevate yourself to the next level. Once there you are faced by an extra robot and a more complex maze.

The keys themselves are represented by different coloured squares situated on the floor. Should you happen to come across the iridium box in your travels, its position remains displayed on the plan view of the maze so that you can find your way back to it.

The maze itself isn't fancy but is very effective, scrolling steadily and without judder, and usually responding quite quickly. Pressing V supplies you with a plan of the parts you have already explored, with the robots and their respective positions shown.

When a robot approaches, echoing footstep sounds emanate, and when it appears in the corridor before you, pressing F will fire one of your three bullets to blast it to smithereens (if it




hasn't already beaten you to the draw). Shooting one doesn't really make things any easier, as it is immediately replaced by another robot.

Maze has certainly become my favourite pastime for the moment, and I'm sure I'll be playing it for some time to come. And if that isn't a recommendation, then I don't know what is!

**Bruce Smith** 



Electron Cass SLG11 £6.99 BBC Cass SBG11 £9.95 BBC Disc SNG11 £11.50



HOPPER

£6.99 £14.95 £9.95 £11.50 Electron Cass Electron ROM BBC Cass BBC Disc



MAGIC SHOW Electron Cass SLX11 £6.99 BBC Cass SBX11 £9.95 BBC Disc SNX11 £11.50



**ACHETON** SNG37 £17.65



STARSHIP COMMAND

Electron Cass Electron ROM BBC Cass BBC Disc

£6.99 £14.95 £9.95 £11.50




**AVIATOR** 

BBC Cass BBC Disc

SBG02 £14.95 SNG02 £17.65




**GRAPHS and CHARTS** Electron Cass SLX02 £6.99 BBC Cass SBX02 £9.95



Electron Cass SLG10 £6.99 BBC Cass SBG10 £9.95



**BLACK BOX & GAMBIT** BBC Cass BBC Disc SBG34 £9.95 SNG34 £11.50




MONSTERS

Electron Cass SLG03 £6.99 BBC Cass SBG03 £9.95 BBC Disc SNG03 £11.50



Electron Cass SLG39 £6.99 BBC Cass SBG39 £9.95 BBC Disc SNG39 £11.50



**CREATIVE GRAPHICS** Electron Cass SLX01 £6.99 BBC Cass SBX01 £9.95



SNOOKER SLG21 £6.99 SBG21 £9.95 SNG21 £11.50 Electron Cass BBC Cass



PICTURE MAKER

Electron Cass SLX03 £6.99 BBC Cass SBX03 £9.95 BBC Disc SNX03 £11.50



GO
BBC Cass SBC42 £9.95
BBC Disc SNG42 £11.50
Electron Cass SLG42 £6.99



Electron Cass SLG28 £6.99 BBC Cass SBG28 £9.95 BBC Disc SNG28 £11.50



MAGIC GARDEN SBX04 £9.95 SNX04 £11.50



WATCH YOUR WEIGHT Electron Cass SLX17 £6.99 BBC Cass SBX17 £11.90






ELITE - the fascinating science fiction programme involving trading, combat, navigational and entrepreneurial skills.

BBC Cass SBG38 £12.95 BBC Disc SNG38 £17.65



SEVENTH STAR BBC Cass SBG36 £9.95



LABYRINTH BBC Cass BBC Disc SBG41 £9.95 SNG41 £11.50





Telephone 0933 79300 between 9.30 a.m. and 4.30 p.m. Monday to Friday.

Your order will be taken personally by our TeleOrder Sales Department - simply state your Access or Barclaycard Number and date of expiry.




Complete the coupon indicating the title(s), type of software required and make of computer. Enclose your

Cheque made payable to Vector Marketing Ltd. or give your Access or Barclaycard No. sign and send to address shown in the coupon.

If you would like a catalogue phone 0933 79300

VECTOR MARKETING LIMITED, LONDON ROAD, WELLINGBOROUGH, NORTHANTS NN8 2RL



WORKSHOP

Electron Cass SL BBC Cass SE BBC Disc SM

The Complete Cocktail Maker

# YOU CAN NOW BUY THE COMPLETE RANGE OF ACORNS SET CASSETTES DISCS & ROMS FROM VECTOR


THE BBC AND ELECTRON

Vector is the central distribution organisation for the Acorn Group including ACORNSOFT and associated software.

We will despatch your goods by First Class post within 24 hours of receiving your order.

DON'T FORGET, VECTOR CAN OFFER THE COMPLETE RANGE.

#### EARNING PROGRAMMES



XRX09 £12 65





SOMETHING FOR THE WHOLE FAMILY GAMES • EDUCATIONAL • BUSINESS HOME INTEREST.

ACORNSOFT have an extensive range of computer programmes. Some require considerable dexterity to master, others are devised to assist in teaching a whole range of subjects at home or in school, suitable for all

Business Software is proven for industry and office efficiency



IT'S SO EASY CIMPLY SNIP AND SENDS

Expiry date of credit card \_\_\_\_\_

By 1st Class post within 24

\_ Tick if VAT invoice required

Complete the order form inserting the codes and prices shown in this advertisement, or, from your catalogue and send to: VECTOR MARKETING LIMITED LONDON BOAD V

This order is for:	VEGTOR WARKETING	LIMITED, LUNDON HUAD
Title	Code	Price
The second secon	ect items are sent tick wh	,
Tick for Catalogue		Company Reg. No. 1632455

/ELLINGBOROUGH, NORTHANTS NN8 2 Name		
Address (to agree with credit card account)		
	Post Code	
Telephone No. (in case of query)		
Cheque enclosed for £	or charge my Access/	
Barclaycard A/c		

# DGBO POWER

Can you meet the challenge of Castle Quest, the absorbing new game for the BBC Micro featuring Micro Power's revolutionary M.P.4 Scrollerama system? A game that's so difficult, we're prepared to bet you a pound, that even employing lightning reactions and sound logic you still can't crack it within three full months. You can make a start at winning the wager by buying Castle Quest on cassette or disk now. It's available from all leading Micro Power stockists.

And good luck.

Probably the most challenging game

Probably the most challenging game ever devised for the BBC Micro.

# **SWEET-TALKING** BEEB-

'Sweet Talker' speech synthesiser, Cheetah Marketing, 24 Ray Street, London EC1R 3DJ, tel: 01-833 4909, £24.95

CHEETAH'S Sweet Talker speech synthesiser at £24.95 must surely be the most inexpensive way of adding synthetic speech to the Beeb. So just what do you get for the price, and how does the product shape up?

The hardware could hardly be simpler and less obtrusive. A small circuit board of some 3in by 2in holds the speech synthesiser chip (the popular General Instruments SP0256), and a modicum of external components.

The whole assembly plugs into IC99 on the Beeb's main circuit board via an IC socket mounted on extension pillars. The unit requires a fair amount of pressure to be driven home, and I would recommend that users unscrew the main circuit board from the Beeb's casing, so that it may be supported from the underside during insertion. This helps minimise the risk of hairline cracks appearing in the PCB tracks.

Since IC99 is very close to the ribbon cable connecting the keyboard to the BBC's circuit board, space is a little tight, but it should be possible to install the unit without exerting undue force on

any component.

There are no tracks to cut, soldering to be done or awkward flying leads to connect. In fact, being so small, the speech synthesiser should not impinge on other hardware fitted inside the Beeb, such as RAM/ROM expansion boards, but check first!

The software accompanying the package consists of a cassette-based program, 'Beebtalk'. Not only does this provide an entertaining demonstration of the Sweet Talker's capabilities, but the code is also meant to serve as an example of how to program the speech

To generate speech, Sweet Talker uses an approach based on allophones, which can be considered as the fundamental building-blocks of speech. When fed with a number between 0 to 63, the synthesiser chip can generate one of 59 distinct allophones, plus 5 different periods of

The allophone technique used in Cheetah's synthesiser does not produce particularly natural-sounding speech, as human speech is not, unfortunately, a series of discrete sound segments. The advantages, however,

Vincent Fojut

lends an ear to

a low-cost speech

synthesiser

are that it is easy to program, very cheap, and should allow any Englishlanguage phrase to be synthesised.

In fact, the demonstration software goes even further, with humorous results. In addition to 'speaking' in English, the program attempts three other languages - French ('Bonjour'), German ('Guten Tag'), and that other well-known 'foreign' tongue, Scottish (yes, the inevitable 'See you, Jimmy'!).

The 'Beebtalk' program includes a short machine-code routine, together with examples of how to call it from Basic, to generate the words of your choice. It works in the following way. Take your phrase and break it into its constituent allophones, then convert these into their corresponding numeric codes, and embed the string of numbers in a DATA statement. By calling the machine code routine with each number in turn (for example, using a FOR . . . NEXT loop), the synthesiser chip should then generate the required sounds.

For example, the phrase 'Acorn User' can be built from the following allophones (using Cheetah's notation):

EY, KK3, OR, NN1, YY2, UW1, ZZ, ER1.

These, in turn, give the following

20, 8, 58, 11, 25, 22, 43, 51.

In practice, the string would probably be terminated with a 'silence' code, such as 0, which effectively turns the device off. Without this extra code, the synthesiser would continue generating the last sound issued, which can be very disconcerting!

While the above approach does work, it obviously has drawbacks. There is no clear correlation between the numbers used, and the sounds which they produce. Consequently, building up even quite short phrases becomes a tedious exercise of conversion and cross-referencing.

In order to simplify the task of programming the device during evaluation. I wrote a short program to allow input to be made using the allophones themselves, leaving the computer to convert them to the appropriate numbers before feeding them to the speech chip. This was a relatively straightforward exercise, and code from Cheetah's own demonstration program was incorporated (as it is intended to be) with minimal effort. I could then type in a string such as 'HH1EHLLOW' to produce the word 'hello'. Not ideal, but much better than a string of meaningless numbers. I leave it to others to take this one stage further, and write a program to generate speech from 'normal' English text (do not underestimate the enormous complexity of this task!).

As far as speech quality is concerned, the 'voice' is unmistakably synthetic, with a falsely high degree of hissy, white noise in a number of sounds. Certain allophones are particularly dubious - the 'W' for example, just doesn't seem to make the mark. Indeed, the untrained listener may be hard-pressed to distinguish many sounds that the synthesiser produces. The monotonal quality of the voice not only sounds artificial, but also becomes

irritating after a while.

Cheetah's demonstration program craftily displays each phrase as the speech synthesiser generates the sounds. In a sense, this is cheating (excuse the pun), since it is much easier to 'understand' the device when you already can see what it is trying to say! A more accurate appraisal of its fidelity can be had by listening to the program (the first few times, especially) without looking at the screen. Most friends I tried this on were unable to make out some of the words at first.

However, intelligibility does improve, not only as one becomes more used to the characteristics of its own particular 'voice', but also as one learns to program the unit more skil-

The Sweet Talker seems ideal for those wanting a low-risk introduction to speech synthesis, especially where fidelity is not of critical importance. Above all, the device is fun to use, relatively easy to program and provides considerable enjoyment at minimum cost.

# CLARES Nº1 IN UTILITY SOFTWARE!



ENHANCED BETA-BASE £25 **8 GREAT FEATURES** 

#### WHAT IS A DATABASE?

It is a FILE which contains RECORDS Records consist of a number of FIELDS containing the information—an analogy can be drawn with a card index in which a box of cards is the file. Each card is a record and each line on the card is a field.

#### **SPECIFICATION**

1) Random Access—disc based, single or dual drives

2) File Size--99K (40 track), 199K (80 track) -65,000 + records

3) Record Size-up to 2048 characters and 200 fields

4) Field Size—up to 254 characters with complete line scanning

5) Access any record using Primary Key in 2 seconds

6) Holds-1200 NAMES AND ADDRESS records on 100K disk

7) Search-500 records on 5 fields in 60 seconds

8) Sort-500 records on 3 fields in 60 seconds

#### SYSTEM FEATURES

 CALCULATE—using any valid expression and store results

POWERFUL PRINTOUT OPTION-Eliminates need for separate mailing program, Parallel/Serial Printout allows setting of printer control codes, line spacing, tabulation, Headings etc, plus label printing with horizontal and vertical tab control.

• REDEFINE—Titles, field widths, number

of fields, number of records etc.

•TRANSFER-Records from one file to

•SEARCH LISTS—Allow creation of sub-Databases within main Database.

#### NEW \*

#GLOBALENTRY enables repetitive data to be typed in once and placed in as many records as required. Can also be used with a search list to provide a powerful global edit/update facility that will save hours of

typing.
#SPOOLER enables you to create spooled files that are compatible with Wordwise, View and other word processors. You can therefore present your data within a document or in varying formats etc The spooler program will allow to format your spooled file in the same way as the print out option. You can therefore have headings, columns, titles, numbers etc.

#INPUT is a routine included on the disc which will allow you to write utilities for accessing your data and tailored specifically to your needs.
#TUBE compatible with the 6502 second

# Comprehensive manual and tutorial. All timings and sizes are relative to ACORN DFS. Compatible with ACORN DFS, WATFORD 1.3 and latest AMCOM DFS SERIESR

# ORIGINAL USERS send your disc plus £3 for up grade.



#### REPLICA II: £12.00.

DISC

The original REPLICA set a very high standard so the specification we set our chief programmer included some impossible features. In fact ACORN state that some of the things that we have done are impossible, it just took us longer that's all. REPLICA II transfers most cassette based programs to disk, even more than REPLICA. When you buy disk drives you do not have to throw away expensive cassette based programs

REPLICA II transfers 'LOCKED' programs, programs loading as files, programs that load below &EOO, those with up to 6 sections and those up to &6E in length eq adventure programs. No waiting for 6 minutes whilst adventure programs load

REPLICA II is very easy to use. The user enters a name, how many sections and whether CHAIN, RUN or \*LOAD to load the first section. Press play and let the program do the rest, even a menu.

Think how much it will cost you to buy just 1 disk version of your favourite program REPLICA II which will hold up to 16 programs, limited only by the disk capacity.

#### FX 80 PRINTER DRIVER £12.00

PRINTER DRIVER FOR EPSON FX80 AND VIEW

Multi-page driver with print menu allowing the setting of global (document wide) printer functions at printer initialisation.

The print menu program contains a sophisticated character generator which allows the construction of 95 user defined characters which are then accessible from VIEW via a highlight option.

Supplied on disc with comprehensive user manual

#### NEW

#### DISCDEX: £15.00 DISC

 Catalogues all your discs quickly and easily.

Room to store four thousand titles.

Quick search and load option.

Compatible with single or dual drives. Extensive print options for catalogue and disc labels.

Update and delete options.

 Supplied with stick on labels to number your discs and a supply of labels for printing your own disc labels.

DISCDEX is the answer to a disc users nightmare. How many times have you had to wade through your discs looking for the file that you know is there somewhere? Now with DISCDEX those days are gone.

DISCDEX will catalogue all your discs and store them in alphabetic order. In addition to the very useful search and load facility DISCDEX will also print out a full catalogue in alphabetic or disc order. Even more useful is the ability to print disc labels for sticking on the disc or the jacket

DISCDEX is only suitable for discs with 31 file names as in the standard ACORN system. It is not suitable for double density interfaces.

Send for detailed newsletter All prices inclusive of VAT & Carriage-NO EXTRAS! Please state 40 or 80 track disc and state which D.F.S. you use

Dept AU5 98 Middlewich Rd., Northwich, Cheshire CW9 7DA. Tel: 0606 48511 Open 9-5pm Monday-Friday

#### NEW ₹ ONESHOT: £12.00 DISC

Full feature trace utility.

Single step through BASIC program or half at user determined interval

Print line number prior to execution.

Obey fixed instructions before executing a line.

Trace window allows screen to be seen

whilst tracing execution.
"Printer only" will force trace output to a printer allowing full screen display.

 Ability to dynamically alter control of ONESHOT

ONESHOT can be configured to run in any area of memory.

ONESHOT is a 1.25kb machine code program which gives the user several powerful aids in debugging BASIC programs. These include the ability to SINGLE STEP through the BASIC code of the target program, stopping the processing at specified points and comprehensive trace functions of the variables used by the target program.


A very powerful option allows the user to enter a command string into function key 0 and instruct ONESHOT to obey this command BEFORE each line is executed e.g. \*KEY0 PRINT X%; M will print the value of X% before executing each line. This is a \*KEYO PRINT X%; M will print the value very simple example and it is possible to do much more complex things including printing the value of a variable only when it changes or when it reaches a certain value or falls within a certain range. This option can also be used to dynamically alter ONESHOT as it is working. The power of this option is only limited by the users ingenuity. In addition to ONESHOT the disc also contains 3 very useful function key routines. The first will search for any DEFPROC or DEFFN and print the line numbers in which they appear together with the name of the procedure or function. The second will search for a specific procedure or function and print the line numbers containing it The third routine will print out every active variable together with its present value. ONESHOT is not compatible with double density interfaces

#### NEW § FUN HOUSE: £10.00

FUN HOUSE is a highly original suite of educational programs suitable for ages 3 to 13. The program is designed to encourage children to spell words which relate to objects found around the home. Animation and music are used to good effect and some highly original ideas are incorporated. Each room exercise is terminated with a warning item e.g. the lounge finishes with 'FIRE' which goes on to engulf the whole lounge. Tests with a newly hired 4 year old resulted in us having to prise him away from the keyboard after 2 hours. In that time he had gone from never having used a keyboard to finding the location of all the keys very quickly and entering the correct answer He had thus started on the path to learning spelling and familiarised himself with the keyboard including the use of DELETE to correct his mistakes. Can you afford not to give your children the same start?

FUN HOUSE is not compatible with double density interfaces.

> All Disc Software now available on 3" discadd £3 to printed prices

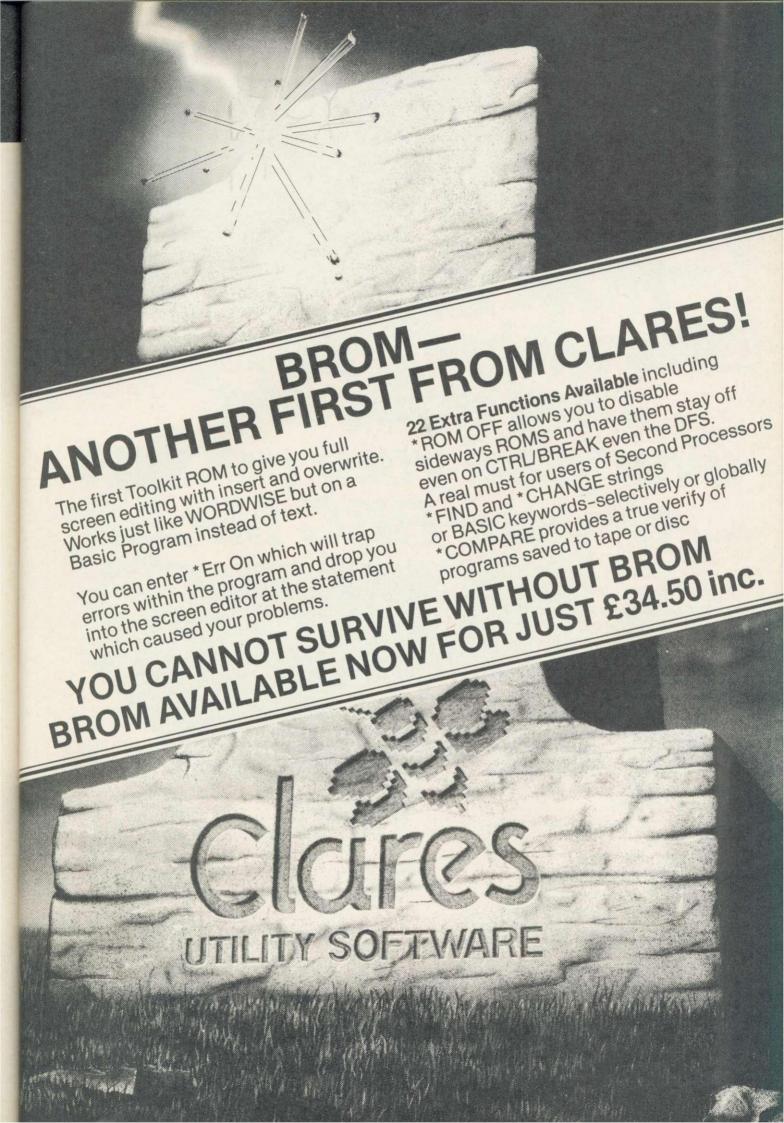


# The only ROM



# Cartridge System that does not overload your pocket or your BBC Micro

Why risk damage to your BBC micro every time you want to change ROM's? Instead, store your growing collection of ROM's in professionally-made protective cartridges!

- All cartridges are gold-plated for durability and reliability.
- No need to switch machine off between cartridge changes.
- Insert and remove 'Wordwise' 'View' 'Disc Doctor', etc., at will, from your micro in absolute safety.
- Low, low power consumption unlike othersystems.
- O Save on memory.
- Price for complete kit, including cartridge only £15.95.
- O Cartridges at £2.95 each.
- O Four for £11.00 (ie £2.75 each).
- Ten for £26.50 (ie £2.65 each).
- Kit comes with 1 ROM cartridge, 1 Cable Assembly, 1 Blanking Off Plate (used if system is removed).
- 1 Socket Cover (used when no cartridges are resident to protect against dust).
- 1 Cartridge Rack (stores cartridges safely when not in use, also expands to a Library System).
- O All prices inc. VAT.

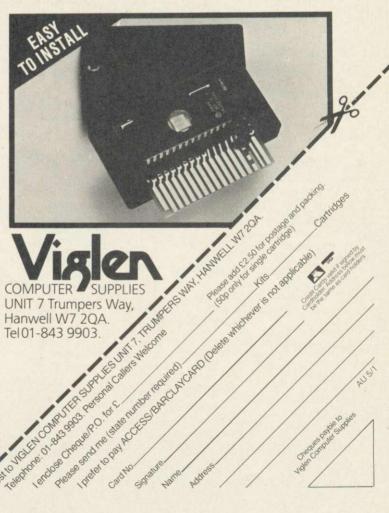






# aaccess

Mitsubishi and TEC 400K and 800K 40/80 drives also available at even more competitive prices. Please ring.

Comprehensive, 53 page manual including fact-filled, techniques of loading from cassette to disc. Not available elsewhere

**ACORN DNFS KIT** also available. Free fitting with Viglen drives £98 only with purchase of drive

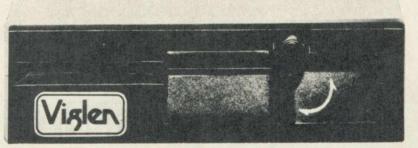



Track switch on rear panel

Replacing your cassette with a disk drive means data access in seconds! Prices include VAT, Formatting Disk, User Manual, Case and Leads. All disk drives are supplied complete with Ribbon Cable to connect to BBC Micro - Power Cable to connect to \* BBC Micro - Comprehensive Manual - Formatting and utilities disc which includes 13 useful utilities including \* formatting \* verifying \* screen dump \* disassembler \* generating 62 files atc

SINGLE DRIVES	
40 TRACK 100K	
SINGLE SIDED 40/80	
TRACK 200K	
SINGLE SIDED	
SWITCHABLE 40/80	
TRACK 400K	- Water
DOUBLE SIDED	
SWITCHABLE	
INTEGRAL POWER	
SUPPLY FOR SINGLE	
DRIVE	
SUPPLEMENT FOR	
SINGLE DRIVE IN DUAL	
CASE WITH DUAL	
DRIVE POWER SUPPLY	

SINGLE DRIVE II CASE WITH DUI DRIVE POWER S	N DUAL AL
VIGLEN WAS A STATE OF THE PARTY	BOSTON MANOR
GREAT WEST ROAD	

**Full Twelve Months Guarantee** 

AWI	VAI	DUAL DRIVES
£119.00	£103.45	40 TRACK 200K
		SINGLE SIDED 40/80
£129.00	£121.17	TRACK 400K
		SINGLE SIDED
		SWITCHABLE 40/80
169.00	£146.95	TRACK 800K
		DOUBLE SIDED
		SWITCHABLE
		INTEGRAL POWER
		SUPPLY
£25.00	£21.74	FOR DUAL DRIVE
		EXTERNAL CASED
		POWER SUPPLY capable
		of driving Dual Slimline

DUAL DRIVES

Drives • Orders welcomed from Educational Establishments and Government Departments.

#### How to order

£42.61

By post: To purchase any of the items simply fill in the coupon with your requirements.
Enclose your Cheque/P.O. or use your Access/
Barclaycard. Please make cheques payable to:
VIGLEN COMPUTER SUPPLIES and post to
above address. Please add £12 for carriage. Order usually despatched within next day.

By telephone: Ring (01) 843 9903. Credit Card holders (Access/Barclaycard only) can purchase by telephone. Please Card No., Name, Address and the items required.

-	N.			
1	/is		OF	-
COM	PUTER	SU	IPPLIE	-


\*Delete as necessary

42.61
As and the state of the s

ACORN USER MAY 1985

# SPECIAL OFFER FROM VIGLEN

- \* Scoop Viglen price £99-00 inc. VAT £86-10 ex. VAT
- \* Normally sold at £143.75
- \* Special purchase




This remarkable Grafpad from British Micro allows you to input information into your computer - very accurate and high resolution, not to be confused with other models which are both more expensive and less accurate. Supplied with all necessary cables, manual and sample programs, to allow you to develop your own application programmes.

Computer aided design programme. Drawing programme etc. CARRIAGE + INSURANCE £8

SEE OTHER VIGLEN ADVERTS ON HOW TO ORDER

COMPUTER



Printer Stand £14.95 INC. VAT Carriage & Packing £3.00

# **A PRINTER STAND**

- For 80 column matrix printers
- Raises printer high enough to put continuous stationery underneath
- Beautifully finished in clear perspex
   Viglen quality every time
   Will accept paper up to 12½" wide
   Non slip rubber pads
   Dimensions: 15" (380mm) wide (320mm) deep 4" (90mm) high
   Also available 136 column stand @ £27 inc. VAT.

EN FOR A FAST, FRIENDLY, PERSO

DEALER ENQUIRIES WELCOME

Prices subject to change without notice AU 5/3

Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL, LONDON W7 2QA.

made out to


VIGLEN COMPUTER SUPPLIES or debit my ACCESS/BARCLAYCARD No.

Address

(gty) PRINTER STANDS at £17.95 each. I enclose Cheque/P.O. for £\_

# PURE EXCELLENCE

Best Design, Best Value, Best Service.

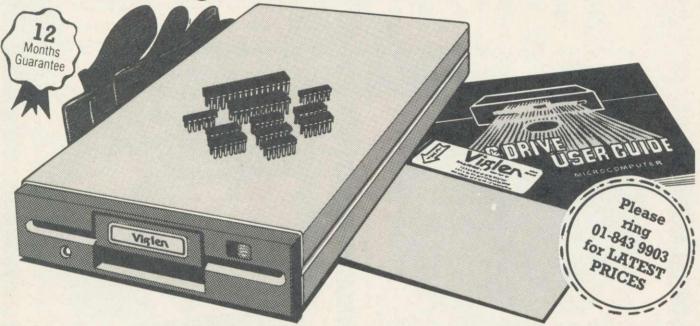

### **COMPLETE 400K 40/80 TRACK SWITCHABLE** PACKAGE FROM VIGLEN

This offer includes the latest 1.2 version of Acorn Interface DNFS.

**Complete Disk** System for the **BBC** Model B

XBRIDGE ROAD

 Package assumes you own a BBC Model B with 1.2 operating system. with power outlet

#### OFFER INCLUDES THE FOLLOWING:-

- Disk Interface (call in at our showroom for free fitting while you wait) or supplied with easy-to-follow instructions.
- 400K 40/80 track double-sided disc drive including case and all leads.
- Comprehensive Manual a fact-filled, 56 page document includes techniques of loading from cassette to disk. Not available elsewhere.
- Utilities Disk includes formatting, verifying, BASIC program comparator, disassembler, Epson screen dump, dual catalogue (giving 62 files), large printing and many others.

OPEN 9.30am-6.0pm. Mon-Fri 9.30am-4.00pm. Sat.

Add to destroy of the land of

Unit 7, Trumpers Way, Hanwell W7 2OA. Telephone: 01-843 9903

AMPLE ON-THE-SPOT CAR PARKING - AND IT'S FREE!

AT Hogue And And Andrew State of the State o

## PHILIPS COMPUTER MONITORS

# From From COMPUTER SUPPLIES



# PHILIPS BM 7502 GREEN SCREEN MONO

From the highly successful 'Philips 80 Range,' here is a monitor specially designed to display graphics and alphanumeric data with perfect clarity.

- > 12" high resolution, 20MHz band width, anti-glare screen
- > Composite Video (CVBS) and Audio Input
- > 2000 character (80 × 25) display
- > Swivel base available £13.95 incl. VAT
- ➤ Suitable for the following computers: BBC B (free leads supplied for the Beeb); Apple II, IIE, II plus Apple III; Atari 600XL, 800, 800XL, 1450XL; Coleco Adam; Commodore Vic20, Vic64; IBM-PC with interface; Texas Instruments T199/4A; Timex Sinclair; Einstein; QL

# DON'T BUY

just a colour monitor when you can have this New Philips TV + Monitor for only

£225


INC. VAT



#### PHILIPS CT 2007 COLOUR TELEVISION + MONITOR

This very popular unit is not only an excellent Colour Television Receiver, but also a sophisticated computer monitor. Featuring:

- > Free lead supplied for BBC Micro
- > Headphone socket and speaker mute switch
- RGB, (TTL and can be modified for linear), Composite Video Input (CVBS), Audio Input <u>plus</u> this model has an AV/TV switch
- > 14" picture tube with 0.65mm resolution
- > Maximum 80 characters per line 20MHz band width
- > 12 pre-select buttons
- > Aerial supplied
- > Swivel base extra £13.95 inc. VAT



Open 9.30 – 6 weekdays, 9.30 – 4 Saturdays



—Full Twelve— Months Guarantee

#### **HOW TO ORDER**

BY POST: To purchase either of the items in this advertisement simply fill in the coupon with your requirements. Enclose your Cheque/P.O. or use your Access/Barclaycard. Please make cheques payable to VIGLEN COMPUTER SUPPLIES and post to the address on the coupon Add £8.00 for Postage, Packing and Insurance for each item. Prices subject to change without notice.

BY TELEPHONE: Ring (01) 843 9903. Credit Card holders Access/Barclaycard can purchase by telephone. Please give Card No., Name, Address and the items required. Post to: VIGLEN COMPUTER SUPPLIES, UNIT 7, TRUMPERS WAY, HANWELL W7 2QA Telephone 01-843 9903. Personal callers always welcome.

AU 5/5

Signature:

Name:

Address


# The BBC Model B All the peripherals from Vigle


# The best service-The best value

#### Disk Storage No.1

This diskette storage holds 70 diskettes

Our Super Low price £14.95 including VAT





#### Disk Storage No.2


This lockable diskette box holds 90 diskettes

Super Low price £14.85 inc. VAT

#### 3M Scotch Disc

DS 40 TRACK £20.00 £18.40 £20.70 £23.00






#### Monitor Stand

Our Super Low price £14.95

#### Microvitec Monitors

Standard £185 Medium £259 Med and Pal £295 High £389



#### Complete package for word processing

From £900 inc VAT

#### **Dot Matrix Printers**

Taxan Kaga KP810 £289 Canon PW1080A £289 Epson RX80/FT £269 Epson FX80 £389 Shinwa CPA80 (100cps) £219 Mannesmann Tally MT80 £209

#### **Daisy Wheel Printers**

Tuki 6100 £369 Quen Data £255

Please add £8 for 1½ metre length printer lead for the BBC micro.

All prices inc. VAT Please add for carriage. A - £2. B - £3. C - £8. Minimum carriage charge of £6 for all orders totalling £40 or more. These will be sent by private carrier and are insured.

UTER SUPPLIES. UNIT 7, TRUMPERS WAY, HANWELL W7 2QA Telephone: 01-843 9903 Post to: VIGLEN COMP

Please send me I enclose Cheque/P.O. for £ Incl. carnage

Cheques payable to Viglen Computer Supplies.

I prefer to pay by ACCESS/BARCLAYCARD (Delete whichever is not applicable) Card No. Signature \_

Credit cards valid only it signed by card holder. Address must be the same is card holder.

ACORN USER MAY 1985

Address

183

AU 5/6


### DEFINE

#### A MULTICOLOUR SPRITE CREATOR, EDITOR & ANIMATION CONTROLLER FOR THE BBC B COMPUTER

DEFINE is a suite of programs providing all the sprite and animation facilities needed to produce high speed arcade type games using your own multicoloured characters (sprites).

The package is extremely easy to use, every command being made with a lightpen, or joystick, directly from the screen. Real size and enlarged views of your sprites are continuously updated while you define or edit them and you may test animation sequences in the editor package as you go along. New sprites may be created by editing old versions and the number of sprites you may define is unlimited. Sprites may be any size up to 12 × 16 pixels and each pixel may have any of the 16 standard mode2 colours. The software needed to animate your sprites is provided as a separate program, which you can merge into your own BASIC, or machine code, program, allowing high resolution positioning with fast, simple commands. The number of sprites, or clones, you may have at any one time is unlimited (except by computer memory) and the speed of movement can be very fast if desired over 400 sprites per second may be printed from BASIC, or 700 per second from machine code. Of course, you may link sprites in your own programs, producing giant sprites, or sub-animation. A 24 page handbook is supplied as well as a BASIC example program.

LIGHTPEN OR JOYSTICK CONTROLLED

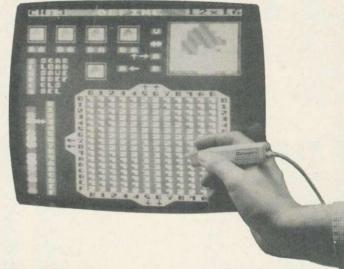

DEFINE tape version DEFINE disc version Datapen Lightpen Pack (optional)

£9.95 £11.95

All prices inc. **VAT & Postage** 

(Software included with lightpen; introduction and 2 drawing programs)

Datapen

Datapen Microtechnology Ltd., Kingsclere Road, Overton, Hants RG25 3JB TEL: (0256) 770488

# University Software

STATISTICAL PACKAGE

MULTIVARIATE REGRESSION: Main output consists of estimated coefficients, t-stats, standard errors, R<sup>2</sup>, corrected R<sup>2</sup>, standard error of regression, F stat, and Durbin-Watson stat. Further output options: multiple correlation matrix, var-covar matrix, ANOVA of regression, residuals, plot of residuals, interpolation. Data options: Log/In option for each variable, no-constant regression, choice of dependent variable, selection of independent variables, auto-omission of linearly dependent variables.

ANALYSIS OF VARIANCE, SCATTER DIAGRAMS AND TIME SERIES PLOTS; One-way and two-way (without interaction) ANOVA tables, scatter diagrams of pair data and time series plots with auto-scaling.

STATISTICAL TESTS, CORRELATION COEFFICIENTS AND PROBABILITY DIS-TRIBUTIONS: Basic stats on each column of data (size, sum, mean, variance, std. dev.). Chi-square (contingency table), t (one sample, two sample, paired), F, Mann-Whitney U, and Wilcoxon signed rank tests. Pearson's, Spearman's rank and Kendall's rank corcoefs. Chi-square, t, F, binomial, Poisson and normal (std., non-std.) distributions. Results of tests and corr. coefs are displayed with significance levels

DESCRIPTIVE STATISTICS, FREQUENCY DISTRIBUTIONS AND HISTOGRAMS: Analysis of raw data or data with frequency counts. Raw data sorted and grouped. Choice of lower bounds and class intervals. Absolute, cumulative and relative frequencies. Histograms with up to 200 classes. Output displays sum, mean, mean deviation, median, variance, std. dev., 3rd and 4th moments, skewness, kurtosis, range.

All programs are datafile compatible with Matrix Operations program in UNIMAX package. Data matrix capacity examples (columns by rows): CBM-64; 2x1250, 5x700, 10x380, BBC-B; 2x750, 5x400, 10x200, 48K Spectrum; 2x1800, 5x900, 10x500. CBM-64 (disk only): £85, BBC-B Torch and Acorn Z80 versions: £100, 48K Spectrum (mdvcart, RS232 option): £60, 48K Spectrum (cass): £50.

#### To: UNISOFT LTD,

(Dept. U) 29 St Peter's Street, London N1 8JP. Tel: 01-359 0978 Prices include VAT and delivery within the UK. For orders from outside Europe add £5.00 per item for airmail post.

LINEAR PROGRAMMING PACKAGE

LINEAR PROGRAMMING: A powerful and instructive optimisation program capable of handling all sorts of linear programming problems (min/max, any combination of  $\leq =$  =, >= constraints and  $x_i>=0$ ,  $x_i<=0$ ,  $-\alpha< x_i<\alpha$  sign constraints). Primal, canonical, dual and their solutions are displayed in standard mathematical form. Unbounded problem and no feasible solution prompts. Edit option for all inputs. Capacity examples (variables by constraints): CBM-64; 10x35, 25x30, 40x25, BBC-B; 10x25, 20x20, 48K Spectrum; 10x45, 25x35, 50x25

MATRIX OPERATIONS: Inversion, transposition, determinant, pre- and post-multiplication, scalar multiplication, addition and subtraction of matrices and vectors. Any output can in turn be used as the input of the next operation without re-typing. Matrices can be saved or loaded at any stage. Datafile compatible with UNISTAT package. Capacities: CBM-64; 35x35, BBC-B; 25x25, 48K Spectrum; 45x45.

CBM-64 (disk only): £60, BBC-B (disk only): £60, BBC-B Torch and Acorn Z80 versions: £70, 48K Spectrum (mdvcart, RS232 option): £45, 48K Spectrum (cass): £40.

NEW FOR BBC-B, ELECTRON AND 48K SPECTRUM

#### INTRODUCTION TO ECONOMICS

AN INTERACTIVE COURSE IN 'A' LEVEL ECONOMICS

ECON 1: Demand measurement, elasticity, supply and demand analysis, equilibrium. the supply curve and production functions

ECON 2: Equilibrium and disequilibrium adjustments in a market economy, exercises in market forecasting.

ECON 3: National income determination, the multiplier and convergence towards equilibrium, IS/LM analysis.

ECON 4: Money and macroeconomic adjustments, the demand for money and the rate

Available for BBC-B (disk/cass), Electron (cass), 48K Spectrum (cass): £40.



#### COMMODORE 64, BBC-B, 48K SPECTRUM

\* Comprehensive user manual \* Full data handling facilities (display, print, change, save, load) \* All results can be printed out \*




# Sunersy Softwore

#### 'PROFESSIONAL Software for the BBC Micro'

#### **EASIPLOT**

"a very good program . . . overall rating 92% "A + B Computing

"excellent" Which? Software Guide



Easiplot is a sophisticated and user friendly BUSINESS and EDUCATIONAL graph package. Voted the 14th best educational program, Easiplot has come to be regarded as an outstanding business package and excellent value for money.

This latest version is configured for single or dual disk drives and is compatible with screendump ROM's enabling large or small graph printing.

Ideal for VIEW and WORDWISE reports.

#### COMPREHENSIVE FACILITIES INCLUDE:

- \*Line, Bar, Pie, Scatter and Data charts
- ★5 line or bar merging
- ★Bar/Line conversion option
- \*Auto or manual scaling
- ★Comprehensive label and edit facilities
- ★Screendumps for Epson compatible printers
- ★Save/Load options on single or dual drives
- ★Provides easy access to screendump ROM's
- **★**Grid and screensave facilities
- ★56 page USER MANUAL ONLY £24.95

#### BIOGRAM is a new concept in computer software

For less than the cost of most ROM software the BIOGRAM SYSTEM provides you with the tools to control your state of relaxation and response to stress.

BIOGRAM uses proven biofeedback techniques to provide you with audio/visual impressions of your physiological and psychological state.

Your stress level is detected by two electrodes and is converted and relayed to the computer by the electronic BIO-MODULE. The BIOGRAM software translates this signal into a form that will enable the user to learn to influence his own state of mind.

BIOGRAM is FUN and EASY to use, just plug in the module, attach the electrodes and choose your program. Ready to run in seconds.

#### **BIOGRAM**





The BIOGRAM system comprises an electronic bio-module fitted with plugs and electrodes and a suite of programs on disk or cassette.

The BIOGRAM software package includes:

- ★RELAXOGRAM a multi-level relaxation trainer and progress tester.
- ★LIE DETECTOR a graphical lie detector with an automatic interrogation facility.
- ★P.REDUCER a programmable phobia identifier and reducer.

The comprehensive user Manual provides many examples of biofeedback applications and experiments to try.

HARNESS THE POWER OF BIOFEEDBACK – LEARN TO CONTROL YOUR FEARS, PHOBIAS and STATE of TENSION. AN INVESTMENT FOR THE WHOLE FAMILY AT £37.95

#### SHARE ANALYSER

'an excellent program' Micro User – Jan 85 'an invaluable aid' Northern Echo 'very highly recommended' Which? Software Guide 'Excellent investment' Luton News

Share Analyser is a comprehensive reporting, analysis and charting package for the BBC Micro. Transaction and share price databases are built up for each share name and a variety of report and analysis facilities can be instantly accessed. Reports can be produced on any printer. Share Analyser is easy to use and is supplied with a comprehensive Operating Manual.

#### **FACILITIES INCLUDE:**

- ★Up to 20 share names per portfolio per disk
- ★Use as many disks as you require
- ★Capacity per disk 20,000 whole number share prices and 320 purchase/sale/ dividend records
- ★Reports include Valuation, Profit Statements, Movement Analysis, Transaction Reports etc
- ★Graphics facilities include Moving Averages, Rise and Fall, Superimpose, Magnification, Grid, Screenwrite, Screendump etc
- \*Adjusts for scrip issues etc
- \*Provides access to screendump ROM's

EXCELLENT VALUE at £24.95 - ask for full details



All Easiplot and Share Analyser specifications are for the disk version. FULL DETAILS OF ALL OUR PRODUCTS ARE AVAILABLE ON REQUEST.

Prices include p + p etc - no extras	PRICE	Disk ordersstate 40 or 80 track (add £3 for overseas orders). Write or phone for further details (0582) 33858 (Ansaphone Service).
Biogram (cassette or disk)BBC B only Easiplot 1 (cassette)BBC B & Electron	£37.95 £15.95	ALL PROGRAMS ARE NORMALLY DESPATCHED BY FIRST CLASS POST WITHIN 24 HOURS AND ARE GUARANTEED FOR 12 MONTHS. Available MAIL ORDER only.
Easiplot 3 (including Dataplotter – disk) Share Analyser (cassette)BBC B & Electron Share Analyser (disk)BBC B only	£24.95 £17.95 £24.95	Send cheque/PO etc to Synergy Software 7, St Andrews Close, Slip End, Luton, LU1 4DE.

ACORN USER MAY 1985 185

# CHASE DATA

PRODUCT LAUNCH

SPECIFICALLY ENHANCED FOR USE WITH THE BBC MICRO.

Canon 221A "Super-Slim"
(33.5mm) 80 track double sided 400K floppy disc drive (40/80 track switching).

Continuing our policy of securing premium quality products at budget prices we are pleased to announce the new generation Canon 221A drive.

7

A

Specifications:

80 track double sided disc drive. 40/80 track switching with dual colour LED. Capacity 400K in single density, operates in double density. Direct drive, track to track access 3 ms in 96 TPI mode. Dimensions:–1/3 standard height, only 33.5mm.

2154

All canon 40/80 switchable disc drives feature an on-board dual-colour LED on the front panel to show track mode selected.

This is coupled with our own unique two-stage illumination. To give a clear operating status, as follows.

extended warranty available

40 TRACK MODE: \_ 80 TRACK MODE: \_ POWER ON: \_\_\_\_

DRIVE SELECTED:

LED GREEN LED RED

HALF-ILLUMINATION (GREEN OR RED) FULL-ILLUMINATION (GREEN OR RED)

LOFFER

£95<sub>INC</sub>

CANON 210 2/3 HEIGHT (57.5 mm) 40 TRACK D/SIDED 200K FLOPPY DISC DRIVE DIRECT DRIVE

Specifications:
40 track double sided disc drive

Price Includes:
Drive cased with

40 track double sided disc drive capacity 200k in single density
Operates in double density
Track to track access time – 6 ms
Full 12 month warranty with optional

#### **FUJI FLOPPY DISCS**

		If purchased
	Per box 10	with disc drive
40 TK SS DD	£17.60	£15.60
40 TK DS DD	£24.50	£22.50
80 TK DS DD	£28.60	£26.60
-1	· · · I I V/AT	0000

These prices include VAT & P & P.



Tests:

Motor speed, read/write, steptest, alignment test\*, step & read/write test, read only test.

**£8.00** inc. **£7.00** if purchased with disc drive.

\*This test requires and oscilloscope & alignment disc.



The ultimate tape to disk utility
Vector 1 allows you to transfer almost all your tape software to disk. Unlike others, you only

need to buy 1 copy of Vector 1 since it transfers tapes to specially formatted program discs. This is easily the most powerful tape to disk utility available.

Vector 2 -

Disk to disk utility

Vector 2 allows you to make backup copies of all your valuable disk software. It is the most advanced utility of its kind available. It is a condition of sale that neither of these products are used for infringement of copyright.

Not compatible with double density interface.

Vector 1 £16 On its own

£15 If purchased with disk drive

Vector 2 £16 On its own

£15 If purchased with disk drive





SLIM SANYO DISC DRIVES: MODEL: 596D. SPECIFICATION OF EACH DRIVE: D/SIDED 40/80 TRACK 400K. (40/80 TRACK SWITCHING)

The Sanyo disc drive is a "half-height" 40/80 track switchable unit of standard dimensions, built to Sanyo's usual high standards of quality and reliability.

All inclusive price list: This means: disc drive + case + all power & data cables + UK carriage + utilities disc & manual + VAT.

CANON				SANYO			
Model	110	6108	210	220	221A	596D	
Formatted Capacity per drive on BBC Micro:	100K	200K	200K	400K	400K	400K	
Single Drive & Case:	£85	£75	£95	£149	£154	£149	
Single Drive & Case PSU:	£110	_	£120	£174	£179	£174	
Dual Drive & Case:	£174	-	£191	£279	£289	£279	
Dual Drive & Case/PSU:	£204	-	£226	£309	£319	£309	

#### DON'T FORGET YOUR VECTOR 1 & 2 WHEN ORDERING.

Support:

Warranty: All disc drives sold by Chase Data Ltd come with a full one-year warranty on parts & labour with optional extended warranty on all drives.

Extended Warranty

Your Insurance of trouble free operation When ordering your disc drive, ask about our second and third year extended warranty scheme. This covers ALL PARTS AND LABOUR and costs from as little as \$15,00 on single drives and \$23,00 on dual drives.

Non-Warranty Service: As the experts in our field, we can offer service on most makes of floppy disc drive.

Recalibration & Alignment ...£25 per unit inc. VAT (parts extra). Phone for details: (Tel: 0784-38487).

Payment:

By Post: Send your remittance (cheques only please) with your order to:



Unit 2, Crabtree Road, Thorpe Industrial Estate, Egham, Surrey, TW20 8RN.

By Phone: (Tel: 0784-38487). Allow up to 21 days for delivery.

#### ROCK BOTTOM PRICES

Whichever way you look at it, we've got the lowest prices, the widest range and the best back-up service in the country.

What you won't get from us, are special gifts, or false promises just honest value and a fully guaranteed after-sales service.

#### Brother - M1009

£173.86 + VAT = £199.95

D

R

N

T

E

R

S

0

8

D

R

N

T

E

R

S

50cps O bi-directional O logic seeking O 96 chars plus international and graphics O 9 x 9 matrix

#### **Gemini 10X** £189.95 + VAT = £218.44

120 cps. Obi-directional Ologic seeking friction, tractor and roll holder standard O down loadable characters O ultra high resolution O 80 cols. O IBM PC version available

#### **CANON PW 1080A**

£265 + VAT = £304.75

Near letter quality ○ 160 cps ○ bidirectional ○ 96 chars. plus graphics ○ 5 print sizes ○ 11 × 9 matrix

#### **DAISYWHEEL PRINTERS**

**Brother HR15** 

Ring for prices

Juki 6100

T

R

S

N

T

E

S

£325 + VAT = £373.75

#### **DOT MATRIX**

**Cosmos JP80** £169.95 + VAT = £195.44

**Epson RX80** £198.95 + VAT = £228.79

Epson RX80 F/T

£228.95 + VAT = £263.29

Epson FX80 £319.95 + VAT = £367.94

Epson FX100 £498.95 + VAT = £573.79

Star Gemini 10X

£189.95 + VAT = £218.44

Star Delta 10 £319.95 + VAT = £367.94

**Star Radix 10** £498.95 + VAT = £573.79

#### THERMAL MATRIX PRINTERS

**Brother HR5** 

Ring for prices

**Brother EP44** 

Ring for prices

Cables ● Paper ● Ribbons ● Sheet and tractor feeders ● Interfaces

If you have any technical gueries or want our latest prices please telephone:

#### Credit card hot line.....01-482 1711

Please add £10 for delivery, we guarantee 48 hour delivery from payment.

Personal callers welcome. We're at the junction of Camden Road, near the railway bridge. Anytime 9.00am to 6.00pm Monday to Friday 10.00am to OOpm Sunday.

Export and dealer enquiries welcome. Post your order with cheque to

#### **Datastar Systems UK**

Unicom House,

182 Royal College Street,

London NW1 9NN

Telex 295 931 Unicom G

THE TOP RANGE

#### PROFESSIONAL MUSIC FROM THE BBC MODEL B

MUCH MORE THAN JUST A SYNTHESIZER....

32 Harmonically Programmable Oscillators 32 Programmable Envelopes Five Octave Keyboard Up to 4 Osc/Envs per note Touch Sensitive Keyboard Programmable Stereo Sound Real-Time Polyphonic

Sequencer

The New Digital CLEF CMS

Price £495 inc VAT & UK carriage

> S.A.E. OR PHONE FOR FURTHER INFORMATION

#### CLEF PRODUCTS (ELECTRONIC) LIMITED

(Dept Au3) 44a Bramhall Lane South, Bramhall, Stockport, Cheshire SK7 1AH, 061-439 3297

#### IMPROVE YOUR BRIDGE PLAY


A program that presents hands similar to newspapers and mags. Each hand illustrates a point in play or defence. No bidding to worry about. At the end of each hand the computer tells you how many mistakes you have made and sums up the hand. You may see all four hands and the solution before starting play if you wish. All hands are predetermined. Go back to a hand at any time. No running backwards and forwards of cassette or disc. A grand slam with only 5 pts, or not making a trick with 33 pts. Interested?

Send cheque or p.o. to V. Milburn, 61 Hainault Road, Chigwell, Essex IG7 5DH.

At present for BBC mod B only. Program 1 for intermediate players. Program 2 for not quite beginners. Cassette £7.95 P&P included. 5.25 disc £9.95 state 40/80 track.

Please state which program required.

Other micro owners please write, we would like to know if there is a demand



#### COPYRITE 40/80

This disc backup utility has now been rewritten to recreate all copyable discs. It will backup all your latest disc based games, databases and utilities 40/80 Disc £10.95

#### MICRO-PHILE

This versatile direct access database package has been designed to enable even beginners to handle its sophisticated retrieval techniques. Its facilities include:

fast key field searching selective reporting simple statistics redefine and extend record format. Disc £14.95

**EDUTIL** Edfax utilities - allows mode 7 frames to be moved in, out or between the Edfax datafile. **Disc £7.95** 

TEXPRINT True mode 7 screen dump suitable for printing with most teletext editing programs. Disc £7.95

Edutil + Texprint £10.95 (on same disc).

#### **DISC-MINDER**

We are experts at producing disc protection. All copiers have so far failed to defeat it!! Choose a custom design from these facilities:-

- produce on your own equipment 40/80 bootable M/C or Basic or complex programs (even overlays)
  - · reasonable once only payment · Write now for further details

**Ephagy Software Products.** 

125 Corporation Road, Grimsby, S. Humberside. DN31 1UR


# Buy one of these



The Opus 3" disc drive now only

£199.95 (INC.

# and we'll give you one of these absolutely free.



A DOUBLE DENSITY DISC INTERFACE (WORTH £100)

This fantastic, 2 for the price of one offer, from Opus Supplies can't last much longer.

We are giving away an Acorn compatible doubledensity disc interface with every Opus 500K double sided disc drive sold. That is a saving of £100.

All our drives are tested to the limit-8000 hours of constant use without failure.

That's why our drives come with an unbeatable 2 year guarantee.

To avoid disappointment, complete the coupon and send it off today.

GENEROUS EDUCATION DISCOUNTS GIVEN.
PLEASE PHONE FOR DETAILS.

GUARANTEED 48 HOUR COURIER DELIVERY. NATIONWIDE.

Please rush me the following (ALL PRICES INCLUDE VAT & CARRIAGE)				
Quantity	Description			

Quantity	Description	Price
	TO'	TAL

I enclose a cheque for £
Or please debit my credit card account with

or please debit my credit card account with

Name\_\_\_\_

Address

Telephone

Opus.

55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.

#### BBC/ELECTRON EDUCATIONAL SOFTWARE

Our educational software is used in thousands of schools and homes throughout Great Britain.

**EDUCATIONAL 1** BBC/ELECTRON Tage £8.00 Disc £10.00 Hours of fun and learning for children aged five to nine years. Animated graphics will encourage children to enjoy counting, maths, spelling and telling the time. The tape includes six programs: MATH 1, MATH 2, CUBECOUNT, SHAPES, SPELL and CLOCK. 'An excellent mixture of games' ... Personal Software - Autumn 1983.

FULLCATIONAL 2 RRC/FI FCTRON Tane f8 00 Disc f10 00 Although similar to Educational 1 this tape is more advanced and aimed at seven to twelve year olds. The tape includes MATH 1, MATH 2, AREA, MEMORY, CUBECOUNT and SPELL.

FUN WITH NUMBERS

BBC/ELECTRON

Tape £8.00 Disc £10.00

These programs will teach and test basic counting, addition and subtraction skills for four to seven year olds. The tape includes COUNTING, ADDING, SUBTRACTION and an arcade type game called ROCKET MATHS which will exercise addition and subtraction. With sound and visual effects.

...'These are excellent programs which teachers on the project have no hesitation in recommending to other teachers.''... Computers in the Classroom Project, Riley High School.

Start your fun with alphabet puzzle, continue your play with VOWELS, learn the difference between THERE and THEIR, have games with SUFFIXES and reward yourself with a game of HANGMAN. ... 'Very good indeed' ... A&B Computing — Jan/Feb 1984


SLIDING PUZZLES by P. Warner BBC/ELECTRON Tape £7.95 Disc £9.95. There are two jigsaw and four sliding puzzles on a  $3\times3$  and  $4\times4$  grid. Each program starts off at an easy level to ensure initial success but gradually becomes harder. It helps children to develop spatial imagination and in solving problems. The tape includes: OBLONG, JIGSAW, HOUSE, NUMBERS, CLOWN and LETTERS.

KON-TIKI by J. Amos Simulation program based on Thor Heyerdahl's KON-TIKI expedition. Enjoy a journey on the KON-TIKI recording on a map the raft's position and entering notes in the logbook on creatures found, unusual events etc. Inclusive of booklet, background information, maps and fully supportive

"A well thought-out package with a wide appeal" . . . Which Micro & Software Review October 1984.

> \*\*SPECIAL OFFER\*\* Buy three titles and deduct £4.00
> Add 50p p&p per order. Please state BBC or ELECTRON or 40 or 80 track for discs.

Golem Ltd, Dept A, 77 Qualitas, Bracknell, Berks RG12 4QG, Tel: 0344 50720



# Harold Rules..OK?

When you call please don't disturb Harold - he broke 1000 on Snapper last week and hopes to crack 2000 soon. Mind you, there are other machines in the store that you can use to try out the software from our extensive range. Printers, disc drives and monitors too.

> 6 Chatterton Road, Bromley, Kent. 460 8991

Data Store

#### A J SOFTWARE for BBC



'The Record Changer' 32K £19.95 Cass. £24.95 Disc.

for indexing, membership lists, directories, inventories, budgeting, etc, etc.

> don't buy a database in the darkcheck the spec!

'The Wordsmith' 32K for Centronics 737/739 AND NOW FOR EPSON FX80:

£19.95 Cass. £24.95 Disc.

Options Timetable 32K £14.95 Cass. £19.95 Disc.

Simple Word Processor 32K £9.95 Cass. £14.95 Disc.

Picture Maths £9.95 Cass. £12.95 Disc.

An arithmetic practice program for primary schools.

Character Definer £9.95 Cass.

Enlarge, reduce, etc. etc.

Tape Catalogue £5.95 Cass.

Catalogue all your tapes using this program and never lose one again

Copy Disc £9.95

Copy disc to tape, tape to disc, M/C, Data or Basic.

**ROM Read** 

f8.95 Cass. £11.95 Disc.

A machine code program to read the contents of any ROM socket and copy to RAM, tape or disc. Not to be used for illegal copying.

Machine code Disassembler £5.95 Cass. £7.95 Disc.

Open Evening Timetable 32K £14.95 Cass. £19.95 Disc.

Utility Eprom £19.95 for basic programmers

Mitsubishi Disc Drives Dual 80 Track 800K £250 + VAT

Single Track Drives Dual Sided 200K £120 + VAT

Double Density Disc Interface £85 + VAT The best there is.

**Epson Printers** FX80 £350+VAT RX80 £215+VAT £8.00 Carr BBC Epson Cable £15+VAT

Normende

Not only the cheapest, but the best

Switchable 14" RGB monitor/Colour TV £220 inc. VAT and cable, £8.00 carr.

Royalties for quality software

All prices VAT inclusive except where shown

AJ Vision Service Ltd, 43 The Drive Loughton, Essex 1G101HB

# The only £200 disc grade which carries

A 5 1/4 " disc drive and double density disc interface for under £200 sounds remarkable enough, but only Opus Supplies could back such a bargain with a 2 year guarantee.

For just £199.95 you can upgrade your system with the popular Opus 5401 250 K\* 5 ¼ ″ disc drive unit and new compact, easy to fit double density disc interface. Bought separately you would pay almost £50 more.

Choose any other 5 1/4 " drive from our comprehensive range and you can purchase our disc interface at reduced cost -£79.95 instead of £99.95. Our bargain prices include VAT, all necessary leads and of course our unbeatable two year warranty.

We also give generous education and dealer discounts. For further details ring us on: 0737 65080

#### 51/4" SINGLE DISC DRIVES.

- •All 1/2 height.
- Low power consumption.
- Comprehensive manual.
   Free utilities disc.
- Direct drive mechanism.
   Fast access time.

5400 100K, 200K Single sided 40 Track £119.95 5401 100K, 200K Single sided 40 Track £149.95 5402 200K, 400K Double sided 40 Track £169.95 5802 400K, 800K Double sided hardware

switchable 80, 40 Track £199.95

We also supply a full range of single drives in a dual case with power supply.

#### 51/4" DUAL DISC DRIVES.

5401 DB 200K/400K 40 Track £319.95 5402 DB 400K/800K 40 Track £369.95 5802 DB 800K/ 1.6 Megabyte 80/40 Track £399.95

#### 51/4" DUAL DISC **DRIVES WITH POWER SUPPLY**

- Metal cased and all necessary leads.
- Separate power supply.

Utilities disc and manual.

5401D 200K/400K on line Single sided

40 Track £349.95 5402D 400K/800 K on line Double sided

40 Track £399.95

5802D 800K 1.6 Megabyte on line Double sided hardware switchable 80/40 Track £429.95

#### FLOPPY DISCS.

\*Unformatted capacity.

3" cartridge £5.75 each or £25.95 for 5. 5 1/4 " Discs with lifetime guarantee and free library case. SS/SD £14.95 for 10. SS/DD £17.95 for 10. DS/DD £19.95 for 10. SS/DD 80 Track £22.95 for 10. DS/DD 80 Track £24.95 for 10.

OPUS PRODUCTS ARE AVAILABLE FROM BOOTS, SPECTRUM, JOHN MENZIES, ALLDERS AND OTHER GOOD COMPUTER STORES NATIONWIDE.

#### **DOUBLE DENSITY** DISC INTERFACE

The ultimate double density disc interface for your BBC micro



Z80 and 6502 2nd Processor compatible. Compact and easy to fit. Compatible with Clares 'Replica II'. 'Mini-Office', 'Elite', 'View', 'Wordwise' and 'Wordwise +'. Also compatible with most sideways ROM cards.

Utilities on ROM including Format and Verify, tape to disc transfer, automatic density selection. unique mass copy routine, powerful machine code operating system giving up to 248 files. 80% faster than single density. Free user manual supplied.

**DDOS** Interface only £99.95 When bought with any disc drive £79.95

For further details ring us on: 0737 65080 or post the coupon below.

Please rush me the following (ALL PRICES INCLUDE VAT & CARRIAGE)

Quantity	Description	Price
	TOTAL	

I enclose a cheque for £ Or please debit my credit card account with

the amount of £

My Access Barclaycard (plese tick) No. is

Address


Telephone.



55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey. ous Supplies Ltd. **TELEPHONE**: 0737-65080

# Draw with the BBC micro and show the true potential of your machine

Fill shapes in one of 23 colours (Mode I) Draw points, lines, rectangles ellipses and circles Smooth curves Wire frame diagrams Hidden line removal Draw in perspective Measure scaled distances Ekta sketch lines, Half tone facility Mirror images Repeat images, SS, enlarged, reduced, stretched Actual colour displayed Store up to 10 ellipses or circles in memory Redraw any one of these at cursor position Change any actual colour for one of 8 others Clear screen, load screen, save screen Print characters or numbers at any pixel point Error messages for incorrect input Fully comprehensive manual

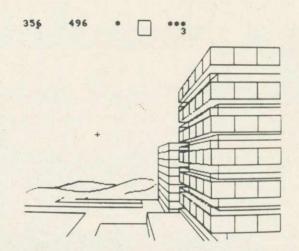



designs

This programme has been purpose designed by professional Graphic Designers for simplicity and ease of use, and is undoubtedly the most versatile drawing programme on the market at this time. There is no need to input any numerical data, as all judgements are made visually. The BBC Micro is the finest drawing machine in its price range. Find out what it can do.

The A. B. Designs drawing programme costs only £36 for over 70 functions (model B). New AB2 Program, available on disc (price £61) and cassette (price £51). When ordering send Cheque/PO and VAT at 15%. Please include phone no. with all correspondence. For further information send SAE and phone no. to A. B. Designs, 81 Sutton Common Road, Sutton, Surrey. 01.644 6643 (closed all day Thursday).

### The Ultimate Tape to Disc System....

THE MOST EFFECTIVE TRANSFER UTILITY CURRENTLY\* AVAILABLE. OR YOUR MONEY BACK! for BBC (B)

This system is ROM based and has the following features:

- Instant access.
- Allows use of all available RAM, (&400 to &7FFF).
- Can handle any length of program.
- Can handle any number of programs.
- Can save to any disc.
- Very user-friendly, (menu driven).

- Contains two transfer routines to ensure effective loading of all but a few currently available software tapes.
- Adventures normally taking six minutes to load will now take about five seconds.
- The system automatically switches to TAPE filing after loading, so that you can still load/save games positions, etc.

•••• PRICE £18.00 (including V.A.T. and post) •••••

At present available for the BBC 'B' O.S. 1.20 with single density interfaces using the standard 8271 chip (e.g. Acorn, Amcom S/D, Watford S/D).

\* Month of issue.

N.B. This ROM solely provides convenience in loading, and does not break software protection.

Also: The ADDCOMM ROM

40 new commands for the BBC 'B' O.S. 1.20 and Electron computer with ROM board. GRAPHICS, TOOLKIT, LOGO GRAPHICS and GENERAL PURPOSE statements all on one ROM.

£28.00 with 72 page User Guide, (including V.A.T. and post).

Or send stamp for detailed brochure.



Available from:

VINE MICROS, MARSHBOROUGH, NR. SANDWICH, KENT, CT13 0PG.

(Or your local Computer Dealer)

(Tran- Card sition) 2 Row	IDC SHROUDED HEADERS WITH EJECTING LOCKING ARMS	IDC D CONNECTORS  Male Fema 9-way £2.70 £3.2
Edge PCB Socket  10-way £1.20 £0.85 £0.80  14-way - £0.90  16-way £1.60 £1.20 £1.00	Straight Right Angle 10-way .85 .90 14-way £1.00 £1.20 16-way £1.25 £1.45	15 way £3.20 £3.7 25 way £3.80 £4.4 37 way £5.90 £6.8
20-way £1.90 £1.35 £1.20 26-way £2.40 £1.60 £1.45 34-way £3.10 £1.95 £1.60	20-way £1.40 £1.60 26-way £1.70 £1.95 34-way £2.00 £2.30	(Centronics)
40-way £3.40 £2.00 £1.85 50-way £3.85 £2.25 £2.00 60-way £4.80 £2.80 £2.25	40-way £2.15 £2.45 50-way £2.30 £2.65 60-way £2.45 £2.85	36-way plug £4.5 36-way socket £5.5
PRINTER LEADS	COMPUTER LEADS	D CONNECTORS
ALL 1 METRE LENGTH  BBC £9.95  BBC serial £8.95  AMSTRAD £16.75  MEMOTECH £12.75	Dual disk drive 1m £10.2: Single disk drive 1m £7.2: 7 pin DIN plug to 2x3.5mm 1x2.5m Jack plugs £2.2: 5 Pin DIN plug to 2x35mm 1x2.5mm Jack plugs £2.2:	5 15-way 95 £1.5 25-way £1.50 £1.9 37-way £2.40 £3.2 HOODS 95
EINSTEIN £12.75 IBM PCC £15.95	6 Pin DIN Plug to 6 Pin DIN Plug £1.9	RIBBON CARLE IPUCA DEL 11
SPECTRUM interface	2x3.5mm Jack plugs to 2x3.5mm Jack plugs to 2x3.5mm Jack plugs to 11.2i  7 Pin DIN plug to 5 pin DIN plug to 3 pin DIN plug and 2.5mm Jack plu 27 Pin DIN plug to 7 Pin DIN plug to 7 Pin DIN plug to 7 Pin DIN plug to 5 pin Domino plug to 5 pin Domino plug to 5 pin Pomo Plug to Coaxial TV Aerial plug 4ET STORMETORS  FOGE CONNECTORS	14-way 18 33 15-way 20 36 16-way 22 46 20-way 30 55 24-way 36 66 25-way 40 68 26-way 45 70 34-way 60 86 33-way 65 88
40 £2.15 ONLY £12.95 +£2.30 p&p TELEPHONE CONNS Surface master jack socket £3.75	2x23-way (ZX81) £1.88 2x28-way (Spectrum) £2.10 2x6-way VIC20/64 £1.20 2x12-way £1.60 DOUBLE SIDED PLUG BOARDS ZX81 23-way £1.21	JOYSTICK I BBC MICRO
Surface extri socket £2.50 Dual outlet adaptor £4.25 Line jack cord 3mtr £1.85 BT jack plug 48p	Spectrum 28-way £1.50 MONITOR LEADS	into BBC Mic analogue po
4 core cable per metre 15p All surface units shuttered BT approved.	BBC 6-pin to start plug E4.9 BNC plug to phone plug E2.9 QL to colour monitor E4.9 QL to mone monitor E1.2	8
SPECTRUM EXT		£12.5
	£10.5 £14.7 £10.7 ons made to order ne for quote	5

# BASIC COMPILER

Turns your basic programs into really fast machine code. The compiler is very easy to use, and comes complete with full instructions.

For the BBC model B, or Model A with 32k.

> Cassette Disk

£26.95 £28.95

(40 OR 80 TRACK)

Cheque/P.O. or SAE for details to

### CK Data

21 Salcombe Drive, Redhill, Nottingham, NG5 8JF Tel. (0602) 262498



# Twillstar reliability for Homea

COMPUTERS		EXPANSION BOARDS		PRINTERS		WS2000
		Raven 20 (upgrade BBC to 52K		Brother EP44	£228.00	A world standard
BBC		computer)	£69.95	Brother HR5	£148.00	between 75, 300/3
BBC Model B	£345.00	RAM-AMP 6 socket + 16K RAM	£56.00	Brother M1009	£195.00	baud rate. This is the
BBC Model B + Disc Interface	£399.00	6 Eprom socket + 32K RAM	£67.00	Canon PW1080A 160 CPS (NLQ)	£289.00	ever likely to need
BBC Model B + Econet Interface	£385.00	IX16K RAM Board	£38.00	Canon PW1156A 160 CPS (NLQ)	£399.00	any computer thro
BBC Model B + Disc & Econet	77.	Eprom Programmer		Kaga KP810 (NLQ)	£279.00	Modem
Interface	£458.00	(Blow all your BBC Eproms)	£49.00	Kaga KP910 (NLQ)	£399.00	Lead
Z80 Second Processor	£399.00	(blow all your bbo Eproms)	L40.00	Kaga RS232 + 2K buffer	£95.00	Auto-Dial
6502 Second Processor	£199.00	BBC UPGRADES		Ensign 1650 165 CPS	£305.00	Auto-Dial Cable
Acorn Bistick			0440.00			
The state of the s	£375.00	A-B upgrade	£110.00	Epson RX80T 100 CPS	£212.60	Auto-Answer Card
Acorn IEE Interface	£325.00	DFS Interface	£99.00	Epson RX80F/T 100 CPS	£240.00	SK1
BBC Prestel Receiver	£132.00	Econet Interface	£69.00	MPO-165 (NLQ)	£299.00	DS1
BBC Telex Receiver	£225.00	Speech Interface	£54.00	Panasonic KP1091	£325.00	
Speech Interface	£54.00			Seikosha GP100A	£189.00	Telemod 3
Acorn 10M hard disc	£1495.00	DISC UTILITIES		Epson RX100F/T 100 CPS	£396.00	BT approved - sw
Acorn 30M hard disc	£2299.00	View Index	£14.95	Epson FX80 160 CPS	£365.00	300/300, 1200/75, 7
Acorn Fileserver level 3	£345.00	View Printer Driver generator	£11.50	Epson FX100F/T 160 CPS	£494.00	communicate virtu
Acorn Music 500	£199.00	Hi-View	£59.00	Shinwa CP80A	£199.00	world, it will allow
Additi Madic doo	1100.00			Riteman Compact 120 CPS	£199.00	services like Micro
		Acornsoft Database	£15.00	Star Gemini 10X 120 CPS	£230.00	One-to-One, Easyl
ELECTRON		Clares Betabase 40/80	£23.00			
Electron	£129.00			Star Gemini 15X 120 CPS	£339.00	a standard with bu
Electron Me + My Micro Pack	£229.00	Clares Graphdisk 40/80	£12.95	Epson 8143RS232 Interface for		auto-answer.
Plus 1 Interface	£59.95	Clares Replica II Disc Copier 40/80	£11.95	FX & RX	£34.00	Modem
Plus 3 Interface (DFS/Drivew)	£225.00	Clares The Key 40/80	£12.95	Epson 814RS232 Interface with 2K	Buffer	Lead
rius 3 interiace (DF3/Drivew)	L225.00	Beebugsoft Masterfile	£19.00	X On/Off	£65.00	Software
		Beebugsoft Design	£19.00			
TORCH				DAISYWHEEL PRINTERS		
Torch Z80 Card + Software	£315.00	Microtext (cassette)	£49.80	Brother HR15	£378.00	BBC BUSINES
Torch Z80 Card + Software + Disc	1010.00	(disc)	£59.85	Brother HR15 Keyboard	£155.00	Microsimplex
Pack Pack	£745.00	BCPL Calculation Package	£19.00			Gemini Integrated
		Masterfile II	£32.00	Brother HR15 Sheet Feeder	£212.00	Sage Accounts
Torch UNICORN Z80 system	£745.00			Brother HR15 Tractor Feed	£95.00	Please add £4.00 fo
		MONITORS		Quen Data 20 CPS	£249.00	1 16036 000 14.00 11
BBC FIRMWARE		Microvitec 1431 Standard Res	£189.00	Juki 6100 18 CPS	£340.00	
View Word Processor	£55.00	Microvitec 1451 Medium Res	£289.00	Juki 2200 Daisywheel/Typewriter	£280.00	
Word Wise Word Processor	£37.00	Microvitec 1441 High Res	£399.00	Juki Single Sheet Feeder	£230.00	ACORNSOF
	£49.00	Microvitec 2031 20" Standard Res	£315.00	Juki tractor Unit	£115.00	
Word Wise + ROM		Microvitec Sinclair QL		Juki RS232 Interface	£74.00	Invoicing
Viewsheet	£55.00		£270.00	Juki Spare Daisywheel	£16.00	Mailing L
Speech Synthesiser	£54.00	Philips BM7502 V.H. Res (Green)	£85.00	our opero data / miles	2,0.00	Stock Control
Graphics ROM	£32.00	Normende TV/Monitor + Remote				Accou
Disc Doctor	£32.00	Control	£249.00	COLOUR PRINTERS		Price £23.95
Print Master	£32.00	Philips CTV + RGB	£229.00	Canon PJ1080A 7 Colour 40 CPS		
Communicator	£65.00	Kaga RGB Vision III 12"	£355.00	Ink Jet	£440.00	
Acorn 1.2 O/S	£11.50	Kaga 12" H.R. Green	£118.00	Seikosha GP700A 7 Colour 50 CPS	£399.00	
Acorn Basic II	£25.50	Sanyo SCM 14" VHR	£425.00	Selkosna Gr700A / Colour 50 Cr5	1399.00	WORD PROCE
Termi Emulator	£32.00	Novex 1414 colour Monitor	£215.00			WUND PHOCE
Gremlin Debug ROM	£32.00	Philips V7001 H.R. (Green) with volu		Plotters		
Caretaker	£32.00	RGB, Composite Inputs	£75.00	Penman Plotter	£275.00	BBC 1
		nob, composite inputs	L/3.00	PIXY Plotter	£399.00	BBC Mod. B, View
Toolstar	£33.00	DICC DRIVES		Epson HF-80	£445.00	Monitor, Quen Dat
Commstar	£33.00	DISC DRIVES				Cassette recorder
BCPL ROM	£99.00	BBC Single 100K Drive	£99.00	Add Ons		the necessary cabl
System ADE ROM	£60.00	BBC Dual 200K	£189.00	AMX Mouse	£79.00	£750.00
System SPY ROM	£30.00	BBC Single 200K 40 Track	£159.00	Trackerball	£59.00	
Edword User Pack	£44.00	BBC Dual 400K 40 Track	£299.00	Truckeroun	200.00	
Edword Teacher Pack	£25.00	BBC Single 400K 80 Track	£159.00			BBC 2
Merlin Scribe	£59.00	BBC Dual 800K 80 Track	£318.00			BBC Mod. B + DFS
ExMon (Beebug)	£27.00	BBC Single Power Supply	£20.00		1	BBC drive, High Re
Toolkit (Beebug)	£27.00	BBC Dual Power Supply	£29.00			daisywheel printer
		BBC Dual Fower Supply	L23.00	DISKS		
Mu-ROM (Beebug)	£27.00	Command Deliver		Very high quality 3M	1	necessary cables a
Gemini Datagem database	£115.00	Cumana Drives	0400			£843.00
BBC UltraCalc	£69.00	CSX 100 40T/600K single	£109.00	Diskettes, guaranteed for lif	e	
BBC Toolbox	£20.00	CSX 200 80T/200K single	£149.00	at only £20.00 per box	12 7 3	BBC 3
BCPL ROM + Discs + Manuals	£95.00	CSX 400 80T/400K single	£179.00	(Double-sided 80 track)		Same as BBC 2 bu
Logo	£69.00	CS 100 40T/100K single (PSU)	£149.00		2000	
Iso-Pascal	£69.00	CS 200 80T/200K single (PSU)	£189.00			BBC 4
Beebug Help ROM	£25.00	CS 400 80T/400K single (PSU)	£199.00			BBC Mod. B + DFS
Beebug Sleuth	£29.00	CD 200 40T/200K dual (PSU)	£269.00			Dual Disc Drive, H
Spellcheck II	£31.00	CD 400 80T/400K dual (PSU)	£315.00	MODEMS		daisywheel printe
DNFS ROM	£20.00	CD 400/S 40/80T switched dual	1010.00	Pace Nightingale	£135.00	and all the necess
R ROM	£20.00	(PSLI)	£399 00	(inc Comstar ROM)	£155.00	naperf1 244 00

(inc Comstar ROM)

£399.00

£155.00

d modem switchable /300, 600, 1200/75, 75/1200 the only modem you would ed to communication with roughout the world.

Modem	£148.00
Lead	£7.50
Auto-Dial	£34.00
Auto-Dial Cable	£4.50
Auto-Answer Card	£34.00
SK1	£11.50
DS1	£11.50

witchable between 75, ,75/1200 and allows you to rtually anywhere in the w you to communicate with onet, Telecom Gold, Prestel, ylink, Microweb. It comes as built in board for £155.00

#### SS SOFTWARE

Microsimplex	£270.00
Gemini Integrated Accounts	£99.00
Sage Accounts	£429.00
Please add £4.00 for Disc Version	

£8.00 £19.95

Order Processing Purchasing List Accounts Payable unts Receivable 95 each

#### ESSING

w of Wordwise, High Res. ata daisywheel printer, er with 10 cassettes and all bles and printer paper.

FS, View or Wordwise, 100K Res Monitor, QuenData er, 10 diskettes and all the and paper

AII

out with 400K drive £929.00

FS, View or Wordwise, 800K High Res. Monitor, Juki 6100 ter, 10 of 80 track Diskettes and all the necessary cables and printer paper£1,244.00

£32.00

(PSU)

BROM


# and Business computer users

#### **ACCESSORIES BBC** Data Recorder £35.00 DR6 Data Recorder £25.00 Tornado Joysticks SW self-cen PR £13.95 Quickshot + I/F for BBC f19.95 Sureshot Joystick f18.00 **BBC** Dust cover £3.50 RH Light Pen £44.00 Graph Pad £99.00 BB Key Function key mask f1.90 Disc storage box (15) f6.95 £14.50 Disc storage box (80) Printer dust cover £4.95 Monitor dust cover £4.50 Listing Paper 9.5" x 11" (2 000 sheets) £15.00 Data Cassette C15 F0.40 Anti glare Monitor Safety Screen

#### Cassette leads £3.00 5 pin DIN to 6 pin DIN (RGB) £3.00 Monochrome monitor lead £3.25 Disc Drive power leads to BBC (single) £4.50

(dual) £5.00 Disc Drive Ribbon Cable (Single) £8.00 £10.00 (dual)

6 pin Din to 6 pin Din (RGB) Monitor lead £3.00 BNC to phono lead for (composite) £3.00

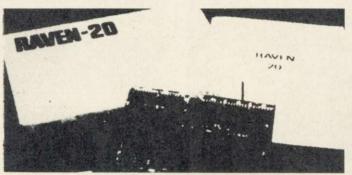

#### **EXPANSION BOARDS**

#### **RAVEN-20 BOARD**

f17.50

The RAVEN-20 is a 20K RAM EXPANSION for the BBC Micro, Model B, fitted with O.S.

This specially designed product plugs in to the CPU socket of your micro (centre socket of the 3 available) with the minimum of effort. The pins are specially custom made, thus avoiding any possible damage to the circuity.

The RAVEN board provides the user with an extra 20K of usable RAM in screen modes 0 to 3. This together with the aid of software makes the system completely transparent to both the user and the computer.

The RAVEN-20 software ROM gives much more than just the standard commands, it has been programmed to give more and better commands! Here are some of the

RON - Enable RAVEN-20 in SLOW Mode FRON - Enable RAVEN-20 in FAST Mode RVFF - Disable RAVEN-20

RTEST - TEST RAVEN-20 RAM RSTAT - Show status of RAVEN-20 SSAVE - Save Screen to file

RAM - Sideways RAM load RZAP - Examine/Alter BBC RAM RVZAP - Examine/Alter RAVEN-20 RAM

RPAGE - Set/Show RAVEN-20 work page (fast mode) Price £69.95 inc of VAT

#### DISC STORAGE

RIBBONS

MX/FX80

GP80

**GP100** 

GP250

KAGA KP870

Juki 6100

Oki 80/82

Riteman

Canon PW1080

Brother HR15 M/S

Brother HR15 Carbon

MX100/FX100

DIOCOLOTOLOGI	
10 x 51/4 library case	£2.00
15 x 5¼ flip n file	£6.95
40 x 51/4 Lockable	£14.50
80 x 51/4 Lockable	£14.50
Disc Albums stores up to 20	£9.95

£11.50

£5.50

£5.00

£5.70

£6.00

£8.50

£8.50

£5.50

£4.30

f4 20

f2 35

£6.50

#### LISTING PAPER

misc. 1 11 1 20 1 7 11 mil 1	
11" x 9½ 2000	£15.00
Teleprinter Roll	£4.50

#### **PRINTER LABELS**


1000 90 x 36mm	£5.70
1000 90 x 49mm	£8.900
1000 102 x 36mm	£7.15

#### **EPROMS**

2764 - 250ns	£4.9
27128 - 250ns	£11.5

TC	P 10	
1	Elite	£14.95 (£16.95
2	Frak	£7.5
3	Blockbusters	£7.9
4	Sabre Wulf	£9.9
5	3D Grand Prix	£7.9
6	Scrabble	£12.9
7	Pole Position	£9.9
8	Football Manager	£7.9
9	Castle Quest	£12.95 (£14.95
10	Music System	£24.9



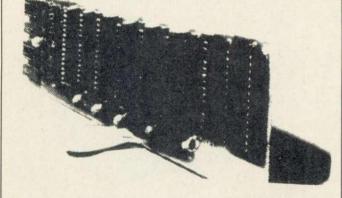

#### **▼ RAM-ROM BOARD**

The RAM-ROM extension board gives an extra 6 sockets for extra ROM's and 2 slots of RAM. This RAM is not an extension of BASIC. It is intended that the RAM be used to develop your own ROM based software. There are in fact seven sockets on the board, the 7th replaces the socket on the main board that would otherwise be taken by the ROM board. (The RAM-ROM board can accommodate both 2764 type EPROMS as well as 27128 EPROMS and ROM).

RAMAMP board is a best of its kind on the market Comes complete with either 16K RAM or 32K RAM. Doesn't need any soldering. Anyone can install in matter of a minute Comes complete with 10 utility programs to make full use of the Board, and it's fully compatible with RAVEN-20 Board.

Are you surprised how we have sold over 2000? (Read Acorn Review March '85).

All prices inclusive of VAT. Please add £1.50 for P&P

#### **HOW TO ORDER**

You may purchase any of the items listed by cheque made payable to: Twillstar Computers Ltd. Barclaycard or Access. All you have to do is fill in your requirements on a separate sheet of paper, post to us and we will despatch with 24 hours, subject to availability. All prices inclusive of 15% VAT. ADD £2.50 P&P for orders below £150. Over add £8 P&P. Credit card holders may order by telephone. Give card number, name, address and items required Please note VAT is not charged on export orders. Export customers please ring for details of P&P.





TELEPHONE ORDERS

Open 6 days a week 9am to 7pm Monday to Saturday



**Twillstar Computers Limited** 

17 Regina Road, Southall, MIDDLESEX, UB2 5PL. TEL: (01) 574 5271







#### Computers

ACORN SPECIALIST COMPUTER CENTRE



POO COMPUTERO			
BBC COMPUTERS:		PACE 5.25" DISC DRIVES:	
BBC Model B	349.00	PSDI SS/40T/100K	119.95
BBC Model B + DFS	469.00	PSD3 DS/40 80T/400K	189.00
BBC Model B + Econet	446.00	PDD3 DS/40 80T/800K	359.00
BBC Model B + DFS + Econet BBC Hard Cover	516.00 11.95	CUMANA 5.25" DISC DRIV	VES:
Acorn Teletext Receiver	11.95 225.00	CS100 SS/40T/100K (PSU)	159.95
Acorn Prestel Receiver	113.85	CS400 DS/40-80T/400K (PSU)	215.95
Acorn 6502 2nd Processor	199.00	CD800S DS/40-80T/800K (PSU)	414.95
Acorn Z80 2nd Processor	399.00	3.5" Drives	POA
Acorn IEEE Interface	325.00	OPUS DDOS + DRIVES:	
Bitstick	375.00	5401 SS/40T + DDOS	169.95
		5802 DS/40/80T + DDOS	279.00
ELECTRON COMPUTER:		DISC UTILITIES	
Electron	129.00	View Index	14.95
Plus One Interface (Printer/Joystick)	59.95	View Printer Driver Generator	11.50
Plus Three Interface (DFS/Disc Drive)	229.00	Hi-View	59.80
TORON COMPUTEDS.		Acornsoft Database	15.35
TORCH COMPUTERS:		Microtext	59.00
Z80 Disc Pack	750.00	S-Pascal	19.90
Z80 2nd Processor Card	299.00	Turtle Graphics	19.90
Graduate	1149.99	BCPL Calculations	19.90
ECONET SYSTEM:		Acorn P-System	299.00
	204	Beebug Masterfile II Beebug Quickcalc	19.00
Full Service Available	POA	Beebug Quickcalc Beebug Starter Pack	15.00 15.00
BBC FIRMWARE:		Beebug Starter Pack Beebug Billboard	15.00
View ROM	59.80	Beebug Paintbox	12.00
Wordwise ROM	44.85	Beebug Design	19.00
Wordwise + ROM	56.35	Spellcheck (Wordwise)	19.00
Viewsheet ROM	59.80	Spellcheck (View)	19.00
Speech Synthesizer	55.00	Beebug Discmaster	19.00
Ultracalc Spreadsheet ROM	79.50	Beebug Dumpmaster	12.00
Graphics ROM	33.35	Beebug Teletext	12.00
Disc Doctor ROM	33.35	Island Music System	24.95
Printmaster ROM	33.35	DISCS	
Communicator ROM Termi Emulator ROM	69.00	Mr Floppy DS/DD/80T	16.50
Termi Emulator ROM Gremlin Debug ROM	33.35 33.35		
Caretaker Basic Utility ROM	33.35	PRINTERS:	
Toolstar ROM	34.00		330.00
Commstar EPROM	34.00	Cannon PW1156A/KAGA	415.00
BCPL ROM	59.80	Epson RX80FT	275.00
System ADE ROM	60.00	Brother M1009	199.95 399.00
System SPY ROM	30.00	JUKI 6100 Daisywheel Shinwa CP80A	399.00 199.00
Edword User Pack	44.79	Shinwa CrouA	130.00
Edword Teacher Pack (Disc)	25.24	MONITORS:	
Merlin Scribe	59.95	Microvitec Cub Standard	210.00
Beebug Soft: Full Range Available	120.00	Microvitec Cub Standard Microvitec Cub Medium	299.00
Gemini Datagem Database ROM Acorn Iso Pascal ROM	129.00 69.00	Zenith Amber	99.00
Acorn Iso Pascal ROM Acorn Logo ROM	69.00 69.00	Zenith Green	99.00
Slave Rom	49.95	Phillips Green	94.00
Floppywise	49.95 29.95	Phillips TV/Monitor	228.00
Comal	49.85		
		MODEMS:	
BBC UPGRADES:		Pace Nightingale inc Commstar ROM	159.85
A-B Upgrade (Fitted)	95.00	Pace Nightingale	136.85
A-B Upgrade (Excluding Fitting)	80.00	Telemod 2	84.95
Acorn DFS Interface (Fitted)	109.00	Telemod 3	159.00
Opus DD/DFS Interface	99.95	Telemod Software BBC User/User	19.95
EXPANSION BOARDS:		JOYSTICKS:	
APTL Sidewise ROM Board	43.70		10.05
Aries B20 RAM Expansion Board	79.95	Sure Shot Joystick Voltmace Delta 14b Handset	18.95
Aries B12 Sideways ROM Board	46.00	Voltmace Delta 14b Handset Voltmace Delta 3b Dual	14.95
Aries B12C Adapter	5.75		15.55
SOLIDISK PRODUCTS:		CONTROL/ROBOTICS	
Solidisk 32K Sideways RAM	57.05	AMX Mouse	89.00
Solidisk 32K Sideways RAM Solidisk 96K Extension	57.95	Commotion EVI/SS	129.00
Solidisk 96K Extension Solidisk 128K Sideways RAM	92.00	Marconi Tracker Ball	59.80
Solidisk 128K Sideways RAM Solidisk 256K Sideways RAM	149.95 POA	PLOTTERS	
Solidisk DD/DFS Interface	39.95	Penman Plotter	274.85
Eprom Programmer	20.95	Wattanabe A3 Plotter	POA
Eprom Eraser	20.95	Acorn Bitstick Plotter Drivers	79.95

#### DOUBLE SIDED 80 TRACK DISC DRIVE & SOLIDISK DDFS 1.9 £199 inc VAT (2.0 DDFS ROM £10 extra)

WE HAVE A RANGE OF BUSINESS & WORD PROCESSING PACKAGES BASED AROUND THE BBC & TORCH COMPUTERS

ACORN APPROVED SERVICE CENTRE

Our workshop offers a comprehensive service including Repairs and Upgrades by our own engineers Shop open 9-6 Mon-Sat

EDUCATIONAL & INDUSTRIAL ENQUIRIES WELCOME



Please phone for our price list All prices include VAT, Post & Packing £9 (Large items) £1 (Small items ROM's etc)



RAINFORD INDUSTRIAL ESTATE, MILL LANE, RAINFORD, ST. HELENS, MERSEYSIDE PHONE 074488 5242



UK's LOWEST PRINTER PRICES ORDERED TODAY - DELIVERED TOMORROW DOT MATRIX

SACRET PLEASE FOR THE SACRET PROPERTY OF THE SACRET PROPERTY PROPERTY OF THE SACRET PROPERTY OF THE SACRET PROPERTY P		EX VAT	INC VAT
BROTHER HR5		£133.00	€152.95
SHINWA CPA80		£185.00	£212.75
EPSON RX80		£185.00	£212.75
EPSON RX80F/T+	SPECIAL OFFER	£212.00	€243.80
EPSON RX100F/T		€347.00	£399.05
EPSON FX80		£314.00	£361.10
EPSON FX100		€425.00	€488.75

DOT MATRIX PLUS NEAR LETTER QUALITY

KAGA KP-810	RECEIPTED TO STATE	£245.00 £281.75	
CANON 1080A	SPECIAL OFFER	£245.00 £281.75	
KAGA KP-910		£340.00 £391.00	j
CANON 1156A	SPECIAL OFFER	£340.00 £391.00	I

DAISY WHEEL

QUENDATA 1120 JUKI 6100 £225.00 £258.75 £325.00 £373.75 **EPSON DX100** £356.00 £409.40

COLOUR PRINTERS

**EPSON JX-80** SPECIAL OFFER £450.00 £517.50

ACCESSORIES

WORDWISE + BBC/PRINTER CABLE £43.00 £10.95

UTILITIES

REPLICA II . THE TAPE TO DISK COPIER


£9.25 £10.63

#### FREE! Users Printer Guide and Screen DUMP

Printerland

Unit 27, Estate Buildings, Railway St, Huddersfield HD1 1JP Showroom open Mon-Fri 9-6pm. Sat morn 9-1pm Tel: Huddersfield (0484) 514105 or (0484) 687875

#### **NEW HIGH RESOLUTION** TV/MONITOR

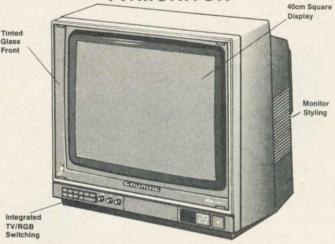

#### Is this what you have been waiting for . . . ?

- ★ 40cm Flat Square display Tube
   ★ 0.4mm Stripe pitch for high
- resolution.
  3 way operation: 1 High resolution TV; 2 Composite Video and Audio; 3 RGBS and Audio.
- ★ Integrated switching & level control
- \* RGB contrast control \* Automatic colour balance for
- long term stability

  ★ 20" version available soon.

A high quality advanced design GRUNDIG TV. Modified only by NEWARK VIDEO CENTRE. Available as a standard version or: luxury remote control with optional teletext

★ Lots of other models from 14" to 26". Standard 40cm £305.95. Remote control £335.95; Remote control with Teletext £413.95. Leads £5.99 (prices include carr. & VAT)

Callers welcome.

Details from:

#### **NEWARK VIDEO CENTRE**

108 London Rd, Balderton, Newark, Notts Tel 0636 71475. Mon-Sat 9am-5.30pm ACCESS/VISA

#### LONDON

London. Association of London Computer Clubs: Robin Bradbeer, Polytechnic of North London, Holloway, London N7 8DB London. Association of Computer Clubs: Rupert Steele, 17 Lawrie Park Crescent, London Se26 6HH London. Radio Amateur Micro User Group (G4KCS): The Secretary, c/o R.A. Webb, 39 Aldworth Road, Stratford, London E15 4DN London. Wandsworth Computer Club: C. Verrier, Earlsfield Library, Magdalen Road, London SW11 East London. SOBAT Computer Club (East London): Mr T. A. Kayani, 12 Calderon Road, London E11 4EU. Tel: 01-556 5423 North London. BBC Micro Users Group: Mr Ric Keyworth, The Penthouse', 4b Kilburn High Road, London NW6 5UL. Tel: 01-734 9235, (7am-3pm Mon-Fri) North London. 6502 North London User Group: Jim Chambers, Dept. of Psychology, University College, 26 Bedford Way, London WC1. Tel: 01-387 7050 Ext 413

#### SOUTH-EAST

Bognor Regis. Bognor Computer Group (BUG) E. R. Piper, 2 Ely Gardens, Aldwick Park, Bognor Regis, Sussex PO21 3RY Bottisham. BAUG: (Bottisham Acorn User Group), G. F. Wilcockson, 19 Gallows Hill, Saffron Walden, Essex CB11 4DA. Tel: 23793 Bracknell. Bracknell Primary Schools Computer Users Group: D. Donaldson, Secretary, Wildridings County Junior School, Netherton, Bracknell, Berks RG12 4DX Brighton, Hove & District. Brighton, Hove & District Computer Club: J Smith Secretary, 30 Leicester Villas, Hove, E. Sussex BN3 5SQ Bucks.Chiltern BBC Micro User Group: Colin Mills, 70 Chestnut Lane, Amersham on the Hill, Bucks HP6 6EH. Tel: Amersham 6103 Caterham. Computer Club: Caterham Leisure Centre, Godstone Road, Caterham Surrey CR3 6RE. Tel: Caterham 48304/43316 Harpenden. Microcomputer Group: R. Welch, 7 Tylers, Harpenden, Herts AL5 5RT

Harrow. Harrow Computer

Group: Bazyle Butcher, 16 St. Peter's Close, Bushey Heath, Watford WD2 3LG. Tel: 01-950 7068 Ilford. ILBUG: Peter Jones, 1 de Vere Gardens, Cranbrook, Ilford, Essex IG1 3EB. Tel: 01-554 9825 Iver. Iver Computer Society (IC's): John Haigh, 11 Colliston Walk, Fords Farm, Calcot, Reading, Berks RG3 5ZJ. Tel: 0734-417534 Kent. CP/M User Group: 72 Mill Road, Hawley, Dartford, Kent Milton Keynes. BEEBACC: Brian Pain, 40a High Street, Stony Stratford, Milton Keynes. Tel (0908) 564271 North & Mid Essex. User Group (NAMEBUG): Andy Purkiss, 12 Palm Close, Witham, Essex. Tel 0376 515609. Prestel: 376515609 South East Essex. BBC User Group (SEEBUG): Miss J. Lines, 97 Oakhurst Drive Wickford, Essex SS12 0NW. Tel: 03744 63396 Sutton. Sutton Library Computer Club: The Secretary, 22 Chestnut Court, Mulgrave Road, Sutton, Surrey SM2 6LR Tel: 01-642 3102 Welling. Computer Users Club: Tony Latham, 69 Hadlow Road, Welling, Kent

## SOUTH & SOUTH-WEST

DA16 1AX

Alton. Alton Computer & Electronics Society: Kevin Weatherhead, Sheen, Old Odiham Road, Alton, Hants GU34 4BW. Tel: Alton 87478 Bristol. Format 40/80 Club: BBC Disc User Group, Peter Hughes, 5 Marsh Street, Bristol BS1 4AA Fareham. Porchester & Fareham Computer Club: Simon Ward, 9a East Cams Close, Downend, Fareham, Hants PO16 8RP Gosport. BOGBUG: Borough of Gosport BBC Users Group, Graham Dubber, 128 Wych Lane, Gosport, Hants PO13 0TE. Tel: (0329) 282221 (evenings)

### MIDLANDS & ANGLIA

Boston. Boston Acorn Computer Users Club: J. C. Goodwin, 245 Church Green Road, Fishloft, Boston, Lincs PE210RP Burton-on-Trent. Beeb Users' Group (Bug Club): Linda Yeomans, 13 Regent Street, Church Gresley, Burton-on-Trent, Staffs DE119PL Derby. The Derby Microcomputer Society: F. Taylor, Secretary, c/o 5 Park View Close, Computer Association: Sqn Ldr J. A. Upham, Man S (ADP), HQ RAFSC, RAF Brampton, Huntingdon PF18 801 Norwich. Amateur Computer Club: Andy Leeder, Church Farm, Stratton St. Michael, Norwich NR1520B Norwich. Norwich & District BBC Microcomputer User Group: Roy Street, Church Farmhouse, Themelthorpe, Dereham, Norfolk NR20 5PS Tel: Foulsham 579 Nottingham. BBC Micro User Group: John Day, 8 Warkton Close, Chilwell, Notts NG9 5FR. Tel: 0602 225660. Prestel: 602 225 660 Redditch, Redditch Computer Club: Anthony Green Green, 14 Radway Close, Redditch, Worcs B98 8RZ. Tel: 0527 61434 Stoke. POTBUG BBC User Group: J. Forest, 50 Cliff Street, Smallthorne, Stoke-on-Trent, Staffs Tel: 818430 Stratford. Stratford Computer Club: Chris Parry Secretary, 15 Kipling Road, Stratford-on-Avon Tel: 0789 68080 Suffolk. West Suffolk BBC Micro Users' Club: Antony Hurden, 14 Plovers Way, Bury St Edmunds, Suffolk IP33 2NJ

Allestree, Derby DE3 2GH.

Tel: Derby 559334 Huntingdon, RAF Personal

#### **NORTH-WEST**

Cheshire. Mid-Cheshire
Computer Club: Simon
Sadler, 75 Swanlow Lane,
Winsford, Cheshire
CW7 1JD.
Tel: Winsford 53339
Cumbria. West Cumbria
User Group: P. Majid,
Tel: 0946 62732 or
K. Purkiss, Tel: 0946 66586
Mersey. Mersey BBC User
Group: Nik Kelly, 56 Queen's
Drive, Liverpool L4 6SH
Preston. Preston BBC User
Group: Duncan Coulter,
8 Briar Grove, Ingol, Preston
PR2 3UR

#### **NORTH-EAST**

Huddersfield. Huddersfield BBC Micro User Group: Stuart Mallinson, 34 Ryefields, Scholes, Huddersfield, West Yorkshire HD7 IXF Hull. Forum 80: 421 Endike Lane, Hull Hu6 8AG Hull. MUSE (for teachers): PO Box 43, 231/2 Friary Chambers, Whitefriargate, Hull Hu1 2HD. Tel: 0482 20268 Hull. TRS-80/Beeb Users Group: R. V. Souter, Secretary, 4 Risby Garth, Skidby, Cottingham, Hull Hu16 5UE. Tel: 0482 845326 Newcastle. Newcastle and Washington BBC User Group (NEWBUG): Jeff Cranmer, c/o Washington Town Centre Library, The Galleries, Washington, Tyne & Wear. Tel Houghton (927) 849342 after 6pm Sheffield. ABUG: John Fryer, Treasurer, 17 Edgedale Road, Sheffield S7 2BQ Sheffield. Parson Cross BBC User Group: Andrew Grant, 28 Rokeby Road, Sheffield S5 9FU. Tel: 0742 461203 S Yorks. South Yorks Personal Computer Group (SYPCG): Bob Hindle, 139 Penrhyn Road, Sheffield S11 8UP Wakefield. Wakefield. BBC

Wakefield. Wakefield BBC Micro User Group: The Secretary, 116 Pinderfields Road, Wakefield, West Yorkshire WF1 3PL

#### SCOTLAND

Central Scotland. BBC User Group: D. Davidson, 1 Roxburgh Place, Larbert, Stirlingshire FK5 4UE Inverclyde. Invercylde BBC Micro Users' Club: Robert Watt, 9 St John's Road, Gourock, Renfrewshire PA19 1PL. Tel: Gourock 39967

# OVERSEAS Australia. BBC Users Group

MacLeod, 5 Hatfield Street, Evatt A. C. T. 2617, Australia.

of Canberra: Steve

Tel: (062) 587719 Australia. Beebnet M. A. Cowley, President PO Box 262, Kingswood, South Australia 5062 Australia. The Sydney BBC Microcomputer User Group: c/o Stuart McCann, 500 Miller Street Cammeray, NSW 2062, Tel: Sydney 923 1137 Canada, Atom Users' Group of Canada: John Wood, 812 Cabot Trail, Milton, Ontario L9T 3M8, Canada Canary Islands (Spain). BBC Micro Club Tenerife: PO Box 1297, Santa Cruz de Tenerife, Canary Islands (Spain). Tel: (922) 216546 Tel: (922) 216946 Eire. Irish Amateur Computer Club: Austin Vaughan, 35 Monastery Drive, Clondalkin, Dublin 22, Eire. Tel: (01) 593112 (evenings)

Eire. OIFIG: (Official Irish Forth Interest Group), C/o Hugh Dobbs, Newtown School, Waterford, Eire Finland. Arjen Raateland, Hopeatie 10A21, 00440 Helsinki 44, Finland. Tel: 90-5625027 France. Club Informatique Assevent: X. Durieux, 7 rue des Warimetz, 59600 Assevent, France


Club (Malbeeb): Ray Zammit, 'San Jose', Old Railway Road, Balzan, Malta Metherlands. Big Ben Club: J. Assies, Secretary, PO Box 177, 4670 AD Zevenbergen, The Netherlands Norway. BBC INFO Horten Ingeniorhogskole, Skippergt. 6, 3190 Horten, Norway Norway. Skandinavien BBC User Group: Frans-Otto Hendriks, Ludvig Karstensvei 14, 1064 Oslo 10, Norway South Africa. Acorn Atom Users Group: J. G. Dowling, 27 Oribi Avenue, Van Riebeeck Park Kempton Park 1620, South Africa South Africa. Pretoria BBC Users Group: Stan Miller, PO Box 117, Montana 0151, South Africa Sweden. BBC User Group (BUG): Anders Wickman, Folkungagatan 58, 116 22 Stockholm, Sweden Tasmania. Tasbeeb (BBC Users' Group): Box 25 PO, North Hobart 7002, Tasmania, Australia. Tel: (002) 342704

Malta.BBC Micro Users

### SPECIAL

Bulletin Boards. Forum 80: 421 Endike Lane, Hull HU6 8AG
Disc Users. Format 40/80
Club: Peter Hughes, BBC
Disc User Group, 5 Marsh
Street, Bristol BS1 4AA
Electronics. Alton Computer
& Electronics Society: Kevin
Weatherhead, Sheen, Old
Odiham Road, Alton, Hants
GU34 4BW.
Tel: Alton 87478
Forth. OIFIG: (Official Irish
Forth Interest Group),
c/o Hugh Dobbs, Newtown
School, Waterford, Eire
Milton Keynes. BEEBACC:
Brian Pain, 40a High Street,
Stony Stratford, Milton
Keynes. Tel: (0908) 564271
Primary. Bracknell Primary
Schools Computer Users'
Group: D. Donaldson,
Secretary, Wildridings
County Junior School,
Netherton, Bracknell, Berks
RG12 4DX
Radio. Radio Amateur Micro
User Group (G4KCS): The
Secretary, c/o R. A. Webb,
39 Aldworth Road, Stratford,
London E15 4DN
Teachers. MUSE.
(for teachers): PO Box 43,
231/2 Friary Chambers,
Whitefriargate, Hull
HU1 2HD. Tel: 0482 20268
6502, 6502 North London
User Group: Jim Chambers,
Dept. of Psychology,
University College,
26 Bedford Way,
London WC1.
Tel: 01-387 7050 Ext 413

# ADVANCED PROGRAMMING

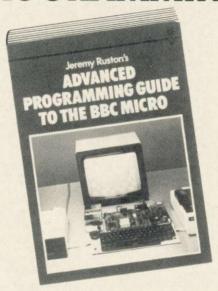

Jeremy Ruston's ADVANCED PROGRAMMING GUIDE TO THE BBC MICRO is now available for £7.95. It contains a full tutorial on programming in assembly language, as well as providing two complete language compilers. Programs written in these languages run from 10 to 100 times faster than BBC BASIC. Many other fascinating topics, including a way of increasing the screen resolution purely by using software. (ISBN 0 947695 21 4)

From Tim Hartnell, the world's most widely-published computer author, comes EXPLORING ARTIFICIAL INTELLIGENCE ON YOUR BBC MICRO (ISBN 0 947695 01X). Study the fascinating world of Artificial Intelligence, as you demonstrate for yourself many of its exciting discoveries with the eight programs in this book. The Computer Bookshelf section of The Bookseller called this work "the best work on AII have ever seen". £6.95

USING THE BBC MICRO IN EDUCATION – Don Thorpe – £5.25 (ISBN 0 907563 87 2)

CREATING ADVENTURES ON YOUR BBC MICRO – Shaw/McCrae – £5.95 (includes ten complete ready-to-run adventure listings!) (ISBN 0 907563 64 3)

Available from your computer or book store, or by mail (post free) from:

Interface Publications Ltd., Dept. QTAU, 9/11 Kensington High Street, London W8 5NP

(UK Trade: WHS Distributors)



LARGEST COMPUTER CENTRE

in

#### MANCHESTER

BBC, COMMODORE, MEMOTECH, SINCLAIR, SHARP, SANYO, AMSTRAD, QL, EINSTEIN, ADVANCE 86 DEALERS.

BBC MICRO	
BBC B	£339.95
BBC B + DFS	
Electron	£129.95
6502 Second Processor	£199
Z80 Second Processor	£349
Bitstick System	
MODEMS	

#### MODEMS Telemode, Miracle, Pace Nightingale.

MONITORS Sanyo 12H	£125
Philips	
Microvitec	
Microvitec Medium	£299
Sanyo Medium	£227
Fidelity	£217
JVC Medium	£199
JVC High	£272
Ferguson MC101 TV/Monitor	P.O.A.

#### TDK DISKS AT PROMOTIONAL PRICES

ERS.	
PRINTERS	
Shinwa CPA80	£219.95
Olivetti JP101	
Star Gemini 10X	£239.95
Juki 6100	£388
Epson RX80 FT	£289
Cannon 1080	£319.95
Cosmos CP80	£214.95
National Panasonic	£319.95
Brother HR15	£458.95
Brother HR1	£343.95
Taxan KP810	£315.95
Taxan KP910	P.O.A.
Juki 2200	£299

#### 

COMPUTER STATIONERY, DISKS, PLUGS, SOCKETS, CABLES, ETC.
TELEPHONE ANSWERING MACHINES/CORDLESS PHONES: NOW IN STOCK
Wide range of books, software (educational software specialist).
Showroom, demonstration facility. Prices include VAT, all items
available mail order. Personal Export scheme.

Suppliers to Universities and all leading Schools Official Dealer for Acorn Micros in the School Scheme

M

#### MIGHTY MICRO



SHERWOOD CENTRE 268 WILMSLOW ROAD FALLOWFIELD, MANCHESTER TEL: 061-224 8117

# EPROM PROGRAMMER

An exceptionally versatile unit, programs EEPROMS and EPROMs from 2K to 32K.

for the BBC micro

Powerful, easy to use software in a sideways ROM. Features full screen data editor, files, and softkeys.

Professionally designed hardware ensures reliable and safe programming, also detects badly socketed EPROMs.

Soundly constructed in a

convenient flip-top box which protects unit when not in use. Supplied with a comprehensive manual.

£95 (excl VAT, free P&P)

2 year guarantee. Detailed information on request



Control Telemetry of London Unit 11, Burmarsh, Marsden St., London NW5 3JA Tel: 01-482 2177

# THREE MAJOR NEW PRODUCTS TO BE LAUNCHED AT THE BBC MICRO USER SHOW.

## THE BBC BASIC COMPILER

The most comprehensive compiler for the BBC Micro. 24K ROM (2 ROMs).

### **SPREADSHEET**

The most powerful spreadsheet ROM. The first of a complete integrated suite of ROMs for the BBC machine.

## THE SPEECH ROM

A sideways ROM that uses the Acorn speech processor, but is phoneme based and so gives an unlimited vocabulary.

For more details of these and our other products contact us at the address below, or come and see (and hear) them at their

Venue: New Horticultural Show





Gaddesden Place, Hemel Hempstead, Herts HP2 6EX Telephone: Hemel Hempstead (0442) 63933

# AGREAT PACKAGE DEAL

For serious users of the BBC Computer.

A professional trio which can be integrated to produce an information management system of exceptional power.

THE PROFESSIONAL WORD PROCESSOR designed for the serious user All

operations fully prompted

No special knowledge of the computer system necessary Document size NOT limited by computer memory ■ Automatic disc buffering ensures text is moved between disc and computer memory without user intervention ■ Up to 255 pages in a single document = 80 column display

on screen underline and right justify

■ See it as it will be printed.

SCRIBE comes in a chip with 5 minute fitting instructions, utilities disc and manual. **DISC MACHINES ONLY** 

£59.95 + 60p p&p

A superb record keeping system with an incredible operating speed. 96 fields per record

One record 2 Kbmax

One field 900 characters max

■ 4000 records per database ■16 level conditional search Find any record in 2 secs ■ Wild card search ■ Record match ■ 8 automatic sub indexes Total flexibility of output via report writer with auto write back to any field ■ Maths pack ■ Semi programming language.

Integrates with Scribe to give conditional search with MAIL MERGE and high powered report formatting Database is in a chip

DISC MACHINES ONLY £49.00 + 60p p&p.

Scribe & Database in one chip

Double density disc interface for the BBC computer.

A high capacity database or word processor is enhanced even further with this state of the art disc interface.

The many features include almost 800 Kb of CONTINUOUS file space on a standard 80 track disc drive Automatically read standard Acorn files Compensate for discs formatted in single density ■ Provide up to 159 files IN ONE DIRECTORY ■ Automatically read, write and format double sided drives to appear as one disc surface ■ Allow maximum use of **MERTEC** Scribe and Database.

Fitting to your computer is made exceptionally safe and reliable by providing connection via a flexible ribbon cable. Full instructions provided.

£109.25 + 90p p&p

NOW AVAILABLE IN ONE GREAT PACKAGE

Purchasers of MCP software are provided with a free update service and an unmatched level of technical support. (Updates subject to postal charge.)

Please supply the following products/information (Delete as applicable). OTY QTY QTY In enclose £ Inc P&P My Credit Card No. is Visa 🗆 Access Tick which Name Address



To: MERLIN COMPUTER PRODUCTS.

33/36 Singleton Street, Swansea SA1 3QN. Telephone: 0792 467980





**MERLIN COMPUTER PRODUCTS** 


#### IMPORTANT NOTE:

Please check with us if you decide to use any other disc interface than Acorn or Double-Dos with Scribe or Database.

# QUALITY IN PRIN



# Top Service

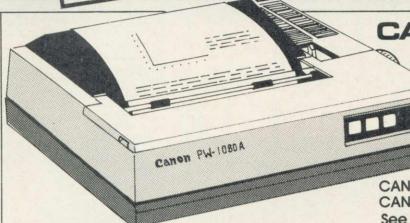

#### CANON PW-1080A

#### NEAR LETTER QUALITY PRINTER

NLQ Mode 23 x 18 Matrix: 27 cps Draft Mode 11 x 9 Matrix: 160 cps Full range of Epson FX 80 Print Codes Friction & Tractor Feed Centronics Interface Standard CANON PW-1156A Available (Accepts 15" Paper)

CANON PW-1080A £278.26 + VAT = £320.00 CANON PW-1156A £360.00 + VAT = £414.00 See below for Printerpack prices

#### C.J.E. MICRO'S **BBC PRINTERPACKS**


For Star, Canon & Juki Printers include:

- 1. The Printer
- 2. 24 Hour Delivery
- 3. Cable to the BBC 1.3 Metres
- 4. Screen Dump Program (M/C Source)
- 5. Text Dump Program
- 6. Function Key set up Program. For use with WORDWISE
  - 7. Function Key Label Printing Program. For use with above.
  - 8. VIEW Printer Driver
  - 9, 100 Sheets of Paper
- 10. Mains Plug with 3 Amp Fuse
- 11. Booklet giving details of using the printer with a BBC
- 12. Character Defining Program for Downloadable-character-set

CANON PW-1080A C.J.E. PRINTER PACK £345 Inc. VAT CANON PW-1156A C.J.E. PRINTER PACK £439 Inc. VAT JUKI 6100 CJE PRINTER PACK £400 Inc. VAT

GEMINI 10X CJE PRINTER PACK £255 Inc. VAT

CJE MICRO'S BBC PRINTERPACKS

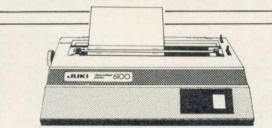


#### JUKI 6100


One Year Warranty 20 CPS: BiDirectional & Logic Seeking 10, 12, 15 & Proportional Spacing Wordstar Compatible 2K Buffer: 13 Inch Platen Underline: Backspace + Lots more Centronics Interface Standard RS 232 Interface 554.00 + VAT Extra
Tractor Feed £119 + VAT Extra
Single Sheet Feeder £199 + VAT Extra
JUKI 6100 £330.43 + VAT = £380.00 See left for Printerpack prices



# PRINTER CABLES/INTERFACES FOR MOST COMPUTERS STOCKED



STAR DP8480 (8" Printing) £187.00 Inc VAT Ideal for BBC/Newbrain/HX20 & Spectrum Int. 1 Phone for full specification



STAR GEMINI 10X

One Year Warranty True Descenders 9 x 9 Matrix 120 CPS Bidirectional & Logic Seeking 40, 48, 68, 80, 96, 136 cpl Italics, Emphasized, Double strike Super & Sub Scripts Downloadable Character Set Hi-Resolution & Block Graphics Friction or Tractor Feed 10X 10" Carriage, 15X 15" Carriage See above for Printerpack prices

Centronics Interface Standard RS232 Int. £52.00 + VAT Extra GEMINI 10X £235.00 Inc. VAT GEMINI 15X £380.00 Inc. VAT

#### STAR DELTA 10

spec. AS FOR 10X PLUS:-160CPS: 8K BUFFER CENTRONICS + RS232 INT'S STD £311.30 + VAT = £358.00

#### OFFICIAL ACORN APPROVED DEALER

#### PRINTAID

processors. Mail Merging. Easy entry of printer control

Powerful UTILITY for BBC word Capability for proportional spacing with right-hand justification on Juki 6100 40 or 80 track.....£16.00 Send or ring for details.

#### **EXPORT ORDERS WELCOME**

VAT INCLUDED WHERE APPLICABLE PHONE/CREDIT CARD ORDERS WELCOME Postage 50p per order or as stated Next day Delivery for Printers/Disk Drives £8.00 FULL RANGE OF CONNECTORS & CABLES AVAILABLE PRICE LIST ON REQUEST

RING FOR SAMPLE PRINTOUT. **FULL SPECIFICATIONS** & LATEST PRICES



Dept AU, 78 Brighton Road, Worthing W. Sussex BN11 2EN (0903) 213900

We've been inundated with Free Ads — more than twice as many as we can carry. This has led to delays in publication and disappointment for readers. The Free Ads are carried in the magazine as space permits, so please allow up to three months for yours to appear.

MICRONET modem and comms ROM, all leads and power supply included. £45. Tel. Atherstone 4906, (Warwickshire).

**DUAL**, double sided, double density, 40 track Shugart disc drives, with case, integral power supply unit, mains lead, dual BBC ribbon cable and formatting disc. £250 ono. Tel: Wayne on (0604) 405210 after 6pm.

**DUAL** disc drives, dual sided, dual density, 400k, own power supply, suitable for a BBC micro with a disc interface already fitted. £250 ono. Ring Sheffield (0742) 396995 after 6 pm.

**BBC** model B  $+7\frac{1}{2}$  inch green screen monitor, tape deck, Aviator software + various books, only six months old - \$\text{\$\su}420\$ ono. Tel: 0253 46723.

ACORN ATOM, 15k RAM, two SSSD drives, home-brew DFS and interface with manual. Lots of software (on disc), ROMs, books, etc. Cheapest disc-based system ever at £250 ono. Russell on 01-249 0035

TEXAS Instruments 745 Data Terminal. Has keyboard, 80 col thermal printer and built-in acoustic modem (300 baud), with connecting lead for BBC micro, manual, additional leads and paper. Only £275. Contact: Richard, 01-249 2406.

LATEST Ultradrive floppy tape unit by Ikon. Operating system on sideways ROM, uses standard DFS commands and user port. Three data certified cassettes plus utilities cassette £55 ono. Faller, 01-449 1808.

SIDEWAYS RAM owners – have you had persistent or unresolved hardware problems? If so, please drop me a line. Geoff Smith, 84 Edenfield Gardens, Worcester Park, Surrey KT4 7DY.

ACORN Z80 second processor, with bundled software and documentation. Exchange DNFS for DFS. Mint condition: a reluctant sale. Bargain at £300. Tel: Hemel Hempstead 45782 (evenings and weekends only).

DOUBLE single sided 40 track disc drive £150. Acorn DFS upgrade kit with above £200. Purchase of Torch pack forces sale. Farnham, Surrey 0252 710566.

DISC drive: BBC original 100k, cable and utility disc £140 ono. Tel: 01-731 6069 (eves). Upgrade forces sale; recently serviced.

ADVANCED User Guide and Caesar The Cat cassette, brand new, £10. Tel: 0790 53161 after 4pm and ask for Jason.

PRISM acoustic modem for Prestel, Micronet 800, etc. With mains adaptor, cable for BBC micro, Micronet software on cassette (with instructions for transfer to disc), and manual. Only £35. Contact: Richard, 01-249 2406.

**ELECTRON** Plus 1 interface and Voltmace 3B joystick, still boxed, £55. Tel: George, Helensburgh (0436) 6336.

ARIES B20 for sale. Unused, but in perfect condition. Call 01-675 0077 after 6.30pm or anytime weekends

ACORN ATOM 12k + 12k, FP ROM, programmer's toolbox + VIA printer port, games, books, manuals etc. £40 ono. Telephone Tamworth 873 406.

**OWLFOOD** products. Information wanted by collector, to your advantage. Tel: 0223 359904 after 6 pm.

BYTE, Kilobaud, DDJ, etc, back issues for sale or exchange. SAE list. Smith, 84 Edenfield Gardens, Worcester Park, Surrey KT4 7DY.

WANTED BBC micro. Must be 1.20S. Also disc drive wanted. Tel: Bolton 397408.

LIGHTPEN Datapen. Hardly used-VGC, original casing + software. Button for incorporating in your programs. Instruction manual. Normally £25, I will sell for £15. Contact me on (0223) 870148 after 4 pm and ask for Frazer.

BBC B Supertalker Phoneme Synthesizer plus 560-word ROM £20, DFS 0.90 EPROM £12, books: Discovering BBC Machine Code £5, Zaks CP/M Handbook £6. Tel: 0480 68686.

**ELECTRON** 32k, magazines, books, leads, games, First Byte joystick interface still under guarantee, for £170. Reason for sale – unwanted present. Tel: 01-640 6248, Mitcham, Surrey. Ask for Joan in the evenings.

BBC B 1.20S, TM100 modem, joysticks, all Acorn Users, Micro Users, Beebugs. Sprites utilities, Paintbox, Exmon, White Knight, Forth + manual, Advanced User and ROM guide and other technical books. Cost £700, accept £399. 031-664 2241.

AMCOM DFS latest issue plus utilities disc and manual, £18. Tel: Harrogate 864603.

DATAPEN for sale. Lightpen and software for £10. Lightpen will connect to BBC micro. Send cheque or postal order to Jonathan Greenwood, 38 Law Lane, Southowram, Halifax, West Yorkshire HX3 9QP.

ELECTRON with software and all leads, some books £200. Will consider any offer. Phone 01-660 6877 (Croydon). Ask for Tim.

MODEM Minor Miracles modem WS2000. All leads and manuals. 600/600 baud, 300/300 baud and 1200/75 baud. Cost £150, will sell for £70. Phone (0873) 4955 after 6pm. 22 Avenue Road, Abergavenny, Gwent NP7 7DA.

BRAND NEW Acorn interface kit for BBC B for sale: £97. Ring Mr Bilkhu on 021-745 8537 after 6 pm. Daytime, 021-622 2128.

6502 2nd processor £160. Cumana 100k disc drive £100. Micro Robotics EVI Camera £100. Tel: 051-638 7466

MICRONET acoustic modem and cassette software, perfect condition, including PSU, leads etc, £37.50 ono. Buyer collects. Ring after 6pm 01-299 1980, for Stephen Corcoran.

Acorn User has been alerted to the abuse of the free ad service and, regrettably, can no longer accept entries selling or swapping software.

BBC B Disc drive interface only £80. Free fitting. Reply to D.K. Smith, 'Wymondham', Nuthampstead, Nr Royston, Herts SG8 8ND or ring Barkway 206.

**BLANK** EPROMS. Both 2764 and 27128 types. Please phone for further details. 0279 812295.

ATOM for sale. 12k + 12k, VIA, FP ROM, Disatom, PSU, books, software, £80 ono. Tel: Clive on 01-458 9033.

ROYALTIES: if you have experienced difficulty recovering your royalties from any so-called 'software house', then please write to me in strictest confidence: Geoff Smith, 84 Edenfield Gardens, Worcester Park, Surrey KT4 7DY.

IKON Ultradrive plus six tapes. Will swap for Acorn Speech Synth. Will accept chips on their own. Write to James Oates, 6/7 Southhouse Crescent, Edinburgh or call 031-664 2949 any time.

DISC drive, s/sided 100k, 40 track including cables. Good condition, £55. Tel: Haywards Heath (0444). 451720 after 6pm (West Sussex).

LYNX 48k with user/Z80 manuals, 'Lynx Computing' book, user group/Camputers newsheets, lightpen, leads and software, £100 ono. Tel: Yarmouth (0493) 669746 (evenings).

JUKI 6100 daisywheel printer. Immaculate condition, spare ribbons, cable. £290 ono. Prism modem 1000, 1200/75 for Micronet/Prestel with software and cables. £55 ono. 'The Music System' by Island Logic, (disc) £20. 0227 751100.

#### FREE PERSONAL AD SERVICE

Sell your old hardware or pass on information. Fill in the form below to a maximum of 32 words (one in each box) and send it to Acorn User Free Ads, 68 Long Acre, London WC2E 9JH. Use capital letters, and remember your name, address or telephone number. Without this full information, supplied on a separate sheet of paper, we regret that we cannot carry your Free Ad. This is a service to readers – no companies please. One entry per form only, and we cannot guarantee any issue.

		THE PROPERTY.

# 3 store

Looking for a new home for your computer? Tired of being pushed from room to room with your family of peripherals? Better take a look at the Organiser showhome from Opus Supplies. It's fully mobile and combines practical features with modern design.



#### **3rd storey**

- Impressive view and just the place for your monitor and printer

2nd storey

Lots of floorspace for your computer and disc drive or cassette recorder. Ample storage space for your software.

Parking space for your books manuals and magazines.

even need

The Organiser desk from Opus Supplies comes complete with castors and simple assembly instructions and our price includes VAT and free delivery.

To order your system phone us on: 0737 65080 or post the coupon to Opus Supplies Limited.

To: Opus Supplies Ltd, 55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.		
Please rush me the following: (PRICES INCLUDE VAT AND CARRIAGE)		
Organiser Desk(s) at £59.95 each (inc. VAT)		
enclose a cheque for £or please debit my		
credit card account with the amount of £		

Name	
Address	
elephone  55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey.	
Opus. Opus Supplies Ltd.	55 Ormside Way, Holmethorpe Industrial Estate, Redhill, Surrey. TELEPHONE: 0737-65080

ACORN USER MAY 1985 203

# British Disc Drives direct from the manufacturer



SPECIAL **OFFER** £150

● BBC compatible ● Metal case

Dual drive
 Switchable 40/80 track

Complete with utilities disc and cables

● The only 51/4 in. drive designed and manufactured in Britain

Dual 80 track single sided 400K unit Runs off BBC power supply



7 Q

a Track Technology Limited.	
ueensway, Stem Lane Industr	ial Estate.
v Milton, Hampshire, U.K., B	H25 5NN
(0425) 619650. Telex: 4767	74

To Data Track Technology Ltd, 7 Queensway, Stem Lane, New Milton, Hants. BH25 5NN Please supply 51/4 single sided dual unit 400K at £181.70\* each Address. I enclose a cheque for £ payable to Data Track Technology Ltd. Please debit my Access/Barclaycard Account No: \* prices include carriage and VAT at 15%

- Jovsticks Now with 'Accutrak' analogue movements for games and CAD/CAM applications. Still best value at £12.95 per pair. Send now to: Peritron (Dept AU), 21 Woodhouse Road, London N12 9EN.
- "Netword' Wordprocessor. BBC/Electron. Networks/Disc/ tape. Easy for beginners, yet documents up to 200k, from £12. SAE, E J Holt, 7 Cambridge Rd, Stamford, Lincs.
- Fourier: Analysis program. Displays waveform and then harmonic spectrum. Define your own waveforms. Supplied with sine square, pulse, £9 cassette, 40-track disc £15. P Edwards, 35 Woodsland Road, Hassocks, West Sussex
- 'Nutcracker': Tape 2 Tape +Tape 2 Disc + Disc 2 Disc +Disc 2 Tape: £5 Rompull +Tapedump: £5. Super disc menu: £5. ROM-filing system generator: £5. R-Soft, 22 Marriotts Close, Felmersham, Beds MK43 7HD, 0234-781730.
- Copycat 3.5: Disc to disc back-up utility. Back-up all discs. Single density only, 40/ 80 track disc £8.95. Integral software, 11 Grove Park, Bangor, Co. Down, N. Ireland BT20 5QT, 0247 463603.
- Listing Paper: 9½" plain, 2000 sheets £14; labels 69 × 36, 1000 £4; prices include p&p. C.W.O. BCC 130 Northfields Lane, Brixham, Devon TQ5 8RH.
- Do you require an EPROM programming service? 8k £10, 16k £18. If interested, please write to A. Miles, 23 Park Prospect, Graigwen, Pontypridd, Mid Glamorgan.
- MW M 2000: m/c screen dumps for BBC B. 6502 compatible. Multi-tone in modes 1, 2 and 5. No mode 7 dump. Send £11 for disc or sae for details. Dr A Cownie, 7 Chatsworth Road, Worsley, Manchester M28 4NU.
- Lockfile: A user friendly database with a personal password entry code, disc only. Operations: Sort, Printout, Amend, Search, 6502 compatible, £9.75. HACKERS! A guide for the novice in tracing unlisted computer phone numbers, £3.50. Andersons, 56 Waterloo Road, Freemantle. Southampton.

- "Fraccy!": The Frak extension. Improved sound, more lives and autoboot onto next level. £2.50 on cassette. Cash, cheque or postal order. Michael Oldroyd, Greenwayes BB2 5JL.
- "D-Master': The most powerful disc backup program seen so far: £7. Nutcracker owners: £3. Handles sectors from 128-2048 bytes, deleted or not, etc. R-SOFT, 22 Marriotts Close, Felmersham, Beds MK43 7HD, 0234-781730.
- Mathematical Graph plotter Multiple graphs - variable axes - grid - text - variable Tape £5.95, 40t disc colour. £6.95. G Digby, 44 Lucy Hall Drive, Baildon, W Yorks BD17
- Educational Programs: development, (language spelling, mathematics, logical thinking), BBC computer, disc Details: Gifted Children's Information Centre, 'Hampton Grange', 21 Hampton Lane, Solihull B912QJ. Tel: 021-705 4547.
- Light Pen: The Pennant Commander for BBC B including comprehensive software (paint, draw, create, etc.), £17.85 Pennant, 29 inc. Hounds Road, Chipping Sodbury, Bristol.
- BBC Program listings. \* Any length \* £1.50! - \*Great Service!\* Guaranteed to send back in 24 hrs! Send tape, large sae, Cheque/PO/Money Order to David Mohammed, "Palmiste", Owlsmoor Rd, Owlsmoor, Camberley, Surrey GU15 4SP.
- Put your Beeb to work. High quality software wanted by publishers for BBC/Electron. Send cassette/disc or sae for details. Pembroke Publishing, 50 Woodstock Publishing, 50 Way, Hartlepool, Cleveland.

- How-To. An essential collection of S/W plus instructions for frustrated new disc owners. £5. Many satisfied users, R-Soft, 22 Marriotts Felmersham, Beds MK43 7HD, 0234-781730.
- ROM: Command clash problem? Simple, inexpensive solution. Your ROM rewritten. Your name included in ROM. SAE for details. Supersoft, 5 Leggatts Close, Watford, Herts WD2 6BG.
- Make Money from writing and selling software. This business guide covers all aspects of selling home-produced software including copyright and publishing. £2.75 inc p/p. Cheque/PO to Shaftsbury Publications, (Dept BG3), 61 Warleigh Road, Brighton, E Sussex BN1 4NS.
- Good Home wanted for Acorn Electron with over £50 worth of software. Ring Macclesfield (0625) 74911. All offers considered. I also have a ZX81.
- Designer EPROM. PRO-GRAM your BBC with Character Definer, Teletext Screen Designer (with program generator) and Extended Trace facility. PROTECT your BBC with your name and address displayed at switch on. PER-SONALISE your BBC with function keys automatically programmed to your defi nitions. All on one EPROM, only £15. SwanSoft, 53 Orchard Way, Thorpe Willoughby, Selby, N. Yorks Y08 9NE Telephone: (0757) 704134.
- Atom users! Follow the Bear for software and hardware. Lots of new items for your Atom. Serious expansion no longer just a dream. Also printers, disc drives, etc. for Atom and BBC. 100gm rate stamp (not SAE) for details to: BEAR HARDWARE (RP), 68 Harmondsworth Lane. Harmondsworth, Middx UB7 0AA.

We must remind advertisers that we cannot carry advertisements which incite readers to break the protection and therefore copyright of commercial software.

- WORDWISE MADE SIMPLE. A user guide to wordprocessing on the BBC microprocessor. A manual written in step-by-step exercises, used for self-teaching, in the classroom, or as reference guide. Published by Nottingham ITeC. Send cheque for £6.50 plus 40p p&p payable to Nottingham ITeC Resource Centre, 51 Glasshouse St, Nottingham NG13LP. Tel: (0602) 584647.
- Acorn Music 500 synthesiser, virtually new, unwanted. £160. Phone 01-539 1697 after 7pm (London E10).
- Colour Screen dumps. BBC with Tandy CGP115, MCP40, Oric printer. Dump your best graphics in full colour. £3.50 G Brown, 3 Orchard Gardens, West Challow, Wantage, Oxon OX129TI
- Hair Defender' Zap down choppers while answering hairdressing topics. Ideal for anyone training in hairdressing. Micronet software review. \*\*\*\* rating. BBC 40/80 track discs, £15. Wanted: original hairdressing programs, eg. 'hairdressing accounts', 'customer records'. royalties. Lists. John Lyons Computer Software, 'Software for Hairdressing', FREEPOST. Camberley GU15 3BR.
- Elite How to fully equip your ship and obtain as many credits as required, quickly, without leaving station. £2.25. Knight, 59 Market Street, Hindley, Lancs WN2 3AE.

P					
=	£10 SMALL AD SERVICE				
ı					
	Please include your cheque for £10 made payable to Redwood Publishing. This is				
н	the standard fee. Don't forget your name, address or phone number. Send cheque				

plus form to A	corn User Small Ads	, 68 Long Acre, Lond	on WC2E 9JH.
		CALLEY ST.	
GH 18. 5.75			
			Fredrick St.
16.0			

### kevzone

SOLID STATE DESK TOP **SWITCHING DEVICES** 



No Problems with Cable Lengths or Data Loss/Errors Having Seperate Ports, Avoids Over-loading Computer

#### THE PRINTERSHARERS



PARALLEI With power supply and plug

26 PIN (AS BBC) 3 MICROS TO 1 PRINTER 26 PIN (AS BBC) 6 MICROS TO 1 PRINTER

\* 36 PIN (AMPHENOL) 2 MICROS TO 1 PRINTER \* 36 PIN (AMPHENOL) 3 MICROS TO 1 PRINTER

EX. VAT

£65-£129-£90-

£105-

Finds and attacks your weak spots

cassette disc Typeasy 8.95 12.50 Type 10.50 6.95 Invaders

Choose from many levels:

normal price 50.00

SPECIAL OFFER until 30 June 35.00

42.00 25.00

Carswell Computers Faringdon Oxon SN7 8JN Tel: (036 787) 238

ECONET DISCS!

tells you which finger to use

CAPS/lower case, numerals, punctuation, signs!

Typing tutor for BBC model B or Electron 139 graded exercises on cassette or disc PLUS routines for writing more yourself KEYBOARD DISPLAY with pointer

• NEW KEYS practised in one line exercises

• ADVANCED multiline paragraphs - checks all strokes, new lines, etc at end of copy

LOG of pupil's work displayed or printed

MEASURES SPEED in words/minute

A game to take you to FRENETIC SPEEDS

LETTERS rain down faster and faster - KILL them by

pressing the right key before they occupy your base

CAPS only, u/l case, numerals, whole words

#### THE PRINTERCHANGERS



26 PIN (AS BBC) 1 MICRO TO 3 PRINTERS

£70-\* 36 PIN (AMPHENOL) 1 MICRO TO 2 PRINTERS £90-36 PIN (AMPHENOL) 1 MICRO TO 3 PRINTERS £105-

OPTIONAL

MP1 - DC mains power pack for sharer/changer £6.50 LEADS - PARALLEL

26-26 PIN 2 MTS £9- Each 26-36 PIN 1 MT £10-Each 26-36 PIN 1.5 MT £12.50 Each

26-36 PIN 2 MT

£15-Each

Any cable can be made to order

SERIAL - RS232 3 way 25 pin Printersharer/Changer Lines I to 8,11,13,19 & 20

£65-PACK OF 3 EACH

Pack of 3 £25-

**EX VAT** 

LEADS - SERIAL 25 pin D type plug on each end -2MT 25 pin D type plug on each end -5MT

F12-£14-£39.50

#### PRINTERCROSSOVERS



26 PIN (AS BBC) 2 MICROS TO 2 PRINTERS £70-36 PIN (AMPHENOL) 2 MICROS TO 2 PRINTERS

\* (METAL CASE BUILT IN SUPPLY) £90-THE PRINTERCROSSOVER WILL RUN UP TO TWO MICROS

AND TWO PRINTERS AT THE SAME TIME - JUST TURN THE DIAL TO CROSS OVER TO THE OTHER PRINTER. CAN BE USED AS SHARER OR CHANGER AS ABOVE

#### **KEYZONE LTD**



U 14, Regeneration House, School Road, Park Royal, London NW10 6TD. Telephone: 01-965 1684/1804 Telex: 8813271

P&P Sharer/Changer £1.50 each. MP1 & Leads £0.50 Interfaces £1.00 each

### **PULSATRONICS**

HIGHEST QUALITY FLOPPY DISKS AT LOWEST EVER PRICES

## Verbatim 51/4"

Verex - (1 Yr. Guarantee)

MD200-1 SS/SD

Datalife — (5 Yr. Guarantee)

MD525-1 SS/DD 15.50 MD550-1 DS/DD 19.75 MD557-1 DS/QD 25.25

Prices are per box of 10 and exclude V.A.T. Add 95p P & P per box and V.A.T. at 15%. Send cheque with order to:-

PULSATRONICS, Dept. AU, 16 Chelton Close Newcastle upon Tyne. NE13 7NF Telephone: (0632) 365748

Bulk order discounts available


14.25

## UP TO 32k SIDEWAYS RAM BOARD FOR THE BBC PLUS CAPABILITY OF WRITE PROTECTION INCLUDED.

This RAM board comes complete with 16k of RAM fitted and sockets available for an additional 16k RAM which can be fitted later by plugging in, this will give a

total capability of 32k.

Plugs directly into socket
12 or 15 in BBC or onto one of the H.C.R. ROM boards. No soldering will be required and it has the extra bonus of a write protect switch to be mounted either in the reset space, rear of case or in spare LED position on right hand front of keyboard. A



right protect switch is fitted to prevent corruption of data loaded into RAM

Sideways RAM is intended to run sideways ROM type software of your own either under development or as an alternative to actually committing to expensive eproms.


Sideways software may be kept on disc and loaded into sideways RAM simply by typing \*Load < NAME > 8000. The RAM can be loaded 16k at a time or by assembling to Hex 8000. A simple program is provided in the manual to transfer software (in RAM or ROM) into user RAM where it can be modified and written back to RAM or saved on disc. With suitable software RAM can be used as a printer buffer or as a data store, etc.

Supplied complete with 16k of RAM and easy fitting instructions £31.50 (£36.22 inc VAT) Further 16k RAM £20 (£23.00 inc VAT) Please allow £2.00 P&P

Also available: Internal 16 socket ROM/RAM card. External 28 socket ROM/RAM card, Eprom Programmer & eproms

#### EPROM PROGRAMMER FOR THE BBC

A very high quality product direct from the manufacturers, contained in attractive sloping box with low insertion force socket and neon indicator for programming fitted as standard, the software adopts the high efficiency method for programming 2764 and 27128. This allows up to 100% faster programming, software in machine code, supplied on cassette and can be placed in eprom. Very easy to use, menu driven with easy to use instructions. This unit is completely self contained with its own power supply and plugs into the user port.



#### THIS PROFESSIONAL UNIT ALLOWS:

- 1. Will program: 2716, 2732, 2532, 2764 and 27128 eproms.
- Copy eprom into memory and compute checksum.
   Blank check eprom.
- 4. Program eprom from memory.
- 5. Verify byte by byte and compute checksum.
- allow buffer start area to be changed.
- All operating system calls may be used when in menu mode.
- Semi-intelligent programming. Typical time to program a 2764 8k device is approx. 50 sec. depending on the data to be programmed.
- 9. Additional software supplied to enable your own program (basic or machine code) to be put into eprom with the necessary leader information to allow calling with a \*command. Downshift routine to enable basic programs to be run is also supplied.

COST £46.50 please add 15% VAT £1.00 post and packing ALSO AVAILABLE RAM/ROM CARD

ORDERS TO:

H.C.R. ELECTRONICS, Industrial Unit,

Parker Road, Chelmsford, Essex CM2 OES 24 Hour Answer Phone Service: Chelmsford (0245) 350188





#### **ACORN USER ADVERTISEMENT PAGES - MAY ISSUE**

A B Designs	192	Educational Admin Soft	143
A J Vision	190	Electronequip	116/117
AB Electronics	74	EMS Programming	126
ACCS	56	Ephagy Soft	188
ACK Data	193	Essex Electronics	60
Acorn User Show	10		
Aim UK	40	G.C.C. (Camb)	134
Akhter	85/86	Gnomonica	138
Altra Roms	148	Golem	190
AMS	12/13	Graphitek	70
ARA	78	Griffen Computers	71
ATPL	8		
		HCR Electronics	207
Beebugsoft	28/29	Hilditch	144
Beebug	193/I.B.C.	1	101
Betasoft	118	Icon Soft	164
Bizzell Computing	128	Interface	198
Brain Train Club	144	Kauzana	206
British Telecom	16	Keyzone Kosmos Software	143
O Took	170	Rosmos Sonware	143
C-Tech	775	L.C.L. Software	140
Caldew Business Systems	126 27	Leigh Computer Systems	126
Cambridge Micro Centre	158	Lib Software	140
Care Electronics	206	Limbic Systems	20/21
Carswell	186/187	Linear Graphics	130
Chase Data	The second second	Logo Soft	64
Cheetah Marketing	151 201	L.V.L.	I.F.C.
CJE Micros	176	L. V. L.	
Clares	176/177	Meadow Computing	128
Clares		Mertec	200
Clef	188	Micro Peripherals	80
Clwyd Technics	152	Micro-Media	71
CMS	90 128	Micro-User Show	88/89
Comlex		Microaid	42
Computer Concepts	66/199	Microdis	130
Computer Supplies	90	Microfast	132
Computer Village	64	Microfix	162
Contex Computing	126	Microman	196
Control Telemetry	198	Micronet	30/31/32
Crossware projects	207	Micropacs	144
Cumana	4/5	Micropower	174
Datapen	184	Microware	120
Datastar Systems	188	Microworld	1
Datastore	190	Microwriter	168
Datatrack Technology	204	Midwich	62
Demon Modem	76	Mighty Micro	198
Discotechnology	44	Milburn	188
Durrell Soft	6	Mirrorsoft	19
Dui foil Goit	3	minoradit	10

Newark Video	196	Superior Software	B.C.
1		Synergy	185
Ocean Software	82	System	151
Opus 18	9/191/123/203		
		Technomatic	33-38/147
Pace	166	Tekform	143
Pineapple Soft	60	Toad Educational Software	160
Practical Programs	78	Touchmaster	14
Printerland	196	Twillstar	194/195
Pulsatronics	206		
	4.10	UDM	58
Remedian Instruments	140	Unisoft	184
Resources Facilities	143		
RSD Connections	193	Vector Marketing	172-173
01	400	Viglen	178-183
Shumwari Associates	162	Vine Micros	192
Softlife	138	Voltmace	157
Software Services	128		
Solidisk	20-26	W.D. Interfaces	138
Stella Enterprise	162	Watford Electronics	47-55
Store Stock Systems	140	Wiltshire Micro Centre	128

#### CROSSWARE CROSS-ASSEMBLERS

FOR THE STAND-ALONE BBC MICRO

Available on disc for the following processors: 6800/6801/6802/6301, 6805/146805, 6809 Z80, 8080A/8085

And now the 68000


Phone or write for full details.

CROSSWARE PRODUCTS Melbourn, Royston, Herts SG8 6BA Tel: 0763 60838









208

# A tale of men in the land of fen

ONCE upon a time, deep in the land of Fen, there lived a physicist called Mr Germann. Now Mr Germann was very clever and one day he discovered a new atom. Mr Germann was very pleased with his new atom and told his friend Mr Hurry all about it. 'Mr Hurry,' he said, 'I've discovered a new atom and I'm calling it Uranium.'

Mr Hurry was also very excited about this discovery and, having a sharp eye for business, realised there might be some money to be made. So he set off down the road with a pile of atoms to sell.

Mr Hurry was a good salesman and he had soon sold all the atoms. So Mr Germann found more and Mr Hurry sold more and they started making lots of money. Mr Hurry knew all about markets and one day said to Mr Germann, 'Mr Germann, there's going to be a boom at Christmas. Let's get lots of atoms, store them away and make a killing.'

So they collected lots and lots of Uranium atoms, gave them to Mr Goat to keep in the garden shed, and it was just as Mr Hurry predicted. They all went



and they sure made a killing.

Who should walk by than Sig di Spaghetti. Now Sig di Spaghetti was very astute and, taking advice from Mr Squirrel, decided to invest in acorns and keep them for a rainy day.

So he gathered up all the electrons that had fallen off the atoms and made his own Piol. Then he took Mr Goat, who had suffered from fallout, to see Mr

Ollie who knew about sick animals. Mr Ollie told Mr Goat he should really have eaten apples and not acorns.

Moral: an apple a day keeps Ollie, vetti, away.

#### Image man spitting mad

PETE Ryvita, image-conscious, yoga-young ideas man at Acorn's video arm, threw a wobbler when his car was broken into just before a computer show earlier in the year.

But what really made him spit was that the only working model of the ABC-based video computer was stolen. The AVC900, as it is called, disappeared from his car never to be seen again.

#### Jacuzzi on wheels

FOLLOWING his immensely successful C5 electronic bathtub we hear that Uncle Clive is testing the C15 electronic jacuzzi.

Chief test driver Paul Bond, younger brother of James, world famous for vehicular bathing beauty excess, commented: 'We can already get it up to 5mph without changing the water. Things look good for a summer launch. We might even change the name to Zeel5.'

Uncle Clive on Z-cars?

#### Orson in decline

IN ITS search for a new chief executive we can exclusively reveal that among the candidates was one O Fact. It seems that our Orson was in fact offered the position as chief car crasher but had to decline for financial reasons.

Part of the deal would have been a mammoth share option but unfortunately Orson's independent backing was insufficiently large to cover the possibility of the shares dropping in price.

#### **Buy-out rumour**

RUMOURS that Acorn User had been bought out by Italian publishers Mamma Mia Magazines were described as 'premature' by Chris Curry's maternity spokeswoman today.

'Itsa not true! Da editor Antonio di Queeni is Inglees as da Royal Family!' she retorted.

The Milan stock exchange closed six points up.

#### **Contract contact**

DEAR, oh dear, more companies being tiresome about the BBC contract. Apple want a bite and Foster's lot are in on the ACT. Next it'll be Seiko with their fancy watches.



#### Cocky Clive gets his comeuppance in the canteen

WE WARNED Uncle Clive. It had to end. He was getting far too cocky - throwing his weight about all the time. Armageddon took place last Tuesday.

We all went to lunch as usual, but he seemed strangely pettish. A slight disagreement with one of the canteen ladies regarding the exact number of beans to which he was entitled with his egg and chips, and that

was it. He challenged her to a fisticuffs session behind the kitchens.

Well, she was only small, but what a mover! Whatever he tried, she had the counter.

Despite encouragement from his closest aides – 'Stick one on 'er, champ' and 'Lay the nut across 'er, Clivey baby' – he was soon reduced to a bloodstained heap.

She obviously had one like him at home.

We borrowed a tray trolley and wheeled him back to the office for repairs, but he's a broken reed now, sulking behind locked doors writing grumpy poison-pen letters to Heinz.

She, on the other hand, is quite unbearable with her cries of 'Ah whupped him good' and her Ali shuffle. Still, at least we can remove our motorcycle helmets and sticking plaster now.

# ARE YOU HALF A USEA.

TEN MAGAZINES PER YEAR • NEWS

SOFTWARE • DIS SPECIAL OFFERS INFORMATION • TECHNICAL SUPI USER GROUPS • REVIEWS • NEWS HINTS & TIPS • DI APPLICATIONS • PROGRAMS • SPI GAMES PROGRA UTILITIES • SOFT DISCOUNTS • RE' SOFTWARE • NEV INFORMA



TECHN



# Become a complete user with BEEBUG

Send or phone for a FREE information pack (UK only)

take out a subscription NOW.

(£11.90 1 year, £6.40 6 months UK only)

Telephone (049481) 5228

BEEBUG dept 13, PO Box 109, High Wycombe, Bucks.



ACORN ELECTRON BBC MICRO

#### AN ARCADE-GAME EXPERIENCE :



















#### TENNATES

#### 49.05 encontro/411 05 office

At last, a program for the BBC micro and Acorn Electron which faithfully recreates the arcade game of the same name. This is an official Atari-approved version of Tempest — the screen grids, the aliens, the colours and the style of play are all as close as possible to the arcade original. Your are armed with a Blaster and a Super Zapper to defend yourself from the encroaching Flippers, Spikers, Flipper Tankers, Fuseballs and Pulsars which move along the grids of the stargate. There are 255 increasingly difficult levels of play, including invisible grids as you become more advanced. An excellent game, destined to become a 1985 top-seller, Tempest is available for the Acorn Electron on cassette, and for the BBC micro on cassette or disc.

#### OTHER TITLES AVAILABLE: £7.95 EACH ON CASSETTE

OVERDRIVE (BBC/ELECTRON)
SMASH AND GRAB (BBC/ELECTRON)
MR. WIZ (BBC/ELECTRON/C64)
SPACE PILOT (BBC)
BMX.ON THE MOON (BBC)

STAR STRIKER (BBC)
JACK AND THE BEANSTALK (BBC)
COSMIC KIDNAP (BBC)
ALIEN DROPOUT (BBC/ELECTRON)
STRANDED (BBC/ELECTRON)

Battletank (BBC) Hunchback (BBC) Spitfire Command (BBC) World Geography (Electron/ 64) Road Racer (BBC)

#### WE PRY UP TO 20% ROYALTIES FOR HIGH QUALITY BBC MICRO AND ELECTRON PROGRAMS.



#### SUPERIOR SOFTWARE LTD.

Dept. AU5, Regent House, Skinner Lane, Leeds 7 Tel: 0532 459453



#### **OUR GUARANTEE**

- All our software is available before we advertise.
- (2) All our software is despatched within 48 hours by first-class post.
- In the unlikely event that any of our software fails to load, return your cassette to us and we will immediately send a replacement.

THE SCREEN PICTURES SHOW THE BRC COMPUTER VERSION OF TEMPEST