

ZX

£1.95

COMPUTING

Britain's Best Buy For The Sinclair User


**Why not go Bang
for a really
explosive
New Year?**

**Go crackers
This Christmas
with our
sixteen-page
shoppers' guide**

**First steps in
Machine Code -
a great new series**

**Take to the skies
with
Bomber
Raids**

Over 130 pages of information and programs for the ZX80, ZX81 and the ZX Spectrum

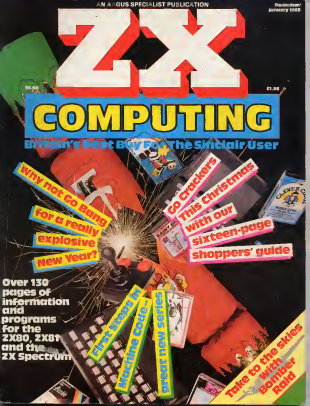

TURBO CHARGE YOUR SPECTRUM



Outperforms any Spectrum interface

The unique Turbo interface from Ram gives you all these features — and more — in one unit.

- A variety of interfaces including Ram cartridges, two-way D plugs for standard cycloids, PLUS full expansion bus at rear
- Compatible with Acorn's standard Petrol protocols
- Works with latest Quikshot RAM II auto-reload cycloids
- Choice of Ram cartridge or tape cassette software
- Instant program loading with cartridge software
- Built-in power safety device — unique kill Ram Turbo
- Full one-year guarantee
- Immediate availability — 24 Hr. despatch on receipt of FO / credit card order (pre-charge — seven days)
- Incredible value — only £229.95

So don't wait around — simply complete the coupon and send it to us today

Or call our credit card hotline on 02534 25252 (Access and Visa welcome)
 Ram Electronics (Feet), Ltd., 386 Feet Road, Feet, Harrogate
 G21 2 8YX.

Please send me

Spectrum Turbo interface at £229.95

+ £3.00 p.p. (between orders £3.00 p.p.)

Quikshot II cycloids at £29.95

(Only when purchased with Turbo — normally £29.95 + £3 p.p.)

For the cheap postal orders charge my Access/Visa £



Name _____

Address _____

TM

© Ram Electronics (Feet) Ltd. 2000. Feet Harrogate G21 2 8YX

Trade and export enquiries welcome



24 Hr. despatch for credit cards and Postal orders

THE AGE OF THE R.A.T.



CONVENTIONAL JOYSTICKS ARE DEAD!

The Cheetah Remote Action Transmitter is the most sophisticated computer controller available

It has these features:

- **Leads Red revolution** – as there are no leads trailing across the living room. Just sit back in your chair up to 30 feet from your machine.
- **Touch control** – no moving parts, extremely fast, long life.
- **No extra software required!**
- **Can be used with all Cheetah R.A.T./Kempston compatible software.**
- **Fits comfortably in your hand for long play periods.**
- **Comes complete with receiver/interface unit which simply plugs into the rear of your Spectrum.**
- **Compatible with all Sinclair/Cheetah peripherals via the rear edge connector.**

Simply incredible at **£29.95** including VAT and p.p.

Dealer enquiries welcome. Export orders at no extra cost.

Send cheque or note to
Cheetah Marketing Ltd (Dept. 20), 24 Ray Street, London EC1R 3DU phone 01 833 4000

Cheetah products are also available from branches of

WHSMITH **Rumbelows**

and all good computer shops



ZX COIL

Editor Ray Elder
Editorial Assistant James Gray
Group Editor Sheila J. Palmer
Sales Executive Jonathan McGilley
Advertising Manager Steve Bingham
Divisional Advertising Manager Chris Norman
Copy Controller Sue Dochowitz
Chief Designer T.J. Connel

Origination and design by MM Design & Print,
Circuit House, 28 Little Portland Street, London W1R 6AP

Published by Amiga Specialist Publications Ltd,
1 Madlin Square, London W1R 3AE

CONTENTS

Welcome 8

Why is Ray Elder sending a Christmas message to his Mum via the pages of ZX Computing?

3D Bowling 12

A superb ZX01 emulation of the 10 pin game

Bomber Raid 16

Stage an assault and maintain a state-of-the-art with our fourth-the-Bigfist Spectrum game.

Carol Quiz 19

No, you think you know your 'Oh Come All Ye Faithfuls' sign your 'Hark The Herald Angels Sing' floor it, with our Spectrum offering for Yule Tied!

ASP FIGHTS SOFTWARE PIRACY

What has happened and what is the consequence of software piracy? And how does it affect the software industry? ASP has already taken steps to eliminate piracy in our machines which allow us to take software to your computer while it is in operation. The software will only work if it is licensed to your computer. It is possible to copy software to other than personal use.

ASP plans to bring the software industry together and create a network to be distributed to the main component of the industry. It is to provide a means to eliminate piracy. The first software store planned to be opened in the UK will be the first to be opened. The software will be distributed to your computer. The software will be distributed to your computer. The software will be distributed to your computer.

ASP will be able to help create the software industry in order to eliminate piracy. The software will be distributed to your computer. The software will be distributed to your computer. The software will be distributed to your computer.

First Steps In Machine Code 25

David Newbould presents the first article in our new series on machine code for beginners



Tortoise Wise 27

How can parents survive the computer-obsessed children?

This Old House 29

Decorated with your current dwelling? Before those portaboo businessmen with the very handy gear.

Floppy Discs and the Spectrum 36

Can it be done? If so, how practical is it to add a pile of hardware to the Spectrum that can cost almost four times as much as the mere disk? Ray Elder investigates.

Spectrum Arcade . 40

Action games on test!

Artificial Intelligence on the QL 44

Tim Haines discusses AI and implements an expert system on the QL.

Mini Bingo 47

One down, look in for our very own version of Bingo.

Resistor 49

Diagnose resistor colour codes with this very useful utility.

The Spectrum Plus 52

Ray Elder offers some first impressions of the new, improved Spectrum.

Shoptalk 55

Industry information and correspondence from those within it.

Hardware News . . . 57

Software News . . . 59

BookNews 61

Crash 64

A place to draw you up the wall!

Spectrum Lessons 70

Mike Edwards tries some software designed by Frank.

Mindplay 63

Does Turnbull score up the latest batch of thought-provoking programs.

PUTTING

88 Computing is published bi-monthly in the English Edition of the month. Controlled by Angus Press Sales & Distribution Ltd, 12 18 Paul Street, London E12 4JF. Tel: 047 6133. Printed in the UK by Queens Print, Richmond and London.

The contents of this publication, including all articles, designs, plans, drawings and computer code, copyright and other intellectual property rights belong to Angus Press. All rights reserved by the Law of Copyright and other intellectual property rights act by virtue of international copyright conventions are specifically reserved to Angus Press. All reproduction requires the prior written consent of Angus Press. All reproduction requires the prior written consent of Angus Press.

© Angus Press Publications Ltd 1984

Club Corner 72

Maze 73

We wouldn't normally advise readers to get lost, but we'll make an exception in this case. OCT/LOST in the Maze!

Meteor Madness . . . 75

A fast-moving interface code space game for the Spectrum.

Problem Page 82

David Newbank answers a selection of readers' problems.

Shop Window 83

Screen pages of ideas for things to add to your computing set-up.

Amazing Games . 100

Three games, each based around a maze of sorts, but different in many other ways.

Readers' Reviews 107

The public's chance to say what they think about commercial software.

Light Screen Designer Part 4 . 111

Tom Baker continues the construction of the designer and includes some of the hints for use with the program.

Snap 116

An exciting ZX81 version of the fast and furious card game.

Designs for Living 130

Colin Deane on Spectrum graphics applications - this issue: LOGO.

Quicksoft 123

Gave Smith provides reviews of selected Spectrum programs.

Competition 125

60 packs of Temptation software to be won!

The Next Step . . . 128

Ray Baker demonstrates ways to improve the performance of your programs.

Gobang 132

Test some time with the version of Othello Checkers for the ZX81.

The ZX81 Soft Selection 138

ZX81 software reviewed by our specialist in this field, Nick Pearce.



Haunted House . . 142

Reverend! This is not a game for the faint hearted! So Spectrum owners with strong beliefs, turn to page 142.

Portability 3 145

Rayn Moore provides us with another 'DIY' pack of hardware: 196 bits, an RS232 interface for the Spectrum/ZX81.

Bookshelf 150

Parrish Can reviews the latest computer books.

Blackboard 152

Why not try your hand at our ZX81 Blackboard program?

Great Games of '84 153

Jim Watson looks back and provides us with a pack of the finest arcade games of 1984.

Debugger 156

Our regular check sheet to help you get that program working.

Conversion Tips . 158

Due to popular demand, our format supplement to help you convert programs to/from the ZX81/Spectrum, now includes a conversion table for ZX81/Spectrum system variable addresses.

Please note that Model 80 ZX81, 1981 ZX Spectrum 64, Sinclair 3B Sinclair 3B Plus, Sinclair Mountain, Sinclair ZX Printer and ZX Printer Range are of separate technology of British Broadcast Ltd.

Subscriber rates: UK £12.75 including postage, annual and other rates apply elsewhere. In US, Canada, Mexico, Caribbean, Central and South America, £15. The Midway Group (London) Newsprint Ltd, 125, Rue de la Vierge, Paris 12th.

88 Computing is committed to the best cut for well-written articles and programs. If you think that your efforts need no rewards, please feel free to supply your work to us for consideration for publication.

All editorial material should be typed if possible. Submissions must be accompanied by postal order plus return postage. Any programs submitted should be listed in a covering letter. All programs will be printed. All programs must come complete with a description of the hardware and software releases the program uses. Spectrum programs should be accompanied with a cassette of the program, as well as the disk.

All submissions will be acknowledged and the copyright to any article which will appear in Angus Press Publications Ltd will be used for its publication unless otherwise stated. All work for consideration should be sent to the Editor at the address below.

3 printers,

A range of daisy wheel and dot matrix printers



cassette unit,

For program storage and

retrieval. For faster storage and



monitor,

Gives really superb reproduction and clarity



joystick

They put the control of

a vast range of software

There's something for everyone and for all interests: thought-provoking, amusing, entertaining, educational



home,

leisure and practical interests;



educational

pre-school and beyond

and

a 64K memory

Plus excellent sprite graphics and 8MB



About the only thing the Commodore 64 doesn't have is

printer plotter,

Plots graphs, draws bar and pie charts. Prints in four colours.



single disk drive,

rapid retrieval of programs

Uses 5 1/4" diskettes, and has a very large 170K memory.

pick-up paddles,

of games directly into your hands... they also improve both speed and accuracy.



software (business,

challenging, and exciting



To cover the essential office and business needs.

educational, games)

created with the help and advice of specialists



From shoot 'em up to strategy

memory.

amazing music synthesis capabilities



is any serious competition.

THE COMMODORE CB SERIES JUST EASY-TO-USE
FOR FURTHER INFORMATION PLEASE TELEPHONE OR WRITE TO THE BUREAU
AND SEND TO: COMMODORE INFORMATION CENTRE, 1 HAINES ROAD,
WELDON (CITY) MORHAMPTON MK7 1DA TEL: 0295 225522

COMMODORE CB MONITOR CASSETTE UNIT
PRINTER/PRINTER/LOTTERY DISK DRIVE SOFTWARE

NAME _____

ADDRESS _____

AD100



commodore

WELCOME

Dear Mum

How are you? All's well here and the cat has almost recovered. I think he must be enjoying the meals laid from the galley for a week when he got it. Still apart from playing at least ten feet from the machine and lewd lewdery for his fun to surf, he seems to be OK.

Remember Jim? He wrote his own computer program to work out his tax returns, a very clever bit of programming. Unfortunately, a power fluctuation caused the thing to add a few pounds to the final total. As he couldn't pay £50 into the Manx or a inspection were not allowed anyway he's only got another 6 months to do this with time off for good behaviour he should be out soon.

Dink continues to have bad luck. Last time I wrote I told you about how he had signed up all his electrical equipment to his Spectrum and by using a spin recognition and controlled his whole home speech. The trouble was that it wasn't too accurate at recognising the words and when another voice was also talking it really got confused. As there's something weird about loading a synthesiser with letters, TV, radio and other appliances linking on and off he eventually added a voice recognised door lock. Not only did the burglar take all his goods but a three conversation diving led to a video which has "How strong is your inferno" made to give Dink reasons that someone abouting JPH collected the alarm first on which he left his last print out. Bill the the computer managed to salvage the message and the hope he order a full backup been advised. The police are getting suspicious to say "We know that's the exact thing, they're two a party." It might be a cent more.

A bit of excitement recently. Spot Sims, the old punk singer with the Damned moved into the area. He sounded up happy volunteers by threatening them with violence, and on the count of three all had to guess either there was a fly or someone who had changed sugar out of him, and so the evening went on and the house was full the night got more and more fun going. He gave a completely excellent grand high dance which consisted

of lively guitars and rock and heavy, suspended over a continuous line. He called the round to see his first attempt.

After loading an inventory program and setting RUP, he had the raster up and gently lowered the weights. Then Benjamin Twining BEEDS did an perfect dive. Only one rule so far, 'C', but all in the game time, and now all he has to do is write the tune and program it. He also has to buy many more Spot trams as he was so excited that he let go of the rope and a knife. These layabouts aren't very strong.

Oh, by the way, Bill's judge divided. He has today a lot of resistance and £600.00 down to British Telecom in terms his modern music and all are they are failed to disconnect his phone line. He's not too unhappy though he got custody of the 2581.

So I must go. Hope you don't mind me telling you all about computers in no time. I know you're not really interested, but all my computer friends only want to talk about **THEIR** business these days when I meet them.

Love Ray



Well this issue marks the end of a full year sitting in the editor's chair. I've had problems, I've discovered a lot, been frustrated and annoyed but over all I've enjoyed every minute.

Thanks to all of you who have written with praise, criticism, problems or just to say hello. I do my best to reply but sometimes take a while to find out, sometimes time is just not available and sometimes they take a couple of weeks.

I have met and introduced to you some showmen who I find

interesting, their judgments from around the country of you. I've written to and spoken to fans, lots of people — readers and manufacturers — who have made me a great deal of help and my thanks go to them all.

I look forward into the new year with excitement and enthusiasm. I hope to continue my custody of **YOUR** magazine. I'll keep going and promise to maintain my wholehearted dedication to producing a varied and comprehensive publication.

And to each and every one of you, I wish a very happy Xmas — and a *Smiler* new year!

Contributions

We are always on the lookout for good programs and articles for future issues of *20*. Contributing is a great honor to look after to our own readers. If when reading through the magazine you think you have a fine program as well, or better still, our present contributors then let's hear from you.

All contributions are, of course paid for at very good prices. But if you've got your eye on a new ZX and on a you'd just like to supplement your pocket money getting into it is well, though that's fine as original and not "followed" or "inspired" from other magazines or books. When Jim Harrod was sitting in the Editor's chair, he was always "inspired" contributions he himself had wanted for his first book.

Any kind of program that's interesting, unique, useful, or just fun will be welcomed which can be edited, altered and efficient ways, or those which employ creative routines which can't be used in other programs.

Programs are also, always with clear explanation of how the program is constructed, what it does and what the user expects to see once the program is RUN. It is even more particularly valuable in this respect. When submitting Spectrum programs, it is very important to remember to include a cassette of the program as well as the listing, so this will allow us to check the program before publication.



In praise of the EP-22

Dear Ray,

Just a note to let you know I have a copy now. I have EP-22, 15, 1580 to 1584, 2081 in Spectram's printer, and the 15, 2088, a Spectra's with new keyboard and address labels and ROM. After getting a Rowwood II word processor, I decided I wanted more than my 2080 Times printer. Like the Alphacom 22 reviewed in ZX Computing!

In the USA, a discount-priced printer in the 2200 class will be a dot-matrix, without dependants. This is about the quality I get with the 2648 printer and additions to print up and down. Even so it is not very exciting. The 1200 class dot-matrix has dependants but does not produce the "dependants" quality like the 2648 on up printers.

Including about the state of the art dot-matrix printers I found that they have 24 x 10 dot pattern for better readability and use a thermal-transfer technology on the paper. That 18000 dots is an indicator of the type.

Now I have an EP-22 type writer by Brother and it has the no-dependants, 8 x 7 dot matrix. I designed the card-punch add-on to Spectram's EP-22. When the new EP-22 was announced I had to think about it, but assumed a word processor had dependants but wouldn't be a class dependant quality. BUY WARD WARDON has reviewed California

15: REMPRESS KEY MAYOR DECIMAL POINT
20: INPUT LINE AN
30: 000000 1000

1000: FOR J=1 TO LEN AN
1010 IF AN(J) = "M" OR AN(J) = "m" THEN LET AS(J) = " " :
1020 NEXT J
1030 LET A = VAL AN
1040 RETURN

Coding for Different Decimals

The user would enter letter "M" as a sign of decimal point regardless of whether the computer is in Com mode. Under 20, LINE supplies the string codes and line 1030 converts the string variable to a number. Yours sincerely

Douglas Mark Yoko
Ovishawa

Not logical

Dear ZX Computing,

In "Logical Expressions" article in the August/October issue, there are a few interesting points that I would like to mention. Firstly, in some of the examples given, there is a misuse of logical expressions; this is always advantageous. For example in Figure 1 where LET L=1/08 is suggested, I often find that the expression LET L=SIGN(A) is more useful than the also suggested for A < 0 which the former does not give A > 0, L = 1, A = 0, L = 0, A < 0, L = -1.

Secondly, logical expressions and their dependent can often lead to very abstract formulae and can often be difficult to decipher when searching for bugs etc. So it is better that the program lines are written out in full without complex logic, and only when you are completely satisfied with your work, then you can go through the program substituting the relevant lines. Having said this, there are a few further simplifying abstractions that can be noted from the article. It exchanges line 31 to look:

```
310 LET X=X+(INT(Y)/100) -  
"0" AND X=100 - INT(Y) +  
"0" AND X=0
```

This takes less memory using AND instead of multipliers, to exchange the 220 for

```
220 PRINT CHR$(127 + 128 *  
MOD X)
```

which gives the same effect. Y.

A different cursor

Dear ZX Computing,

I have a tip for any program which uses INPUT. It is that you can create your own cursor by defining the graphics character as 158 " " and then FORING 25517 158. Here is an example of how to use it.

```
10 FOR N=1 TO 7: READ A,  
POKE USR "A" + M, A  
NEXT N
```

```
20: FOR J=17 TO 158  
30: INPUT LINE AN  
40: PRINT AN: GOTO 30: DATA  
0, 50, 32, 32, 55, 126,  
124, 0
```

You do not have to limit yourself to the " " character. You can use the LOGO with a code that is divisible by 8 as A, B, I, M, O and U. To obtain these, POKE the appropriate value 160, 168, 176, 184, 192 and 198 respectively. You can also use C, D, E and R, but as these are only in pressed the cursor will change back to the character with a code of zero less. I hope this will be of use and interest to your readers.

Yours faithfully,
Stephen Jennings (age 15)

Different decimals

Dear ZX Computing Spectram users who find it hard to have to press both the shift key and enter M keys every time they want to key in the decimal point when entering numeric data, will find the following helpful.



If $A=0$ then 120 will be added to the 27. If $A=1$ then 128 will be added to the 27. (I developed the 230 as follows.

120 LEFT = 21 * (1-1) + 10-10 * 1
 = 21 * 0 + 0 + 0 * 1
 = 21 * 0 + 0 + 0 * 1
 = 21 + 10 * (0-2) = 21 + 10 * (-2) = 21 - 20 = 1
 (much shorter than the original)

From this, a simple lesson may be learned: whenever logic expressions are not used in the same line twice (as I did in the original).

Lately, I've also noticed Doris simulate BDR for BDR users.

A BROTHER - NOT Y!

where x and y are logical expressions. This expression will equal 1 when either x or y are true and 0 when both are true or neither are true.

hi! This use of the double negation, is NOT NOT x, to state that any number is 1 and 0 is certainly true at the same as NOT NOT x and NOT NOT x useful double logic combinations is shorter than (NOT)

hi! Note the priority ratings of the three logic functions AND 3 OR 2 NOT 4. (see P 116 in the Spectrum manual)

Although I suspect that some of these were originally deliberate for the sake of programmability, I hope the letter has been helpful. Yours faithfully, Stephen P. Owen

prints which explain why I have sent you two copies of the same letter.

The Tandy paper is about 1/2 inch narrower, but it suits perfectly. James D. Gilmore

Thanks James and of the other readers who've sent me lots of nice, fun DK stuff. Spectrum magazine, it's just like the old 11 was! However, I've been using the combination for one or two days at a time, I'd like what the response is! — Jay



Faster shuffling

Dear ZK Computer, I read "Faster Shuffling" (Aug 1984) and the 4 hands are chosen by simulating the well-known method of shuffling by dealing. A routine for dealing this is completely different way is given below, no sorting is needed and the routine takes about half the time of the naive routine.

H represents the pack to be given. A, B, C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000.

The right probability is achieved by Line 130, where N is the number of cards still to be picked for the current hand, and D is the number of cards still to be considered in the residual pack. Thus to begin with, $D=51$ and $N=12$. If H(1) is picked then H(1) is considered with $D=51$ and $N=12$. If H(1) is not picked then $D=50$ and $N=12$. The 2nd hand begins with $D=38$, $N=12$ and the 3rd hand with $D=25$, $N=12$.

1 NEW PICKING A SPOOR NAME

10 DR PR(3)
 20 DR(14) 130
 30 FOR M=1 TO 62
 40 LET PR=M-CHP
 50 PR=PR
 60 NEXT M
 70 FOR M=1 TO 13
 80 LET C=0
 90 LET C=C+1
 100 FOR N=13 TO 1 STEP
 -1

110 LET C=C+1
 120 LET D=C-1
 130 IF PR=D GOTO N-STEP
 140 LET C=C+1
 150 LET PR=PR-CHP
 160 LET C=C+1
 170 NEXT M
 180 LET PR=PR-CHP
 190 NEXT M
 200 LET PR(1)=PR

Yours Sincerely M C Trisman

A readable renumber

Dear Sir,
 Re: REMUM - Aug/Sept 1984
 I read with interest the above short article. Inevitably a being of my own number and out of which I have been using for some time and which is shorter and, I think, easier to understand than REMUM.

A short basic program recently be devised to enter the number to be accepted into a renumbering, giving the low byte in 150 70 and the high byte in 150 80. The program steps can be shown by giving a value for 14924. Here the program by Rand LBR 18114
 Yours sincerely
 John Schofield

Corrections for Oct/Nov

Just two 'Toy Day', mistakes noticed and relatively insignificant (but so what?) — (a) I wrote 'report for the Oct/Nov/November issue. David Webster's 'Seasonal' program from the 1 K Core of that issue (page 132) contained an error in line 2. The line reads:

3 LET M = 6

whereas it should have read

3 LET M = 8

The COMFAC program which appeared in the October/November issue, also contained a couple of bugs. Firstly, the logical statements have disappeared from the last line in two copies; what was (CHP 131) after the starting in the 18000. Without these, the top terminals will not work (although the bottom address terminals do).

Secondly, in the top loader there should be five 828 lines as specified in the text, and the last line of the last jump is not necessary but harmless.

After the customizing loading, as described in the text, $A=130$ should read $A=136$ and in the next paragraph there should be a 'less than' symbol before the number 136.

The error in line 1808 can be taken as further proof that Murphy's Law actually works. It, having previously 'labelled' it with that line as 'GOOD NEWS', it was that line only the only line out of the main program to get validated!

4082	31000	LD PR,0000	31100	TO first new line number required
4080	297000	LD HL,407D	31110	LD HL to start of first one get line byte of line number
	70	LD A,C	31120	Increment in start of line
	00A	ADD A,A	31130	get high byte of the number
	4F	LD C,A	31140	add in any carry bit
	70	LD A,B	31150	store it back
	000	ADC A,B	31160	put in new line number
	47	LD B,A		
	70	LD HL,A		
	31	RD HL		
	31	LD HL,C		
	03	RD HL		
	6F	LD B,HL		
	25	INC B		get line length
	60	LD C,B		
	19	ADD HL,DE		
	03	INC HL		find end of next line
	70	LD A,HL		and if the above value is a readable character — is so then
	FD08	CP Z		start of Display file reached
				end loop around for next line
	08	RET Z		
	1300	JR 40800		

John Schofield's renumber routine



Tandy paper

Dear Sir,
 I had been looking for a cheap and reasonable PRINTER and I bought an ALPHA 600 92 when receiving your 'Invisible' issue of 10/20 Computing Feb/March issue. My little son, recently from the blue print don't take well enough for the message.

Initially I had some difficulty getting the correct paper and had a roll of the paper the best TANDY shopped for their TP 10

HUB

MacGibbon

King Arthur's Quest



£19.95

Using our 3D graphics, you'll be able to see what you're doing in 3D. It's like being there!

Aztec
 Those for the sun god



£19.95

With their 3D graphics, you'll be able to see what you're doing in 3D. It's like being there!

£19.95
 COMMANDER 64

After Midnight – two adventure games that herald a new dawn

A new concept – all graphics, 3D, and 360° scrolling

Sports simulations

that leave
 the rest
 standing

Rally
 Driver

Commander 64 only £19.95
 486 SPECTRUM COMMANDER 64

Yacht Race

Black Screen has
 created more!

COMING SOON
 World Cup Football
 Basketball for Dads

HUB MacGibbon Ltd, 83 Fleet Street, London EC4Y 1DH

All computers tested by First Week Computer Ltd.

Telephone
 01-563-1452

3D Bowling

The last time I went bowling I got my finger stuck in a hole! No chance of that with John Wilson's game.

102001 Bowling is an excellent emulation of a Tim Pin bowling alley, with a good perspective view. Your Spectrum score board score and puts a wrap to channel.

When you first progress sets up a 3D representation of the bowling alley with the frame in display and a bowling "spin" factor. The ball's trajectory is determined by the spin factor, a -1 factor will give the ball a curve to the right, a $+1$ factor will curve left and a zero factor causes the ball to not straight down the alley.

Your score sheet is shown at the bottom of the screen and is

automatically filled in as the game progresses. Strikes and spares are correctly identified and represented by a X and $/$ respectively.

To control your ball use the keys B and L to position it across the alley and then press B to release it, trying to catch the spin factor at the required -1 , 0 or $+1$ position. This is when the ball comes in.

Once you have entered and debugged the game SAVE the game (GOTO 1593) and it will then RUN automatically on re-loading.

This striking game will NOT spare you any frustration!



```

30 LET F=0
40 GOSUB 1300
50 LET H=10
60 LET N=1
70 GOSUB 110
80 IF F>0 THEN LET F=F+1
90 GOTO 290
100 REM **NEW FRAME**
110 FOR Z=1 TO 25
120 NEXT Z
130 IF F<29 THEN PRINT AT 1,0;
"FRAME ";INT ((F+4)/3)
140 PRINT AT 0,12;"0 0 0 0"
150 PRINT TAB 12;"XXXXXXXXXX"
160 PRINT TAB 13;"XXXXXXXXXX"
170 PRINT TAB 14;"XXXXXXXXXX"
180 PRINT TAB 14;CHR(18);"B";CH
R# 10
190 PRINT TAB 15;"B"
200 LET B=1
210 FOR A=5 TO 17 STEP 2
220 PRINT AT A,11-B;"B";TAB 17+
B;"B"
230 PRINT AT A+1,11-B;"B";TAB 1
7+B;"B"
240 LET B=B+1
250 NEXT A
260 IF F=29 THEN GOTO 1390
270 RETURN

```

```

280 REM
**RIMS BALL**
290 PRINT AT 10,0;"0"
300 GOSUB 560
310 IF INKEY#="" THEN GOTO 300
320 LET D=B-(INKEY#="B")+INKEY
#="B")
330 IF D<5 THEN LET B=D
340 IF D>25 THEN LET B=25
350 PRINT AT 10,0;" "
360 LET B=D
370 GOTO 390
380 LET N=1
390 REM **BOWL BALL**
400 FOR C=10 TO 1 STEP -1
410 IF C=15 THEN LET B=B+5
420 PRINT AT C,0;"0"
430 PRINT AT C,0;" "
440 IF C=5 AND B=15 THEN GOTO 4
00
00

```

ZX81 GAME

```

450 IF C=4 AND B=14 OR C=4 AND
B=16 THEN GOTO 810
460 IF C=3 AND B=13 OR C=3 AND
B=17 THEN GOTO 900
470 NEXT C
480 IF B=12 OR B=18 THEN GOTO 1
130
490 LET F=F+1
500 PRINT AT 20,F;B
510 IF N=2 THEN GOTO 50
520 LET H=10-H
530 LET N=2
540 GOTO 290
550 REM **SPIN FACTOR**
560 PRINT AT 3,20;" "
570 PRINT AT 1,21;"SPIN FACTOR"
580 LET S=-1
590 IF INKEYS="0" THEN GOTO 480
600 PRINT AT 3,20;" "
610 LET B=1
620 IF INKEYS="0" THEN GOTO 480
630 PRINT AT 3,20;" B "
640 LET B=0
650 IF INKEYS="2" THEN GOTO 400
660 RETURN
670 REM **REMOVES PING HIT**
680 PRINT AT 0,12;" "
690 PRINT AT 1,12;" "
700 PRINT AT 2,13;" "
710 PRINT AT 3,13;" "
720 PRINT AT 4,14;" "
730 PRINT AT 5,15;" "
740 LET F=F+1
750 IF N=1 THEN GOTO 700
760 PRINT AT 20,F;"/"
770 GOTO 50
780 PRINT AT 20,F;" I"
790 LET F=F+1
800 GOTO 50
810 IF B=16 THEN GOTO 870
820 PRINT AT 0,12;" "
830 PRINT AT 1,12;" "
840 PRINT AT 2,13;" "
850 PRINT AT 3,14;" "
860 GOTO 910
870 PRINT AT 0,14;" "
880 PRINT AT 1,14;" "
890 PRINT AT 2,15;" "
900 PRINT AT 3,16;" "
910 LET F=F+1
920 IF N=2 THEN LET H=10-H
930 GOSUB 1220
940 PRINT AT 20,F;H
950 IF N=2 THEN GOTO 50
960 LET N=2
970 GOTO 290
980 IF B=17 THEN GOTO 1030
990 PRINT AT 0,12;" "
1000 PRINT AT 1,12;" "
1010 PRINT AT 2,13;" "
1020 PRINT AT 3,13;" "
1030 PRINT AT 0,12;" "
1040 PRINT AT 1,12;" "
1050 PRINT AT 2,13;" "
1060 PRINT AT 3,13;" "
1070 GOSUB 1220
1080 LET F=F+1
1090 PRINT AT 20,F;H
1100 IF N=2 THEN GOTO 50
1110 LET N=2
1120 GOTO 290
1130 PRINT AT 0,14;" "
1140 IF N=2 THEN LET H=10-H
1150 GOSUB 1220
1160 LET F=F+1
1170 PRINT AT 20,F;H
1180 IF N=2 THEN GOTO 50
1190 LET N=2
1200 GOTO 290
1210 REM **COUNTS PING HIT*
1220 LET P=PEEK 16396+256*PEEK 1
6397
1230 FOR B=P+13 TO P+19
1240 IF PEEK B=100 THEN LET H=H-
1
1250 NEXT B
1260 FOR B=P+47 TO P+51
1270 IF PEEK B=100 THEN LET H=H-
1
1280 NEXT B
1290 FOR B=P+81 TO P+85
1300 IF PEEK B=100 THEN LET H=H-
1
1310 NEXT B
1320 IF PEEK IP+155-100 THEN LE
T H=H-1
1330 RETURN
1340 REM **PRINTS SCORE SHEET**
1350 PRINT AT 19,0;"
-----+D=4
1360 PRINT AT 21,0;"
-----+D=8 ;
1370 PRINT AT 22,0;"| | | |
| | | | |"
1380 RETURN
1390 PRINT AT 17,10;"END OF GAME"
"
1400 FOR I=1 TO 100
1410 NEXT I
1420 CLS
1430 PRINT AT 10,2;"PRESS ANY KE
Y TO PLAY AGAIN"
1440 IF INKEYS="" THEN GOTO 1440
1450 CLS
1460 GOTO 30
1470 SAVE "30 BOWLING"
1480 RUN

```

Death it takes you deep down
in a tangled labyrinth of dark tunnels.
Struggle through spider infested corridors,
ghost bats and mutant life forms.
Fly through the muckhills
(you numbertwo speeds?)
and bravely plunge into the dark water
of flooded caverns.

The tension grips
your pit light folds
and buff you with the Guardian.
After this test gruise ma trial
will you still have strength enough
to return?



© 1988 Durell Games, Inc.

Shun is tricky? - well it is... and we haven't
told you half of it.

DEATH PIT - another high quality machine-made
game from Durell.

Available now from most retail outlets for the -
4PK Spectrum, BBC, Commodore 64, and Amstrad.

**DURELL sales dept. Castle Lodge,
Castle Green, Taunton, Somerset TA1 4AB**

Death Pit



from

DURELL — a touch better than the rest

Bomber raid

Defend your city from the bombers —
the task set by W Simister of
Haverfordwest

Written for the 16/48K Spectrum this program shows an extensive use of USR graphics. These help to fill the screen, and make for a full and colourful game. The game is set during the second world war, before so many cities were bombed. Your city is defended by a balloon barrage and by anti-aircraft guns.

You are in charge of one gun battery, and have 50 shots, fighting with "F" when a bomber is overhead. Each shot is shown by an explosion of the bomber, and it disappears. When you have used 5 shots a bomb lands on the city, and a building starts to burn. After another 10 shots a second bomb lands, and another after a further 10 shots. If a gun aim is shot down at the bombers before too many bombs land.

135 PRINT AT 17,80 "XXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXX"
140 PRINT AT 18,80 "XXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXX"
145 PRINT AT 19,80 "XXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXX"
150 PRINT AT 20,80 "XXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXX"
155 PRINT AT 21,80 "XXXXXXXXXXXX
XXXXXXXXXXXXXXXXXXXXXXXX"
160 REM Gun firing
165 FOR x=0 TO 7: READ y: GOSUB
USR "G"+x,y: NEXT x
170 FOR p=0 TO 7: READ q: GOSUB
USR "G"+q,p: NEXT p
175 DATA 24, 24, 24, 24, 24, 24, 24, 3
4, 24, 40, 40, 200, 200, 40, 40, 40
180 PRINT AT 10,200:INK 0;"G"
PRINT AT 17,200:INK 0;"E"
185 PRINT AT 17,100:INK 0;"F"
PRINT AT 17,210:INK 0;"G"

```

1 REM XXXXXXXXXXXXXXXXXXXXXXXX
  Underlined characters
  have entered in 4
  graphics mode.
  XXXXXXXXXXXXXXXXXXXXXXXX
15 BORDER 0: PAPER 0: INK 1: C
  LS
  20 REM Build City
  25 PRINT AT 12,80;"B": PRINT A
  T 13,80;"..": PRINT AT 13,3
  0;"B": PRINT AT 14,80;"..":
  PRINT AT 14,270;" "
  30 PRINT AT 15,80;"....."
  40 PRINT AT 15,250;" "
  50 PRINT AT 16,80;"....."
  60 PRINT AT 16,250;" "
  70 PRINT AT 17,250;" "
  80 PRINT AT 17,250;" "
  90 PRINT AT 17,250;" "
  100 FOR x=0 TO 7: READ y: GOSUB
  USR "G"+x,y: NEXT x
  105 FOR p=0 TO 7: READ q: GOSUB
  USR "G"+q,p: NEXT p
  110 DATA 170,140,110,77,170,140
  ,110,77,50,200,50,50,170,170,50,
  200

```



SPECTRUM GAME

```

338 FOR a=0 TO 7: READ y: FORK
USR "D"+a,y: NEXT a
339 FOR p=0 TO 7: READ q: FORK
USR "D"+p,q: NEXT p
340 DATA 0,100,200,127,127,127,
200,100,0,240,200,200,200,200,20
2,240
341 PRINT AT 4,4: INK 11:"OH": P
RINT AT 4,20: INK 11:"OO": PRINT
AT 7,18: INK 11:"OO": PRINT AT 8,
7: INK 11:"OO": PRINT AT 8,20: IN
K 11:"OO"
342 INK 11: PLOT 24,24: DRAW -14
,41: PLOT 70,20: DRAW -14,24: PL
OT 102,41: DRAW -14,60: PLOT 200
,41: DRAW -14,74: PLOT 244,24: D
RAW -12,40
400 NEW Scores
401 FOR a=0 TO 7: READ y
402 FORK USR "D"+a,y: NEXT a
403 DATA 0,0,10,20,250,124,20,0
0
404 FOR a=0 TO 7: READ y
405 FORK USR "D"+a,y: NEXT a
406 DATA 0,0,20,200,124,20,04,0,
0
407 LET Score=0
408 FOR Q=1 TO 20: REEP .000,Q:
NEXT Q
409 LET Shots=40
410 FOR H=00 TO 20 STEP -2: REE
P .000,H: NEXT H
411 LET A=0: B 0 0 0 0
412 LET B=0
413 LET Across=0
414 FOR a=0 TO 7: READ c: FORK
USR "D"+a,c: NEXT a
415 DATA 24,140,140,70,127,122,
200,200

```

```

416 PRINT AT 0,20: INK 11:AT 4
,20:AT 8,20:REPS TO 1-001: TO
2: REEP .000,20-Shots
417 FOR Q=1 TO 4 STEP -1
418 DO IF INKEY="" THEN PRINT A
T 0,20: INK 11:"" PRINT AT 11,20
:" " NEXT B: LET Shots=Shots-1
419 IF INKEY="" AND Across=
1-0" OR INKEY="" AND Across=
0-0" THEN PRINT AT 0,20: BRIG
HT 1: PAPER 7: FLASH 10: INK 21:"
" LET Shots=Shots-1: REEP .00,0
:otal: LET Score=Score+20: REEP .
00,00-Shots: LET Across=""
420 IF INKEY="" AND Across=
1-0" OR INKEY="" AND Across=
0-0" THEN PRINT AT 0,20: BRIG
HT 1: PAPER 7: FLASH 10: INK 21:"
" LET Shots=Shots-1: REEP .00,0
:otal: LET Score=Score+20: REEP .
00,00-Shots: LET Across=""
421 PRINT AT 0,20: INK 0: INVE
RS 1:Score: " FLASH 10Score)
FLASH 01: Shots Left: " FLASH
10Shots: FLASH 01"
422 IF Shots Left<=0 THEN PW
HT AT 12,0: BRIGHT 1: PAPER 7: F
LASH 1: INK 21:"OO": PRINT AT 13
,20: " " PRINT AT 13,0: BRIGHT
1: PAPER 7: FLASH 1: INK 21:"OO"
" PRINT AT 13,01: " " PRINT AT
14,01: BRIGHT 1: PAPER 7: FLASH 1
: INK 21:"OO"
423 IF Shots Left<=0 THEN PW
HT AT 17,01: BRIGHT 1: PAPER 7: F
LASH 1: INK 21:"OO": PRINT AT 18
,01: " " PRINT AT 18,01: BRIGHT
1: PAPER 7: FLASH 1: INK 21:"OO"
" PRINT AT 18,01: "
424 IF Shots Left<=0 THEN PW
HT AT 19,20: BRIGHT 1: PAPER 7:
FLASH 1: INK 21:"OO": PRINT AT 19
,201: " " PRINT AT 19,20: BRIGHT
1: PAPER 7: FLASH 1: INK 21:"OO"
" PRINT AT 19,201: "
425 IF Shots<1 THEN PRINT AT 1
0,21:"THAT'S THE END OF THE GAME"
: STOP
426 LET A=0: B 1-001:1
427 LET B=0: B 1-001: TO 2
:
428 GO TO 340

```



LOOK!

NOW THERE ARE HI-RES PROGRAMS FOR THE 16K ZX-81

3



- 1. Mine
- 2. Control Room
- 3. Powering Rail
- 4. Ore
- 5. Ore in Tank
- 6. Ore in Tank
- 7. Ore in Tank
- 8. Ore in Tank
- 9. Ore in Tank
- 10. Ore in Tank
- 11. Ore

FORTY NINER

In 1949 the Great American Gold Rush started. Almost everyone who could hold up everything and headed to the west coast to look for the precious metal - including you!

You must recover the precious metal - but can you survive the giant mine and that vicious Grendel which will come to infest your mine? Can you track the miners into finding their comfortable nests and destroy the site for you? Can you keep the Grendel at bay?

Riches await you - but so do the hazards!

ROCKET MAN

Get rich quick by collecting Demos that are simply lying there waiting for you! Oh - I forgot to mention that there are one or two problems!

There is an expensive tank of toxic water between you and the Demos and a storage base of Bubbles that won't help here - so getting you in is somehow you must cross it!

You have a Rocket Pack to help you (in Water on higher levels) but you must walk around the platform and leaders collecting cans of fuel (you can bank with the Water) and carrying that toxic Bubble. Once you have enough fuel, then it's *Choo Choo!*

Oh - but don't run out of fuel on the way - otherwise it's SPLASH!



- 1. Demos
- 2. Ore
- 3. Platform
- 4. Bubble
- 5. Fuel Cans
- 6. Rocket
- 7. Water
- 8. Ore in Tank
- 9. Ore
- 10. Fuel Cans
- 11. Fuel Cans
- 12. Fuel Cans



Z-XTRICATOR

A long time ago in a galaxy far far away a terrible war took place between two hostile wars. Any prisoner taken could not expect to live very long in the hands of their captors. Their only hope lay with a group of valiant warriors - the XTRICATORS - whose task it was to rescue fellow beings from the alien planet's surface. You are about to take on the role of such a warrior.

Please send me

	QTY	TOTAL AMOUNT
FORTY NINER £3.95		
ROCKET MAN £5.95		
Z-XTRICATOR £5.95		
TOTAL		

Available from all good computer shops or send cheque/P.O. for £5.95 (inc. P&P) to:
**Software Farm,
FREEPOST (No stamp required) BS34658,
BS8 2YF.**

Software Farm, 115 Wilton Road, Bristol, Bristol BS3 3NF
Telephone (0274) 310111 Telex 984046 SWANEN G

Carol Quiz

Now the festive season is near, everywhere you go people are humming, whistling, or even singing Christmas carols. But how quickly do you recognise the tune? Here's your chance to find out! After an elaborate animated and entertaining title sequence, following which successive screens are set so don't try to pass it quick! The machine will play a carol, giving it much needed fast gaps of active BEEP. All you have to do is recognise the tune and press the appropriate key. Easy? Not a lot! Here's the catch: The tune won't start playing at the beginning!

Low scores are best as the longer you take, the more penalties you collect. But don't make a mistake — that's an extra 15 points.

Typing in

The program makes use of the PRINT routine so that you can see "your" response tape onto screen. LOAD "carol" from side when the program begins, UNRA then NEW 0 (Don't panic! The bytes you want are still above RAMEND) Now type in and RUN the line given below. ENTERING the number 100, TABLE A, reading across the line.

This sets up the user defined graphics:

```
FOR I = 100 TO 1000 : GOTO I
NEXT I
```

Now you are ready to type in the main program, but PLEASE read the notes which follow first!

The Capital letters within quotes in lines 5, 6, 99, 100, 101, 170, 148, 149 are user defined graphics and must be entered in V Mode.

Some string variables are declared with colour control codes: ENTER these as follows:

```
Line 8, starting after LET
a$ = "" : GOTO 100
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
```

```
Line 148, starting after LET
a$ = "" : GOTO 100
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
MODE:CAPS SHIFT 4:G
```

```
End with 8 MODE:CAPS
SHIFT 2:G MODE:CAPS
SHIFT 2:G MODE:CAPS
SHIFT 2:G MODE:CAPS
SHIFT 2:G MODE:CAPS
SHIFT 2:G MODE:CAPS
SHIFT 2:G MODE:CAPS
SHIFT 2:G MODE:CAPS
```

In the above lines don't type in the spaces. They are just there to separate the key presses.

```
SAVED the parts of the program using SAVE "carol" LINE
10000 :SAVE "Co" :CODE 1000
"9" :SAVE "co" :CODE
10000 :END
```

```
with VERIFY:
VERIFY: :CODE VERIFY
:CODE
```



SPECTRUM GAME

When you LOAD the program back into your tape the main program will automatically LOAD in the graphics and machine code before it starts. If you want to try it a slight way just use RUN EDITOR.

Interesting points

Rather than go through the program line by line, I will highlight certain lines which are of interest to readers to use in their own programs.

Line 1 - The problem of a 108 Spectrum having only about 655 of usable RAM. To fit the program in a number of modules have been used. Relating the graphics and machine code separately, not as DATA within the program is a useful approach. Another good asset is declaring variables for often used numbers, e.g. LET $a = 1$. These can be shortened even more, e.g. LET $a = NOT PRINT$ any number is 0; or LET $a = VAL "0"$. VAL can be used for any number within the program, but it should be remembered that all these space savers slow down the program. The golden rule is get small numbers, unless you want speed, and variables where it doesn't matter. Two of other points if you declare variables early, the program then then forgets and variable before (e.g. $a =$) expense can be saved with offener when.

Now some specific points.

Line 1 - This is needed to jump over the calculations in lines 2 to 6. These subroutines are put here as being so easy that they can be found quickly by the reader.

Line 2 - This subroutine is used to 'good' the program in line 174. The always appears as a line of spaces (28), the JUTES message graphics (54) and the message (30). Variable a is then 'good' together with the routines above the same into a block of 32 characters, starting at the left end, moving one to the right each loop. This produces the right-to-left scrolling effect.

Line 3 - This is called within a loop from line 885, where a is set to 1. It produces the flashing stars around the scene. The apparently repeated LET $a = a + 1$ is in fact a use of the modulus logic. If a does equal zero then the statement within brackets in line 3 logic turns this equals 1, or $a = 1$. The next in the sub-routine is added $a = 1$ so the bracketed statement is false. This is repeated as 0, the low value for a . This 'toggle' effect

repeats itself. The value of a is used in the PRINT statement in another logical statement. If you ever find it in an address, NMI 1 is a good reference point.

Line 5 - This sets up and calls the 'Horizontal' PRINT routine. Various values have to be POKE'd in first, as a block colour, by a point down, as a letter height magnification factor, as a letter width factor and as a starting line. PRINTed if you want to know more about this routine WAIT on THIS SPACE. There is an article in preparation.

Line 8 & 9 - PRINTs the story, day and the main title - 'Sonic' script.

Line 95 - Assigns the variables for the music DATA. This saves alot of space in these lines (1000-8850).

Line 100 - Inverts the screen by PRINTing a line of 32 spaces 32 times down the screen. As OVER 1 is used nothing but INVPRG or less PAPER is altered. INVPRG or INVERT would work just as well.

Lines 110 & 120 - Demonstrates the use of animation and sound together. Moves the variables in the DATA line. A good space saver, but not showing on most computers. Area I will be happy.

Line 116 - Writing the string in the DATA line is another way to saving bytes.

Line 248 - This line, followed though it is to enter events a good deal of space.

Line 388 - Produces the festive header to the game.

Line 508 - A number of interesting points here. The flashing stars use sub-routine 3 already discussed. Also the use of $a = 1$ to PRINT on row 23. The values for line lengths 3 and 6 are first, then used in the DATA line to save space. Also when appearing along with the tempo it was added to alter two values then in the DATA variables.

Lines 1628 to 8888 - As list the stories of getting objects into just one or several numeric DATA, takes up a tremendous amount of memory. Using variables reduces this drastically. Apart from this space saving there is another advantage in this system. If you choose your variable letters carefully (or choose their length, as for 50 and 1000, etc.) and A-Z, for the same path with, for example PC for F stop, BP for B start and FC for F ending in the DATA, direct from the music, it has and may be an advantage having just a basic knowledge of musical notation.

```
1 GO TO WAL "9"
2 FOR  $a = 1$  TO LEN  $a$ : PRINT
AT  $j$ , $d$  INVERSE  $a$ : $a = a + 1$ : GO TO 2
3: END  $a = 1$  OR  $a = 0$ : RETURN
```

```
5 LET  $a = 1$ :  $d = 0$ : PRINT AT  $a$ ,  $d$ 
INP  $d$ : GO AND  $a = a + 1$ :  $d = d + 1$ : PRINT
LEAVE  $a$ ,  $d$ :  $d = 0$ :  $a = 1$ :  $d = 0$ : PRINT
 $a$ ,  $d$ :  $d = 0$ :  $a = 1$ :  $d = 0$ : PRINT
AT  $a$ ,  $d$ :  $d = 0$ :  $a = 1$ :  $d = 0$ : PRINT
 $a$ ,  $d$ : RETURN
```

```
5 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :
 $k = 0$ :  $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :  $h = 0$ :
 $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :  $m = 0$ :  $n = 0$ :
 $o = 0$ :  $p = 0$ :  $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :
 $u = 0$ :  $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :
 $z = 0$ : RETURN
```

```
6 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
7 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
8 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
9 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
10 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
11 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
12 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
13 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
14 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
15 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```

```
16 LET  $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :
 $g = 0$ :  $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :
 $l = 0$ :  $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :
 $q = 0$ :  $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :
 $v = 0$ :  $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ :
 $a = 1$ :  $d = 0$ :  $e = 0$ :  $f = 0$ :  $g = 0$ :
 $h = 0$ :  $i = 0$ :  $j = 0$ :  $k = 0$ :  $l = 0$ :
 $m = 0$ :  $n = 0$ :  $o = 0$ :  $p = 0$ :  $q = 0$ :
 $r = 0$ :  $s = 0$ :  $t = 0$ :  $u = 0$ :  $v = 0$ :
 $w = 0$ :  $x = 0$ :  $y = 0$ :  $z = 0$ : RETURN
```


Why wait any longer?

Upgrade your 16K ZX SPECTRUM Now!

The CHEETAH 32K RAMPACK simply plugs into the case port at the rear of your computer and increases the memory instantly to 48K.

- Fully compatible with all Sinclair accessories via rear edge connector
- NO NEED TO OPEN COMPUTER AND REWELDED GUARANTEED!
- Why send your computer away and wait weeks for repairs?
- Fully tested, tested and guaranteed.

only £39.95

including VAT and P&F



Now make your Spectrum and ZX-81 Talk Compatible with Interface I & II

The Cheetah SWEET TALKER just plugs into the back of the computer using the existing power supply. Based on an ultrasonic system you can create, program and record text-to-speech. Fully tested, tested, guaranteed and compatible with all SINCLAIR accessories via rear edge connector. Complete with demonstration cassette and full instructions.

No more lonely nights!

Simple to install at

£29.75

(Please quote when ordering whether Spectrum or ZX81 owner)

50K RAM Pack for ZX 81
84K RAM Pack for ZX 81

£19.75
£44.75

Prices include VAT postage & packing. Delivery normally 14 days. Export orders at no extra cost.

Dealer enquiries welcome.

Cheetah products available from branches of

WHESMITH  **Rumblings**

See if you're in or call us

Cheetah

Marketing



Cheetah Marketing Ltd, 24 Roy Street,
London EC1R 3DU Tel 01 603 4909
Telex 9954958

CHRISTMAS CRACKERS

**Meow
Micro**



DESIGNED FOR RELIABLE SAVING & LOADING OF COMPLEX DATA

FOR ANY
SPECTRUM

COMPACT SIZE

28mm x 165mm x 130mm

HIGH RECORD & PLAY

ACT-TO-STOP

ENTIRE CPU ON RECORD

AND PLAYBACK

ALDHO MONITOR
ON LOAD & SAVE

1 Year TPC 11440
2 Year RT 4621P
1 Year F4 & 5 1112
2 Year RTV 907 A&L

DATA RECORDER



TFT
COLOR

FM-O
SOUNDER

SLIDE
LOAD LEVER

BATTERIES
OR AT ADAPTOR
ADAPTOR IS PROVIDED

GUARANTEED FULLY
COMPATIBLE WITH
SPECTRUM OR YOUR
MONEY BACK!

SPECIAL £29.95 (inc VAT) with FREE 'Programmers Workshop' TAPE

LOOK!! £2.50 ea. NEW TAPE PRICES!!



SPECTRUM 128 PERFECT VALUE tapes for each computer **SPECTRUM 48K** **SPECTRUM 48K**

Boat Race
A 100 rowing race
is won through the
skill of the rowers. You
must stay on the
beat for 40 miles.
Full record of
times, points, finish
Full commentary

Success
A 100 game for 2 players.
Whoever gets 100
wins. Full
commentary

Golf
Play your
own course in 18
holes. Full
commentary

Rice Balls
A 100 game for 2 players.
Whoever gets 100
wins. Full
commentary

Knobs
A 100 game for 2 players.
Whoever gets 100
wins. Full
commentary

Hardships
The toughest
computer game
yet. Full
commentary

Scoundrels
The original board
game for 2 players.
Whoever gets 100
wins. Full
commentary

Starfighter
You are commander
of a space ship.
Whoever gets 100
wins. Full
commentary

**Devilish
Gangster**
A 100 game for 2 players.
Whoever gets 100
wins. Full
commentary

**Master of
the Rings**
A 100 game for 2 players.
Whoever gets 100
wins. Full
commentary

NEW!!
FISHY DEK
A 100 game for 2 players.
Whoever gets 100
wins. Full
commentary

LOOK!!
CHRISTMAS CRACKERS
A 100 game for 2 players.
Whoever gets 100
wins. Full
commentary

SPECTRUM £2.50 ea.!! 2 SUPER GAMES ON EACH TAPE!! £2.50 ea.!!

ALL Tape Prices include Postage and Packing and V.A.T.
Data Recorder ADH11.19 Postage, Packing & Insurance
Allow 7-14 days for delivery. Tel: (0574) 22425
Send cheques or Postal Orders only.
Overseas orders for surface are extra only. (A.D.N.S.) 1 001

ORDER NOW **Meow Micro**
8 Bakers Lane
Black Notley
BRAINTREE
Essex

First steps in Machine Code

Part 1. Basic Concepts

An introduction to Z80 Machine Code by David Nowotnik



After BASIC, the most popular method of programming home computers would appear to be machine code. This language offers the advantages of being built into the computer (so it's fundamental to its operation), and readily accessible from BASIC through the ROM system. The attraction of machine code is that programs run much faster (often 100 times faster than BASIC), but there is a price to be paid for that speed. Programming in machine code is considerably more difficult than BASIC.

For the past few years ZX Computing has brought you many articles containing sophisticated machine code routines. While these have been well received by those with some knowledge of machine code, we have received many letters from other readers who would like to understand machine code, but find many of our articles too complicated. It is for those readers I am starting a new part series in introducing machine code on the Z80 and Spectrum.

The series is intended for

complete beginners, but if you already know a little machine code, then I hope you'll still find it of interest. You will learn in this part 1 what provides computers with machine code, and some examples to practice on the Z80 and on the Spectrum. To learn to understand machine code, we have to know something about how computers work. And that's where I'll start.

What is machine code?

Most modern-day computers, and certainly all home computers, possess information stored in two states, or bits, as 0 or 1 — 00 or 01 — similar to a switch. Most home computers store information in blocks of eight bits. A BYTE is the name given to a block of 8 bits. Some switches can have one of two possible states, then there are a total of 256 (2⁸) combinations of bits within a byte. If you don't want 16 bits you need for it, you have many different com-

bination of 1's and 0's — you can produce by combining 8 at a time!

Instead of thinking of a byte as a block of 8 bits, we can think of it as a number, an integer between 0 and 255. Each number represents a certain combination of bits. For more advanced machine code, we'll have to go back to examining the bits that make up a byte, but for now we can use machine code by just using numbers.

In this way, numbers 0 (0000) are stored in the computer's memory ROM (Read Only Memory) forms a fixed store of numbers, while RAM (Random Access Memory) allows the stored numbers to be modified by user. Each byte in the computer's memory is identified by an ADDRESS. The address is itself a number, and it will normally be between 0 and 65535 (the exact range depending on the amount of memory built into the computer and other features of the microprocessor).

Simply then, the computer works by moving and manipulating numbers under

program control. The control is provided by a special chip called the central processing unit (CPU). The Z80 and Spectrum have the same CPU — the Z80 Z80. A block diagram of the Z80 is shown in figure 1. It is this chip that manipulates machine code instructions to operate the computer. So to understand machine code, we need to know a little about how the Z80 works.

There are a number of external 8 bit buses in the CPU. These are similar to bytes in memory, and are called REGISTERS. They store and manipulate numbers in the CPU. They are given names A, B, C, D, E, H and L. There are also some special purposes 16 bit registers called SP, BP, and PC. Throughout the series I'll deal with most of these.

The CPU is connected to the rest of the computer through a number of connections called "buses". Simply, there are three 16 bit data buses to send and receive external data to and from other parts of the computer. It receives an instruction. The first thing the CPU does is to put onto the address bus the contents of the PC 16-bit register. PC is short for Program Counter, and it contains the address in memory where the next machine code instruction is held. That then takes a lot of questions which I hope to answer later. Control outside the CPU decodes the message on the address bus to locate the address in the required address memory. The contents of that address are passed on the DATA BUS, and the number is then transferred to the CPU.

The number is a coded instruction to the CPU which is decoded by the CPU, which then follows a fixed sequence of operations appropriate to that instruction. When complete the PC register is incremented by BASIC this would be $SP = PC + 1$, and the next instruction is fetched




Figure 1. Internal architecture of the Z80 CPU.

From memory

The 286 CPU understands over 800 different instructions clearly as one byte from memory can only hold 256 different numbers, sometimes more than one byte is required to complete the address there are a large number of two-byte opcodes. The CPU understands that when the first byte is decoded, it requests a second byte to complete the instruction. To fetch this number, the PC register is incremented and the next sequence of events is as described earlier, read page 4.

More instructions in the CPU require some data to be provided. These appear as numbers which follow immediately after the opcode in memory. These are fetched from memory in much the same way as opcodes, but are transferred to different parts of the CPU, depending upon the requirements of the opcode. These data bytes are called OPERANDS. There can be one or two operands per opcode. Therefore a single instruction to the CPU can be anything from one to four bytes long.

Other wires from the CPU send out and receive control signals which ensure that all these operations occur at the right time. The CPU is under the control of a clock which sets in motion the same way as a metronome, defining out a time sequence with which the CPU must cooperate. The faster the clock, the faster the CPU will work, within the physical limits of the CPU of course.

Assembly Language

A common mistake in terminology is to refer to machine code and assembly language. In fact it is clear from my discussion earlier that some things which are called machine code, it is the sequence of numbers held in the computer's memory which give the CPU instructions on what to do. While the CPU understands numbers, these are not readily understood by humans who would prefer something closer to the written language. For us, simply when the CPU requires the number 66 (as in opcode 1) it interprets this in human terms as "load the A register with the number in the next memory location. That assembly is somewhat cumbersome, but we could adopt a shorthand which means the same thing. Assembly language gets us that shorthand — LD A, [next] into A, the number. Assembly language, therefore, is a distinctive shorthand of

machine code operations. It is easier to write machine code in assembly language, therefore a special program called an assembler translates assembly language into machine code. The assembler translates a coded description.

The point will enter both machine code and assembly language as examples will be provided in both forms.

How to store and use machine code

Machine code is a series of numbers stored in the computer's memory. These numbers need to be kept in a safe place where they can remain undisturbed by the inevitable write-in of BASIC. One of the safest places would be in the 286's special ROM. Specimens is allowed RAMTOP data address in RAM which is the lowest accessible to BASIC. Loading RAMTOP creates a safe area in RAM into which machine code can be loaded.

Once RAMTOP is loaded we'll deal with that in a moment, then machine code can be entered. For now, the best way to do this is use a BASIC loader, a program which POKES values into a series of bytes along RAMTOP, these values being the numbers which make

up machine code. The examples at the end of use the BASIC loader program.

Give the machine code in place you then have to get it to execute. The BASIC word for this is USR. USR is a function which, to complete its action, it has to know what's called a destination. The equivalent is the memory address of the machine code routine, then valid BASIC instructions to operate that machine code routine are:

```
POINT USR 2200
RAMD USR 22000 (in the
RAMTOP)
RAMONCE USR 22000 (in
the Specimen)
LET Y = USR 22000
IF Y < USR 22000 THEN
```

There are others, but these are the ones used commonly.

The only USR works to store the current contents of the PC register, then pass into PC the address of USR. The reason for the address is PC is stored in that case, the machine code is stamped a return to BASIC, a position provided that the machine code is written to allow that return. A machine code routine can be much like a subroutine in BASIC, with the BASIC program continuing from the place it left off after control is handed back to BASIC.

The RETURN in BASIC which ends a BASIC subroutine, this is a machine code instruction which ends a machine code subroutine. In assembly language this means to RET, the machine code value is 205. You'll see that in most of my examples, but without it for security reasons the computer would tend to control to BASIC. The result of this would be that the computer continues loading machine code to store on a pet's floppy disk — and that's not the only solution to either of these to put on the power line, which is to do everything from RAM and start again. This is one of the main instructions of machine code, but if you angle the algorithm as not allowed a loop, which means you then everything you placed into the computer. The golden rule of machine code is to save or save any machine code BEFORE you put that machine code — just in case.

16-bit registers

Earlier I mentioned that there are several stores of data in the CPU called registers. Each register holds an 8-bit number, giving a range of 0 to 255. The 286 has the facility for combining certain registers, such that they contained registers can hold a 16-bit number. The procedure an effective range of 0 to 65535. The combined registers are H with C, D and E, and B with C, E, D, and F, and C with four bytes. The 16-bit number is calculated as 256 times the value in the high register plus the value in the low register.

You may have noticed from the USR instructions given earlier that a machine code routine can give a numerical value to BASIC, which can be printed on the screen (PRINT USR I, or assigned to a variable (LET Y = USR I). The number handed to BASIC is the 16-bit number in the BC register at the time of the return to BASIC. The easiest way to demonstrate this is to try a few examples.

Machine Code Examples

Simple BASIC loader routines for the 286's and 2x Specimen are shown in Plus 2 and 3. The 286 version assumes a 1MB RAM pack address. First type the loader into your computer then save the routine on tape.

All the examples given in this article will work on 286's

Plus 2 286 machine code loader

```
10 POK 10000,47
20 POK 10000,117
30 LET X = 24000
40 INPUT A$
50 IF A$ = "E" THEN STOP
60 POK X, VAL A$
70 LET X = X + 1
80 GOTO 40
```

Load RAMTOP to address 21000

Plus 3 Specimen machine code loader

```
10 CLEAR 20000
20 LET X = 20000
40 INPUT A$
50 IF A$ = "E" THEN STOP
60 POK X, VAL A$
70 LET X = X + 1
80 GOTO 40
```

RAMTOP to 20000

Plus 4a

Example 1 Simple return to BASIC

```
RET 261
```

Plus 4b

Example 2 Load a number into BC (E)

```
LD B,61
LD C,60
RET 201
```

Load a number into BC (E)

```
LD BC,600
RET 1,244,1
261
```

machines, these are shown in Fig 4. To try the examples RUN the loader program and enter the numbers on the right hand side of Fig 4, ending with an F to terminate the loading routine. For example, in example 1, you just enter 241 followed by an F, and in example 2 I'll enter 5, 1, 14, 22, 25, 1 (pressing **ENTER**) after each number and end with an F.

All you have to do is type in an example and run it. So after you have loaded the simple loader and approved it with **SAFE**, **LOAD**, **SAVE**, **LOAD**, **SAVE** writing

helps. However, you may like to consider it an achievement to enter a machine code routine, and return safely from it! For just like a BASIC subroutine in which the first line is **RETURN**. If you use **PRINT** **USR** 30000, then a number is printed on the screen. It should be 30000, as the **USR** routine puts the number into **BC** as well as into **PC** so this is the number which is in **BC** on return to **BASIC** and so is printed on the screen. The example programs in Fig 4 all modify the contents of **BC** before the return to **BASIC**.

as can **PRINT** **USR** 30000 with all of these in use at the effort.

In example 2 (1) the **B** and **C** registers are loaded with 2 numbers 1 and 58 respectively. Note that the screen **LD B** is followed by the operand 11. The number loaded into **B** (initially the operand 80) follows the operand (14) to load a number into **C**. The **BC** register pair now contains 112241-58-334. This is the number you should see printed on the screen.

A different way of loading a number into **BC** is shown in 2(1) F. A single opcode (11) in which the CPU is told the next two numbers 208 **BC**. Note the first number (244) is loaded into **C** and the second (24) is the machine code conversion — in 2 byte numbers. The first byte is dealt with first, then the high byte. **LD BC** number = 2 byte instruction, the first byte is the opcode, followed by 2 operand bytes. There are similar instructions to load the **B**, and **DE** registers, bits at a time, or as a pair.

In example 3, the contents of the **B** register are loaded into **BC** before **BC** is loaded to load the contents of any one register into another, but these

are no instructions which move the register pair to another. The result you see printed on **PRINT** **USR** 30000 may well vary, as this depends on the contents of **HL** at the time of calling the routine. The final example prints the **BASIC** instruction **PRINT** **USR** 30000. The **B** register is loaded with 0 and the **A** register is loaded with the contents of byte address 30000. The brackets around 30000 in the assembly language instruction **LD A, (30000)** means the contents of the memory at instruction **LD A, (30000)** will have to load the byte value into **A**. Then register **A** is **C** with **LD C, A**. Address 30000 contains the first byte of our machine code routine, so you should see 5 printed on the screen.

So far, the machine code examples have not been very shortening, but, as it is said, the address (and all) rightly gets to grow. So if you've got this far and followed most of what I have said, then in the next issue of **ZX Computing**, I'll be introducing more of the instruction set, and have a few more routines, more which might just produce a "wow".

Figure 4(a)

Example 2 - Load the contents of HL into BC

LD B H	80
LD C L	77
BC	334

Figure 4(b)

Example 4 - PEEK an address in memory

LD B 0	00
LD A 00000	5848317
LD C A	78
PEEK	301

Tortoise wise

or lines from a parent who gets left behind by David Stewart



My twelve year old son is loading **Interwise**.

"What's the problem son? Can I help?" I use my most sympathetic tone to convey parental concern.

"Only if you know how to get infinite lines or produce the kind of screen graphics in an **Ultimate game**."

He stands up and head bowed leaves the room. I turn to his nine-year-old brother. "What's the matter with him?" I ask. "Infinite lines? **Ultimate Game**? It is a bit deep isn't it?"

"You can't help us. You don't know enough." He joins the brother upstairs in their room. They have left me looking again.

We parents have always had a lot to cope with. **Measuring** and the **Jays** of **Forestwood**. But it's getting worse. The **Jays** I mean.

Oh I can handle the pop music and their spate on jeans. When I closed my eye yesterday I had the distinct impression I had seen my friends and I in the local **break dancing** club. Only I don't recognize me or advance my attitude. Nothing to worry about as long as I see in touch with my growing son.

No, the real threat to my cerebral equilibrium and self respect comes from a home computer. The one is called

Speccam. Before that we had another called **Z801**. And I've tried, Heaven knows I've tried, and I've still trying to get on with these children from the future.

But no matter how hard I try to "get it all together" computer-wise, I am this side of it all hanging out and falling apart.

Remember the tale of the Tortoise and the Hare? Well I'm in the Tortoise and I've got at least TWO Hares concerned with Tortoise-wise. I'm losing the race but I mention what **Wile E. Coyote** I've got left as a middle aged parent.

Waren's there a time not so long ago when parents were supposed to know everything and be able to do most things? (I'll bet) in not more than Tortoise-wise. I'll bet there are Tortoise like me, practically every other home in Britain who gets the **Jet Set Willy** and the **Yodabingers** a featured time a week. Not to mention having our tortoise (fantastic and not our **Wile E. Coyote**). And I mention what I think I may have been absent about as long.

He doesn't even know what **BASIC** means, "they said" when I hear friends come round.

"I do I do. It is a computer language."

"Oh big deal, what does it stand for?"

"Well, I read it as it is a book. I've just forgotten that it all I've got other things to think about apart from your future you know."

"I do what?" they ask innocently.

"Well we don't know that one. It is probably for the **BBC** or the **Commodore 64**. Dad, when can we have another **Speccam**? It's boring with only one. Then you could buy an **adult dress** for our birthday and a **Modelm** for Christmas."

Is there such a thing as a mind-blowing screen I wonder Tortoise-wise I'm going to be a long race I fear.

This old house

still has a few surprises for the unwary. Enter N Kidd's program and enter the house - if you dare!

There are a lot of adventure games currently available on retail order (most are either as printed) but a different look of such games in magazines. This is just one of the reasons why I have written this guide for the 108 ZX81. There are several others! Firstly, I think people should enjoy playing the game and in the same time learn more about programming techniques, especially, I would like to mention:

The idea of the game is that the player finds himself transported to an old house and must explore, find the password and £100 before he reaches the end. Just to make it difficult, he will encounter various problems, be he may wish to explore rooms, locked doors and so forth but I will not reveal anything - it is up to you to find out with the aid of the instructions.

With a little knowledge of computing, a key to the variables I have used and a guide as to what each part of the game does, the game is easily adaptable and a lot of fun. However!



Variable Use

M()	Master string - holds the 30 characters variable
W()	Wagon string - holds the 10 wagon you could find and use
TH()	Treasure string - holds the different types of hidden treasure
OB()	Object string - holds the 8 objects to aid you on your journey
PD()	Password string - holds the 8 different passwords that could be chosen
D4	Door present message
R4	Door closed at today's password
AD(1)	Door closed at today's password
AD	Door of the week string
DR(1) LR	Message saying string (uses printing out statements freely) (uses)
DR(1)	Message you own use
T	The amount of treasure you can have in £1
Y	Room entered during battle
Y(1)	Room in present
Y(2)	Wagon code (8) - W(8)W
S	Right strength (depends on W(1) and £1)

AA 85

AAA(88)

L

MS

A

S(824)

K(1) W(1)

R(1) X(1)

S(10)

Your location on the screen from the AT command

Direction in which to move (representing door numbers)

Character - alternating character for either dark room, no floor or exit

Strength of message

What will happen to you this turn? (see line 1440)

Will give two lines of print but not destroy the rest of the display as CLM does (with S(8) R(1))

will only clear one line!

Less convenient, hardworking variables sometimes doing more than one job

Structure of the program

Line

10-60

66-120

120-148

Furniture

Defines constants, names using ZX81

READDATA routine

Defines messages

Defines types of treasure

160-200 Define objects that you may find
 200-240 Define password
 Sets up screen display of house. Note the part that prints on * then later PRINTS the screen for cheat enter (sk) and changes item to an open/closed door or a then wall
 330-360 Input user's command
 400-415 Win routine
 435-500 Move routine. Is it open/closed door or then outside wall? If so has the player the necessary object to pass? If * then look out for a discarded room etc., or the possibility of one coming soon
 515-1005 Broken object routine. Remember L3 = "Is you there if okay?"
 1010-1014 It looks great today's password for a few seconds
 1030-1038 Broken weapon, but's less dangerous one
 1110-1114 OK looks to the beginning
 1200-1235 Describe transfer data
 1240-1478 Battle with the monster
 1410-1470 Printing an object
 1710-1770 Finding a weapon
 1780-1980 Using an object
 2000-2060 Reading the wall - the text
 2060-2080 From the instruction page by page
 2100-2130 Your first stolen fee a 20000 rounded
 2400-2490 Setting up monsters
 2600-2854 Saving program during running

```

5 CLEED
6 TOLD
7 LET A6= THIS OLD HOUSE
8 DRAW R6
9 PLOT
10 LET A6="BLUNT SHOT,TROLL,OH
OUT,THE,GET,SIGHT,ZOBBIE,MIRRO
ROUND,BOUL,SHARPEN,GET,DRAGON,
OR,IN,AND,SHOES,MYOARD,DEMON,CYC
LOPE,PHOENIX,JACKET,DRAGONH
GEORGE,HERO,HERO,UBILED,SMITH,
MAGPIRE,HELL,ROUND,HOUSE,SWAMP,OR
C,SL F
11 GIM FR:100,101
12 FOR P=1 TO 30
13 LET A=P
14 LET A6=F(A)+OR(1)
15 LET A6=H(2) TO 1
16 IF A6(1)="" THEN GOTO 55
17 LET P=P+1
18 GOTO 22
19 LET A6=H(2) TO 1
20 NEXT P
21 LET A="503300,REN KNIFE,,J
AC,KNIFE,DRAGON,POSS,LANCE,JAVE
L,IN,ROSHIR,AXE,SWARD

```

```

70 DIM W(10,10)
71 FOR P=1 TO 10
72 LET A=P
73 LET W=P(A)+OR(1)
74 LET A6=H(2) TO 1
75 IF A6(1)="" THEN GOTO 110
100 LET A=P+1
105 GOTO 55
110 LET A6=H(2) TO 1
115 NEXT P
120 DIM T(5,4)
121 LET T(1,1)="BRONZE"
122 LET T(2,1)="SILVER"
123 LET T(3,1)="GOLD"
124 LET T(4,1)="PLATINUM"
125 LET T(5,1)="DIAMOND"
126 LET A6="HAMMER,TORCH,KEY,CL
AW,F,POD,DRINK,ARROW,SP,INT,PH
55 GOTO...

```

Now you should be able to build the program to your own specifications or add a few more objects, but watch out for memory overflow! To put you some idea of how this is done, the following is an example of how to put another word into the equation of the password for today.

- 37

█ 100

Inverse 0 = 100

Inverse 6 = 170

Inverse P = 171

Note: There are only a few graphic characters to be careful with in this program, in general the following instructions have been used:

- 1 Lower case letters on their own like the inverse letters
- 2 Graphic characters are indicated by lower case 'B'

When a number of objects are needed you will see notation as in line 201: 226 93 = 965 = out
 This means a graphic found on key 3. Out of the graphics on key 8 and a graphic from line 4. Note: 'B' means inverse space or graphic space.

The following lines contain these constants:
 200 270 280 282 300 to 400, 351 302 370 5000 3070

Despite the occasional quibbling mistake, this is an excellent game and worth the time spent in writing it. The only problem, Spectrum users may find a word with the PRIN PRIN 1 6388 = 268 * POE, 14-220). This returns the character code of whatever is at the current position (marked by the previous line last line 311)320). Repeat with the SCREENOUT AT 14 and the inverse character number to allow for the off-screen in 2001 and Spectrum character codes

1) For another four letter word (a reasonable one!) edit the 202 and place the new word directly after 226P but line 210 and change it to P(1)Q 4)
 edit line 218 and change it to F = 170 70)
 edit line 2090 and change it to A = INT(999*10)

2) For a six letter word eg PRABIT
 edit line 206 making two spaces after every word and place the new word after 2NAP PRABIT. Note carry on so for 10 but substitute the 4 in line 210 for a 6

Simple but effective isn't it? Once you've got the hang of it you could almost compulsively change the program.

For those with a Spectrum, line 220 can be changed to fit quote from the ZX81 manual: "Address of print cursor in display file cursor PCRA6 which gets output printed elsewhere. Thus line 230 now reads Print on 5:20 (out + forget the) and 226B 3 23 - ". The other 226B values are

```

320 FOR P=1 TO 10
330 FOR S=1 TO P
340 PRINT AT P,S
350 IF PEEK (PEEK 16386+256*P+S)
360 LET A=INT (RAND)
370 LET B=CHR$ (112+8*(A+1)*S)
1182734: (X52) 848: 8114=8142P+11X
4414971
375 PRINT AT P,S,B
380 NEXT S
390 NEXT P
400 FOR I=16416
410 GOTO 410
420 GOTO 410
430 PRINT AT 23,0,"OPEN DOOR"
440 LET B=INKEY$
450 IF NOT (B=" " OR B="U" OR B="
460 " ) THEN GOTO 470
470 IF B="U" THEN GOTO 480
480 PRINT AT 23,0,B," TO 32"
490 IF B=" " THEN GOTO 490
500 IF T=0 THEN LET C=C+1
510 IF T=0 THEN GOTO 430
520 LET T=T-1
530 LET C=C+2
540 LET A=1
550 GOTO 410
560 GOTO 410
435 PRINT AT 23,0,"LEFT-CORNER"
440 PRINT AT 23,0," "
450 LET B=INKEY$
460 IF NOT (B=" " OR B="S" OR B="
470 " ) THEN GOTO 430
480 IF B="S" THEN GOTO 430
490 PRINT AT 23,0,B," TO 32"
500 LET C=C+1
510 LET D=D+1
520 PRINT AT 23,0,B," TO 32"
530 LET T=T+1
540 PRINT AT 23,0,"OPEN DOOR,YO
550 U USE TORCH"
407 IF INKEY$="" THEN GOTO 407
410 PRINT AT 22,0,B
420 GOTO 470
430 IF T=1 THEN GOTO 470
440 PRINT AT 23,0,"CLOSED DOOR,"
L USE TORCH"
325 FOR P=1 TO 4
330 IF 16716="K" THEN GOTO 330
340 NEXT P
345 PRINT 23,KEY
350 GOTO 470
355 PRINT 23,KEY
360 LET C=C-1
370 IF INKEY$="" THEN GOTO 380
380 PRINT AT 23,0,B," TO 32"
390 PRINT AT 23,0,KEY,""
400 GOTO 480
410 PRINT AT 23,0,"THEN ULL"
420 FOR P=1 TO 4
430 IF 16716="H" THEN GOTO 440
440 NEXT P
445 PRINT 23,"HANNER"
450 GOTO 470
455 PRINT 23,"HANNER"
460 LET C=C-1
465 GOTO 480
470 PRINT AT 23,0,KEY,""
480
490 LET L=PEEK (PEEK 16386+256*
PEEK 16390)
510 IF L=171 THEN GOTO 570
515 IF L=171 THEN GOTO 700
520 LET B=INT (RAND)
530 IF B=0 THEN GOTO 540
540 LET C=C+1
550 PRINT AT 20,0,B
560 LET B=C-1
570 GOTO 510
580 IF B=0 THEN GOTO 700
590 PRINT AT 20,0,"THE ROOM IS
600 DARK"
610 PRINT AT 20,0,KEY,""
620 FOR P=1 TO 4
630 IF 16716="T" THEN GOTO 700
640 NEXT P
710 PRINT AT 23,0,KEY,"TORCH"
720 IF INKEY$="" THEN GOTO 720
730 PRINT AT 22,0,B
740 GOTO 470
750 PRINT AT 23,0,KEY,"TORCH"
760 LET C=C-1
770 IF INKEY$="" THEN GOTO 780
780 PRINT AT 22,0,B
790 GOTO 470
800 PRINT AT 23,0,KEY,"TORCH"
810 LET C=C-1
820 IF INKEY$="" THEN GOTO 830
830 PRINT AT 22,0,B
840 GOTO 470
850 PRINT AT 23,0,KEY,"FLAME"
860 GOTO 370
870 PRINT AT 23,0,KEY,"FLAME"
880 LET C=C-1
890 IF INKEY$="" THEN GOTO 900
900 PRINT AT 22,0,B
910 GOTO 470
920 IF INKEY$="" THEN GOTO 930
930 GOTO 470
940 LET B=INT (RAND*10+1)
950 IF B=10 THEN GOTO 1200
960 GOTO 990+10*B
970 FOR P=1 TO 4
980 IF 16716="H" THEN GOTO 994
990 NEXT P
1000 GOTO 1200
1010 PRINT AT 21,0,"YOUR TORCH IS
ATTN" 23 FLAT" AT 22,0,B
1020 GOTO 930
1030 FOR P=1 TO 4
1040 IF 16716="K" THEN GOTO 994
1050 NEXT P
1060 GOTO 1200
1070 PRINT AT 21,0,"YOU FIND YOU
R KEY IS A BROAD PEARL" AT 22,0,L
1080 GOTO 400
1090 FOR P=1 TO 4
1100 IF 16716="G" THEN GOTO 994
1110 NEXT P
1120 GOTO 1200
1130 PRINT AT 21,0,"YOUR PLAN H
IS GOOD-CORN" AT 22,0,L

```

SPECTRUM / ZX81 ADVENTURE

```

976 GOTO 935
978 FOR P=1 TO 4
979 IF IS/FI="P" THEN GOTO 974
980 NEXT P
981 GOTO 1290
984 PRINT AT 21,0 "YOUR FOOD HAS
A SOME OF" AT 22,0,LS
985 GOTO 930
988 FOR P=1 TO 4
989 IF IS/FI="D" THEN GOTO 984
990 NEXT P
993 GOTO 1290
994 PRINT AT 21,0 "YOUR DRINK HAS
BE DISAPPEARED." AT 22,0,LS
995 GOTO 930
998 FOR P=1 TO 4
999 IF IS/FI="S" THEN GOTO 994
1000 NEXT P
1003 GOTO 1300
1004 PRINT AT 21,0 "YOUR BARRAGE
IS THEM AT 22,0,LS
1005 GOTO 930
1008 FOR P=1 TO 4
1009 IF IS/FI="S" THEN GOTO 1004
1010 NEXT P
1013 GOTO 1290
1014 PRINT AT 21,0 "YOUR SPILTY
HAS SHIPPED" AT 22,0,LS
1015 GOTO 930
1016 IF IS="E" THEN PRINT AT 21,
0 "YOU FIND THE PASSWORD IT IS
A" REVERSE IT,
1017 FOR AS TO 30
1018 NEXT AS
1019 PRINT AT 22,0,SS
1024 GOTO 1790
1026 PRINT AT 21,0 "YOUR 'AS'
IS BROKEN"
1031 LET AS=4
1032 IF AS THEN LET AS=1
1033 PRINT AT 22,0 "YOU FIND A
GEM"
1034 LET AS=AS+1
1035 IF AS="5" THEN GOTO 1030
1036 PRINT AT 21,0,SS
1037 GOTO 910
1038 GOTO 1290
1039 IF INT (RND*3) IS THEN GOTO
1110
1110 PRINT AT 21,0 "YOU ARE TOOK
SPOTED BACK TO THE START" AT
22,0 "AT 3.1.0"
1111 LET AS=1
1112 LET AS=1
1113 IF AS="2" THEN GOTO 1110
1114 PRINT AT 21,0,SS
1115 GOTO 910
1120 LET AS=INT (RND*4)+1
1121 IF AS THEN GOTO 1440
1122 LET AS=INT (RND*30)+1
1123 LET AS=INT (RND*10,000)+1
1124 PRINT AT 22,0 "YOU MEET A
MAN WHO HAS A STRENGTH OF 20,
HE IS NOT AS" OF AS" OF AS"
1125 LET AS=AS+1
1126 IF NOT (AS="P" OR AS="L" OR
AS="T") THEN GOTO 1440
1127 PRINT AT 22,0,SS
1128 IF AS="P" THEN GOTO 1290
1129 LET AS=INT (RND*30)+1
1130 IF AS THEN LET AS=
1131 GOTO 910
1132 GOTO 1440
1133 IF AS AND IS THEN GOTO 10
90
1134 PRINT AT 22,0 "YOU ARE TOO
LATE YOU MUST GO"
1135 IF AS="E" THEN GOTO 1030
1136 PRINT AT 22,0,SS TO 30"
1140 GOTO 1290
1142 IF I,AS AND AS=4 THEN

```

```

LET IS=1
1070 LET AS=INT (RND*4)+1
915,70,1)
1075 IF AS=0 THEN LET AS=0
1076 IF AS=1 THEN LET AS=301
1077 IF AS=2 THEN GOTO 1440
1078 LET AS=INT (RND*30,0,0,0)
1081
1082 IF P=0 THEN LET AS=
1083 IF P=1 THEN LET AS=
1084 GOTO 910
1085 IF INT AS=0 OR IS=0 AND AS
NO AND AS THEN GOTO 1440
1086 PRINT AT 22,0 "THE 'AS'
HAS A STRENGTH OF 20, AT 20,
0, 'MIGHT OR"
1087 GOTO 1290
1088 LET AS=INT (RND*4)+1
1089 PRINT AT 22,0 "THE 'AS'
IS DELETED" AT 22,0 "YOU FIND
A"
1090
1091 AS=AS+1 THEN GOTO 1440
1092 LET AS=INT (RND*1,000)+10
0,15) (RND*11)
1093 PRINT AT 22,0,SS
1094 GOTO 910
1095 IF AS THEN GOTO 1790
1096 IF AS THEN GOTO 1790
1097 IF AS THEN GOTO 1030
1098 PRINT AT 21,0 "YOU FIND A
GEM"
1099 PRINT AT 22,0 "SUCK IT UP O
R"
1100 LET AS=AS+1
1101 IF NOT (AS="P" OR AS="L" OR
AS="T") THEN GOTO 1440
1102 IF AS="L" THEN GOTO 1690
1103 FOR P=1 TO 4
1104 IF IS/FI="L" THEN GOTO 1690
1105 NEXT P
1106 IF IN="E" THEN GOTO 1690
1107 PRINT AT 22,0,SS+1 TO 32
1108 GOTO 1690
1109 GOTO 1690
1110 FOR P=1 TO 4
1111 IF IS/FI="E" THEN GOTO 1690
1112 NEXT P
1113 PRINT AT 22,0,SS+1 TO 32
1114 GOTO 1690
1115 LET AS=INT (RND*10)+1
1116 PRINT AT 22,0 "YOU FIND A
GEM" AT 22,0 "SUCK IT UP OR"
1117
1118 LET AS=AS+1
1119 IF NOT (AS="P" OR AS="L" OR
AS="T") THEN GOTO 1790
1120 IF AS="L" THEN GOTO 1770
1121 LET AS=AS+1
1122 LET AS=
1123 PRINT AT 21,0,SS+1 TO 32
1124 GOTO 1790
1125 LET AS=INT (RND*10)+1
1126 PRINT AT 22,0 "YOU FIND A
GEM" AT 22,0 "SUCK IT UP OR"
1127
1128 LET AS=AS+1
1129 IF AS="T" AND AS="H" THEN
GOTO 1790
1130 IF AS="H" THEN PRINT AT 21,
0,SS
1131 IF AS="H" THEN GOTO 990
1132 PRINT AT 22,0 "WHICH OBJECT
IS"
1133 IF AS="E" THEN GOTO 101
0
1134 LET AS=AS+1

```


More exciting games for your ZX

Atari **Atari** **Atari**



Atari **Atari** **Atari**



Atari **Atari** **Atari**



Atari **Atari** **Atari**

Remember the following games
 O'Brien O'Brien O'Brien
 O'Brien O'Brien O'Brien
 O'Brien O'Brien O'Brien
 O'Brien O'Brien O'Brien

Name _____
 Address _____

 I would like to see _____



Artificial Intelligence

Sinclair QL

By Peter Jones and Michael Palmer

Artificial Intelligence: Backward

By Peter Jones and Michael Palmer

Other Titles

The Sinclair QL for Artificial Intelligence: Backward, £12.95
 The Sinclair QL for Artificial Intelligence: Forward, £12.95
 The Sinclair QL for Artificial Intelligence: The Game, £12.95
 The Sinclair QL for Artificial Intelligence: The Language, £12.95
 The Sinclair QL for Artificial Intelligence: The Library, £12.95
 The Sinclair QL for Artificial Intelligence: The Manual, £12.95
 The Sinclair QL for Artificial Intelligence: The Tutorial, £12.95
 The Sinclair QL for Artificial Intelligence: The Workbook, £12.95
 The Sinclair QL for Artificial Intelligence: The Exercises, £12.95
 The Sinclair QL for Artificial Intelligence: The Projects, £12.95
 The Sinclair QL for Artificial Intelligence: The Reference, £12.95
 The Sinclair QL for Artificial Intelligence: The Appendix, £12.95
 The Sinclair QL for Artificial Intelligence: The Index, £12.95
 The Sinclair QL for Artificial Intelligence: The Glossary, £12.95
 The Sinclair QL for Artificial Intelligence: The Bibliography, £12.95
 The Sinclair QL for Artificial Intelligence: The Index, £12.95
 The Sinclair QL for Artificial Intelligence: The Glossary, £12.95
 The Sinclair QL for Artificial Intelligence: The Bibliography, £12.95

Name	_____	Address	_____
Address	_____	City	_____
Postcode	_____	Country	_____
Telephone	_____	Daytime	_____
Evening	_____	Weekend	_____
Other	_____	Other	_____
Address	_____	Other	_____

Please send me _____

ALL-IN-ONE

Spectrum Interface

Drive Unit 1

Drive Unit 2

RS232 Interface

Centronics Interface

Spectrum owners! Imagine what great use you could make of all these components. Rotronics has the great news of all in one microdrive styled compact unit. All the power and convenience of floppy disk drives for years. But in a fraction of the cost.

A complete package

Wafadrive is extremely versatile. The major components are housed within this one unit - the micro interface, two 1.2MB drives, RS232 serial and Centronics parallel ports. Also included in the package are: software and documentation. It's a superb value proposition. The micro interface forms the nerve centre of Wafadrive controlling all its major functions. The dual drive unit junction and the ability to connect standard programs directly provides professional system flexibility. All this without a mass of separate components and valuable space. Wafadrive is the ultimate in compact microdrive storage. A complete package in a very powerful system.

Speed, reliability and capacity

The wafers contain an endless loop of specially developed magnetic tape allowing high speed read/write capability. The result is fast access without data loss. Three sized wafers are available with a maximum formatted capacities of 184, 544, and 1204. The 5289 wafer costs £3.95.

Data transfer rate is approximately 20K per second. Access time is proportional to capacity. 120K wafers are ideal for program development with the larger capacity wafers being more suitable for personal use and archiving of completed programs. Available. Mechanical longevity is determined by the size of High grade materials throughout and full interchangeability between read/writes is guaranteed.

Extreme software applications

Wafadrive provides intelligent file handling and easy access to data. Program development and other applications can be performed with ease. Data word processing integrates with the specially developed software package included with Wafadrive. It deals with a user made miscelaneous program. Whatever your mood, you'll find the application of Wafadrive software challenging and rewarding. All in versions of software will be available for most popular hardware. As software packages will be compatible.

For further information contact us on our 1-800-800-4000.

ALL-IN-ONE PRICE
£129.95 (inc. VAT)

Rotronics Ltd, Station
House, Watlington Road,
Leeds, West Yorkshire, LS16
5JH. Telephone: Leeds
0113 234 761 (0800-4000)



ROTRONICS
WAFADRIVE

Floppy discs and the Spectrum

Is it possible? Ray Elder investigates

One late evening meeting found me, in a rather long 100-watt Sanyo in a room of ZX Computing, I used Technology Research Ltd, had not seen fit to send one of their disc drives that I wrote that, and before the hour had passed the newstands, they had finished me over.

Needless to say they were quite intrigued at what appeared to be a complete layoff, but during the meeting, they were explaining explanation and invited me to visit their premises. Well, a chance of a day out was not to be missed and so off I went.

The Spectrum central heating was on, and I was greeted and my to find this a large, sprawling complex of offices and warehouses and a great deal of activity was taking place.

I was invited to TPL's office where I was met by Mr. Rutherford, the general manager, a pleasant gentleman with a wealth of experience in marketing and who introduced me to Steve Tom, who is the marketing director and to Steve Mok, managing and technical director and who is the inventor behind the product.

The workshop is just what you would imagine such a place to be, lots of components, strange looking half finished gadgets and a steady hum of activity. Everything is done to a high degree of accuracy, and a top priority is to make sure that the machine has been purchased to ensure the retail retailer soldering and to remove the chance of any errors.

I had asked for a loan of an interface but from Mr. Rutherford showed his business acumen and gave me one, on the spot. If you have it on loan you'll maintain us once in your review if you have 1 permission then you'll be able to try it out with the latest devices as they're produced and keep everything

in a report to compatibility. Regular readers will recognize this as being true as I'm always mentioning the ZX Lord 111 interface and ZX Tronix keyboard.

Merge

Back at the office I'd been informed that I had an interface and asked if there was a spare drive I could use. What type? What capacity? What DPS or GDS? The experts asked.

"No idea," I said, "don't you just plug it in!"

The game of devices laughter at my ignorance, somewhat demoralizing confidence. As it turned out there wasn't one there anyway. So I contacted some of the companies who sold disc drives, the reaction was much about the same but also there was a feeling of disbelief. A disk drive for a SPECTRUM?

Eventually I phoned Vogen, their attitude was similar at first but soon changed to one of interest and they agreed to provide me with a drive. By now I was able to inform them that it was a standard floppy connector — I'd read the interface manual!

Verify

Sure enough, two days later a huge parcel arrived beside of which, and taking up approximately 1.20 of space but very well protected, was the disk drive.

Plug the interface into the back of the Spectrum, a tight fit normally, but with the ZX Tronix keyboard very much so in the end I used the Commodore slot extension board between the interface and the Spectrum, a much better fit all round. The interface has a full port at the rear and I used the ZX Lord 111 computer interface there first. It worked but the overall depth of the optical was

disk drive connector for cable to the socket on the right side of the interface plug in the Spectrum power supply to the ground socket on the left of the interface, hold my breath whilst keeping my fingers crossed and switch on.

List the TRX interface

The 8 Disk interface as a call out is a large black ABS box which fits into the Spectrum, it's full through just as intended as well as sockets for the Spectrum PSU and the drive motor.

It is a nice looking unit and it was quite a surprise, the compact size and soldering was tidy and neat.

The accompanying manual is a joy to read, I read it first while waiting for the drive to arrive



and could understand it without having to leave the thing working in front of me to examine it more.

In a clear and concise manual each of the functions are explained, all the standard BASIC and LOGO formats are provided plus a facility for writing the machine code for specifying the run address as a third parameter when using Moby is not supported and this option is set at first. However, after extensive use, I can honestly say that I never had to touch BASIC.

Some Microdrive commands are used, BPAUSE, CAT and MOVE to copy up the disk, and you can then drive past the recorded data from the interface.

On power up the interface is automatically brought in, the TRL notice is displayed and the disk password is requested (each disk used can be protected by its own password). Once this

is entered then the interface type is displayed, you can then access the disk commands by entering RETURN (control) keys.

The Microdrive file system is governed by the commands the function OPEN and CLOSE are not used. Drive read file is working on it, but I can see no mistakes naturally as to my knowledge there is no commercial software using it and there are many ways of getting around it.

A useful device is the use of F00K and F00L, disk commands which will allow you to have random access to any sector of the disk. In comparison any programs could make use of this to access the 255 bytes for 512K.

The disk commands can be accessed from within both Basic programs and machine code programs. Don't get full instructions are given in the manual.

Vigen disk drive

Vigen are essentially a computer supplier and were interested in the idea of linking a disk drive to a Spectrum. I got the impression from some sales papers that this couldn't be bothered with as a lowly printer.

Vigen have a large range of drives available at a large range of prices, but the one I tested for was a very simple 40 track, single sided drive plus built in PSU.

The one supplied was the T16C, 16001 and goes then beyond. The cost for the unit is £199.95.

The drive itself has a smart, long thin front case with a black front which is mounted and a lever controls their apart from a slight nibble on the drive motor and stops operation in almost quiet.

The case dimensions are 148x41x200mm, and it weighs 1.4kg, ie. it's bigger and heavier than the standard Spectrums. There's not much to see about the disk drive except that it has performed perfectly and to recommend the company is good as they were very helpful.

Run

CRASH! Oh dear, however the problem was soon traced down to the incompatibility of the YTK 0300 and the interface. Both avoided to interface and operate on power up.

TRL were again helpful and suggested a simple modification which would overcome this. In effect, to cut out the extra start up all that is needed is a small single pole, two way switch. They offered to modify my interface and send that for a small charge (they will fit a replacement interface if required) it seems a pity that it couldn't have been built in as standard.

After that all worked perfectly.

The interface was interconnected 128 bytes of the Spectrum RAM, and apart from the usual problems which all microdrive owners trying to convert programs encountered, getting programs onto disk was simple stuff!

Programs which were written in a professional manner for serious purposes were obvious by providing with a field a documentation which made it easy.

Termed 15, probably the most widely used and professional word processing software for hobbyists, including 4 more including software disk load time if such a

Microdrive from Carwell's systems. The most interesting program I have is the user for the Spectrum disc transfer rates if it was designed for disk.

So I tried Jet Set Why No problem.

Here is a comparison:

Jet Set Why loading times	Time
4.33 mins	
Microdrive 5.50 to 45.15	
more depending	
on tape position	
Disk	11.10

REM

TRL administered the interface working with the standard interface 1. It is fully compatible with so that the 16032 and not working facilities can be used.

This is particularly useful in an educational situation as it means that several Spectrums can have use of a single disk drive through a central controlling Spectrum.

The latest device from TRL is a Carwell's interface for the QL which plugs directly into the 16032 socket. This should cost around £45.00 (ie. V&V under the production model) I saw the unit was built into a connecting cable.

A similar unit is planned for the Spectrum interface 1. 16032 port and should be available soon.

Output

Very impressive indeed, but also expensive. At £15.00 for the interface plus £199.95 for the drive £214.95 this is certainly to be the system for the occasional user.

Indeed, if you then use a games set of equipment is to get at those drive quicker than the Microdrive is more than adequate. A disk system could be a waste of money in this case.

However, if you take your hobby seriously or use your Spectrum for any business purpose, then this system is well worth considering. In the long run the price of disks compared to that of microdrives — £1.00 to £4.00 — is worth noting.

Disks, although not the perfect storage medium by any means, have been intended for a while and the drive are well tried and easily reliable.

And finally, if you get something like a disk drive it is almost certainly going to be compatible with another computer if and when you upgrade from your Spectrum, whereas the Microdrive almost certainly will not.



A L I E N



In space no one can help you reform.

 <p>MELISSA HILL The Goddess Commander - Personal file</p>	 <p>ANDREW ARCHER First Lieutenant Captain's Log</p>	 <p>KORPLOSH QIP Nervous Extraterrestrial Threats Analyst</p>	 <p>CAPTAIN In a Fight-or-Flee Instinct Mode</p>	 <p>MAJOR Resolute, Brave, and Fearless Soldier</p>	 <p>MAJOR Aftermath Liaison, Training</p>	 <p>MAJOR Former Aviator Operations, Liaison</p>	 <p>MAJOR Former Aviator Operations, Liaison</p>
-------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------

THE CREW
Personal files follow
yours to command -
well after bot

MIND GAMES
SPECTRUM 41K • CDM54



Featuring
the unique
Personality Control System

No. 1 Golden Series, London M1R 2AB, Telephone 01-437 9606



Calling all whizz kids – my CLEVER CLOGS games are the ultimate challenge!

Three exciting games of skill and chance use the combined work of real life 'Clever Clogs' and 'Real Teachers' to give you the ultimate challenge in computer games that really make learning fun.

Exciting graphics, a wide choice of difficulty levels & an exceptional knowledge pack for serious players in the single make 'Clever Clogs Bonus' best buy in early learning software.

Starting with 'Study Time' for Age 3-11, the 'Clever Clogs' team bring a new approach to learning for school boys and girls. And if you join the 'Clever Clogs Club' you'll be automatically eligible for many money-saving special offers.

Searchable files available at W H Smith, Morrison and other leading retailers.

CLEVER CLOGS early learning games

produced by
ARCUS PRESS SOFTWARE
Garden Square, London, W1E 3AE
Telephone 01 437 0935



STUDY TIME
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG CHALLENGE
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG QUIZ
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG MATHS
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG SCIENCE
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG HISTORY
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG GEOGRAPHY
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG MUSIC
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG ART
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG DRAMA
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG DANCE
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG SPORTS
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG GAMES
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG PUZZLES
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG TRIVIA
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG FACTS
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG FIGURES
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG WORDS
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG NUMBERS
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG SHAPES
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

THE BIG COLORS
for ages 3-11
A fun way to learn
the basics of
reading, writing
& maths.

Available at W H Smith, Morrison and other leading retailers.
Supplementary Knowledge Packs £2.95

Spectrum Arcade

David Harwood gives us the low-down on some high-scoring arcade games

Combat Lynx by Burell Software

Having wrapped my hands in mouse and joystick through, I thought that I would start off with the best of the bunch—*Combat Lynx* by Burell for the ZX Spectrum, comes in a small plastic case which is more like a video cassette case than a software box, with a list of pictures on the front which should attract the punter.

I was more attracted to the name—"1100 Harwood" if my copy of the game did not have a blue plastic cassette body with the words "BURELL" impressed on it, would I have bought it? Well, in all of my life but this, the last was not buyers and not 1100. I think that this is a brilliant idea to test software given, which is being done here down under and I definitely hope that more other companies will follow suit.

Combat Lynx is described as an air-to-ground battle simulation game and it is what appears, 100%, machine code. The manual reads "probably the most comprehensive 'real time' real simulation ever written" (does this remind you of a legal advert?)

The idea of the game is to prevent your base from being attacked by the enemy and also to stop yourself being blown up in return.

At the beginning of the game the user has the option to select the keys and save or load game and key definitions. The staff level then needs to be selected between one and four, with four being the hardest and with four bases to look after. Your base D has lucky got an endless supply of fuel weapons and the magical touch of remaining injured troops.

Enemy vehicles will slowly attack all your bases unless stopped by allied vehicles or yourself. As all you supplies are in base D, this means you eventually lose. There is unfortunately only one hit weapon leaving you totally dependent on weapon supplies as injured cars can't be recuperated.

Now back to the helicopter,

which at the start of the game is hovering above base D and by gently leaving the "down" key, you land at Base D and are presented with a set of screens in order to select weapons and traps. Passing through the screens, you will end up with a set of injured personnel, a helicopter and various weapons collected. There are six types of weapons of your disposal, each having different characteristics. The more weapons and personnel that are killed the more fuel is automatically dropped as there is a maximum weight allowed on board.

There are mines, which can be strategically placed around your base to prevent a land attack on them, there are heat seeking missiles, air-to-ground missiles and three unguided missiles.

The intelligence map is a map of the battlefield with the over ground in different colour to the lighter ground and all the bases and vehicles, both allied and enemy, are represented by symbols. It is advised that you do not blow up the allied vehicles as you will definitely need all the help that you can get.

At any time the co-ordinates of all bases can be found out. This by using the map the general direction may be found out. The map is controlled by using the cursor keys with North always pointing upwards.

As well as this it also has a message screen the colour of which your bases are under attack and also when they have

been totally wiped out, as well as any other appropriate messages. Fuel, speed, temperature gauges and a compass are all present in order to help the helicopter pilot, to our lives and with the war.

The helicopter, seen from behind, is easily controlled although a flicking of the right stick occurs when you turn more than 45 degrees in order to put you in the rear of the helicopter again. This can put you off at first, but as it is very easy to handle your game as there isn't any delay in rotating the flight angle. The weapons are fired first of all entering the desired system, pressing the weapon's sight key, lining up the back-sight and finally pressing the fire button. This process can be too long if the game is in flight. By the time this necessary process has been effected the enemy has disappeared. This is why I found the fuel seeking and heat guided missiles most useful, as there is no real need to rotate and line up the weapons sight.

An excellent game, which kept me (repeatedly) awake to the early hours of the morning, that you be enjoyed by all. You are placed in the centre of a real-time battle situation and as you own base as to how you may win the battle.

The game is not for the very young or the elderly, but even if you come in the middle of the above range, I am sure that you will find that simulation is a very fast, fun concept on the best I sup-

pose was the sound, which can be turned off and on, and is as clear as any music can get to a realistic helicopter's noise.

So, all in all brilliant graphics, outstanding simulation — a real winner game.

INSTRUCTIONS	— 85%
PRESENTATION	— 88%
ADAPTABILITY	— 86%
VALUE	— 88%
ZXC FACTOR	— 10

Where the ZX Spectrum is a mark out of five recommending whether I would buy the game.

Dragonfire by Cheetahsoft

You are Young Prince Wilbur, whose illustrious father is to recover the nation's treasure from the hands, guarded of course by an evil dragon. As the treasure is in the castle, the Prince needs to get into the main rooms of the castle via the drawbridge. So the Golden Prince sets off along the drawbridge, solving fast-moving puzzles, traps and other tasks for such a young fellow.

The controls are fairly simple using the cursor keys to move left and right, B to duck under the bridge and C to jump over. The game is controlled completely with the Cheetahsoft A.T. keyboard interface.

Once inside the castle the queen says will reveal young Wilbur in the desired direction in order to grab up the stolen treasure. Once the screen is completed, the game goes back to the level screen where the level of play is automatically increased and the Prince has to get into the castle, dodging the fireballs again.

Inside the castle, as previously mentioned, to find a dragon, but instead it looked more like a crocodile. The dragon moves along the wall while being hit by fireballs. Occasionally when struck by a fireball, the body of the Prince was not erased but the game continued with a new Wilbur. This is a small bug but as playing progressed it far larger one occurred if the Prince walked alongside one of the walls or in fact on the corners, the fireball just went through him and nothing happened. Let's hope that this is cleared up in the final version. These bugs are quite worrying as with only two screens and ZX Spectrum I would have thought they could have been extensively checked.

The graphics are slight and clear but nothing special, but on





the whole I found it a no-go game.

INSTRUCTIONS 80%
PRESENTATION 85%
ADAPTABILITY 85%
VALUE 85%
ENG FACTOR 7

Frank N Stein by P55

Game number two in the lot is **FRANK N STEIN** by P55 and is the type of galahed game we expect to come from such a good software house. The idea is the same as *Music Man*, coming round the screen doing things up. This time not light bulbs but... yes, parts of a man's body. It's a very task as the real mad professor is eager if he gets introduced to his assistant, Dr. Celine, to collect components of various parts of the body and then make a complete man to get to the next screen. This may sound easy, but to really be the ability of your mission, the body must be collected in the correct order and not in any old fashion and therefore not always in the most obvious or accessible place.

On the first screen the professor begins the night shift and then immediately slide down a rope, also the gut can certainly like you, which is just one example of lots of fun, and so on and so forth, jumping out the rest is to follow.

The jumping is not to be feared, it is not as easy as it

looks. Most as the professor tends to be exactly positioned over a starting component, he is to slide down before activation can take place. I found it easier to walk past the starting with the jump button held down at the same time, so at the right moment the professor would jump and so time would be lost. Incidentally, the control keys are well placed and the game is joystick compatible.

Some thought needs to go in to some movements. How on earth is the professor going to pick a leg, for example, without being squashed by a wire or get held by an arm, without being captured by the robot.

After each body-collection screen there is just a straightforwardly available screen. This is great fun as you manoeuvre the Professor to the top of the screen in order to activate the motor screen before going to the next screen in **FRANK N STEIN**'s lot.

The obstacle course is more enjoyable than collecting the body on a direct plan of action to be achieved in this the ball may fall on your head or the crane, lobster, spiders, lamps, race accidents, jumpings, lots and more. In the last obstacle may get you.

Another problem is the ground, which is not always so sound as it may seem. So it is strategically placed and a great fun to watch as the Professor slips and slides. So also are the great patches of ice, sliding the movements of the Professor down greatly as he slides across, sliding the way, and

the light bulbs, causing an electric shock and finally the fluorescent which only you can get to be seen your own side.

All these and more go forward to make the game exciting, intelligent, fun to play with beautiful graphics and sound & music.

INSTRUCTIONS 70%
PRESENTATION 100%
ADAPTABILITY 100%
VALUE 100%
ENG FACTOR 10

Jump by Unique

A game that I have been looking out for as the software thinks that seems to appear in all the stores now has finally arrived - **JUMP**, by Unique, is an arcade type game where you are in control of a man in a tight way on a tower block of flats. You have six controls to move either up or down, left or right. This is for the more finky keyboard operators and unless you possess nimble fingers, you may find it quite a task. I think it would have been a good idea to include a joystick option, especially as this game is directed only to the arcade game market.

Controlling your figure you must climb up the tower block, keeping an eye open for the wire down which must not shut off, also as you will find yourself falling to the ground. This wire down are opened and closed by mad men, who also throw giant pots at you, in an effort to get you off their tower block.

An interesting point to note is that in the instructions we are told that you have to climb the tower block and at the introduction screen, we see an eye appearing at the window, but in none of the game screens, we see a face. It is a little bit of a puzzle to see the eye and all the eye has changed into a red dot.

The game seemed to come at incredibly random moments, as quite often there is a chance of escape. This certainly made the game more of a challenge - not to be beaten by these eyes for me!

The music is good and the very detailed and smooth graphics are excellent, although they can get a bit boring after a time. The game, though, is a sure must for any arcade fans to windows-clean.

INSTRUCTIONS 80%
PRESENTATION 85%
ADAPTABILITY 80%
VALUE 85%
ENG FACTOR 7

Sights by Atlantic Software

Next we come to **EIGHTS**, by ATLANTIC Software and is the only game out of the whole bunch that is not strictly an arcade style game.

EIGHTS is an easy to learn card game of strategy for two players - you and the computer. The computer is of course master dealer, scorekeeper and opponent. We are told that the computer does it no way, then, he just sees how many cards you've got and so further and if he does that, he would win every time. He plays too damn well, really.

The game is as follows: Each player has seven cards. Player 1 discards his first card and then player 2 must follow the same suit or denomination as the card just played. If the player cannot go he must draw cards from the deck until he can go and no more cards are left. There is a limit to the number of cards that you may draw from the deck, so if you want to cheat!

Eights are played as wild, so if you lay down an eight, the suit can be changed so the player can plan out his moves and hopefully get rid of all his cards before the opponent can. This is a game of luck, determined by the value of the cards in the discarded hand, with eights worth 80 points as they are so valuable. The overall winner is the first one to be handless, but the computer will not give up easily.

The simple instructions will enable any old card game supporter to receive his ways and get addicted. On your turn, you enter first of all the value of the card - eg. A for Ace, 10 for Queen, 8 for 80 etc. and then the suit - H for Hearts, C for Clubs and so on. The computer then checks that the card exists in your hand. If it does then the computer takes his go, and so on. If you cannot go by simply creating 8 you draw a card from the pack or if there are no cards left, X to end your turn.

The playing cards are represented in graphic form at the centre of the screen and your hand is shown at the bottom, just detailing the cards. The cards are good, although not as sharp as they could have been and also the suits could have been coded both ways up as in real playing cards and not just spread as on the screen.

Some may think this is included with thinking to remind you that it is your go, the sounds of the shuffling and dealing of the pack and the four levels of

also make *Football* exciting and intelligent, games that is hard to stop playing once started. The computer plays a skilled game, even at the easiest level. A good buy for any card-gamers. The good thing about it is that you don't have to beg somebody to play cards with you — just switch on the computer and TA, get a stack of drinks made and you're in every.

INSTRUCTION 100%
PRESENTATION 85%
ADAPTABILITY 95%
VALUE 85%
DOC FACTOR 2



World Cup by Artic Software

Now is it your football fanatic, *World Cup by Artic Software* the game that you have waited for and no doubt had many sleepless nights, hoping that it would appear soon.

The game is set up to give a demanding simulation of real action. Having selected the number of players and the desired teams out of a choice of 40, the action begins with either a practice mode or the full league.

As the players run onto the pitch, the cheering crowd are introduced with various tunes — March of the Day, I'm Forever Blowing Bubbles, When The Saints, Nice One Cyril but only after a goal, which also acts through the game. Inexpensive for the sound off key as these simulations sometimes get a bit boring.

The game starts with player 1 kicking off, which is taken automatically, as are the passing movements and through balls if you play against the computer. It seemed as if playing a good game while very hard to beat.

Unfortunately, you do not have control of your own run on the pitch, only of the team nearest the ball. The controls are a great disappointment at first, but the computer is generally quite good in containing the rest of your side, so it is not too much of a problem.

Unfortunately also there is no key-press option, which would have been welcomed as having the save slightly uncomfortable to use. F for up, Q down, S right and A left with the bottom row for shooting. You are allowed to use either the *Football* or *Remington* joystick, which provides of great advantage as a joystick section and movement is a lot more accurate.

I found that both goals were a little thick in that they just felt like get rid of the ball and kick it over the line instead of passing to a specific player. Instead you of any teams — I could name a few.

The speed of the play was not always as fast as you would have been. My footballer moved faster than a jet than that in a straight line. In spite of this, I thoroughly enjoyed all the games in the league and although the computer was not yet his hands (hands!) on the cup at the end of it all, my wife was knocked out in the first round. (At least I got her to play at all.)

I did find a little bug when the player had just been after a throw-in, there was a gap on the line, which was restored quite soon afterwards. I would have thought that by the time the first version arrives at the shops the error will not occur.

Another pointed game from Artic software are management games in a couple of adverts above the sound for their range of software and right at the end that wonderful phrase appeared "and many more". Well keep an eye on some of these carefully get better.

INSTRUCTION 100%
PRESENTATION 85%
ADAPTABILITY 95%
VALUE 85%
DOC FACTOR 2

Hyperblaster by M. C. Lothlorien

Fortunately, we come to *Hyperblaster*, which is another arcade type game. For many people this will obviously be an instant turn-off as the number of arcade-oriented type games on the market is tremendous and when you have seen one, you have seen them all. BUT — this

game is different. This game seemed to have an unknown, adjustable, variable brightness and once sitting in the pilot seat at the Q-74 U. In such laser surveillance craft, it is very difficult to get off.

Unfortunately there was not a joystick option, which would have helped, but as the controls are simple enough — 1 for clockwise, 2 for anti-clockwise, 4 for thrust, 7 for fire and one key on the bottom row for *Hyperblaster*, there should be no problems.

HYPERBLASTER is just a good name for the purpose with effective sound and graphics as your Q-74 U is destined to another position in the galaxy.

Having selected the dual level and either 1 or 2 players, the action begins. You have got 98 seconds to completely clear the first screen of aliens. There are 17 screens total and each screen has got its own detailed shapes to be destroyed, from rotating balls to discs to die shapes to toroids etc. and with shape is peculiar to what it can be that to be blown up.

There is not much here that I can say about the game, apart from its detailed graphics and arcade quality sound make it up into an exciting and addictive game. Great fun.

INSTRUCTION 80%
PRESENTATION 85%
ADAPTABILITY 100%
VALUE 85%
DOC FACTOR 2

Pin'n're by Automata UK.

The last of the bunch is *PIN'N'RE* by Automata UK. United Automata is a trendy company, doing to computers what the *SEX PISTOLS* did to music.



PIN'N'RE is another game where you have to go around screens and collect even the greatest "Arcade" among you. There should be no time of boredom.

A nice feature of the game is that after every five lives has been used up, the next game can be started from the last, wasted screen or from scratch. This is a great idea and I hope that many more software authors will follow, as sometimes it can be tedious going through all the same screens when wanting to discover how. You can choose or lead the best position and high score, which will stop you from going through the screen to get to the 40th machine. A second life will also be granted, if the word EXTRA is 5 up at the bottom of the screen.

The idea is an follow: You are Ben, who has been ejected into the computer where his mission is to track down the elusive "BIG BUD" isn't there are in every computer! As you go through many screens, collecting the various objects, it would love to know how many bottles managed to get into the computer, but you cannot trust resistance all the time. I, your progress is hidden by most bugs, each with their own degree of intelligence. The bug is able to travel after you whenever the other threat is dead.

And then there are the EDT keys, which when located from the walls, will give you an extra 30 points if they fall on a "bug". The only problem being that if they fall on you — BANG — a life gone. One other feature is when the EDT key marks fall upon you right at the beginning and you have to get out of the way immediately, or else!

With nice but not top detail graphics, with good sound and joystick option, with the wonderful music of Joni Koopa on the "Grade" of the tape is definite must for any computer game freak and lover of EDT's music.

INSTRUCTION 80%
PRESENTATION 85%
ADAPTABILITY 95%
VALUE 85%
DOC FACTOR 2

FOOTNOTE:

Having eventually finished the review of the other CIP, I thought I would at least be satisfied by something on the screen about death, but I missed it five words were up on the screen and then was. I suppose I should be satisfied with my brilliance!

SPECTRUM COMPUTING

For 128 and 64K machines,
100% of program 20p. by loan and refund

• 3 Original Games

Arcade, Adventure and Strategy — more fun, more value — only from Argus!

• On screen reviews of newly launched games

Picture and views of the wonderful, wacky world of home computing

• UTILITIES

Generators delight to glare — improved graphics, sounds, discussions — it's all here!



Spectrum Computing adds a new dimension to your micro!

Run this Argus Spectrum tape and you'll soon see why it's Britain's top selling tape magazine. Each issue gives you a variety of exciting and challenging games to play.

reviews of other newly released software plus valuable utilities enabling you to write your own programmes and games.



Stretch your imagination and skills with Spectrum Computing — available every other month from WH Smith, Monzees and other leading stores.

(You'll see them advertised on TV from September!)

Get your copy today!

Argus Tape Magazine produced by
ARGUS PRESS SOFTWARE
1 Golden Square, London W1R 3AS
Telephone: 01 402 0202

Artificial Intelligence on the

QL

Artificial Intelligence is the science of making machines do things that would require intelligence if done by men. In this article, Tim Hartnell examines a simple artificial intelligence program for the QL

Artificial Intelligence (AI) is a fascinating field, where science has intersected with science fiction.

Since the first computers were built, ingenious designers have been toying over topics such as: Can a machine really think? What is the nature of intelligence, and will a machine ever be built which can perform all that nature has performed?

Programs have been written which allow computers to do things many believe only top tier intelligent machines can now learn and reason, can talk with people, play them and do vast things. An achievement in the field announces the question: is the computer really thinking? But there's a hitch! The approach researchers tend to be along the lines of "It doesn't matter whether the computer is really thinking or not, so long as it can reach some similarity to intelligent systems, which work in a certain way, then we've got intelligence!"

There is a limited number of experts in the world on any one subject. It doesn't matter what field you're talking about — teaching cats, mining for uranium, diagnosing human illness, sorting out the multitudes that populate oceans — there is a limit to the number of experts we have available.

Now what if the world is not exactly dying out for some machine learning experts? There are areas of the world where there are not enough doctors. If intelligent computers could help overcome this shortage, it would be of immense benefit.

Using computers to act intelligently to assist or replace a person is one aim of AI which great strides have been made in the past few decades. The new

of the field is expert systems, in which the computer program is used to capture the expertise of an expert in a particular area. The program in this article will demonstrate a simple expert system in use on the QL.

An intelligent form of expert system is a series of IF/THEN statements. A diagnostic system could be as simple as this:

```
IF the patient is coughing
AND he has recently been soaked to the skin
AND then stood at a freezing wind for an hour
THEN the patient has a cold
```

Of course one would hardly need an expert system to make a diagnosis like this.

It is interesting that many human experts do not know exactly how they reach their conclusions. Building an expert system for a particular area can be as much of a revelation to the human as it is to the person creating the knowledge base for the computer program. In the book *The Fifth Season — Artificial Intelligence and Japan's Computer Challenge to the World* (Foghorn and McGraw-Hill) you find the very sad story of an expert who, although experienced, has methods to a "knowledge engineer" (the name given to those who draw out others' expertise and then modify it for the computer program). The expert was rightly regarded (and well paid) for his expertise and was at first disbelieving when the knowledge engineer discovered the expert's usual method involved a few hundred working rules of thumb. Here, instead, the expert is now charged to use of experience and finally to put the field a broad man.

While running our expert

system and developing your own is hardly likely to have as dramatic effect in pace as our human expert experience, you will learn a great deal about how such systems are developed.

There are a number of successful systems around. They include *COXBRAD*, which is able to work out limits about electrical circuits from an electrical code, *COXBRAD*, which is able to draw a circuit which

shows which of the three Ohm's laws the form of the appliance you were thinking of.

After writing the name, with the line numbers up to 60, the real business of determining which circuit you're thinking about begins, with the routine at code from 110 to 210. You'll see in the rest of the program from lines 210 to 350, the routine *COXBRAD* is set to work on the start of the rule and is controlled by one such line. A rule answer is given. Using the information *SPURT* has a routine deciding which circuit you're thinking about (lines 250 through to 300). As you see, it is a pretty simple program but one which lays the foundation upon which expert systems could be built. From it you can develop programs which — for example — could do things like predict the main failure time of electrical motors. Use our framework, and try to develop your own expert system in a field of your choice.

This article is based on the books *Exploring Artificial Intelligence* by your QL and *Exploring Artificial Intelligence* by your ZX Spectrum. The books are £8.95 each and are available from the publishers, newnes Publications, 271 Kensington High Street, London W8 5NF.

10 R/H/Mark 100000

11 R/H/Mark SPURTE

14 R/H/Mark 100000

15 .

20 PRINT @:GOTO

21 REPEAT:GOTO LOOP

26 PRINT:PRINT "I want you to think of %" a hawk%" a horse%" a sparrow"



```

00 FALSE 000
02 PRINT: PRINT
70 ask_questions
00 PRINT
90 PRINT "-----"
100 PRINT: PRINT "Press ENTER for an
other one , or"
110 PRINT "any key and then ENTER to
quit"
120 INPUT q#
130 IF q#<"": EXIT main_loop
140 CLR
150 END REPEAT main_loop
152 STOP
154 :
160 REMark *****
162 REMark definitions
164 REMark *****
166 :
170 DEFINE PROCEDURE ask_questions
180 count=0
190 PRINT "Does it have two legs?"
200 process_answer
210 PRINT "Can it walk?"
220 process_answer
230 PRINT "Can it fly?"
240 process_answer
250 PRINT "You were thinking of a ";
260 SELECT ON count
262 =1: PRINT "horse"
270 =2: PRINT "man"
280 =3: PRINT "sparrow"
290 END SELECT
290 END DEFINE ask_questions
300 :
310 DEFINE PROCEDURE process_answer
320 REPEAT control
330 INPUT " y or n " i#
340 IF i#="y" OR i#="n"
350 EXIT control
360 END IF
370 END REPEAT control
380 IF i#="y" count=count+1
390 PRINT
400 END DEFINE
410 :
420 DEFINE PROCEDURE initialize
430 CLR #0
440 BORDER 7,4
450 PAPER 1
460 INK 7
470 CLR
480 END DEFINE initialize
490 :
490 REMark *****
470 REMark END SPLIT
490 REMark *****

```

WIN £25,000 AND SAVE THE WORLD

Eureka!

350 K OF PURE MYSTERY
BY IAN LIVINGSTONE

- **5 programs in one** — Includes a 30-minute TV show, 30-minute radio show, 30-minute newspaper feature, 30-minute TV show, 30-minute radio show, 30-minute newspaper feature, 30-minute TV show, 30-minute radio show, 30-minute newspaper feature.
- **Free to watch** — Eureka! is available on all major TV and radio networks, including the BBC, ITV, Channel 4, and Sky.
- **God is in the house** — This show has a special message for you and your family.

5 PROGRAMS IN ONE

- All 5 programs are free — but you must watch 3 programs regularly and receive your FREE TVC card in 30 days. You must also watch at least 3 programs a week to receive your FREE TVC card.
- **1 month** — The first 30 days — not just an advertisement. At the end of each month you will receive a special offer. To receive your TVC card you must watch 3 programs a week.
- The better you watch, the stronger and better you feel.
- **FREE!** It's all yours — yours — with completely emerging, state-of-the-art technology. It's all yours — yours — with completely emerging, state-of-the-art technology. It's all yours — yours — with completely emerging, state-of-the-art technology.
- It's part of the "Eureka!" show, your own free TVC card. It's all yours — yours — with completely emerging, state-of-the-art technology. It's all yours — yours — with completely emerging, state-of-the-art technology.
- If you're really into it, you can have the TVC card for £25,000.



Receive 40% of
£25,000 in
100 days!

Get some more
£25,000 in 100 days
in 100 days —
and see the £25,000
in 100 days!

Receive your
£25,000 in 100
days!



High quality
and content
and
entertainment!

Don't miss the chance to get your TVC card in 30 days. Order by Credit Card on the "Eureka!" telephone hotline 01 450 4000.

Eureka!

THEME MUSIC BY DWY

DESIGNED BY
IAN LIVINGSTONE



Eureka! was produced by Ian Livingstone and designed by Ian Livingstone. It is a 30-minute TV show, 30-minute radio show, 30-minute newspaper feature, 30-minute TV show, 30-minute radio show, 30-minute newspaper feature. It is a 30-minute TV show, 30-minute radio show, 30-minute newspaper feature, 30-minute TV show, 30-minute radio show, 30-minute newspaper feature.

Available from
all good software retailers
or directly from the publisher
or hotline telephone number
01 450 4000
NOW

NAME: _____

ADDRESS: _____

CITY: _____

POSTCODE: _____

TELEPHONE: _____

DATE: _____

01 450 4000

Order by the £25,000 card in 30 days. Order by Credit Card on the "Eureka!" telephone hotline 01 450 4000.

Mini Bingo

No Big Prizes, but what a game! From the portfolio of R G Luxton in Solihull.

Mini Bingo is a game for four players in which the computer prints out a bingo card for each of the players. Each card has ten random numbers which are unique to that game.

After a warning that the screen will go blank for about 30 seconds, you are asked to press **B** to start the game, and from then on the computer does everything until a winner is declared.

The numbers allotted to the cards are called at random by the Z801. If the number called appears on the card, that number is blacked-out. The first card which is completely blacked-out is declared the winner, and the number of "calls" required to win the game is reported.

In addition to the winner of each game, the owner of the winning card requiring the least number of calls of the card will be declared the "owner of the week". If someone claims that one of their numbers was called, but was not crossed-off on their card, or if you just want to get over the game again, then simply enter "CHECKLIST" whenever the computer will print out a list of numbers used in the game, and a list of all numbers called.

The program involves around ten number cards, both of which randomly mix the numbers, and ensures that a number is not used more than once.

Lines 180 to 310 Pick 40 numbers of random from an available 99. In order to fill the players' cards.

Lines 316 to 1150 Initializes the 40 numbers and "calls" each one as the program runs.

Why have I used two different number sets routines?

Intuitively, the first set routine — which has a choice of any 40 numbers from an available 99 — is faster than the second set which uses a string along routine. However, this soon becomes obsoleted up and can be very time-consuming. Conversely, the more sophisticated string set — which randomizes the previously selected 40 numbers — does the much faster but is slower in selecting numbers in the first place. However, note or horror the fact may be

as the numbers are "called" the Z801 counts them, with the first one to have six 10 numbers called declared the winner.

The use of BASIC is good for the game, a little, and provides an interesting and simple way to introduce floating graphics into a program.

The program runs approx. mainly 45, at 1MM. An average game lasts about 5 minutes.

Loading time is approx. 2 1/2 minutes, and after RUN, the program goes into FAST mode for 30 seconds to set variables and to print graphics. After that it's fun all the way, so "Turn down and look in."

OUT 30 SECONDS, DURING WHICH TIME THE SCREEN WILL GO BLANK."
 "GO PRINT AT 14,4;"

"GO PRINT AT 14,4;"
 "JAT 14,6;" "PRESS B TO STA
 RT;" "AT 14,5;"

"JAT 14,6;" "PRESS B TO START"
 100 IF NOT INKEY="B" THEN GOTO 90

110 FAST
 120 CLR
 130 LET S=0
 140 LET T=0
 150 LET C=0
 160 LET P=0
 170 LET Q=""
 180 LET C#="XXXXXXXXXXXXX"

190 LET Q#="XXXXXXXXXXXXX"
 "

200 LET E#="BOARD#CARD#CARD#
 CARD#"

210 LET F#="XXXXXXXXXXXXX"
 "

220 LET G#="BINGO"
 230 LET H#="MIND"
 240 DIM R(40)
 250 DIM A#(40,2)
 260 REM SET CARD NUMBERS
 270 FOR M=1 TO 40
 280 LET A#(M)=STR# INT (10+RND#

89)
 290 FOR J=1 TO M-1
 300 IF A#(M)=A#(J) THEN GOTO 260

310 NEXT J
 320 REM SET FOR "CHECKLIST" STR
 INDEX

330 IF M=1 THEN LET Q#="B"
 340 LET Q#=#+Q#(M)+"/"
 350 IF M=10 THEN LET Q#=#+"0"
 360 IF M=20 THEN LET Q#=#+"0"
 370 IF M=30 THEN LET Q#=#+"0"
 380 NEXT M

390 REM PRINT CARD NUMBERS
 400 LET C=0
 410 FOR B=2 TO 23 STEP 3
 420 FOR A=5 TO 14 STEP 2
 430 PRINT AT A,B;A#(C)
 440 LET C=C+1
 450 NEXT A
 460 NEXT B

470 REM PRINT CARDS
 480 FOR A=2 TO 18
 490 FOR I=1 TO 25
 500 IF A=6 THEN LET A=13
 510 PRINT AT A,I;Q#

10 REM "Z# BINGO"
 20 REM IF CLAIMS OF ERRORS ARE
 MADE, KEY IN "CHECKLIST" IN/LIAT
 THE END OF GAME
 30 PRINT AT 0,0;"WELCOME TO Z#
 BINGO,"
 40 PRINT AT 2,0;"-----"

50 PRINT
 60 PRINT "FOR 30 SECONDS, NEW CA
 RDS ARE PREPARED FOR EACH BA
 RE, AND TWO ARE EVEN THE SAME
 E.I."

70 PRINT AT 9,0;"THIS TAKES AB

ZX81 GAME

```

520 FAST
530 NEXT I
540 NEXT A
550 FOR A=4 TO 22 STEP 4
560 FOR I=6 TO 14
570 PRINT AT I,A;" "
580 NEXT I
590 NEXT A
600 NEXT A
610 FOR A=7 TO 13 STEP 2
620 FOR I=2 TO 24
630 PRINT AT A,I;" "
640 NEXT I
650 NEXT A
660 FOR A=1 TO 20 STEP 4
670 FOR I=2 TO 14
680 PRINT AT I,A;" "
690 NEXT I
700 NEXT A
710 SLOW
720 FOR L=1 TO 12
730 PRINT AT 8,4;" "
740 NEXT L
750 REM PRINT FLASHING TITLES
760 SLOW
800 REM REM PRINT CALLERS BOX
810 PRINT AT 8,27;" "
820 PRINT AT 9,27;" "
830 PRINT AT 10,27;" "
840 PRINT AT 10,1;" WELCOME BACK
...PLEASE"
850 PRINT AT 19,1;" KEY **B** TO
START GAME."
870 PRINT AT 3,2;O1;AT 4,4;O1;A
T 3,2;O2;AT 4,4;F1
870 IF NOT INKEY="B" THEN GOTO
870
880 PRINT AT 10,1;"
"
885 PRINT AT 17,4;" HERE WE DO
... "
890 REM SUBROUTINE TO CALL NUM
BERS
900 LET T=" "
910 LET M=" "
920 FOR I=1 TO 48
930 LET O=I
940 LET M=M+CHR# O
950 NEXT I
960 LET F=M
970 FOR I=1 TO 48
980 LET S=INT (RND*F)+1
990 LET J=M(I)
1000 LET J=CODE J
1010 PRINT AT 9,30;M(I)
1020 LET T=T+M(I)+"/"
1030 LET S=J
1040 FOR B=2 TO 23 STEP 3

```

```

1050 FOR A=6 TO 14 STEP 2
1060 IF M(I)=M(I+2) THEN PRINT A
T A,O1;" "
1070 PRINT AT A,O1;" "
1080 PRINT AT A,O1;" "
1090 PRINT AT A,O1;" "
1100 PRINT AT A,O1;" "
1110 PRINT AT A,O1;" "
1120 PRINT AT A,O1;" "
1130 PRINT AT A,O1;" "
1140 PRINT AT A,O1;" "
1150 PRINT AT A,O1;" "
1160 PRINT AT A,O1;" "
1170 LET D=D+J
1180 NEXT A
1190 NEXT B
1200 PRINT AT 9,20;" "
1210 SODU 1200
1220 LET K=M(I TO 6-1)
1230 LET L=M(I+2 TO LEN M)
1240 LET M=L+K
1250 LET F=F-1
1260 NEXT I
1280 REM SUBROUTINE FOR COUNTING
CALLS FOR EACH CARD AND DECLARI
NG THE WINNER.
1290 IF J<=18 THEN LET S=S+1
1300 IF J>=18 AND J<=28 THEN LET
T=T+1
1310 IF J>=28 AND J<=38 THEN LET
D=D+1
1320 IF J>=38 AND J<=48 THEN LET
P=P+1
1330 IF S=18 THEN GOTO 1300
1340 IF T=18 THEN GOTO 1300
1350 IF D=18 THEN GOTO 1340
1360 IF P=18 THEN GOTO 1340
1370 RETURN
1380 PRINT AT 8,2;O1;AT 10,4;" A
"
1390 PRINT AT 12,3;H
1400 GOTO 1370
1410 PRINT AT 8,0;O1;AT 10,10;" B
"
1420 PRINT AT 12,9;H
1430 GOTO 1370
1440 PRINT AT 8,14;O1;AT 10,14;"
C"
1450 PRINT AT 12,15;H
1460 GOTO 1370
1470 PRINT AT 8,20;O1;AT 10,22;"
O"
1480 PRINT AT 12,21;H
1490 PRINT AT 17,4;" CONGRATULATI
ONS"
1500 PRINT AT 19,4;" THAT TOOK "
1510 PRINT " "
1520 INPUT M
1530 IF NOT M="CHECKLIST" THEN
GOTO 1540
1540 IF M="CHECKLIST" THEN DIS
1550 PRINT "CHECKLIST"
1560 PRINT
1570 PRINT "NUMBERS IN EACH BOX,
(TOP TO BOTTOM, LEFT TO RIGHT):"
1580 PRINT
1590 PRINT " "
1600 PRINT "NUMBERS CALLED:"
1610 PRINT " "
1620 STOP

```


Resistor Resistor

J P Roebuck from Huddersfield supplies all electronic constructors with this handy 16K colour band decoder

Although written for the ZX81 this program should work as well on the Spectrum as well. As most databases do also, those know, the value of a

resistor is given by a set of colours printed on it's side. This program will decode the full four bands almost instantly!

```

160 PRINT AT 21,0;"PRESS A KEY"
170 IF INKEY="" THEN GOTO 170
180 PRINT AT 10,0;R1;R2;R3
190 PRINT AT 21,0;R4
200 GOTO 30
1000 DIM B$(10,7)
1010 DIM C$(10,2)
1015 LET B$(1)=""BLACK"
1020 LET B$(2)=""BROWN"
1030 LET B$(3)=""RED"
1040 LET B$(4)=""ORANGE"
1050 LET B$(5)=""YELLOW"
1060 LET B$(6)=""GREEN"
1070 LET B$(7)=""BLUE"
1080 LET B$(8)=""PURPLE"
1090 LET B$(9)=""GREY"
1100 LET B$(10)=""WHITE"
1110 FOR F=1 TO 3
1120 FOR N=1 TO 10
1130 IF A$(C1)=B$(N) THEN LET C$(
F)=STR$(N-1)
1140 NEXT N
1150 NEXT F
1160 IF A$(4)=""GOLD" THEN LET
C$(4)=STR$(0)
1170 IF A$(4)=""SILVER" THEN LET
C$(4)=STR$(10)
1180 IF A$(4)=""BRONZE" THEN LET
C$(4)=STR$(20)
1190 LET H=VAL (C$(1)+C$(2))
1210 FOR F=1 TO VAL C$(3)
1220 LET H=H*10
1230 NEXT F
1240 IF H<1000 THEN GOTO 3000
1250 IF H>10000000 AND H<100000000 TH
EN GOTO 3100
1260 IF H>100000000 THEN GOTO 320
0
3000 LET D$=""OHMS."
3010 RETURN
3100 LET D$=""KILO OHMS."
3110 LET H=H/1000
3120 RETURN
3200 LET D$=""MEGA OHMS."
3210 LET H=H/1000000
3230 RETURN
9000 SAVE "RESISTOR"
9010 RUN

```

Description

Lines
10-20 print main heading
20-90 input the colour of the resistor
100-110 tell the operator to wait
120 gets the routine
130-200 print answer and when the programme
1000-1100 set up the variables
1110-1140 check first 3 inputs and define the answer
1150-1180 check the last input and define the answer
in variable H equal the first 3 answers
1210-1230 let H equal the third answer as well
1240-1260 check if the answer is in mega, kilo or ohms
3000-3010 define all as ohms
3100-3120 define all as kilo ohms
3200-3230 define all as mega ohms
9000-9010 save and auto run

Variables

A\$ input variable
B\$(10,7) matrix variable to check A\$ with
C\$ first parts of the answer
D\$ type out of the answer in range
H the final answer
I the colour
OHMS the tolerance

```

10 PRINT "ROEBUCK C Q H
P U T E R S"
20 PRINT " " RESISTOR CODE
OR CODE. "
30 DIM B$(4,7)
35 DIM C$(12)
40 PRINT AT 10,0;"PLEASE INPUT
COLOUR BAND NO. "
50 FOR N=1 TO 4
60 PRINT AT 10,30;N
70 INPUT A$(N)
80 IF A$(N)="" THEN GOT
O 70
90 NEXT N
100 PRINT AT 10,0;R1
110 PRINT AT 10,0;"PLEASE WAIT"
120 B0R00 1000
130 PRINT AT 10,0;R2
140 PRINT AT 10,10;R3 " ";D$
150 PRINT AT 12,10;"AT ";C$(4);
" PER CENT. "

```


The Spectrum Plus



Without the usual blaze of publicity, Sinclair Research slipped onto the market their latest production model of the Spectrum. It arrived unannounced at the office and was, even though rumours were rife, quite a surprise!

First Impressions

On opening the box we were impressed, and excited looking machine lay before us to spite was very similar to the QL, Spectrum and much more solid looking than the usual Spectrum. Every inch a "real computer". What wonderful electronics were hidden beneath the case? Perhaps an Amstrad T40000 operating system?

The first thing to strike me was that the keyboard no longer consisted of the rubber pads which pop off to carry prints, and that the colourful key legends had all disappeared by

white letters or black keys. Secondly, the case material was different and although not as plastic as the cover, was full of colourful pictures and in interesting looking examples about somewhat "firmer" than the original.

Finally, the keyboard base (as supplied with the ordinary Spectrum) has been replaced with a cassette containing six, new, programs.

A close look

Examining the computer more carefully revealed that it had in fact the 48K Spectrum PCB we know — housed in a new

keyboard. This means of course that the quality of Spectrum software will still be visible on the Spectrum — much to the relief of many (I would imagine).

All the Spectrum hardware peripherals will also be compatible, although due to the novel height of the case some units which have a "lip" to fit over the normal keyboard will not fit accurately. The modules such as graphics, items as DR-Thorpe Compton and Church interfaces if a of course, fully compatible with the 48K Model-ives and the Sinclair-Interface) and:

So this takes a critical look remembering that for roughly

the same cost, £179.95, you could buy a Spectrum and a separate keyboard.

The keyboard

This appears (without dismantling the computer) to be the standard membrane type with rubber keys (popped off by plastic keys). This actually works quite well, the action is firm and the keys spring back quickly. They feel good to touch and travel nicely about with the exception of the two CAPS Shift and the ENTER key which tend to wobble somewhat. This will not appear too bothersome, as well balanced and it does not suffer from the:

To anyone used to using a typewriter the keys may seem a little quiet — no satisfying click — and they are a little close together for fast typing, but perhaps this is a matter of getting used to and only time will tell. The keys are like the QL's, butted with slight recessed channels to them.

A new touch is the addition of two new keys which may be located to give the keyboard a neat forward tilt (since if you have anything attached to the port at the back it may be a bit hanging in the air by its connector).

One more nice feature is the addition and absence of extra keys. The most obvious is the new space bar, but there are a total of 24 keys in all.

A double speed CAPS Shift key is provided at the bottom of each side of the keyboard, and the enter key is a large reverse L shaped key to fit.

At each bottom corner a special shift key is provided and single key entry or access of True Vision, Inverse Video, Delete, Graphics (Reserved) (C) mode, Edit, Caps Lock, Insert, ... — and the cursor keys is also provided. This layout makes programming much easier, and once you get used to it, it is a great advantage.

The extra cursor keys are nicely positioned for game players but unfortunately, because they are already Caps (Shift) won't work in many of the existing games using the cursor keys. Finally, the left handed safety under the overhang of the top of the keyboard (it's a great button. This is the RESET button. When stuck in the back way or when your computer talks up with that machine code routine no longer do you have to keep pulling out the plug. Just press the

button & great spring on the rear end rear of the Power center.

The manual

This is a much better manual than the original. It's straight, well written, interesting and it starts with the setting up of your computer and then goes straight in with simple programs.

Color photographs have been used to show examples of the screen display at the input left, right and the whole approach is geared to simple instructions. Some games of Spectrums were used to borrow the manual and try out some of the little programs. One game used, after trying the LOGS section. Oh! So that's how Binary and LOGS are related! — and he has had his spectrum for nearly eight months.

Although the manual is a decent volume, as far as I can see all the information laid in the manual is included in this one.

The only criticism I can think of is that experienced users may find it unnecessary to find out a specific item of information in the hex code of a particular character.

in use

The keyboard is a great improve-



ment, and the extra keys make programming much easier by the time touch types found their computers for typing at speed.

I found that although I've been using a Spectrum for as long as they've been available, the fact that keyboards are printed in white on the key-

board caused confusion. Finding some of them took a bit of searching and yet I thought I knew all their positions. Actually they are laid out quite logically — command keywords and symbol shift keywords are on the colored part of the key and the old 2 mode green and red keywords are on the flat bit behind the key. Again perhaps time and practice will remove this problem.

If you play games and see the keyboard the the more positive action and raised tops are much better. Although although some of the key positions have been adjusted, some of the games are more awkward to play.

If you see a joystick controller, take the Data is an alternative.

Assessment

A beautiful looking machine which is a big improvement for the basic Spectrum. It is not perfect, but then what can you expect? The manual is excellent — I've seen it especially for beginners and that includes those for some very expensive machines.

Sinclair Research tell me that they have no plans to sell the keyboard separately — so that the old style Spectrums can't be upgraded — but that the manual will be on sale in most computer shops for £4.99.

Personally I think these improvements sound that are so good it's not better for about the same price as the one costs — especially if you want a specific feature such as the numeric keypad to be found in some. However for those who do not want the fun of adding the extra bits it's quite interesting & fully keyboard power was quite amazing!

It seems that Sir Clive has listened to the outcry and made an effort to modify his machine with their comments in mind. All things considered, I would say that the price is a little high for what you get. At around ten pounds less the Spectrum+ would be excellent value for money.



HORNBY SOFTWARE SPECTRUM PRO GOLF SERIES



NEW ERA IN COMPUTERISED GOLF

Recommenced by *Smoker User August*

- EXACT SIMULATOR OF BRITAIN'S TOP GOLF COURSES
- (1) ALL GOLF RULES APPLY
- (2) DESIGNED FOR ONE OR TWO PLAYERS
- (3) PLAYED ON ANY HARDWARE
- (4) ON EACH HOLE EXC. PAR GREEN ENLARGEMENT
- (5) CONTROL SHOT CLUB STRENGTH DIRECTION
- (6) SPEED OF SHOT
- (7) GRAPHICS EXCELLENT
- (8) EXTREMELY REALISTIC

**NEW GOLFING
MADE EASY**

TRICORN 48K
NEW BRIDGEMAN 48K
LINDUCK 48K

WENTWORTH - EAST & WEST COURSES 48K
WENTWORTH Business Official 1988 International Championship
9 HOLE SIMULATED COURSE

ALL PRICES INCLUDE V.P. TAX P+P AVAILABLE FROM

HORNBY SOFTWARE
21 PINFOLD HILL, LEEDS LS15 0PW

FREE QUOTATION OFFER
WHOLE SERVICE
£21.00

FREE CAREER BOOKLET

Train for success, for a better job, better pay

Enjoy all the advantages of an ICS Diploma Course training you ready for a new higher paid more exciting career.
Learn at your own home in your own time. At your own pace through ICS home study. Learn by over 1 million slides!
Look at the wide range of opportunities waiting for you. Whatever your present or past there is an ICS Diploma Course which has you in mind.
Send for your FREE CAREER BOOKLET today - it's no cost or obligation at all.

INTRODUCTION TO COMPUTER PROGRAMMING	<input type="checkbox"/>	ELECTRONICS ENGINEERING	<input type="checkbox"/>
PROGRAMMING IN BASIC	<input type="checkbox"/>	GCE <small>(For Further Education)</small>	<input type="checkbox"/>
PROGRAMMING IN FORTRAN	<input type="checkbox"/>	BOOK-KEEPING & ACCOUNTANCY	<input type="checkbox"/>

Please send FREE DETAILS for the courses listed above

Name: _____

Address: _____

Post Code: _____





Day Release
 Day School
 Evening School
 Home Study



"Run more than ten tasks on a ZX81-FORTH ROM?"

Start at just one 10 tasks small assembly and in some cases up to 300 lines code! That's what replacing the basic ROM with the new FORTHisms for the ZX81 - and more!

The brains behind the breakthrough leading to David Hudson's *Julius* (Labled by Skywave Software on the strength of a *1 August* order) are heading in search of a way to see why

The ZX81 FORTH ROM gives you a totally new system in addition to the old basic and split screen windows capability you can also get 1 programme while three or four others are in executing without tasks to run from 60 lines beyond basic's 998 and with a further modification which enhances FORTH and BASIC whenever you like.



The ZX81 FORTH ROM gives you a normal keyboard with a 64 character buffer and space of support and ROM. ROM 544 Baud pack. It is programmable and it supports the ZX printer.

The price for a normal user is £14.95. A complete set (with manual) is £25.95. A complete set (with manual) is £29.95. A complete set (with manual) is £34.95.



Skywave SOFTWARE

By post only at 21, Canal Way, Weaver Works, 47, Canal Street, Weaver Works, Macclesfield, Cheshire SK11 5BA. Tel: 0625 255 591.



Avalon Software Ltd.

present, for ZX Spectrum

RODMAN A realistic wargaming strategy game which you control in the most exciting and challenging environment ever. The object is to plan to become a military professional and to lead your army into the 21st century. The ICS 48K standard program will run on the ZX Spectrum. It is available from Skywave Software. Price £14.95. (Price includes postage and packing charges and delivery to your door) or £19.95 (including postage and packing charges and delivery to your door) or £24.95 (including postage and packing charges and delivery to your door). **£14.95**

THE STUN Does your love of shooting in a virtual world make you a gamer? Or does your love of the game make you a gamer? The game is a complete 3D strategy game. Price £14.95. (Price includes postage and packing charges and delivery to your door) or £19.95 (including postage and packing charges and delivery to your door) or £24.95 (including postage and packing charges and delivery to your door). **£14.95**

COMMANDER KEVIN Only control by yourself in an exciting and challenging environment. Price £14.95. (Price includes postage and packing charges and delivery to your door) or £19.95 (including postage and packing charges and delivery to your door) or £24.95 (including postage and packing charges and delivery to your door). **£14.95**

For very young children (with help from a parent or teacher) try: **TALK** An educational game which helps the child with his learning. Price £14.95. (Price includes postage and packing charges and delivery to your door) or £19.95 (including postage and packing charges and delivery to your door) or £24.95 (including postage and packing charges and delivery to your door). **£14.95**

All games have full resolution graphics and full sound effects.

Available by direct mail from
AVALON SOFTWARE LTD
62 Abdon Street, Mansfield, Notts NG20 3AU

Shoptalk Shoptalk

Odds and ends, letters, and company info

SINCLAIR RESEARCH are just as usual, far from cutting down on Spectrum products they are increasing it in fact they are doubling production to 200,000 units per month by the end of the year.

Research are also expected to increase TV and CD, computer production to 20,000 and 20,000 units respectively.

It is nice to see the alcohol software titles for new buyers of the Spectrum, especially in the programme question were some of the best on the market. If it's not our long-time supporters who have been with them since the ZX81 (and before) would be to give some final of boost.

If you're the "Expansion System" package only have been interested in long-term, it is the interface, a 16-colour and four excellent software programs (Forecast II, Mountain, Snow Drifter and 3D Art Attack).

Someone to make you ask that you write one of the first in line to buy!

BOOZUK SPECTRUM are being used by the automation and computing department of Chert's North East Technical College to enable their graduate members to learn basic.

They were also provided with "an introductory library of software programs" including LOGO and Micro Prolog.

A nice letter from Software Farm

Dear Ray,

Following the success of "Forty Hour" and the success of a string of its follow up "Bookbrain" ZX81 readers might be interested to know of Software Farm's Software Club.

The club is specifically designed for ZX81 owners who otherwise get something of a raw deal. We supply you, not to Software Farm tapes (as the rest of general/reserved) but necessary for the purchase, but to help ZX81 owners in general.

ZX81 owners who have just started might have learnt something with information of Spectrum, BBC, Commodore

and... and... news and general info and books — but never a mention of the year old ZX81! For instance "Where can you get a joystick that is compatible with the ZX81?" is the sort of question we are asked and can help with.

Unfortunately, we have to charge £2 per annum for £100 life membership which equates a little more than average for an owner club. In actual fact, the £100 fee even cover the cost of the quarterly newsletter sent to members and is extremely good value for the service we offer. We are committed to giving individual service to members and have several sessions spent a considerable amount of time talking them the more about queries for a single member. A main point being a member interested in the continuation of ZX81, books and PARTH.

It is nice that you support the ZX81 to the full and I hope that

you might be able to put some pressure on the editors of ZX Computing to allow you enough space to make the following point worthwhile (I think you will agree). We have a very good and highly successful program already on the market, i.e. "Forty Hour" and a potential best seller about to be published. The trouble is that given the ZX81 owners gets a new and every week we are flooded with letters saying that they have heard about "Forty Hour" and have tried to obtain it by cutting around at their local shops without success. Now while most of the major "retailer" distribution club "Forty Hour" will be doing so with "Bookbrain", it has proved an impossible task to persuade the multitude of smaller distributors and dealers to stock the title. Perhaps during the summer months when Spectrum programs are selling like hot dogs, it is not surpris-

ing that they will not stock ZX81 titles, which they have been conditioned to believe will do most work. The essential issue the ZX81 user, who I know from experience is dying to buy — even during the summer!

Perhaps you could impress another feeling of self-help. Do not allow lack of the shelves of your local shop for "Forty Hour" and the "Bookbrain" to be a good — "Bookbrain" — "Bookbrain" the title, CUT OFF THEM if they don't stock it for any other company's ZX81 to sell! This will give the shop owner a better idea of what will sell and, in turn, the distributor's confidence will grow in the message as a whole. In the end this will benefit all concerned.

Keep up the good work!

Yours sincerely,
J N Chopart



Andrew Newman of the Chicago Computer Distributors Store, Ray Job, Andrew Newman of the Chicago Computer Distributors Store, Ray Job, Andrew Newman of the Chicago Computer Distributors Store, Ray Job, Andrew Newman of the Chicago Computer Distributors Store, Ray Job, Andrew Newman of the Chicago Computer Distributors Store, Ray Job.

Teletext adaptor for the ZX Spectrum

The TTX 2000 teletext adaptor can work either the 100, or 400 British Standards is now available. No modification to the Spectrum is necessary - simply plug in, switch on and enjoy the best access to Carlton, Channel 3, 4, 5 and 4 Tels provided by BBC1, BBC2, ITV and Channel 4 respectively.

Priced at around £140 (pp VAT & P) the TTX 2000, power adaptor, ZX interface cable and full detailed instruction manual are available in one package direct from the makers. D.E. Limited, the companies

store specialists of North Point, Gillette Industrial Estate, Pimlico, Corroton, GA11 609, Tel: 037831 8874/9. D.E. Ltd are also the designers and manufacturers of the Prime ZX 2000 robot.

The TTX 2000 fits directly beneath the Spectrum with its 8bit connector to the video and an auxiliary power supply lead to plug the adaptor into the mains socket. It will work with any standard black and white colour TV, displaying 40 columns of graphics and a 24 rows, or full teletext page reproduction.

There are four channel per teletext and pages are coded up by simply buying the appropriate number. The usual 400 lines such as Field and Festival are provided for. Teletext pages can be held on screen, stored on a discdrive for later recall or printed out for a permanent record using a Spectrum printer or any compatible unit. The TTX 2000 measures only 9" x 6" x 1.5" and weighs just 1.25 lbs.

D.E. Ltd have announced plans for a teletextware programme to allow all TTX 2000 users to receive sophisticated, specially designed software for use with the ZX Spectrum. The BBC has just started software development tools for the Spectrum via Teletext on Codes, and D.E. Ltd states that the download facility will be available shortly to an upgrade ROM.



ZX Spectrum lightpen from Datapen

The photograph shows Datapen's lightpen in use with SEXTON, a high resolution software drawing program. Using the program the lightpen is capable of drawing (and erasing) lines, triangles, rectangles, circles, etc. plus user defined shapes. Text characters will float over files all to an amazing and adjustable single pixel accuracy. The program is very easy to use as it is controlled by the lightpen instead of mouse movements on the screen. You don't need a keyboard if you have a lightpen.

In another lightpen operated program, Datapen provide a user defined character generator enabling you to generate any and visual way of designing your own program stages for use in other programs.

Both programs, plus an in-

struction program, are included along with the Spectrum version lightpen for just £39 in colour.

The lightpen plugs into the expansion socket on the Spectrum and is powered by the computer. The Datapen are located inside the pen body and using miniature watch style micro miniature camera.

Datapen lightpens which are available for other popular systems are high performance lightpens with top of the range features such as a built in switch LED signal lamp and the ability to work under all lighting conditions.

Further details are available from Datapen Microtechnology Limited, Datapen Road, Overton, Hants RG25 5J3. Telephone 0344 770466.

Interface Systems launch new range of printer interface adaptors

Socket based computer interfacing specialists, Interface Systems Inc. has launched a new range of printer interface adaptors.

(branded Microway, the new adaptors are available in the following formats: RS232C to Centronics; Centronics to RS232C; RS232C to Centronics; Centronics to RS232C and Centronics to RS232C. As a complete range, the price is below for almost

any combination of RS232C Centronics and IEEE interfaces.

The systems solve printer compatibility problems that are frequently encountered by microcomputer users.

The Microway adaptor sits between the computer and the printer and comes complete with all necessary cabling. Measuring 8 x 8 1/2 x 1 1/2 inches, Microway is sold for price a just £79 + VAT.



A new range of hand controls

Based-based electronic toys company CGL, are handling distribution for Wink Hand controls in the UK.

CGL currently has four types of game control available in the Wink range: Tridax, Three Way, The Ace and Red Ball.

The 3-way joystick offers three ergonomically-designed interchangeable grips: a standard finish for hands and feet, a smooth finish for hand only and a 3-way joystick grip for hand only. The 3-way joystick offers 12 around 120°. Now you can change handles as often as you change video games... and there are

two independent fire buttons controlled by a 3-position selector switch.

According to CGL, The 3-way Joystick is the only popularity priced precision-engineered and controlled market today — it results in reduced £13. Compared of durable, high impact plastic. The Ace has soft-associated action-time and features a comfortable grip handle with a thumb action fire button.

The Tridax RedBall Joystick will be familiar to many players as it looks the same as those used in most arcade games. The 3-way joystick provides 3-way directional control in four light ring quick responses. There are two fire buttons, one on the handle and the other on the base which allows greater versatility. The heavy duty plastic base is equipped with rubber grip pads for table top use as well as hand-held use. Red Ball is priced at around £20.



RGB output for Spectrum

One of the major disadvantages of owning a Spectrum has always been its lack of quality graphics due to there being only a UHF signal available to the user. This not only gives poor quality colour pictures but it's also invariably incompatible with the latest TV receiving much better.

Following the success of their video output kit ADAPT ELECTRONICS have teamed up with the complete answer to Spectrum video pictures. An RGB output driver module to raise features to:

Gives true TTL level RGB on standard DIN socket.
Separate saturation system can be used on any monitor with TTL RGB inputs.

Increases no modification or external connections to the Spectrum.
Simply plugs into expansion port.
No separate power supply required.

Does not affect UHF output. Can be switched to give optimum performance for your local TV.
Improved picture quality results in eye strain.

Why buy a monitor capable only of Spectrum? Now you can use any RGB(TTL) monitor of your choice. When you change computers there will be no need to change monitors.

Price £29.95 plus 9.5% P.M. and available from

ADAPT ELECTRONICS
20 Beaufort Close
Buckham Hill,
Evesham WR11 3TN

or send SAE for further details

IN.....BRIEF (hardware)

■ Sinclair Research's revolutionary flat-screen pocket TV is now available in its final gold model. This, 'the screen which has everything' priced retail for around the £3,000 mark and is currently available from Agency & Company PLC of London.

For details regarding the gold gold screen pocket TV contact Christopher MacDonell, Agency & Company PLC, 185 New Bond Street, London W1Y 0AN (Tel: 01-493 8313).

Customers enquiring regarding the pocket TV (black plastic case) should be directed to Sinclair Research Ltd., Cambridge CB2 7U 02111.

■ A new Permal printer costing less than £100 by The Mag Systems Limited, the Falmouth-based specialist peripheral manufacturer who recently announced the PHL200P data storage system.

Called the PerMail, the compact 40-column printer has a new element but based on existing printing in two dimensions, lower cost operation and printing. Other features include variable character mode and bit image graphics — facilities normally only found on larger printers.

The printer needs a Computer Interface which will cost you a further £50.

The Mag Systems Limited, Theoproggie Industrial Estate, Falmouth, Cornwall TR11 3TU.

■ The GMA Model, being marketed in High Street retail outlets by Proton Computing Ltd, enables computers to communicate via a telephone line and is the first of its kind to cost British Telecom approval. It is compatible with most personal computers including the Zenith ZX Colour, Commodore 64, BBC Model B and Acorn Geometry when used in conjunction with a Proton Interface Pack.

■ Unisys has announced a third plane EPROM linear which are presently in use at EPROM's in minutes. Price of £16.95 the company claims is the lowest price available.

The Unifac EPROM linear comes complete with power cable and instructions.

The company also expects to be producing an EPROM Programmer in only £26.95.

■ Several companies go once again to have worked up to the fact that the Spectrum's telegraphics capability by being possible and have produced professional quality storage devices.

Both systems based on 8000000 and control the telegraphics which consists of two high speed tape drives a composite parallel port and a 100000 serial port.

We have not which our movement is giving an extensive trial, but first impressions are very favourable.

System units if bought separately would cost around £300 each price is £129 including VAT and a wordprocessor program.





French and German is fun

ODE More Systems have produced an audio cassette edition synchronized to run with both their French is Fun and German is Fun educational programs for the Spectrum 48K. The cassette aids correct pronunciation of the programme words and phrases and was produced using the facilities of the Open University. It costs an £2.95 and is also available in a three part presentation pack containing the audio cassettes and both the French and German is Fun programs, which is priced at

£12.99. The offers a saving of £2.41 compared with purchasing the two programs and audio cassette separately.

French is Fun and German is Fun are carefully structured and feature a 30 page text, providing a choice of one of six picture scenes and a Coaching Tutor at the Time and an All Points system. The cassette contains corresponding sections, such as formatted with a tone to allow synchronization of tape and program.

A table is provided to record test counter start and stop positions, making it subsequently quite easy to find the required section of tape.

Two ways to ocean's gold

Ocean Software's new sports simulation "Daley Thompson's Decision" gives some nice timing the chance to compete in the Olympics from the comfort of an uncluttered terminal.

The game which is available for the 48K Spectrum 128K

£6.95) recreates the 10 decathlon events — all of which are played under Olympic qualifying standards. Facilities for the game will go to the British Amateur Athletic Board, and a free poster often included with every copy of the game.

Regional Ocean managing director David Ward, "We showed an incomplete version of the game to Daley Thompson — he loved the 500 metre sprint and long jump. Clearly he pronounced the game — our programming team had a tradition



IN BRIEF

■ CRL, formerly Computer Fennels Limited, are going strong on the game of the TV show programs.

Tomb Raider was written by Richard Taylor, and is a 3D perspective flight-based game, price is £6.95.

Coming soon in the last TV (previous vocabulary) is Mega Roundabout.

■ While on the theme of TV shows, Big Byte, a long established and well respected software house, have obtained the rights to Jurassic Beach this space.

■ A package of tapes from Pinbury Software arrived at the office with little info.

Now to see six DOS programs included, Games 1 to 3, Star Machine, Box File, Andromeda and Process are the first four at £4.95 and the last two at £5.95.

Three Spectrum programs are Games 1 and Armwrestle at £6.95 and Andromeda and Process at £8.95.

I'll get our team experts to study these in depth.

■ Another image tentatively let Genesis release manage a few more this year and it was greeted with moderate acclaim. This is now as packaged it is Frog Foot, an education game, and Shoot Rider, an action game which also requires some thought.

All are available for the 48K Spectrum at £5.95 each from 125 Bamberley Rd, Glasgow.

■ Words and Pictures is the latest educational program from experts Cyalsoft, nicely packaged early learning games (3 to 7) complete with booklet. £9.95 from 37 Wilkerson Rd, Worcester, Wtd 12R.

■ Clarity, the company who specialise in chemistry measurement simulation programs, are increasing their range by three — What Equations, Male and Female Tables.

All their programs will now sell at £6.95 instead of £8.95 and many are available via the new 800

programming strategy to get the game ready in time.

To play the game one player takes on the role of Daley Thompson competing against the computer. To qualify each player has to take an "energy test" — and the computer's decision on fitness is final. Micro's equipped with a speech unit and will hear competitors' words via a microphone. "Go your marks, one stroke, three times can be heard, and animated graphics reproduce the stadium and track.

Players are disqualified if they have more than three false starts at any event — Ocean recommended taking off at 45 degrees for the long jump, avoid a false start, Ocean programmer David Culler accuses competitors that it is possible to beat the computer.

"Gilgamesh Gold" is hidden in the curious depths of a multi-toured mine shaft. The spirit of Ocean's arcade-style adventure game, which is available for the Spectrum 48K, is to collect and remove the bag of gold — just before the deadline runs out.

Equipped with a wheelbarrow, the player can generate as the time and raise the score, on each occasion that a bag is deposited in the barrow.

It's a simulation but three scores game and Gilgamesh's man-powered front screen to score by hitting a lit on a passing truck — or crashing a handy job too and plummeting through a cliff wall.

However, life is not all for the elegant Gilgamesh. A host of dangerous obstacles (at least) possibly placed as after him, and his gold. Clearly represented on the screen as out and "bad" dies, with skeletons showing their faces — they are ready to put up a little fight.

Game reflexes from the player enable Gilgamesh to step out in order by deftly slipping a bag of gold on his head. Gilgamesh can also escape on a truck — but if he steps in front of it he can also be obliterated by it. He can use ladders at 180° — but because of the mining safety rules, an iron safety gate is set when the lift actually stops. If not, he may come to a messy end at the bottom of a hard shaft.

Fast movers

UNIQUE, the latest software issue to enter the computer games market, has just signed an exclusive contract worth several thousands of pounds.

The contract, according to UNIQUE's founder, John Wilson, "enables us to fully utilize the benefits of a huge development team and a team of top-performing programmers and systems analysts."

"By combining our games designing team with the new development system we are introducing a program that is as excitingly high quality as well as being fun and enjoyable to play."

The first two releases were **JUMP** and **RED ATTACK**. **JUMP** is an original quick reflexes game to end all quick reflexes games. You have to recognize a large balling using nothing but the window ledge and backdrop but watch out and get ready to **JUMP**. **Flows** puts on being thrown by real puns and somebody keeps shouting the windows.



RED ATTACK is the most comprehensive, detailed and fast-moving of all their unique game ever designed. One to first players, yet has players' breath out for reviews.

Next were **WINDWALKER**, **WET TIGER** and **WINDWALKER**. All four have a strange resemblance to the programs seen by **WIN TAMATIC** from Spain.

formal specialized we're going to market the full out of them."

VIRGIN GAMES is seeking its own titles with a £250,000 spend. The titles include an exciting new game for the Spectrum, **Scorpius**. The game is priced at £5.95 despite its cost, primarily — offering exceptional value. **Virgin** are also offering a price of a £2,000 rebate for the first person to successfully complete it.

We believe that **Scorpius** has the Spectrum in its own right. **Virgin** is Technical Manager. "We would have called it a Mega Game but we felt the name has been developed.

IN BRIEF

• **Hyperborea** is a maze game with some originality and humour from **Blizzard** another retail company. The **Blizzard** **Nightmare** source format.

• **Alvarez** **Mary** is the latest in the **Mastermind** £1.95-4.95 **Spectrum** games range. Your task is to figure out a proof and it is related to a mixture of science, strategy and adventure. Great! I hope it is good as I expect any effort to provide value for money, however they have a test day for friends so I cannot make any comment.

• **Kalstein** **WFF** from the subculture. It's like a 1 if it's going to be worth showing out at your local store. £5.95 for the 48 K **Spectrum**.

• **Ramp's** **Stack Control** program has now been modified so that it will work on **Mastermind** and make use of a full sized printer as a **RGB 22** or **ColorStar** interface.

I will fourth confusing, but motivated to not being arranged in the bookkeeping line.

Also it wouldn't transfer to the disk drive even though I made all the necessary modifications. It costs £29.95.

• All these games programmers or would be commercial program writers should look at **White Lightning** from **Daim Software**. Described as a games writing language, and I will agree with that, it consists of a suite of programs, a sprite editor, a sprite designer and the master program.

All three are very powerful and the demo will convince you that the program, along with your imagination, can create commercial quality programs.

The master program is essentially the **Fortran** language so if you've some experience of that you will find it a bit odd. I will admit with it I think the first time I've so far seen a practical use for it on a home computer.

As always with the kind of program, it's only as good as the user, and you have to be prepared to spend a great deal of time learning to use what is essentially a powerful and sophisticated tool.

Programs written with this package run completely independent and **Daim** make no claim for royalties or other including restrictions on the programmer.

• One of the best accounting systems around is that supplied by **Hastecrest Business Software**. They have now redesigned their programs around a twin interactive system.

This was a very sensible idea and the set comprises of three programs which operate independently or as part of an integrated system. They are **Sales Ledger**, **Purchase Ledger** and **Cost Book**. Each program costs £29.95 or £32.95 for **Legend** £75.00 for three, if you are considering running your **Business Accounts** from the **Spectrum** I suggest you give them a try.

Next stop **130 PO Box 12, Langdon Business, Isle LUT 020** Tel 0425 523 7755.

• **Highgate Software**, 3 North Court, Hillside, Essex CO9 2RH are selling **Contract Bridge** which they claim is the "best-possible" game, and, for and away the most realistic and computerized computer **Bridge** game. I must get someone who plays to comment on it. Meanwhile you can try it for £5.95.

• **Fleetwood Ltd** are marketing **Simple Business Accounts** for £1.95. **Tighe** written in **BASIC** and with **interactive** options. I found that the format, but been able to rely on over simplified. A little experimenting and I was starting to think it definitely had possibilities.

I changed it to operate on the **Technology Research Data** drive system without any problems and was starting to find some attractive features.

I also changed it to operate with the **Shiva** printer and **Commodore** interface. There are built in options for the **ZX printer** for **Alpha** or **RGB 22** driven printers.

At the stage I sent it for a full review so we can see what someone else thinks.

Personal comment: With a **Mastermind** or other test access system it could be very useful.

Fresh start from virgin games

VIRGIN GAMES, the computer software company of the **Virgin Group** is going into the **1988** Xmas season with a fresh start.

Games are the joys of releasing big numbers of titles for all markets in the hope that something will hit. Instead, a traditional selective approach has been adopted.

We have changed with the market and **VIRGIN GAMES** Managing Director, **Nick Alex** writes: "The first game approach will not touch any more — the autumn was our only releasing effort, all of which have been extensively researched and tested.



The Sunshine three

Well known publishers Sunshine have produced three more books on a variety of topics

Home Applications on your Main by Mike Green, principal contributor to several computer magazines and editor of the Com number 64 adventures, is intended to provide you with practical ideas for using your micro.

It gives examples of how a database, a spreadsheet and wordprocessor can help you in running your home, extending your business and removing non-peace and book.

A good book for those looking for the answer to the open question 'Why save but what can it do?' at a cost of £4.95

Inside your Spectrum by Jeff Taylor, author of several commercial computer games, and Denis Rogers, well known as TV and business management, is a guidebook that is going on inside the case of the Spectrum.

The book is in two volumes the first deals with computer design and the second concentrates on the Spectrum, in particular the screen display, keyboard and sound

I will a quick look at this one and at first sight it appears to be a clearly written fascinating book, especially if you're interested in computer work.

The book also costs £8.95. All of these should be available from computer bookshops or from Sunshine, 112/114, Little Newport Street, London WC2R 3LD.

Programs are included to illustrate many of the points, and it is claimed that users also introduced to the world of machine code programming partly via a monitor program and fonts and experiments.

A clearing title indeed and at £8.95, I think you get our reviewer to give it a considered opinion in the next issue.

Winning Games System and Graphics for the ZX Spectrum is the first of a line for John Durr's book. It is a former fire director who specialises in system integration using a Spectrum.

Every chapter contains short lesson or short code programs to perform specific tasks which may then be added to your own programs

IN BRIEF

■ The Micro Manual by Stewart Hasted is promoted as "the book the micro-owners should have written in the first place" and is intended to be clear, simple and enjoyable.

The press release which included a few micro-owners' testimonials, but no sign of anyone outside the firm, Dartford SRA Publications, 58 Sheldon St., Covent Garden, London WC2

■ Hutchinson Computer Publishing Company Ltd have released five books for the ZX, which cover an Introduction, Spreadsheets, Text, Logo Computing, wordprocessing and advanced programming.

The CD series has been produced with the cooperation and support of both Sinclair Research and Home and the introduction to the software was written by Robin Shotton. Each book is priced at £8.95

■ Tony Matthews and Paul Brotherton the two 18 year old authors of 'Winning Games on the ZX Spectrum' published by Ellis Horwood Ltd.

The slightly ambiguous title refers in fact to the twenty "designed by new games" which are featured in the book, although "mathematics makes" like Codebreaker, 240 grand horse floor is 162 pages will cost you £8.95

■ The latest edition of Microcomputer Software Directory contains over 4,000 software packages from more than 1,300 suppliers making it the most comprehensive directory of micro-computer software available in the UK. Packages are available on more than 400 machines, operating under the control of 248 different operating systems.

There are full indexes in the Microcomputer Software Directory, software, operating system, product and occupation, explanation. The index by machine type provides an explanation, then alphabetically according to the type of machine manufacturer.

The Microcomputer Software Directory is published by Computing Publications Ltd, and can be obtained from £8.95 Post Office, London W1A 1HG. Telephone 01-429-4242. Price £40 plus £2.20 p.p.

ADVANCED SPECTRUM FORTH

by David Wall

£8.95

£8.95

£8.95

£8.95

£8.95

£8.95

ADVANCED SPECTRUM MACHINE LANGUAGE

Extend your Spectrum with nearly 1000 machine language routines



Two new from Melbourne House

Two of the latest books from Melbourne House are aimed at the advanced user.

Advanced Spectrum Machine Language is written by David Wall and is aimed at programmers who already have some knowledge of machine code programming.

The book contains many machine code routines which can be included in the reader's own programs. The programs range from changing the colour of the screen and border, horizon movement etc. to simulation and pixel line move (etc).

At £5.95 the volume is essential reading for those who've reached the limits of machine code and

wish to go a step further.

Advanced Spectrum Forth is a book which is found useful. It is based on Forth but more fully treated a complete program in the language.

The book takes in practical techniques and a full of useful suggestions. Although Forth general in application it is specifically aimed at users of the Advanced Forth program also marketed by Melbourne House.

Work-look and you intend to use Forth is that then simply equivalent with it. The price is £8.95 which may differ more both are available in bookshops and by Melbourne House, 38 Milton Trading Inc, Abingdon Oxon OX14 1TD

Mindplay

Greg Turnbull looks at games of strategy and tactics

BLENDS OF LANGERHAAS, Amazing Games, £5.50, 48K Spectrum

This is one of the many recently mass-produced and sold using Microsoft's "The Guild". The adventure makes a great welcome change from battling through the usual scores of rooms, killing goblins, gnomes, etc. Your quest is to journey through the human body to locate the "leak of Langerhaas" (look it up in a medical dictionary), and return them to the capsule world.

Out to the west of the Guild, the program is in 120 levels of machine code, hence quick to respond and accepts the usual commands. There are many very clever combinations, which can be changed to four letter strings. For example, THROW KNIFE (not a dive).

No comprehensive document comes with the tape — only other Amazing Games — some of the game is to discover a vocabulary that works.

The lack of knowledge, plus the logical nature of the test, may cause a few problems for people without a D-level biology. However, the problems are not too difficult, and the format does make a pleasant change.

I believe a version of the program is available for the ZX81, entitled, "Panic in the Village". The idea for the program comes from the excellent tape, "Ameyo" (now "Panic in the Village"), which was made into a superb film with Reginald Kitchin in 1948. If you have either read the book or seen the film you will have a head-start here.

Amazing Games also claim that the program can be used as a vocabulary test for students using D-level biology classes. As an ex-biologist, I would say that this is partially true. A knowledge

of physiology/biochemistry is certainly an advantage. If you get stuck you can always look the terms up.

The test is not entirely clinical, there are references to looking in T.V. telephones, record players, gramoids, etc. So previous adventures shouldn't have too many problems. A couple of humorous touches can be seen, e.g. if you ask for help, I'll help you get it. "This isn't a Scott Adams adventure".

On your journey you will visit such locations as the liver, kidneys, heart, brain, testis, etc., as once you pass there is no returning and many others. Problems can be conquered by using increases you've stored. Involuntary jerks of branch molecules, lesions and poisons, etc.

The only criticism I have of the game is that objects may be used more than once, so you could try them all until you get the right one, requiring no specialised knowledge. Otherwise I enjoyed playing this most interesting and unusual adventure. It is a pity that no graphics could be included.

Incidentally, while some users of the Guild will avoid returns to come up with many more such games, and other unassisted formats. This will prevent the adventure field from becoming stale. I look forward to playing further Amazing Games programs: "Thriller" and "The Last Jedi" — watch the column for future reviews.

THE CODE Soft Concern Ltd. 48K Spectrum

This is a highly complex text-only adventure game, with a price of £25.000 for anyone who can complete it. Ten former-up prices of £25 are also available. The idea being that you are a secret agent in a Russian military establishment; you must work your way through four floor levels to reach the

brief room, and crack the code.

The program is highly detailed in text-only adventure, with extremely complex problems to be solved. This is told expected considering the sum of money involved if you can beat it.

Verdict: Only buy this if you are superb at solving difficult puzzles and can think fast, or are very short of cash. If like me you can't progress very far through the program, at least there is a nice frozen-salmon picture to look at while the tape is loading.

STAR TRADER Rug-Byte 48K Spectrum

Star Trader is one of the growing range of spreadsheet programs for the Spectrum. It is the best for those who want an arcade strategy feel to it. Basically it involves you in buying various types of goods in one planet, transporting them safely to another planet, and trying to sell them again at a profit.

The strategy aspect comes in knowing when to buy the goods and how many items to purchase (your storage space being limited). The arcade aspect comes between the buying and selling; you've got to get there safely first. This is made more difficult by the fact that you encounter them likely to be attacked by space pirates en route.

If you have the correct weapons you can fight back in an approximate simulation of 3-D, which can be fun. The graphics on the planets consist mainly of the labels of shopkeepers, and are well done.

Other problems that can beset you on your travels are pickpockets, rogues and other such unpleasant people. If you thought this was enough, you will like to consider your stomach. You must eat and drink (mostly beer in the local Bunker Club) to keep you in good

health. If you fail to do this you won't be allowed to take off and will eventually die of starvation.

You start off with a set amount of cash which is reduced by buying goods, food, drink, payments to space-junkies if you get caught etc. For another problem to take a space tax. When landing on a new planet you can choose to divert all sales or none of your cargo and risk losing it all. Alternatively you can try to bribe a customs official (which may not always work).

Careful planning, the use of the report facilities, buying and selling is required. Overall a game that will give you plenty to think about. However, it may get a bit repetitive because of the multi-planet format. The graphics make a welcome addition here. Recommended for good or average strategy game looking for something a little different.

THE INFERNO Richard Shepherd Software £5.50, 48K Spectrum

This is the latest graphic program from the well known Shepherd stable. It has a completely text, colourful landscape and graphics which can be watched off. The game is based on Dante's 13th century book "Inferno".

Your quest is to explore the underworld, travelling through the nine circles of hell, to reach the centre and finally escape.

Some of the areas to be explored include: The city of Dis, the marsh at Sisyphus, plains of ice and many others. Your actions can influence the behaviour of other characters, but I found that I didn't see this necessary feature much. You must try not to be too violent as most other characters are stronger than you are.

The SAVE routine is a little tricky and can be used often, without problems. There is also a SCORE mechanism, although occasional numbers can be found (30-4000) you should add you get. "You can see something horrible, no. It's just your imagination".

Seasoned adventurers should have little problem with this program. However, the cost can be likely to see in choosing the "Dis". In conclusion, an impressive looking game, but somewhat lacking in text substance to make it totally absorbing. It can be recommended with some reservations.

No, not a simulation of the ZX81 RAM problem, but a great motoring game from Luc De Jaeger of Gent, Belgium.

This is a clever combination of a driving simulation, an adventure game, and also needs the usual cautions associated with all such games.

Once you have typed in the listing and filled the program, the first thing you'll see is your dashboard. At the top of the screen is a thermometer representing your speedometer, this is indicated by 000H.

Below this on the left is a rectangle which will indicate brake failure, and on the right is a rectangle which shows when you are very low on fuel.

A digital petrol tank meter is set below this and has 00 litres at the start of the journey, so you drive you will see up petrol and when the gauge starts to act strangely then you're starting to get low.

On the left of the screen is a display of the options:

```

0 to brake
1 to turn left
2 to turn right
3 to accelerate
4 to decelerate

```

A single press of any of these keys should be enough to change your status accordingly.

On the right of the screen is the computer display of the in-

stant situation on the road and, being like your brain, it also informs you of the correct action to take. Basically these figures to react correctly within a reasonable time, failure to do so will inevitably result in the crash of the car.

As nice as you have to be to take the driving test, watch your safety belt, and off you go remembering to drive on the right and you're on your way.

Technical details

The main routine begins at line 80 and all the different sections are set in separate subroutines which are arranged as follows:

```

100 - 218 Long road
220 - 260 Speed
268 - 278 Turning
280 - 498 Brake failure
500 - 678 Empty petrol tank
680 - 818 Accident
820 - 898 Low petrol
910 - 948 Crashing
1000 - 1020 Speed
1027 - 1088 Braking
1091 - 1155 Restart
1200 - 1278 Home
1520 - 1510 An accident
1600 - 1608 Dashboard
1600 - 1608 Speed/Petrol
7000 - 7065 Crash
7500 - 7505 Turning

```

```

107 IF RND>.3 THEN GOSUB 400
110 IF RND>.3 THEN GOSUB 1000
111 IF RND>.3 THEN GOSUB 1027
112 NEXT N
115 GOTO 1200
120 GOSUB 400
123 PRINT AT 10,10;"YOU ARE DRIVING ON A";AT 12,10;"LONG ROAD"
125 IF N<10 THEN GOTO 200
140 GOSUB 6000
170 GOSUB 300
180 RETURN
200 PRINT AT 14,11;"YOU MAY HIT HER YOUR";AT 13,22;"SPEED"
205 IF INKEYS="" THEN GOTO 200
210 IF INKEYS="F" THEN LET N=N+INT (RND*15)+1
213 IF N>27 THEN LET N=27
215 GOSUB 6000
216 GOTO 120
270 GOSUB 400
275 IF N<10 THEN GOTO 245
240 IF N>10 THEN GOTO 270
245 PRINT AT 17,10;"XXXXXXXXXXXX";AT 18,10;"XXXXXXXXXXXX"
252 FOR J=1 TO 50
255 LET M=INKEYS

```

```

3 CLR
7 LET N=4
10 LET A=4
15 LET A0="FUNCTIONS"
20 LET B0=""
25 LET C0=""
"
38 LET E0=""
39 LET F0=""
"
48 LET G0="000"
49 LET H0="000"
50 LET I0="XXXXXXXX"
51 LET J0="XXXXXXXXXX"
52 LET K0="000"
45 LET L0="XXXXXXXX"
75 LET Z=52
80 GOSUB 5000
81 RAND
85 FOR N=0 TO 10
88 IF RND>.3 THEN GOSUB 100
92 IF RND>.3 THEN GOSUB 200
100 IF RND>.3 THEN GOSUB 300
105 IF RND>.3 THEN GOSUB 710

```




```

268 IF M#="F" THEN GOTO 272
265 NEXT J
270 GOSUB 7888
271 GOTO 688
272 LET N=N+INT (RND*24)+1
273 IF N>27 THEN LET N=27
275 GOSUB 6888
276 GOSUB 488
277 RETURN
279 GOSUB 6888
288 PRINT AT 9,11;"YOU ARE DRIV
ING TOO";AT 10,22;"FAST";AT 11,1
1;"YOU CANNOT AVOID";AT 12,12;"A
N ACCIDENT"
291 FOR I=8 TO 65
292 NEXT I
293 IF RND*.459 THEN GOTO 297
294 GOSUB 7888
295 CLR
297 GOSUB 6888
298 PRINT AT 10,11;"FORTUNATELY
YOU ARE";AT 11,11;"NOT HURT AND
YOU CAR";AT 12,11;"IS NOT TOO M
UCH";AT 13,20;"DAMAGED";AT 14,11
;CHR$ 5;CHR$ 5;"XXXXXXXXXX
";CHR$ 133;CHR$ 133;AT 9,11;"YOU
HAD AN ACCIDENT"
292 FOR I=8 TO 95
293 NEXT I
295 RETURN
297 GOSUB 7888
298 PRINT AT 2,1;"D=D=D=D=D=D=D=D
XXXXXXXXXX=D=D=D=D=D=D=D=D"
299 GOTO 565
300 GOSUB 488
305 PRINT AT 10,12;"THERE IS A
TURNING";AT 14,12;"TO THE RIGHT"

318 FOR J=1 TO 45
315 LET M#=INKEY$
328 IF M#="B" THEN GOTO 348
325 NEXT J
330 GOSUB 7888
335 GOTO 7588
340 FOR S=8 TO 18
345 PRINT AT 1,29;88;AT 1,29;84

358 NEXT S
360 GOSUB 6888
365 PRINT AT 12,12;"ALL IS WELL
NOW"
366 GOSUB 718
370 RETURN
408 FOR L=9 TO 21
405 PRINT AT L,18;84
418 NEXT L
415 RETURN
428 GOSUB 688
432 LET C=RND
448 GOSUB 4888
445 FOR I=8 TO 18
447 PRINT AT 8,4,18;AT 6,3;84
449 PRINT AT 8,3;84;AT 6,3;84
451 NEXT I
453 PRINT AT 10,11;"XXXXXXXXXXXX
XXXXXXXXXXXX"
454 IF INKEY$="*" THEN GOTO 454
455 IF INKEY$="B" THEN GOTO 435
458 IF INKEY$="S" THEN GOTO 466
460 IF INKEY$="R" THEN GOTO 488
462 IF INKEY$="W" THEN GOTO 487
464 IF INKEY$="F" THEN GOTO 498
466 FOR J=8 TO 18
465 PRINT AT 1,1;84
470 PRINT AT 1,1;84
472 NEXT J
473 PRINT AT 11,11;"YOU ARE ON
THE BORDER";AT 12,12;"OF THE RDR
D";AT 14,13;"HERE ENDS THE GAME"
AT 15,19;"FOR YOU"
474 FOR I=8 TO 75
475 NEXT I
476 GOSUB 7888
478 GOTO 565
488 FOR J=8 TO 18
481 PRINT AT 1,29;84;AT 1,29;84

482 NEXT J
484 PRINT AT 9,11;"YOU WILL HAV
E AN";AT 11,19;"ACCIDENT"
485 GOSUB 281
486 RETURN
487 LET M#=INT (RND*15)+1
488 IF N<4 THEN LET N#6
489 GOSUB 978

```

Crash

ZX81 GAME

```

494 GOTO 484
495 LET N=N+INT (RND+12)+1
496 IF N>27 THEN LET N=27
497 GOSUB 6000
498 GOTO 500
500 GOSUB 400
510 FOR J=0 TO 10
520 PRINT AT 5,1;TAB(1) AT 6,1;LF
525 PRINT AT 3,1;P;AT 6,1;P;
530 NEXT J
535 PRINT AT 13,11;"SLOW DOWN"
540 IF RND<.5 THEN GOTO 540
545 IF INKEY="" THEN GOTO 545
550 IF INKEY="D" THEN GOTO 552
551 GOTO 488
552 LET N=N+INT (RND+12)+1
553 GOSUB 970
554 GOTO 458
555 IF RND>.6 THEN GOTO 55
560 GOSUB 7000
561 PRINT AT 2,2;"THERE WAS NOB
ODY TO HELP YOU,";AT 4,2;"YOUR C
AR HAS NO PETROL,SO";AT 6,2;"YOU
HAVE TO WALK"
565 PRINT AT 21,12;"XXXXXXXXXXXX
XXXXXXXXXX"
570 IF INKEY="" THEN GOTO 570
575 IF INKEY="Y" THEN GOTO 5
579 STOP
580 LET N=N+INT (RND+25)+1
582 IF N>27 THEN LET N=27
585 GOSUB 6000
590 GOSUB 7000
591 PRINT AT 2,3;"YOU COULD NOT
AVOID AN ";AT 4,3;"ACCIDENT BEC
AUSE YOU DROVE TOO FAST"
592 GOTO 545
600 CLS
605 GOSUB 7000
610 PRINT AT 4,7;"ANOTHER CAR C
RASHED";AT 6,7;"INTO YOU"
615 GOTO 565
620 PRINT AT 15,11;"GO TO THE L
EFT BORDER";AT 16,10;"THERE IS S
OMEONE WHO CAN";AT 17,11;"HELP Y
OU"
625 IF INKEY="" THEN GOTO 625
630 IF INKEY="B" THEN GOTO 475
635 GOSUB 7000
640 GOTO 488
645 PRINT AT 19,11;"ALL IS WELL
";AT 20,11;"YOU FOUND SOME PETOL
"
650 LET Z=25
655 GOSUB 6000
670 FOR I=0 TO 65
675 NEXT I
677 GOSUB 400
679 RETURN
710 GOSUB 400
720 GOSUB 6000
725 PRINT AT 14,10;"YOU GO STRA
IGHT TO";AT 15,14;"A CROSSING";A
T 16,12;"XXXXXXXXXXXXXXXXXXXX";AT
17,11;"YOU HAVE PRIORITY"
730 FOR J=1 TO 60
735 LET M=INKEY
740 IF M="C" THEN GOTO 775
745 IF M="D" THEN GOTO 805
750 IF M="B" THEN GOTO 825
755 IF M="S" THEN GOTO 855
760 IF M="R" THEN GOTO 895
765 NEXT J
770 GOTO 400
780 LET N=N+INT (RND+12)+1
790 IF N>27 THEN LET N=26
795 GOSUB 6000
800 GOTO 81
805 CLS
810 LET N=N+INT (RND+15)+1
815 GOSUB 970
820 PRINT AT 7,4;"WHY DID YOU S
TOP ";AT 8,4;"YOU HAD PRIORITY"
825 GOSUB 7000
832 GOTO 565
835 GOSUB 970
840 GOSUB 6000
845 GOSUB 400
850 RETURN
855 FOR I=0 TO 10
860 PRINT AT 1,1;M;AT 1,1;LF
865 NEXT I
870 GOSUB 6000
885 GOSUB 1027
890 RETURN
895 LET N=27
897 GOSUB 6000
898 GOSUB 1027
900 PRINT AT 1,29;M;AT 1,29;LF
905 NEXT I
910 GOSUB 6000
915 RETURN
920 FOR Q=27 TO 8 STEP -1
922 PRINT AT 1,0;" "
924 NEXT Q
925 IF M4 THEN LET N=5
927 IF N>27 THEN LET N=18
930 RETURN
935 GOSUB 400
940 PRINT AT 12,11;"YOU ARE DR.I
VING ON";AT 14,11;"A SPEEDWAY"
945 GOSUB 6000
950 IF M15 THEN GOTO 1095
955 IF RND<.7 THEN RETURN
960 GOSUB 400
965 PRINT AT 15,11;"XXXXXXXXXXXX
XXXX";AT 16,11;"THE CARS IN FRON
T OF";AT 17,11;"YOU ARE BRAKING"

```


THE FINAL TOUCH

Whether you're looking for a new joystick or a new mouse, we have the perfect solution for you. Our joysticks are designed for precision and accuracy, while our mice are designed for speed and efficiency. Both are available in a variety of colors and finishes to match your system. And, with our new joystick and mouse, you can enjoy the ultimate in comfort and control. So why wait? Order yours today!

Available in:
 • 100% ABS plastic
 • 100% metal
 • 100% wood
 • 100% leather
 • 100% silk
 • 100% cotton
 • 100% wool
 • 100% linen
 • 100% rayon
 • 100% polyester
 • 100% nylon
 • 100% spandex
 • 100% lycra
 • 100% elastane
 • 100% polyurethane
 • 100% polypropylene
 • 100% polyethylene
 • 100% polybutylene
 • 100% polycarbonate
 • 100% polystyrene
 • 100% polyacrylonitrile
 • 100% polyvinyl chloride
 • 100% polyethylene glycol
 • 100% polyethylene oxide
 • 100% polyethyleneimine
 • 100% polyethyleneimine
 • 100% polyethyleneimine

Continued from
 high intensity stereo ABS

All connections
 available at our



FOLLOW OUR LEAD FOR THE RIGHT CONNECTIONS

MICRO DRIVE EXTENSION LEAD

The 100' Micro Drive Extension Lead is the perfect solution for those who need a long, reliable connection between their computer and their drive. It's made of high-quality materials and is designed to last. So why wait? Order yours today!

\$6 WAY FIBER CONNECTOR

The 6 Way Fiber Connector is the perfect solution for those who need a reliable connection between their computer and their fiber optic system. It's made of high-quality materials and is designed to last. So why wait? Order yours today!



WINNING IS WITHIN YOUR GRASP

- Outboard Joystick I**
- Super sensitive response
 - 100% buttons
 - 100% ergonomic design
 - 100% quality

- Outboard Joystick II**
- 100% sensitive response
 - 100% buttons
 - 100% ergonomic design
 - 100% quality



SOUND IDEAS FOR YOUR SPECTRUM

The 3200 Series Sound System is the perfect solution for those who need a reliable connection between their computer and their sound system. It's made of high-quality materials and is designed to last. So why wait? Order yours today!

The 3200 Series Sound System is the perfect solution for those who need a reliable connection between their computer and their sound system. It's made of high-quality materials and is designed to last. So why wait? Order yours today!



Please tick one of the following:

Microdrive Competition Keyboarding	<input type="checkbox"/>
Membrane Extension Leads	<input type="checkbox"/>
68 Way Ribbon Connections	<input type="checkbox"/>
Control Joysticks I	<input type="checkbox"/>
Control Joysticks II	<input type="checkbox"/>
Three Channel Sound System	<input type="checkbox"/>

Please send me and postage £14.00000 (Minimum £14.00000) or add 1 my Account/Barcode No.

Signature Name

Address

Order to: 4 E. Write Now 24 H. Focus Spectrum Catalogue



100, Fenwick Lane, Unit 4, Stone Hill Industrial Estate, Solihull, Warwick, CV57 9JF. Telephone (0121) 881111 (24 hrs) & Fax (0121) 881112

The Spectrum Connection

Spectrum lessons

Mike Edmunds marks a mixture of ZX81 and Spectrum programs

TIME WITH THE PIRATES
ZX81 (16K) £3.00
MPT Software,
42 Roadward Drive,
Bury-St-Edmunds,
Suffolk

In the dim, dark recesses of my mind, I suspect that there are many in the ZX81's just waiting for outside software to come along that will justify their purchase and, since again we must apologise to all those who think their more grandiose counterparts.

For many schools the Humble School will perhaps be a first at being to enter the computer age and whilst moving to be able to begin to use the more sophisticated machines they have been quickly appreciated by those sophisticated models it has long been felt by many teachers however that this, now relatively simple machine, still has a great deal of potential for use within the classroom. It is with some pleasure therefore that I am able, this issue, to review programs that aim to run the ZX81 for more than 200 hours.

Clearly a program that helps the pupil to fill the time. From MPT Software a newcomer on the education scene, comes **TIME WITH THE PIRATES** essentially this is a drill and practice type program with its life span at the end of a term.

It is a little difficult to see just which age range this is aimed at, but lower Juniors should be able to cope sufficiently well although a few reading skills is required for both the on screen text response and the fairly standard education sheet that accompanies the program. It is supported by the author that parents help may be required for some children.

The program has six levels each of the first five ending with and setting a different goal. The



each level consists of a five question test with a graphic reward of points for the child if they get 1 score highly looking the pirate.

In order, the levels deal with **D'QUACK, QUARTER PAST, HALF PAST, QUARTER TO and MINUTES PAST** to the program loaded easily and, given the limitations of the ZX81's graphics it really did not look like any of the more advanced titles and a good attempt has been made to cater for work things as the effort is made here at quarter past the hour.

There are however, certain aspects of the program which are not so good. General spelling mistakes in on screen material have on the first couple of screens and programs of the nature should be thoroughly checked before release. The program is not fully error-tolerant and will accept certain inputs that should have no effect but will build up! Apart from these small points the program runs well and actually seems to achieve what it sets out to do.

In addition because of the necessity for accuracy with its puts of data into spelling

although care must be taken with spacing of screens. The computer's instructions therefore need to be read carefully and it is likely that teachers parent help will be needed until the pupil is familiar with the program.

The carrier is a nice little graphics routine but as it is the aim for easy test I suspect that a child would soon lose motivation. In conclusion this is a reasonable program for the reinforcement of skills already learnt and could conceivably be used by small groups within the classroom. I do not see it taking over from traditional methods of learning teaching time but as the price is certainly worthy of consideration.

HIDDEN LETTERS
ZX81 (16K)
POPPY PROGRAMS,
Richmond House,
Ingletton,
Carnforth,
Lancs. LA6 3AN

This is a program that has been available for quite a long time now but re-examines its words meaning in a good example of a program that can be used right across the Junior age range and beyond and have a whole range of editors.

The program uses a traditional termed educational technique known as 'word processors' to give practice in spelling. It also

develops comprehension skills and encourages the pupil to use context clues of grammar and punctuation in order to extract the author's main text. All these skills are an essential prerequisite for reading fluency and the program seeks to develop these skills in an enjoyable manner.

The program includes a subject test and there is a choice of 9 difficulty levels. The aim of the game is to discover the hidden letters. In Management, the pupil being presented with a number of statements but which letters discovered. The number of actual letters hidden depends upon the difficulty level selected. The greater the level the more difficult seen that may prove difficult to find the option to enter text over text. It is suggested that a single sentence from a reading book is used for the beginning reader whilst a long type passage may suit the more able child.

The procedure for entering the program to suit individual needs is clearly explained and it is possible to build up a library of suitable texts.

In use the program performed well with little lead out and easy to use, albeit rather slow. However the type of program has been well recognized and used by but those with reading difficulties even though the reward is not much of an incentive. I see the major problem being the time necessary to type in the alternative text.

FASTWORD
ZX81
(16,32,48,64K) £5.50
SoftChoice Ltd,
52 Platts Lane,
London, NW3 7NT.

This is not really an education package more of a utility with general educational uses. I occasionally use the add report about business users being



then system upon the good old 51, and then, combined with the frequent adjustments for multiple expansion, some evidence that a lot of people still have a great amount of faith in a machine that may now seem somewhat redundant.

For those without a system the package may be just what, in fact, you need: more than 1MB of main memory to exceed 1MB, it may still be value for money. **FASTWORD** is the name of the package's suite of programs and it is essentially a powerful word processor.

The essential section five programs — a 15K Editor, Formatter 1 and 2, separate word and Processors 1 and 2. The latter also contain final versions of these programs for use in conjunction with the **FASTLOAD** system developed as was **FASTWORD**, by Dr G Pease.

Given the limited space of review such as there is, it is not really possible to do such a program justice and I asked therefore just to give an overview of the system, my comments relating mainly to the 15K elements of the package.

The editors has features on macros which allow the saving and loading of text files to and from tape or disk — simply a disk system for the 511. The editor sections if the program are fairly fast and would allow a moderate typing speed provided of course that you have a decent keyboard.

Text editing is also impressive and as the extremely comprehensive manual points out — menu driven, screen mode support, automatic file saving, editing techniques. The capabilities of the program are really good and contain a great deal of facilities nearly everything that a normal formatter can print, plus subpage numbers as well as several useful special variables.

28 characters per line are produced with the ordinary print command but back of 2000 characters lines up to 255 characters long can be printed with a wide variation of character sets possible.

You have only 10K of RAM for all you need to use the 15K editor to create, load and edit

text files. The maximum file size is 125 screen lines, roughly equivalent to two typed pages. You can then use Formatter 1 to load your text files from tape and print them.

The Editor section has 34 lines available for display and text is easily manipulated using single key cursor commands. Blocks of text can be moved around or copied to new locations and the program has a fairly fast **REPLACE** command for the more complex functions a simple menu, a located bottom-screen to give you additional features include auto-repeat lines, fast character location movement, line space available — in fact almost everything you would desire in a word processing program.

The Formatter section performs with the aid of macros and commands available are Catalogue, fill lines device one of the character sets to give enough memory for adequate printing, Load, Print and Backup (which allows setup to be changed in Formatter 3 only).

The basic formatter 1 takes a text file forwards it to commands which you enter and sends the results to your printer. Formatted alpha letters are generated as Lower case, without video giving capitals. The formatting commands control such things as setting of left/right margins, spacing, underlining and height and width of the characters/print.

The commands can be given as direct commands or be incorporated within the text to be acted upon when printing or both. Some of the facilities offered include line centering, line justification, initial text, visible-ased characters, insert and delete printing (change margins only).

As with most programs of this sort the great limitation is to get right off it and start the busy-stuff straight away. However it is possible (but couldn't be very easy) as the features off once I had started. A thorough read of the manual is strongly advised **WORD** you start!

A trial version here codes **FASTLOAD**, the later program it claims to load any program from 4 to 8 times faster than speed is not, it certainly load so the simple program approx 4

times faster but it was difficult to load and I was therefore unable to test the **FASTWORD** sections which used the system.

However, the booklet to accompany **FASTWORD** gives detailed instructions on how to take your own programs to utilize the facility of macros and reduced loading times. This alone would make it worth purchasing for the £1000 **WORD** user (cost £150).

Individually, loading programs seems both of these programs seem to represent real value for money. The words are extremely versatile and although there is a complete word processing package such as you would already in common use by those with 15K, for those using **WORD** as the basis of a business package who have 10, 40 or 80K then this set of programs demands serious consideration.



HELL MATHS and SPELL-COPTER Spectrum 48K

£3.95 each
Kerlan UK Ltd.,
29 Clisburn Road,
Hessle,
Hull HU13 9HZ

Really, back to the Spectrum which, despite seems to be gaining favour as a 'desktop' machine in schools somewhat. This, I believe is mainly due to the increasing amount of relatively cheap, quality software now appearing.

Educational software has come a long way since the early days of 'drill and practice' routines. Nowadays a program may not only be educationally valid it must also be seen to offer something extra if it is to find a place in the classroom especially if these days of

restricted allowances for items other than books, textbooks.

Obviously these programs do not aim to be so good to justify either the price or the heading 'educational'. The less behind both are very good — a helicopter loaded to and in spelling or conjugation, but the structure of both programs does not provide much of a challenge for the user and after several attempts one is inclined to ask, is there there is too? Admittedly there is something else to be mentioned and that may well appeal to younger children. The assistance however a program should not be entirely too obvious and the degree of motivation is obviously different.

HELLMATHS gives the option of answering questions on any of the four sides in a mixture of all. A score is displayed in large alphanumeric and the child is required to guide a helicopter to the correct answer. The correct answer results in a score and congratulatory message followed by an instruction to have another go. However, a successful score is displayed on the screen and a green arrow indicates the side. The idea is essentially good but the inability to set difficulty levels and the fact that only answers to 99 are required to make the offered task so it seems.

SPELL-COPTER has much the same format. A word is displayed and has one of the letters destroyed by a red helicopter, it is then up to you as your black machine to repair the word by selecting one of the supplied letters. Answers are marked on the screen very as **HELLMATHS** and, again, the same is in my opinion, likely to be more appealing than the **HELLMATHS**. There is a degree of increasing difficulty which into the 118 sets of words but there is no facility to change any of these and although the sets are based on the same sources, only one letter now needs to be replaced.

Put together these two programs have some nice features, in particular the graphics and sound, but apart from that have really little to offer that has not been done better and more cheaply, than others in my opinion not really value for money.

Club corner



Liantwit Major Computer Club

Dear Sir,
This club seemed to be active as of the 20th of March 1984 and it would be appreciated if you would publish this fact in the club section of your magazine.

Yours faithfully,
D.J. Mountain,
Secretary,
Liantwit Major Computer Club
Westwood.

The Network

Dear ZX Computing,
I am the President of the Times Sinclair User's Group in Vancouver, B.C., Canada.

We have in our group at the present time about 150 paid up members. We publish a monthly Newsletter for our members and also the Newsletter is sent to over 25 other User Groups in North America. We also receive their Newsletters. This exchange is called the "NET NEWS".

The NETWORK tends to keep all the User Groups informed of what is going on in the field of the Times Sinclair computers and other products.

The computers tended to are ZX81, T151000, T151000 and the T150488 (Advanced ZX Spectrum) and soon the new Sinclair QL computer which is to be made available in North America. This should be around Christmas time or even then later in the early Spring.

We would like to hear from other Sinclair User Groups in England and other parts of the world. Let's keep in touch and support our Sinclair computers around the world.

Thank you for your kind contribution on this matter.

Sincerely yours,
B. Lussart
President
The Group's mailing address
P.O. Box 788
New Westminster, B.C.
Canada V8L 4Z8.

If you're in need of some contacts wherever you are, read on . . .



Pen Pals Required

Dear ZX Computing,
I own a 48K ZX Spectrum and would like to set up a User Club in my area. Would you help if you could get someone in my area to contact me at the address below. Show if any of your readers wish to have a pen-pal from here who share the same interest in computers, please be free to write to me. Any suggestions, newsletters and reviews from the readers are most welcome.

Yours faithfully,
Adrian Fox
170 Happy Garden
Jin Ruyuan Lane
Kuala Lumpur,
Malaysia
Tel: 031 728883

Dear ZX Computing,
A girl from the west, as less 13 years old and own a 16K ZX81 with printer and am looking for a Pen Pal.

If anyone is interested please would they write

Yours faithfully,
Doris Chambers.

19 Pages Lane,
Murrell Hill
Glasgow G12 1PL

Dear ZX Computing,
I would be more than happy to help you, helping me to find a pen pal from a ZX81 and would like to write to help you in the program and a machine too.

Yours sincerely,
Stephen Masters,
2 Jordan Terrace,
Altonham Bywater,
Cradford,
West Yorkshire

Dear ZX Computing,
For thirteen years old and in desperate need of a pen pal. I live in South Africa and own a ZX Spectrum 48K, a printer and I'm getting a joystick interface. Can you help?

Yours sincerely,
T. Thomson,
11 1/2 St James,
Fish Hoek,
Cape Town,
South Africa,
7828.

P.S. Compliments on your magazine - I really enjoy it.

The West Yorkshire Sinclair Users Club

Dear ZX Computing,
I am starting a computer club which is to be called The West Yorkshire Sinclair Users Club. Every member will receive a club magazine at the beginning of the month, the magazine will contain news, reviews, ideas, programs to try and lot more. The cost for this is a mere £1.00 a year. For details please write to me at:

West Yorkshire Sinclair Users Club,
18 The Green,
Saxton Gardens,
Leeds,
LS20 2RH

ZX Users Group of New York

Dear Club Corner,
Our ZX Users Group of New York celebrates your very first formation and a special publication related to Sinclair personal computers. We will appreciate if you would publish the details in your next issue.

Our Club was founded in 1981, currently we have members from many countries and with diverse experiences and professions. We would like to exchange newsletters with other Sinclair user groups.

If individuals wanted to join our club, they may do so, by sending an international money order of \$15 per year, or subscription to our newsletter including a short description of their background and experiences. Best regards and happy publishing.

George F. Gonzalez,
Chairman,
ZX Users Group of New York
Box 540,
Wall Street,
New York,
N.Y. USA 10008

Mazes

An Amazing program
from Danny O'Mara who
resides in Basingstoke.

When I was a child in 1977 we brought books of these mazes down in the park from one point to the other. Danny's program generates this difficult exercise using hardware from the ZX series.

As a more-advanced exercise in programming you could create a routine to draw a line around the screen under cursor control, but for now I'll hand over to Danny for an explanation of the program.

Description

The program, although small in the amount of code, draws a maze on the screen and lets you try to demonstrate the maze. It uses a 64,000 bit processor. However, it does take a lot of data storage and the listing as given requires a 48K Spectrum. The height and width of the maze may be reduced, in which case it will fit into a 16K machine. This is accomplished by changing the variables *w* and *h* from 10. The best results the maze *w* should be between 11 and 31 and the height *h* between 10 and 11.

After loading the program you'll be asked two variables and their default, random, single connected maze, copying each one to a pointer if fitted. The walls of the maze are drawn black and the paths are in white. The start and end positions are marked with a dot. Sample prints are shown.

A singly connected maze is one in which there is only one path between any two points and any other point. That is to say there are no loops. This is the reason mazes to generate by computer. The multiple path maze is more difficult to program. Pacman type games use single multiple connected mazes. Obviously, a singly connected maze cannot be used for

Pacman, there would be no mazes.

The screen is divided into blocks of 4 by 4 dots. A maze built path using the 32 by 32 character positions would be too easy to solve. The program draws a maze of walls first and then works down the walls to form the maze. This is shown on the screen as it happens. The program does not use the left-hand row character lines, these are left for you. You can reset lines into the program to print the values of the various variables here and monitor the progress of the program. A good variable to monitor is *v*. This holds the distance from the starting point, and it's quite interesting to see it increase as the maze built, and decrease as backtracking takes place.

A line by line description of the program is provided to enable the workings to be understood. Here are some suggestions for development of the maze program.

• The program set at three produces a single long path with short dead ends making the maze easy to solve. To prevent this the variable *v* can be used to limit individual path lengths. *v* can be tested against some random value and backtracking forced.

• An error modification is to force a cursor in the screen controlled by the Spectrum's arrow keys. The user uses the keys to move the cursor around the screen to enter the maze. • Single-connected mazes by the 48K Spectrum is made possible using blocks of 2 by 3 pixels. This together with a random path length limit should create some very difficult mazes.

• For the advanced programmer, how about some code to solve the maze?

0140
0100-0170

Select one of the 24 random sets of directions by the last direction and set *i* a flag to when we've been before. If we've already been there GOTO 0200 where we set up another direction to try.

0170-0170

We have not been here before so knock down a wall, record our position and check if the maze is finished.

0100-0100

Record the maximum distance travelled from the start and record the wide long.

0200

Select another direction to try if we haven't tried all 4.

0210-0220

If all directions tried then backtrack until we can move somewhere.

0300

All finished, put the furthest position we got from the start.

Variables

w

width of maze — up to a maximum of 31

h

height of maze — up to a maximum of 10

l

are the width and height in terms of the 4 by 4 pixels in the Spectrum screen.

width

the dimensions of a wall and values of -1 if the point is a wall. 0 is a path which has not been visited and 1 the distance from the start if the point has been visited.

done

the number of walls broken down. The maze is finished when done equals the width times the height.

v

marks the distance we are from the starting point.

014,241

a constant array containing the 24 combinations of the four compass points, North, South, East and West.

Other variables used in the program are for temporary storage of intermediate computations to improve the speed of the program.

```

1 1000 Maze
2 10 LET w=31: LET h=10: GO TO 0
3 000
4 100 LET p=INT(64-0): LET q=INT(64-1)
5 10
6 100 OVER 1: FOR a=0 TO 3: PLOT
7 p+4,q: DRAW 0,3: NEXT a: OVER
8 0
9 100 RETURN
1000 LET r=2*INT(1): LET a=2*INT(1):
11 1 1+0: OR a+0: OR a+0: OR a+0:
12 1+0: PRINT AT 0,0: "Height or wid
13 th: ok of range:" GO TO 9999
14 000 DIM a(4),p1
15 0100 DIM 0(4,24): RESTORE 0000:
16 FOR i=1 TO 24: FOR j=1 TO 4: REA
17 0(1,j): NEXT j: NEXT i
18 010 DIM a(10): DIM p(4): DIM w(4
19 ) DIM h(4): FOR i=1 TO 4: REA
20 0(1,i): REA p(1,i): REA w(1,i): REA
21 h(1,i): NEXT i
22 010 FOR i=1 TO r: FOR j=1 TO w
23 LET a(1,j)=0: NEXT j: NEXT i
24 010 FOR i=1 TO r: STEP 2: FOR
25 j=1 TO w-1: STEP 2: LET a(1,j)=0:
26 NEXT j: NEXT i
27 020 GOS
28 020 FOR i=1 TO r: STEP 2: FOR a=
29 0 TO 3: PLOT (a-1)*4+0,a: DRAW
30 0,4*4-1: NEXT a: NEXT i

```

Line by line description

100	Subroutine to knock down a wall
0000	Height and width check.
0100-0120	Set up constants.
0130-0138	Draw a maze of walls and holes.
0140-0145	Select a random starting position and plot it
0150	Start of main loop.

```

0100 FOR y=1 TO 4 STOP 2: FOR z=
0 TO 3: PLOT 0,48y+10z: DRAW 48
y-1,0: NEXT z: NEXT y
0110 RANDOMIZE : LET a=INT (RND
0111-10/2142): LET y=PRINT INMR0:
0-11/2142): LET a1,y1=PI: LET a1
=0: LET y1=1: LET v=1: LET max=0
0: LET done=1
0120 PLOT a104-3,y104+12: DRAW 1
,y1: DRAW 0,1: DRAW -1,0
0130 LET a=1
0140 LET a=INT INMR22:1
0150 LET v=ata+dic+d11: LET v=
y+1000,017
0160 IF v=0 OR v=99 OR v=0 OR
0 v=99 THEN GO TO 0200
0170 IF a1v,y11v THEN GO TO
0200
0180 LET v=1: LET a1v,y11v:
LET done=1: LET a1=atd1c,d
17,y1+101c,d11v
0190 LET a=atd1c,d11: LET y=
y+101c,d11: GO SUB 100
0200 IF done=0 THEN GO TO 020
0
0210 LET a=1: LET y=0: LET a=1
0220 IF v=0 THEN LET a=0: L
ET x=0: LET y=0

```

```

0100 GO TO 0140
0000 IF a=4 THEN LET a=4: GO
TO 0140
0210 LET v=1
0220 FOR i=0 TO 4: LET v=atd1c
1,011: LET v=atd1c,d11: IF v=
0 OR v=99 OR v=0 OR v=99 THEN T
HEN GO TO 0220
0230 IF a1v,y11v THEN GO TO 0
200
0240 NEXT 1
0250 GO TO 0200
0260 LET a=1: LET y=0: GO TO 0
200
0270 PLOT a104-3,y104+12: DRAW 1
,y1: DRAW 0,1: DRAW -1,0
0280 COPY
0290 GO TO 10
0300 DATA 1,2,3,4,1,2,4,3,1,3,2,
4,1,3,4,2,1,4,2,3,1,4,3,2
0310 DATA 2,1,2,4,2,1,4,3,2,3,1,
4,2,3,4,1,2,4,1,3,2,4,3,1
0320 DATA 3,1,2,4,3,1,4,2,3,2,1,
4,3,2,4,1,3,4,1,2,3,4,2,1
0330 DATA 4,1,2,3,4,1,3,2,4,2,2,
3,4,2,3,1,4,3,1,2,4,3,2,1
0340 DATA 0,1,0,2,1,0,2,0,-1,0
,-2,-1,0,-2,0

```

sinclair

DEALERS / PROGRAMERS SPECTRUM SOFTWARE NEEDED



GAMES TO LEARN BY, INC.

David Debar
PO Box 18
24 Clear Hill Rd
Collierville, Tenn.
38012
615-473-7800

FOR DETAILS

Write or Call

Charles Winger
PO Box 375
1 South Street
Williamsburg, Mass.
01966
413-668-0300

U.S.A.
For use with TS/2068

ROMSWITCH



**Gavin Smyth triumphs again
with another all action
machine code
masterpiece**



Meteor madness

September's **METEORS** on the first games tape for the ZX81? In my opinion, it was the best game on that tape, but it still has a few disadvantages.

The graphics could be better. The ship is at the top of the screen and "moves" down the screen, which would be more consistent.

The ship moves across the screen and so can be "stepped" at the edges with no chance of avoiding the asteroids.

Finally, since the game is in BASIC, it is quite slow.

The game for the ZX Spectrum (128K or 48K versions) of this and has a few extra features. The screen completely in machine code and uses smooth high resolution colour graphics with continuous sound. The ship cannot be stepped at screen edges because it stays in the screen while the asteroids flow past (or float in

The program has three separate play control routines to enhance this and these can easily be altered to be called from BASIC for your own programs. The game also has an eight digit score counter, although at first level only needed the first four!

You can't emphasize enough a variable equation of your long distance green radar screen. Does your car sport it anyway — as it gets closer, it gives red and blue cues. If there is nothing in case to make it glow! It still looks interesting on screen.) Can you resist the rock in the increasingly dense meteor storm?

Gradually, "artificially" asteroids show up on the screen — if you can hit these exactly on the nose of the ship, the whole screen is covered of meteors, giving you short time to recover. The best for this is a 128K. £6.99. 0011 0111

machines may be fortunate to can take some ornament. Colliding with anything else reduces the strength of your shields — after five hits, you are spectacularly blown up.

Entering the program

The method of entering the program is slightly different for 128K and 48K owners, but whichever machine you have, first enter the four line "initial program" listing (see **DATA**) in the SHAVE "editor" LMB 1 on the game or tape you will use for your final program. Revised and VERIFY and then save the tape at the position to record the machine code on once it has been entered.

48K Spectrums

Type in the listing of DATA, statements and add the 48K loader program at the end of your program. I suggest you save the final program in case any changes are made although a check-sum has been built in, it's not fool-proof!

RUN your program and control any errors or if these occur, see

Should the program crash then type PRINT and press ENTER, the number displayed is the line in which something is wrong. Check and correct it.

16K Spectrums

Do not type in the DATA listing, but enter the 16K loader program. Run the program and enter the DATA of each line, a whole line at a time. The program will tell you of any errors and you'll have to re-enter the whole of that line. Should the program crash, type PRINT *0000 0000 and press ENTER. Re-enter the line whose number is displayed on the screen.

Both Spectrums

When the "SAVING PROGRAM" message appears, put your original tape into the recorder. Use one with the initial program recorded on it, start recording and press any key on for a usual SAVE.

It may be preferable to make a back up copy by typing 0010-0100, enter and saving on a spare block of tape of tape with you to run your master a 4K.

Verify by typing VERIFY * * * * *000, recording the tape and pressing enter and play on the recorder.

To test the program type RANDOMIZE LMB 01000 and look out!

To end the game or subsequent occasions position the tape at the start and type LOAD * * * * * will load a program load the machine code and start the game.

```

10 DATA "F0C000E7ACD3C7ACD1304"
20 DATA "6D7000C17AC0007A1303"
30 DATA "C07070000070007A1300"
40 DATA "FE100000C00070007A03"
50 DATA "0070C00000C000007003"
60 DATA "C0F077100072100000734"
70 DATA "61000000011000000007"
80 DATA "C0007000700000007000"
90 DATA "70010000000000710000"
100 DATA "F00000701000107007"
110 DATA "000000000000000000"
120 DATA "000000000000000000"
130 DATA "700000000000000000"
140 DATA "000000000000000000"
150 DATA "700000000000000000"
160 DATA "000000000000000000"
170 DATA "1010111000700000704"
180 DATA "007000000000000000"
190 DATA "000070000000007001004"
200 DATA "0000000000000070004"
210 DATA "C070700000000070000"
220 DATA "700000000000000000"
230 DATA "000000000000000000"
240 DATA "F00000000000000000"
250 DATA "700000000000000000"
260 DATA "000000000000000000"
270 DATA "000000000000000000"
280 DATA "700000000000000000"
290 DATA "700000000000000000"
300 DATA "700000000000000000"
310 DATA "000000000000000000"
320 DATA "000000000000000000"
330 DATA "000000000000000000"
340 DATA "000000000000000000"
350 DATA "000000000000000000"
360 DATA "000000000000000000"
370 DATA "000000000000000000"
380 DATA "000000000000000000"
390 DATA "000000000000000000"
400 DATA "000000000000000000"
410 DATA "000000000000000000"
420 DATA "000000000000000000"
430 DATA "000000000000000000"
440 DATA "000000000000000000"
450 DATA "000000000000000000"
460 DATA "000000000000000000"
470 DATA "000000000000000000"
480 DATA "000000000000000000"
490 DATA "000000000000000000"
500 DATA "000000000000000000"
510 DATA "000000000000000000"
520 DATA "000000000000000000"
530 DATA "000000000000000000"
540 DATA "000000000000000000"
550 DATA "000000000000000000"
560 DATA "000000000000000000"
570 DATA "000000000000000000"
580 DATA "000000000000000000"
590 DATA "000000000000000000"

```



```

600 DATA "000000000000000000"
610 DATA "000000000000000000"
620 DATA "000000000000000000"
630 DATA "000000000000000000"
640 DATA "000000000000000000"
650 DATA "000000000000000000"

```



```

640 DATA "1879E18F111F8886714"
670 DATA "107719772318FACD070"
680 DATA "9C7A111276113288466"
690 DATA "030C363A0670C07F888"
700 DATA "7A3A5070CD7F74B182A"
710 DATA "8880C08F882C077C881"

```

```

720 DATA "C8797A2A8070CD7F1820"
730 DATA "74B18884C08F8886882"
740 DATA "803A5A7C8F8A7F47730"
750 DATA "C8181A8A801880888"
760 DATA "1188881908080808888"
770 DATA "8A78C1818118F4211180"
780 DATA "D8F81847C88F7C8F88"
790 DATA "21884811C87C8888882"
800 DATA "1A77241188F88181888"
810 DATA "87A7E842888888888"
820 DATA "8388888881F88888888"
830 DATA "88883288F8C811FF188"
840 DATA "4F8888C818888888888"
850 DATA "87428875C8812888811"
860 DATA "E888C88C7C813888114"
870 DATA "F881888788888128819"
880 DATA "8888888188888888888"
890 DATA "818888842888881712"
900 DATA "38888888888C118888"
910 DATA "C818848888887728811"
920 DATA "188C7C888C1FF4F188"
930 DATA "811F888888A7C888878"
940 DATA "44C81888888881A78"
950 DATA "2888F8C88C7C8888788"
960 DATA "8A8C888881888881720"
970 DATA "1F888488884C818814"
980 DATA "E88828C81E8818F8888"
990 DATA "C88C7C88888C8881188"
1000 DATA "2A887C887C818A788"
1010 DATA "22887C7881C88881118"
1020 DATA "7C88188788818881288"
1030 DATA "C772811F888722888"
1040 DATA "722172C788888888888"
1050 DATA "88888888888888888"
1060 DATA "188887488847888848"
1070 DATA "7343677288288888888"
1080 DATA "8788F18828828888888"
1090 DATA "81288188F1888888888"
1100 DATA "2881828128888888888"
1110 DATA "8288888188878818888"
1120 DATA "8188848884848888472"
1130 DATA "4F84488388888888888"
1140 DATA "8F728817888887888"
1150 DATA "72817888C8C88888811"
1160 DATA "47887488788F7888888"
1170 DATA "888888887878788888"
1180 DATA "788182888878888788"
1190 DATA "8188737884888888788"
1200 DATA "4C78888128888878718"
1210 DATA "488F728878888877888"
1220 DATA "7328888888788888781"
1230 DATA "3872818881722888813"
1240 DATA "488F728888817288888"
1250 DATA "83818888788F7888888"
1260 DATA "7888488887881788887"
1270 DATA "4888748888888888888"
1280 DATA "74888F7288737888888"
1290 DATA "72883F8888887888888"
1300 DATA "817288888877488813"

```

SPECTRUM GAME

```

1310 DATA "4840174497265627997a"
1320 DATA "28774866178684666279e"
1330 DATA "4873732180974662858a"
1340 DATA "77497732863c8c8f6c8887"
1350 DATA "694646286286687476e"
1360 DATA "72614626c7799776976e"
1370 DATA "744626647666746667e"
1380 DATA "744626647474667267e"
1390 DATA "286173746672667679e"
1400 DATA "44282897797328612137"
1410 DATA "4c6c888877466673777e"
1420 DATA "2860677462667377379e"
1430 DATA "2861736286826c8e797e"
1440 DATA "7746266677374666774e"
1450 DATA "4666746677374666774e"
1460 DATA "4628776616667666776e"
1470 DATA "88881888828628628628e"
1480 DATA "8838888887746673738e"
1490 DATA "28606266746628628638e"
1500 DATA "28388888868686766137"
1510 DATA "6073887267676674779e"
1520 DATA "8888726673736694738e"
1530 DATA "67366266774628667669e"
1540 DATA "6076667328666667762e"
1550 DATA "60687466737373766818e"
1560 DATA "8888188882862862738e"
1570 DATA "6073733886868686648e"
1580 DATA "4003882874672866868e"
1590 DATA "6747666281888766187e"
1600 DATA "8812161888888886888e"
1610 DATA "161118791612814833e"
1620 DATA "4447668683668766888e"
1630 DATA "4516131763434763443e"
1640 DATA "4614146644664676615e"
1650 DATA "67747914138888864137e"
1660 DATA "2868882867668628638e"
1670 DATA "1888889718188889138e"
1680 DATA "1888878818887881137e"
1690 DATA "1818888818188888218e"
1700 DATA "884888872881818188e"
1710 DATA "8878882886888888268e"
1720 DATA "8844888781488288258e"
1730 DATA "8838777638188888388e"
1740 DATA "88182458582418888888e"
1750 DATA "666141818388888667e"
1760 DATA "8181888888888888188e"
1770 DATA "8488888888888888724e"
1780 DATA "7878783828888888878e"
1790 DATA "1818785884888888888e"
1800 DATA "2187888183888888188e"
1810 DATA "84888886788888888188e"
1820 DATA "3878787888888888888e"
1830 DATA "8888888888888888888e"
1840 DATA "8888888888888888888e"
1850 DATA "8888888888888888888e"

```

```

9000 REM *****
      8 16K LOADER PROGRAM. 8
      *****

```

```

9000 CLEAR 38777
9010 LET a=0
9020 FOR i=10000 TO 32000 STEP 8
9030 LET a=i+1: READ a: LET i=i
9040 FOR j=0 TO 7
9050 LET b=i+10000: a=i+1-8: i7
      AND a(i+1)*9+1)+CODE a(i2)-48-17
      AND a(i2)*9+1)
9060 LET a=a+b: FOR i(i+j),b: LE
T a=a+(i2 TO i)
9070 FOR i(i+j),b
9080 NEXT j
9090 IF a<0:VAL a: THEN PRINT "E
ror at line "i:GOTO STOP
9100 NEXT i
9110 PRINT "SAVING PROGRAM"
9120 SAVE "MC:CODE 31000,1500

```

Machine code loader - 48K version

```

9000 REM *****
      8 16K LOADER PROGRAM. 8
      *****

```

```

9000 CLEAR 38777
9010 LET a=0
9020 FOR i=10000 TO 32000 STEP 8
9030 LET a=i+1
9040 INPUT a: LET i=a-8
9050 FOR j=0 TO 7
9060 LET b=i+10000: a=i+1-8: i7
      AND a(i+1)*9+1)+CODE a(i2)-48-17
      AND a(i2)*9+1)
9070 LET a=a+b: FOR i(i+j),b: LE
T a=a+(i2 TO i)
9080 FOR i(i+j),b
9090 NEXT j
9100 IF a<0:VAL a: THEN PRINT "E
ror at line "i:GOTO PRINT "PLEASE
RE-ENTER": PRN: LET i: GOTO
9110
9120 NEXT i
9130 PRINT "SAVING PROGRAM"
9140 SAVE "MC:CODE 31000,1500

```

Machine code loader - 16K version

```

1 REM 8 Initial program 8
2 CLEAR 38777
3 LOAD "MC:CODE 31000"
4 RANDOMIZE USR 31000

```

Enter program - refer to text

Computing today

DECEMBER 1984

10p

GRAPHICS GALORE!

Bits and blobs:
drawing with Acorn's Blitstik



Taking the tablets:
Koolapad reviewed



Art and the Amstrad:
simple drawing program

PLUS:

GRID
lines –
Compass
computer
reviewed

Psion
Organiser –
Pocket
Power?

IO's Pluto
for out of
this world
graphics

OUT NOW

PAINTBOX

Superb Graphics — in third-generation hardware!

PAINTBOX is a must for every owner of a 48K Spectrum.

It will give you the ability to produce stunning graphics on your screen — simply!

With **PAINTBOX** there's no need for expensive hardware — why pay up to £150 for hardware when you can produce incredible picture and graphics with one cassette-based software package?

If you haven't seen **PAINTBOX** demonstrated you're in for a pleasant surprise!

For instance, **PAINTBOX** will enable you to draw practically anything on your screen and save it either as **SCREENS** or as a machine code memory file to use in your **BASIC** or **MIC** programs.

You wield enormous power over the graphics capability of your **SPECTRUM** — including the definition, storage and use of up to 64 **UDG's** — 4 times more than normal! A brief description of facilities are as follows:

UDG DRAWING BOARD for defining up to 4 banks of **UDG's** including **ROTATE**, **MIRROR**, **INVERSE** etc.

UDG EDITOR for storing up to 64 **UDG's** for use in screen planning or in your other programs.

PRECISION PLOTTER. A high-resolution drawing board which allows you to draw anything on the screen. Facilities like **CIRCLE**, **FILL**, **ARC**, **PLAT**, **DRAW**, **ERASE**, **COPY**, **DRAW**, **RAIALINE**, **INK**, **BRIGHT** etc are included and easy to use!

SCREEN PLANNER gives you the best of both worlds! The combined use of **PRECISION PLOTTER** and your banks of **UDG's** for highly detailed and precise screen graphics.

The program is complete with **DEMO** on side two of the cassette and a 28 page instruction booklet.

PAINTBOX can be used with **Joystick** and is **Sinclair Microdrive** compatible.

SCREEN MACHINE

Instant Machine Code for graphics and text

SCREEN MACHINE is a completely professional graphics ability to use with **Paintbox** (or any other graphics hardware or software).

It will allow you to manipulate your screen graphics and test in ways which will make your programs better and more memory efficient. For instance:

If you have produced a screen full of superb graphics you can enlarge, reduce, rotate, flip screen, relocate your graphics to another part of the screen, superimpose one screen on another and perform all sorts of other wonders!

Then you can take your results and put them through a series of memory compression routines to allow you to save enormous

HERE'S SIX WAYS TO IM



amounts of memory! Such items like compressing with or without attributes, saving thirds of the screen and multiple combinations of both are possible.

Never has machine code storage of graphics been simpler because **SCREEN MACHINE** automatically creates reusable multiple screen files with a location catalogue so that you can add them to your programs!

SCREEN MACHINE also allows the user to program **UDG's** or test directly into machine code, so if your programs use a lot of test instructions or invoke **SCREEN MACHINE** is going to save fantastic amounts of memory!

SCREEN MACHINE is a major graphics toolkit for the 48K **SPECTRUM**. It is completely menu driven, **Sinclair Microdrive** compatible, and comes with instruction book and an unbelievable **DEMO** on side 2 of the cassette.

ADVENTURE PLANNER

A must for the adventure game fan

If you're an **Adventure Game** nut, **Print 'N' Plotter's** new **ADVENTURE PLANNER** is exactly what you have been looking for!

It's a 98 page, **BIG SIZE** (16 1/2" x 11 1/2") pad with a complete 'mapping' system with over 150 locations on each sheet — created to help you solve **Adventure Games**.

It's the best way to beat the 'system' and is obviously for use with any make of computer. **ADVENTURE PLANNER** will also assist you in planning **Adventure Games** for programming — a helpful pad to keep by your computer at all times.

D IMPROVE PROGRAMS.



ADVENTURE PLANNER is published with instructions for use, examples, hints and tips on how to play and win the game faster.

ADVENTURE PLANNER is a high quality pad, board-backed and fly-leaf cover is, unusually priced too!

ZX SPECTRUM JOTTER

For planning, your screen made easy... and precise!

Print 'n' Plotter JOTTERS have become a household word for the Sinclair enthusiasts.

Despite various imitations our original ZX SPECTRUM JOTTER is still the one people prefer!

Of course it could be because it is professionally produced... the quality is superb.

And the fact that it is **BIG SIZE A3 (29 7/8" x 11 3/4")** is a distinct advantage when working in high resolution.

It's also 100 pages thick... 50 pages of PLOT grids showing each raster (red pixel) co-ordinate and 50 pages of PRINT grids showing every character and graphic character position and INPUT lines.

Each page also contains 24 LDCG planning grids (2400 per page).

Consider also the fact that it is printed on Artix's Dated paper... thick enough to take any writing, drawing or colouring, wet then enough to overlay onto a drawing and trace-off!

For pre-planning graphics, text, tabulation or anything to produce 'on screen', a Print 'n' Plotter JOTTER won't be beaten.

The complete package comes with a set of coloured pens, a Pencil ruler and a handy computered storage tray.

If you use **PAINTBOX**, **SCREEN MACHINE** or any other graphics utility... you'll do things better with the **ORIGINAL** Print 'n' Plotter JOTTER!

KEYBOARD OVERLAYS

The simple answer to "Which key?"

Print 'n' Plotter **KEYBOARD OVERLAYS** for the standard ZX Spectrum keyboard are the economic answer to "Which key does what?"

If you program, or buy commercially-produced software, sooner or later you'll be faced with a mind-boggling mass of keys that perform different functions.

Let's face it, the Spectrum keyboard is complicated enough so why not take the easy way to remember.

lay over the keyboard a Print 'n' Plotter **OVERLAY** and write the function underneath it's child's play!

Print 'n' Plotter **KEYBOARD OVERLAYS** come in packs of ten. Purchased to fit your Spectrum. Priced to suit your pocket!

ZX PRINTER PAPER

High quality... Cheaper Price!

Print 'n' Plotter have gained a good reputation for the most reliable and high quality **PRINTER PAPER** for your **ZX PRINTER**.

Now it's even better because we've reduced the price!

So if you want **ZX PRINTER PAPER** that gives good, clear print... and you want it a little cheaper... order today for quick delivery!

ORDER NOW OR ASK YOUR LOCAL COMPUTER SHOP! CREDIT CARD 24hr ANSAPHONE ORDERS 01-660 7231

Order by 11.00am (Mon-Fri) or 12.00am (Sat) for next day delivery.
 Please Order 24hrs from the date of receipt of invoice through AnsaPhone 01-660 7231. (24hrs outside the UK during)

100 sheets 29 7/8" x 11 3/4" A3	£11.95
50 sheets 29 7/8" x 11 3/4" A3	£6.95
25 sheets 29 7/8" x 11 3/4" A3	£3.95
10 sheets 29 7/8" x 11 3/4" A3	£1.95
5 sheets 29 7/8" x 11 3/4" A3	£1.00
2 sheets 29 7/8" x 11 3/4" A3	£0.50
1 sheet 29 7/8" x 11 3/4" A3	£0.25

Please to L. Dwyer & Partners, 100, Victoria Road, Basingstoke

All prices are in £ sterling, ex. postage.

Checks are taken, add 2% discount please for orders sent by credit card.

For the minimum order

Please call on 01-660 7231, 24hrs, any day, year, any time, any day for

Name _____

Address _____

Print 'n' Plotter PRODUCTS

Problem page



David Nowotnik answers your questions

Low PRINTING

Dear David,
Is it possible to print to the bottom two lines of the ZX Spectrum, and also have printed on those lines?

Stephen Day,
Hastings, Sussex

Dear Stephen,
You can print to the bottom two lines of the screen by modifying the PRINT command to PRINT #1. The syntax of PRINT #1 is identical to PRINT. There is no equivalent to CLR for clearing the bottom two lines, although the system makes use of ROM to do this. The bottom two lines are cleared using the following command:

INCODED USER 3-138

Faulty RAM pack

Dear David,
I have purchased a 64Kbytes 84K RAM pack for my ZX1, but find that I cannot use all the available RAM for programs. Is there a fault in my RAM pack?

John Anthony,
Oxford

John,
64Kbytes refers to a fault with their 84K RAM, which they are unable to solve. The memory map within their supplier's web states that only 24K is available for BASIC programs. The memory addresses with the RAM pack in place are 8-5F — ROM; 6-1A* — user machine code; 70-32* — BASIC; 32-24* — dimensioned arrays.

Pool's storage

Dear David,
I have written out part of a football pool program in the

my ZX1. I want to store individual team scores each week, and input them from tape as we go along. So far, I have been unable to do this, even with the aid of the ZX1 manual. Please can you help?

B. McIntosh,
Perth

Mr. McIntosh,
Assuming your match results will go into an array, the solution lies between one of loading and saving the array on tape. Unfortunately, the ZX1 does not provide a separate SAVE and LOAD routine for arrays (this

is the Spectrum). However, if you can avoid the use of ROM and CLEAR arrays may be saved on tape with the program, and re-loaded when the program is brought back from tape.

The best way of doing this is to have a SAVE subprogram within the program, for example:

```
SAVE SAVE "POOLS"  
RETURN
```

Along on these lines a re-load at a subprogram, then what you save the program using these program lines, you have all the variables too and, on re-loading,

the program will auto-start, providing you have made the mistake of using AUTO to start the program, and leaving your disk.

Big Brother

Dear David,
I am using a Realtime 6244 typewriter as a printer for word processing with the Spectrum and Terminal Two program. I'd like to enter text using the 6244 keyboard. Is this possible?

Philip Johnson,
Dunbar

Philip,
The producers of Terminal Two ensure that it is possible. Send a 242 for details to Robert Denton, 12 Trifford Road, Newark, Northants NN9 2JH.

Selective INPUT

Dear David,
I wish to include in a program an INPUT statement which will be used to select one of several strings (containing names of towns), but I cannot make it work. Can you advise me?

Martin Pindan,
Santa Rosa, Brazil

Martin,
You should print the town names in a string array, either through a set of simple strings, as in the example you sent. Hence, I would change your program line to:

```
10 DIM T(2,10)  
20 GET #0: T = "Abingdon"  
30 GET #0: T = "Basingstoke"  
40 GET #0: T = "Covebury"  
50 PRINT "Select a city"  
60 GET #0: T  
70 PRINT #0: CODE(0,0-4)
```



OLD MARYLEBONE ROAD

SW1

SHOP WINDOW



**A roundup of the many units available
to enhance your Sinclair computer**

Alternative input

The desktop computers probably have a more extensive supply of peripherals than any other make of computer. In fact it is possible by selective buying to provide yourself with all the capabilities of a computer system costing far more. However, when we provide a collection of ten items all the units on the market we've could cram into these pages, so that when you are wondering what to do with your Christmas present money a perusal of these pages may inspire you.

Of course, arriving on the newsgroup's shelves before Xmas gives you a chance to gaze longly at the covered item and sigh wistfully in the presence of the possible presents.

Many of the items have been featured in lengthy reviews in previous issues, since we do feature hardware as we are trying to do himself. However, an idea of what a gadget and what it will do and, as such, comments tend to be general.

The amount of space given to an item or to a user reflects the performance of that product, and opinions, comments etc. can fall short to be in depth reviews, just a guide to the device which may stimulate you to find out more about it by either asking the company or writing your local expert.

What we have made every attempt to keep up to date, due to the speed of events in the field of human interface, prices or updates may change from these pages. Some companies may even go on to exist between the writing and the publication of this article, so may I respectfully advise that you check before parting with your money.

Voice recognition units

Possibly the ultimate aim is to be able to control the machine by speaking your instructions. We are still a long way from this stage of control but two companies have taken the plunge and produced one, which at least to do the **WILLIAM SHAW SYSTEMS** were the first on the market with the **SHAW UNIT**.

This unit comprises of a fairly large box and a microphone. The microphone is by a 250 system and instructions are provided in

written form that you can make the necessary corrections. However, the unit is designed as part of a complete system and if you purchase the unit, music synthesizer and speed synthesizer as well the whole lot simply plugs together. It will cost you £8,000 VAT and the other two units £25.00 and £38.00 (4 VAT respectively).

If you imagine that you have any fast action words entered with such a unit then forget it. It is during the input sequence it waits until some signal has been received then starts its data to feed as close a match as possible.

This data has been set up for a "teach" mode where the word has to be repeated several times. It takes a few seconds to try and find the match, longer if a lot of words have to be learned. The maximum amount it is capable of is an unproved feature.

Plenty of information is supplied for the knowledgeable programmer to investigate the device and for user programs and it is feasible to use it with many type software or, like adventure games, however, the necessary is not that good.

The **WILCO COMMAND** unit from **QEDWARE** is a much more professional looking device and consists of the usual type of de-activated box which connects directly to the speaker's part, into which the microphone is plugged.

The software type provided with the unit includes simple "games" and it is obviously aimed more at the average home user rather than the hobbyist or the big fan.



The system is almost identical to the **WILLIAM SHAW SYSTEM** and has all the same problems, except that future expansion does not seem to be intended. It costs £24.00.

Although I may give the impression that these units are not very good, in fact they have provided hours of fascination in presentation. I can see many uses apart from the novelty value, helping children to pronounce words correctly for in-

stance, and if you are interested in the computer as a machine then they will fascinate you.

I suggest that if you may be more suited to the dedicated hobbyist then the **MIRA COMMAND** will appeal as the more general unit.

LIGHT PENS

There are four on the market at the time of going to press. In the **ASIA LIGHT PEN** from **COLIN CHITMAS** reviewed the **DE TRAYLOR** pen and was very favourably impressed.

This comes with the standard plug-in interface and the pen plugs into that. It worked very well and I recommended it as a demonstration device and also used it with some success before with. The interface pen and software costs £18.00.

The **TRIGRAM** light pen was also looked at by Colin Chitmas, purchased some difficulty in making it operate. The unit plugs directly into the interface and costs £13.25 complete with tape.

Colin Chitmas has a light pen and interface but I could find no information on it, except for writing being to contact them about it though.

The **GRAPEMOUNT DESIGN MICROTECHNOLOGY** unit is the most expensive on the units on the market at £28.00. It has





Joysticks

Selecting a joystick is one of the most confusing tasks around. There are just so many!

Unlike many peripherals, the D-type connector is necessarily provided by most joysticks and computers. Therefore, the Spectrum owner has almost the full range to select from.

The type of joystick you buy will depend entirely on your own personal preference, but there tend to be either large and need a wrist rest or a bulky design and a gentle finger and thumb touch. Of course, there's always the unusual, the touch pad track ball and most recently, the RAT.

Nearly every manufacturer has either produced one or enclosed one and a complete account of them would take up all the room we have for the whole Shop Window, so if we missed out your favourite, or one you like a company mention... sorry!

MSI The Invariant II would have joystick, mouse, keyboard or a large number of other options. Handling it all often really shows what a general handy set of those who, like me, make their intelligent guess that it must something like "cheap to fit the hand" or "used good". I tested it up and as defined by the Concorde (Spectrum) it is "the study of efficiency of persons in their working environment. So all they're saying is that it is designed after existing some one play space invaders etc. for an hour or two. A pretty impressive word which means it fits it".

Head up all those who couldn't care less!

Kempston

Kempston almost single handedly established joystick control of the Spectrum and so its only job to forgive them. Their *Standard Joystick* has been around almost as long as the Spectrum and still looks good. It has a short elastic strap with a ball grip at the top, the given good control is used by placing the whole finger over the top and grip the side with the thumb and middle finger. Two fire buttons are provided which makes it suitable for both left and right handed players. Recently Kempston introduced the PRO 5000. It has more features and costs £13.95.


Recently added to their range are the PRO 3000 and PRO 3000 joystick. Both have the same base which has a single fire button pointing towards the front, but the 3000 sticks in a vertical format. The PRO 1000 is the most delicate type and the PRO 3000 has a full sized barrel grip with an extra fire button on the top of the handle.

These are priced at £10.99 and £12.25 respectively.

My personal opinion is that the 5000 is hard to beat although the 1000 is nice to use. Both the 1000 and 3000 seemed very precisely and the 3000 stick's top firing button popped up after a short while.

Suncom

From Consumer Electronics comes the best range of joysticks that I've seen so far.



side of the gun which is generally attached to a wrist rest for the Spectrum's port. This is a dead weight and you cannot add on other peripherals afterward.

I have tried this one out and was impressed. It does everything that the makers claim and was a joy to use. The instructions were simple but comprehensive and the accompanying book was fun to use.

The original product was designed and marketed for the BBC micro and it seems they have brought the results of their expertise to the Spectrum.

I would personally recommend this one if you are in

contact with computer aid design or music driven software.

Our reviewer also mentioned another high speed one for the PRO DIGITAL TRACER. This is a very versatile unit for downloading drawings from paper to the screen. This design you handle data just as the package which includes software are given control for scaling, print & file.

There are two variants available the "professional" at £75.00 which will work up to A3 ball paper and the "mini dard" which does the same but only to A4 size. Clearing and seals £55.00. Versions for both the ZX81 and the Spectrum are available.

The STACKLIGHT Rifle is a plastic rifle with a red and infra-red which is attached to the Spectrum's port. This is virtually identical to the very modified "point game gun, but perhaps a bit more up market.

It is a good fun and works well after folding with the TV to get the optimum colour balance. However, no matter how good quality, there is only one thing it can do and that is shoot at a still or moving target.

Personally I found the novelty soon wore off, but if you want an innocent and harmless way of shooting at objects or a novelty for a little or some fundraising event then it may be worth looking at it in more detail.

The Stack Light Rifle costs £29.95.

STACK LIGHT RIFLE

In Brief
 a GRAPED is a light pen based unit which also consists of a unique special plug in keyboard device for manual and program. Although I haven't tried it, I can see it will be a joy to use. It is mainly for the serious user approach it seems a bit expensive at £149.95, but its special discounts are offered for educational establishments. Perhaps this is the intended market.



Continued from previous page

(There's not to say there's some better joystick I haven't seen any better). All of them systems are robust and sturdy, you can't break it's strong. As for the Atari and Commodore are better they are a little expensive, but out of these will last 2-3 times that of a cheaper model. **SHK ST60** is the cheapest at \$29.95. It's also red with a shiny, positive-feel top grip and some 1/2 inch fire button.

The **SHARPSHOOTER** has the same feel as the buttons on the SHK ST60, but a finger/thumb straight stick, rounded at the top and across the ball. \$13.95.

TAC 3 (Atari Arcade Controller) is their top of the range joystick and a beautifully

solid constructed it is too. If you see the feel of a firm, weighty stick as equipment with no wobble perfectly then sure up that extra bit of money and get this one. \$19.95.

The **JAY JOYSTICK** is similar to the hand controllers used by the professional for games. It consists of a rectangular case with a circular sensor pad and a fire strip at the top.

Pressure-sensitive it was like going back to the 2881 and, although I was sure its resistance robust, I was working of the time that it may be pressing too hard!

The best if you want something different is \$29.95



The RAT

According to Chester Marketing you might as well not bother to read the rest of this Review Action Transmitter is the last thing in joystick control.

Personally I wouldn't agree. Although it's a neat device, using infrared signals to do away with leads that are many of those addicts who refer to the physical action of moving a hefty stick around. The damn thing rubbing of the RAT doesn't quite give you that pleasure.

I must admit to finding it though, and personally I'd rate it in preference to many of the cheaper systems on the market.

The RAT costs £29.95 including the interface which is a standard controller and has a 1/2 inch port for 2881 or 2880 systems and the same cable worth considering.

From time to time using comes a new 'super joystick', the **ARCADIE PROFESSIONAL**.

If you're looking for weight durability and extra grip on your joystick, then you're bound to be attracted to this one (You'd probably also rather drive a Cadillac or a Porsche and wouldn't be seen dead in a Mini.)

The Arcade Professional is 3-1/2 x 2-1/2 x 1-1/2 inches, and weighs out at 200g (about the weight of a coin). It's quite good to be housed in a module a quarter of the size. But that's somewhat close to what the Arcade itself is capable of. It offers two-handled control, the stick itself has high speed fire buttons. Both systems and buttons respond positively and sensitively



— so adding extra or side fingers. However having the sticks on the left and the buttons on the right will not suit everyone necessarily, though it's a pity though to get used to them. Many systems use these two identical fire buttons which turn out to do exactly the same job. So old I, but then I remembered the minor one is Figure 1.

When engaged the unit only has a 4-way gate. An 8-way gate is supplied with simple instructions as how to change gates. But it's a fiddly job though it doesn't take long and it's difficult to understand why the professional supplied with the 8-way 'quadrotor' control already set up. At a guess few people would want to change back the other way.

Overall time are offering a piece of hardware which doesn't do that they claim it will do. Certainly lives up to it in terms of how easy to use and the fact of it is a really like used it with a 2881 joystick interface.

In Brief

Probably the most popular joystick around, and certainly the most easily accessible, are the **Commodore 1 and II**.

This is a large plastic point and click stick with five buttons on the top of both sticks and cost \$29.95 and is bigger than and on the top. \$29.95. The **OS 8** also has a 'snap-fire' feature, but your stick feels must be compatible.

They cost around £7.95 for the OS 8 and £10.95 for the OS 8 from various suppliers.

Recently released from Cambridge Computer Supplies is the **EXPERTOR** which is a heavy-duty long handled device. Although a basic delivery it is made with high quality materials and has a two year guarantee.

In the last time I have had to use it I can confirm its robustness and it has quite a nice feel to it. The only thing that disappointing is the hefty 'blank' when using the top of stick fire button. It's not a complete switch but a steel rod running the entire length of the stick to the switch in the base.

At £13.95 it's well worth trying out.

Atari have produced a fixed joystick with three large push buttons and one which consists of the 'real' arcade joystick. Priced at £49.95, the unit contains a 2K RAM chip and plugs directly in the rear of the Spectrum.

In Brief

• There are only two recreational ports — the small Televisions — in the Teleskop, a novel replacement for pop-ups. You look in it from left and notes your thumb over two photo-transistors on the top-left light and your index finger over two more far up down. See London Electronic's site! Shows proportional speed control and gear location. Kameleon compatible, and up to eight can be used simultaneously. £28.

• The Trips Command looks as though it might be the shape of things to come.

From the States, the real home of the arcade game, carries the top-of-the-line joystick with a 16-position square right joystick. All these offers. The internal rotating parts are made of solid nylon rather than plastic so that it should be stronger.

The joystick comes complete with an interface unit so that it can be plugged into the Spectrum's Trips Command at prices of £18.95 for interface and joystick complete.

The Trips Command is available from Giall Electronics.

Joystick Interfaces

Another area where there is a bewildering choice. We did an in-depth survey in our last issue to help you fit in even less is fortunate than usual in this section.

Interfaces tend to fall into two main categories, with sub-divisions and overlaps. There is the fixed format type and the programmable type. The fixed format can provide control for games using the cursor keys or using the Sinclair protocol or using the Kameleon protocol or a combination or all three. For example, the latest Kameleon interface provides three joystick sockets. The first is Kameleon or Kameleon's own format or the cursor control keys (often referred to as the Proton system). The second requirement is the Sinclair system. An impressive interface which worked perfectly (however, when used with the ZX interface 1 and no doubt some other things) happened. I have to try it out a little longer before I'm prepared to say

whether it fits the Kameleon or the Sinclair interface which is at least good value at £18.95.

Then again there is the latest Proton interface the one has got joystick control but also a three-way switch which will let it work in any of the three modes mentioned.

This is one of my personal favourites and also costs £18.95.

OK, Tronics must be one of the market leaders here with their two systems two-socket interface which provides for Kameleon and cursor keys control for only £13.95.

OK, so what if you do like arcade games doesn't all the joystick interfaces do? Well, the Sinclair protocol is available but there's a ZX A101 to be able the solution to buy one of the programmable interfaces on the market. These are essentially solutions on two systems, either enables the joystick or an interface with a built-in ROM to affect control. The disadvantages are that they

are more expensive and take more time to set up. Out of the ones I've seen I will recommend with the Proton interface with a built-in EPROM software which can be updated for other purposes. This is probably one of the easiest to use and I give my full approval.

Also high on the list of my preferences are the A&F Interface. This is one of the few if not only interfaces using a special interface for the ZX81, and at only £9.95!

Then new Protocol 4 interface looks good, getting rid of the safety of micro-wires at their own cost, but so yet we haven't had one to try out. The ZX Tronics is again a reasonable buy at £23.95 providing a through port and it promised to be extremely compatible. This is not to say that the other are inferior but again these are only personal preferences.



In Brief

• The Spectrum Electronic Programmable Joystick Interface is an easy-to-program for different games, particularly as the software is on an EPROM and not on cassette. £24.95.

• The Ace Electronics Joystick Interface contains a CMOS RAM, powered by a triple charge battery, which can store the names and analysed details of up to 16 games for three months. My the makers. It can also be used as a pseudo-ROM for regular used routines. Available from Spectrum for joystick. Price £24.95.

• The Ace Electronics Joystick Interface is probably the cheapest on the market. Kameleon compatible, it comes with a two-year guarantee. Ace Electronics says that, unlike some others, its model will store saved files with the Ace Quattro's joystick. Ordered through mail order and retail. Price £9.95.

• The Sinclair Research Interface is likely to become the standard joystick interface. It can have two joysticks and operates on keys 1-5. A ROM cartridge slot is on top and there is an selection of good quality software available on ROMs. A snag is that only the ZX Printer will fit on the rear edge connector because of the slant of the slot. £18.95.

• The Cambridge Computing Intelligent Interface is a programmable interface which will work with any joystick. Unfortunately the program has to be loaded from tape and the tape inserted every time you switch on or use a game which uses different control keys. It makes things time-consuming. The design is wonderful, but the price isn't too bad for a programmable joystick. £24. With joystick £28.95.

• Available from Antipax Electronics is the Antipax J811 joystick and interface for the Spectrum. Complete with demo program, this package is priced at £18.95 all inclusive.

• The Picked Controller is a device allowing you to connect any Atari-type joystick to the ZX81 or Spectrum. The unit also allows you to specify which keys the joystick is to simulate. The price of the Picked Controller is £29.95, and if you want to buy joysticks from them, you'll have to pay £1.95 each.



Printers and printer interfaces



With the demise of the ZX printer we are left to find alternatives. For a long time most users of the Sinclair machines have been seeking other means and there is a lot to be said. One alternative is also costly a lot.

The cheapest and perhaps satisfactory means of getting a printout is by buying an AlphaCom 32 printer. These now cost around £200-250 and are fully compatible with both ZX81 and the Spectrum. It's ragged paper prints blue on white which is a little hard but the paper available at Tandy stores works perfectly and gives a black on white print.

However if you are not satisfied with the AlphaCom then you will have to make a massive leap into the expensive world of dot matrix, daisy wheel, etc. type printers. There are many of these machines around all offering different features and advantages and disadvantages. I suggest that you visit some shops after comparing your needs to requirements.

Thought is given to Epson CP80 and all the Spectrum ranges for ZXc are done as in. However a common cage with ZX81 graphics and easily has had a printer with

a downloadable character set facility.

Epson's 2200 is a magnificent machine. It should be at nearly £400-500 and you have to produce perfect ZX81 output with it. However the Spectrum graphics were designed on it.

Before the respective printer-computer sets in and compare let me say that the interface that connects the device from the printer is of vital importance and affects the performance of said device.

The most common printer connection seems to be the Centronics type, most printers are fitted with it but to note, the RS232C can usually be added at a small cost.

Some of the more recent interfaces are the Epson (Epson Express) at £39-50 including local software etc.

Generation II, which has an on-board ROM which eliminates any need for loading software, easy to use and recommended.

ZXLprint II (£24-95 - £90-95 for required cash) fits in the one which I use to produce the Spectrum ranges for ZXc. This also has an on-board ROM and a very easy to use, and has the advantage of also having RS232C compatibility so well. Very impressive.



In Brief

• The AlphaCom 32 is imported from America where it is used with the Tandy system of the ZX81. Unlike the Sinclair model, it uses its own power supply (optional). It supports all the Sinclair commands and prints in blue on white paper in slightly thicker and taller characters. The paper is much cheaper - £7 for a 20cm roll. £99-95 from **Gene Electronics**.

• **Wilderley** have produced an interface in the Centronics style for the Spectrum as well as the software to run it. Complete with one year of cable, the package is priced at £45. Software for the interface interface is written in BASIC and machine code, although permits the use of LIST and PRINT, as well as including a software routine so that you can copy the screen. The software provided also includes a two-word processor from **Teslow**.

• **Color Technology** have two interfaces for the ZX81 providing connectivity to either a Centronics printer or an RS232 printer. The device connects into the back connector of the ZX81 and provides about 40 characters under software control. Both units are priced at £20 + VAT.

• **Mass Peripherals** have put together two interfaces, both priced at £20-25. In one box with cables for the Spectrum and the ZX81. Each package includes a Centronics parallel and a 25 character RS232 interface. With these devices you can print the full length line allowed by the printer you intend to use. In use the LIST and PRINT BASIC functions, and use a selection of baud rate. The Spectrum version uses a built-in operating system allowing you to use word processing packages.

• **Advanced Digital Systems** have introduced a Centronics interface for both the ZX81 and ZX Spectrum.

Complete with one year of cable and a Centronics plug, the package comes complete with software which includes LIST and PRINT providing direct printouts from BASIC. This unit is guaranteed for 12 months.

As well as being compatible for both the ZX81 and Spectrum, with additional software and an in-passive adapter (if you) you can also use the interface with the Jupiter Ace.

The complete package is available from **Advanced Digital Systems** for £34.00.



In Brief

■ The **Tandy Interface** allows the ZX Spectrum and ZX81 to be connected to the Tandy series intelligent printer, the GCP-118.

The interface allows printing and plotting on the Tandy machine, as well as a wide range of print sizes and the added flexibility of overprinting different colours. The printer will handle four pen colours: red, green, blue and black, and the printing speed is 90 characters per the horizontal and 2.3 lines/sec on the vertical.

The interface handles carriage returns with software written in machine code to control the movement of the pen. With the package you can print text, plots, drawings, program listings, job layouts, tables and even mail letters.

Priced at £35.

■ The **Memotech M2322** is a well designed, snug-fitting interface which handles software as ROM. Available in Memotech's blue and black colours, it works very well. £24.95.

■ The **Memotech Centronics Interface** is similar in style to the M2322 version and works just as well. £24.95.

■ The **Siemens ZX Interface II** acts as the underside of the Spectrum (bring it forward). It permits up to eight harddrives, has an M2322 interface for full size printers, joystick interface, and can network up to 64 Spectrums at 100K baud. £30.



Consoles and cases

If someone gets tedious having to pack away all your equipment after every session and you've just the first purchase as a TV for it's own use.

The next problem is where will have to look in a case of someone who owns had an extensive collection on the house (but still a classic Model However it isn't necessary to go to these extremes and here is a selection of alternative means of keeping it all together.

I personally use a Marcol Cabinet which houses the computer and all the bits with the TV and the printer on top. As the

cabinet has two closing doors it all looks very neat when finished with it cost me £39.95 + £5.00 p.p.d.

Marcol also sell the most useful open dress and other prices range from around £29.95 to £185.00 for the super-dress all coming together they can be found in Robert Burgess Co., Millbrook Rd, Mill Hill, Borehampton.

However many companies now sell similar gear for a similar price and could be better or worse, it's just that I have had no dealings or experience of their service.



In Brief

■ The **Expertise Case** from Telex Design specifically designed for the Spectrum, this ABS plastic case combines the features of an executive case allowing you to carry your equipment around with you, and also as a cabinet on which to work on.

The console features a raised and padded support for the Spectrum and a reserve housing is provided for the printer, pack giving access to the air circulation. There is also room for a printer cassette recorder and external wiring. An efficient switch and LOAD/SAVE switch are also provided.

Two cassettes and spare printer paper may also be stored in the unit, and the lid, as well as covers for storing disks, cassettes and other floppy disks to keep the equipment secure in transit.

The whole package is priced at £47.45.

■ The **Computer Case ZX Custom Case** for Spectrum/ZX81 is the one you may have seen at W H Smith. It is a briefcase which will hold your Spectrum/ZX81, power pack, printer, tape recorder and a cassette, etc. There is room space for the cables. Everything is protected by foam, which also could stop users to make space for other items like the keyboard. The case itself is executive style in black with white metal fittings. £35.00.

In Brief

■ A Spectrum workstation is available from Peter Furling Products made from durable ABS plastic and priced at £16. There is a lot for the Spectrum and the associated wires are hidden away, space on top of the unit is provided for the television. LOAD/SAVE switches, speaker unit and an alloy base are provided for a neat desk change.

■ In the cheaper end of the console market comes a keyboard and mouse/trackball from Matrix Products. Priced at £6.25, this keyboard also provides a mouse for those that prefer a mouse and pointer. The package fits in for mice up, but this is quite tricky with the instructions provided. A through rail room for peripherals modification can easily be made due to the texture of the vinyl covering base.

■ The Desk Console from Traffic Technology is a desk console constructed from heavy gauge, black ABS plastic with a detachable base cover and keypad feet.

Behind the console, there is room for the Spectrum, power supply, Sinclair Printer RS232C interface, joystick control, two floppy disks, cassette recorder, cassette and tape sockets. There is also a built-in switch which means that you don't have to bother the leads when you're LOUding and SAving.

The price of the device is £42.15

■ If you want to tidy up the wiring you accumulate around the ZX81 or Spectrum, there is a large built-in tray and stand which you can get from Commodore for £21.93. With room to stand a television on top of the stand, the computer sits comfortably with all the trailing wires tucked away inside the unit.

■ The Minicase from Miles Aids is just one of the products available from Miles Aids.

The Minicase, designed for both the Spectrum and ZX81, is an executive style case with a fully detachable top. Inside it fitted with room to store the equipment, and also contain the computer cassette recorder and cassette, power pack, printer and leads. The price of the Minicase is £32.95.

There is also a workstation available which has space for a Spectrum, cassette/Minicase and monitor. This unit is priced at £22.95.

You could also ask them about their Spectrum Planning Aids Desk Covers and various other devices.

■ The Computer Desk from PH Scientific Products have a computer desk made from ABS plastic for both the ZX Spectrum and ZX81.

With sockets for the computer and printer, there is also support for a television to sit on top of the unit. The power supply and joystick wiring can be safely hidden from view.

The price of the Spectrum version is £198 and £1 less for the ZX81 computer desk.

■ The Backpack for the ZX81 Spectrum fits neatly, at with standard on-off switches and space for the power supply. Top of the bag also has a cassette rack and cassette, three 1/2 amp sockets, switch and power indicator. Unlisted: £27.50-£12.95 from *Halfpenny Computer Cases*.

■ ZX81 Mobile Stoppers are a great idea for those who get system crashes away from the Pause key is pressed. The unit is that the RAMBox is clipped firmly to the back of the computer. The pieces of these may be a little steep for you, though. See also Miscellaneous section. Small set £6.25 Small third £6.25 Large set £6.75 Large third £6.75 from *Halfpenny Computer Cases*.

■ The Microstation/Work Station for the ZX81 Spectrum. The desk is deep shaped with space for computer and peripherals. The Work Station includes for other monitors as well as needs of sound, assembled about metal and has on-off switch, four 1/2 amp speakers and carrying handle. Room for peripherals and the TV stands on top. Accessories: Printer Area (ETD 80-C11) up to 10, 111 and keyboard turn cover (£2.50) Unlisted: Microstation £7.95 Work Station desk top model £49 from *Halfpenny Computer Cases*.

Keyboards

Once the top has bitten the price revolution in the Sinclair computers is usually by adding a better keyboard.

There are several keyboards to choose from many have only recently hit the shelves. One probably worth a mention is the Sinclair Profile DS Tenree. Have been around for the longest time. Their early model was suitable for both ZX81 and the Spectrum, only the key legends and the base being slightly different. They had a lot of criticism for certain aspects of the keyboard, although basically it was a very nice unit. Their new version seems to have allowed for many of these comments, being more ergonomic and having a space bar. It sells for £16.95.

A word of warning!

In several shops I have seen them still selling the old version for the Spectrum. Don't get misled off with one if it hasn't got a full space bar.

The unit also has a mechanical keyboard-type of the normal type. I have been using an old version for about a year and I'm perfectly satisfied with its performance.

Teletron Ltd. sell what appears to be a similar unit for £28.95, although I've heard that it has a metal case and is better in construction. Unfortunately we've not had one to review so cannot comment further.

Realise a good keyboard of every respectable price. Made in an attractive metal case and containing a full sized mouse (though still being compact it costs £37.95). This one is well worth your consideration.

Advanced Memory Systems Ltd provided to send me one of their Low Profile keyboards for review when I mail them at a recent Monitor. It has not yet materialised, but I'll give you a

full review when it does. Its price is £19.95.

From Matrix comes a keyboard to go with their workstation. The MS costs £19.95 and with the keyboard £24.95, worth looking at and if you send us one I'll report on it in full.

Knowledge Electronics sell a keyboard for the gamma player. It has a built in gamma amp and tape interface plus full size space bar and microphone compatibility. I'm afraid I had to turn down their offer of a review model as they couldn't return before I could get it done. However it looks like a nice unit for £29.95.

Hope to do one of our special features on some of the keyboards available in a future



ness, as if I've left my car out of your company wishes to be informed please let me know!

Stage 1 SAMPOUR keyboard looks a very neat and compact

unit for £24.95 and a promise to be compatible with all add-ons including Interface 1. Contact them at Woodham Hall, Woking, Surrey.

In Brief

■ The **Tactile Keyboard** from **Beetle Industries** for the ZX81, incorporates full-sized keys and provides the professional mechanism for proper touch typing.

The case has a low profile and the keys are angled to ease typing. A full complement of legends is supplied for the ZX81 with clear plastic inserts so that the legends remain intact over a long life.

Full instructions are provided so to how the unit is fitted. You can obtain this keyboard for £25.95 from Beetle.

■ Consisting of a black ABS resin case, the **Push Button Keyboard** covers over the ZX81 keyboard providing a much improved keyboard. Quite standard, you have sixtyboth 3 coverly with raised keys which provide a positive feel to them when pressed. Priced at £2.95, you can find out more about this expensive keyboard alternative from **Hewlett Ltd**.

In Brief

■ **Custom Key Panel Kits** from **Softworks** allow you to customise your keyboard to suit all the different pieces of software you use. For example, in some games the keys you need to press to move right and left are often the '8' and '9' keys respectively — however, as you all know, all keyboards can be completely different and require a vast spanning number of keys to properly play the game. With this kit, you can now place a word over the keys and using a clear plastic insert unobscured guides for your different software packages.

Softworks provide 10 overlays and two sets of sticky labels, one already printed with words like 'left', 'right', 'move', 'fire', 'jump', 'cancel', etc, and the other left blank for you to draw up your own labels.

The Custom Key Panel Kit is priced at £3.99 a pack.

■ The **Memotech keyboard** is not thrilling, but does have the advantage that you do not have to take your ZX81 out of its case — that unit just sits over via a ribbon cable. Although it is very easy to fit it does mean that you have now got two separate units. The keys, typewriter style and angled, don't feel right but the case design is quite attractive in Memotech's blue house colour. £24.95.

■ The **Computer Keyboard** for the ZX81 Spectrum is a lot "bigger", but the typewriter-style keyboard — angled like a real typewriter — is quite nice. Again, the computer case is removed and it sits over it and there is space for the power pack. There are two versions available, with standard or metal case. Good keyboard Standard £25. Metal £28. From **Computer Keyboards**.

■ For physically disabled people, there is a special sort of keyboard. There is the **Quick Top Spawning device** the **Reliance Spawning Model** and the **Expanded Keyboard Model**. Both have been designed to help people with certain afflictions. The price of the units is very much dependent on the input device used with the keyboard. For more information, call or write to **Program Concepts Ltd**, Middlegreen Road, Langley, Berks. SL5 8JF or phone 0763 79226.

■ **Memotech** have produced a keyboard for the Spectrum which is priced at £25.45. The keyboard is clearly marked with its functions, thus denoting their function. The keyboard has incorporated a cursor control pad with a 'fire' button and has sensibly placed direction buttons.

■ A new concept in keyboard overlays has been introduced by **Tactile** aimed at early education programmes. The **Tactile keyboards** fit over the Spectrum, and a series of keyboard overlays can be attached. The overlays come in all sorts of shapes and colours and the company produce compatible software which utilises the overlays.

■ A new range from Spanish company **Indescom**, all housed in good-looking glossy black boxes. Includes a novel **Graphics Controller** for the Spectrum which has four outputs to control lights, lights, hearing and so on. **Unlimited Keyboards** are typewriter style. **Spectrum Keyboard R43 99**, **ZX81 keyboard L29 56**, **Domestic Controller C27 74** from **Indescom**.

In Brief Ram Units

■ **Spocom** have a plug-in memory edge connector to give a four-bit widebus and a 24-line bidirectional programmable port board. **Access** is provided to give programming via **Mikami's 8 Tronic** pins to enable a range of additional cards for use with the board. **Unlimited C33** approx from **P.R. Tronic**.

■ The **Model 8P45** expands the 128K Spectrum to 64K of RAM and the **8P46** takes the computer to 81K of RAM. Both have extensions for extra one or two **Unlimited**. Free with 8P45 beyond. However tape for advanced programming. Issue one **8P45 C35**, Issue two **8P45 C35**, Issue one **8P46 C35**, Issue two **8P46 C35** from **East London Software**.





In Brief

- From **Stonechip Electronics** comes the **ZK Perks** - a 16K RAM extension for the ZX1.

Mounted in a slide box, the pack connects to the rear of the ZX1 via a 16-pin edge connector. There is also an LED built into the front to indicate if the system is receiving the RAMPerks.

There is no extra wire connector at the back of the device, so it is possible to add a further 16K, in the case with a RAM board priced at £14.95.

The ZX Perks is available from Stonechip Electronics, priced at £19.99. Telephone enquiries can be made on 0252 216260.

Thoughtful like to check them about their other add-ons for the Spectrum including eight pin, an echo amplifier, a programmable numeric interface and a keyboard.

- JAG Software** have on offer a number of ICs which transform your Spectrum from 16K to 48K. The first uses Spectrum card kit incorporated using a RAM board which is fitted inside the computer. Requiring no soldering, the RAM board is priced at £42.95. For the first two Spectrums, there are 12 ICs provided, marked A to K which are to be fitted inside the Spectrum replacing ICs already in position. Installation is carried out simply by following a diagram supplied. The price of the ICs is also £42.95.

- DK-Tronics** makes 16K and 48K RAM packs for the ZX1 and upgrades for the 16K Spectrum to add 32K of RAM. ZX1 16K £22.99, ZX1 48K £32.99. Spectrum four one 32K £34. Spectrum issue two 32K £33. From **DK-Tronics**.

- Computer Add-Ons** has a 16K RAM pack and a 48K model both for the ZX1, and upgrades to add 32K of RAM. ZX1 16K £22.99, ZX1 48K £32.99. Spectrum four one 32K £34. Spectrum issue two 32K £33. Spectrum issue two 32K £33.

- Featured in many books, **Indevision's** ZX1 memory expansion pack for the ZX1 gives an additional 16K, 32K or 48K, and there is a 32K version for the Spectrum. ZX1 16K £19.99, ZX1 32K £21.79, ZX1 48K £22.99. Spectrum 32K £28.99.

- Chetah's** 48K ZX1 upgrade for the 16K Spectrum has been specially designed to avoid system £29.99 from Chetah Marketing.

- Camel's 48K Dream-81** expansion for the ZX1 has an LED to show when power is on, a link option to double the 0-16K size of RAM and is designed to accept an EPROM as an alternative ROM. It, a memory expansion unit for the ZX1, enables you to read useful read manuals concerning used software over EPROMS. Dream-81 £22.44. ROM-81 £19.20.

- Acute Computers** have introduced a RAM pack, priced at £19.99, for the ZX1 to make it up to a full 16K. The unit incorporates built-in speakers in the same height as the main and has a plastic grip which hangs over the top of the ZX1 holding the RAM pack in place.

In Brief

- Memotech** provide a wealth of features and one for the ZX1, including a number of memory packs.

Called **Memopack**, the unit fits snugly into the back of the ZX1 and can be stacked together to further enhance your micro system. To simply extend the memory capacity of the ZX1, you can add the 16K, 32K or 64K Memopack, which are priced at £29.95, £49.95 and £79 respectively.

To temporarily extend your add further, you could stack add one of the other three Memopacks onto a video high frequency Chetah's package, a Cambridge Printer Interface, and an HD 322 Printer Interface. These are all priced at £29.95.

You could also see Memotech about their ZX1 keyboard if you're going to phone them on 0953 2877.

- The 16K RAM pack from **Data Essentials** priced at £29.95. You can also purchase a plug-in module for your ZX1, which when used with the RAM pack will extend your memory up to a full 32K. The price of this unit is £29.95.

- For those two Spectrums only, there is a Spectrum upgrade to 48K available for only £24.95. For further details, get in touch with **Pountain Computers Ltd**, Garvill Road, Ripley, Alfreton, Notts. S24 0BW. You could also look for the first and second issue concerning the way to get the best out of the chips of the Spectrum. Piped at £1, this A4 sheet shows you how you can get a marvelous display simply by adjusting a few internal controls of the Spectrum.

- You can upgrade your Spectrum, either issue 1 or issue 2, from 16K or 48K using a RAM kit from **Data Resources Ltd**. First add some RAM kit comes **Data Chiplets**, a memory chip group compatible providing complete standard loading of the existing 16K, 32K and the 32K extension. The issue 1 RAM kit is priced at £27 and the issue 2 version is priced at £31.

Speech and sound

We had feature items on speech software in a recent issue, again, it'll not take up too much time with lengthy descriptions.


There are essentially two systems of producing speech from the computer, either by replaying pre-recorded digitised speech or by constructing it from phonemes or synthesized phonemes. The first is clean, but

limited to the words programmed and also expensive in memory, while the second is more flexible but rather robotic in sound.

On the full dozen or so on the market, a brief summary of reviews in Spectrums are as follows:

Speech Talker for speech, easy to use, built in mp and





speaker. **Cornish MicroSpeech** very easy to use, the games simply choose as some software companies are producing programs featuring the system in its varying degrees of use, such as **S-Park**, a really quality sound vocabulary, ideal for educational purposes. **Expansive Characterize**, the instant user choice. Built-in amp and speaker, designed for both ZX1 and Spectrum, part of the complete system of voice recognition and sound generation! **William Stuart Systems**.

Sound

This is becoming almost a speakerless era of computing. Many units such as the **MSX** will allow you to connect your **Speep** just to use as the cheapest musical instrument available such as the **Game**.

However, there are many units which make use of the ex-

cellent AY-3-8812 sound chip.

For the sound specialist I would recommend looking at **Beep**, a software range of sound generating units, which has a really simple and sophisticated interface such as **Digital Drive** and **Half octave Analysis**.

William Stuart Systems sound box works best when used in conjunction with their other two chips. The speech and sounding it with an amplifier, I loved this one and was very impressed with the support software. The **AMP** (a page 60 note requested) program kept me fascinated for hours. I was sad to have to return this to them and was very tempted to buy one. Should interest musical computerists with limited technical knowledge.

Orwell have just brought out a **Beep** amp. It plugs into the port unit is connected to the speaker. At £19.95 it may be what you need if all you require is an amplified **Beep**.

DKT chips and again, are in to the game of the market. They have two units which look very good and consist of the usual interface plus a 4" x 6" mounted speaker. One costs £14.95 and is a simple **Beep** amplifier and the other costs £26.95 and as well as boosting the **Beep** also contains the AY-3-8812 sound chip to provide 3 independent channels with envelope and volume. Very similar to the sound on the **SAC**.

The **Tetrad** is a sound unit for both **ZX1** and **Spectrum**. The latest improvements not only take the one plug interface **CPROM** but the software is provided separately on tape. It is obtainable from **Mustach Intend**.

Developments in 1. **Countdown** 88, **Mountain** About, **Devon** **TC12** ZX1, Tel: 0628 62828 and is priced at:

ZX1	£24.95
with amplifier	£28.95
Spectrum	£26.95
with amp	£28.95
	£31.95

for a **Beep** amp socket to be fitted.

As a special Christmas present to all our readers they are offering £2.00 off any unit until Jan 30th 1985. Send the coupon printed somewhere in these pages and send it with your order for your discount.

In Brief Speech and Sound

• The **Speech Reflex** available for £24.95, is designed to provide speech synthesis for the **ZX1** and **ZX Spectrum**. The package comes complete with demonstration cassette and instructions on how to use the software system.

• The **Cornish U Speech** for the **Spectrum** "speaks" the letters and the **ASCII** keywords as you type them in. It will hold anything you want the unit to say. It is simple to use with your own **ASCII** programs, by handling the sound in a format appropriate. So you would write **hello** as **H E L L O**. Upper and lower case words in lowercase. Some commercial titles are available, such as **U Speech** for games. An example is **Supplies a Words and the Beep**. Shaped a little like a block cassette case — and packed with a great value — the **U Speech** software plugs into the port. Its operating guidelines state you should plug anything on the back apart from the speech unit and, possibly, microphone. The sound comes out of the TV speaker, so if you use a monitor this will not work with it. £28.95.

• The **Characterize** for the **ZX1** **Spectrum** is another unit as in the standard form from **William Stuart**. But the same standard of understanding your speech, it speaks to you through its own speaker. It uses alphabets which are acceptably easy to program. **Characterize** is equipped with two external amplifier sockets — one stereo and one mono — and has an edge connector for other peripherals. Pretty good, £46.95 from **William Stuart Systems**.

• The **S-Park** **DCP Microdevelopments** is an upgrade of the **Digitalizer** and **Word** and for the **ZX1**. Now designed for the **Spectrum**, you can get hold of the **S-Park** for £48.95.

The unit comes supplied with a vocabulary of 71 words, phrases (numbers and letters). These can be called from programs using simple **ASCII** statements.

Should you get bored or feel confined with the collection of speeches, you can always purchase one of **DCP's** other three **Word Pools**, priced at £14.95, which come as ROMs.


• Not listed, **Jan's Beep Booster** has a 2in loudspeaker, a speaker (remote to be fitted) and an amplifying plus in volume control knob. Runs a stereo and requires no separate **Beep** code. Ring based on price and supplied details £14.95 from **Deal Marketing**.

• The **Tetrad** **Beep Booster** is an upgrade of the **Tetrad** **Beep** unit, the new unit can be fitted not only to the new two **Spectrum**, but also to the **ZX1** and **Spectrum**.

The **Beep Booster** allows you to amplify the sound from your **Spectrum** through the television speaker so that you can really make the most of the most **Video** programs available on the market. Measuring only 2cm by 1.3cm by 1cm, it is claimed to be the smallest module in the world.

The **Beep Booster** is connected inside the **Spectrum** via miniature plated clips which push onto the connection points.

The Spectrum Add-on from Microprocessor



In Brief

■ Easily adapted for a variety of uses, come the **BIOP Amp** from **Hypertek**. The device comprises an 8 Watt amplifier with a 12 Watt Woofer and tweeter in a small speaker unit. The unit is easily connected into the MIC socket of the Spectrum. Priced at £23.95.

■ From **Hi-Tech Electronics** comes the **2090-81** is compatible with all Sinclair computers, although for the Spectrum an adaptor is required - this can be bought separately for £8.99 if you are upgrading from 81 to Spectrum.

The unit offers a wide range of sound effects, such as planes, tanks, helicopters, lasers, explosions, etc. The soundchip used has been designed so that the pitches and volumes of the three channels and overall attack/delay/envelope can be controlled by BASIC statements.

The 2091 version of the device is priced at £26.95 and the Spectrum model comes complete with adaptor at £32.75.

■ From **Micro Power** comes the **Spectrum Add-on** priced at £18.95. The board, once connected, provides three channel sound effects, includes a 3 Watt amplifier and loudspeaker to amplify the effects, and has room for two programs. These provide can be purchased for £7.45 each.

■ The **Soundbox** is the sound unit of the **Characterics**. Above average three channel output and quite easy to program. Also, but needs an external amplifier. £27.95 from **Williams & Gossett Systems**.

■ **Speasound** is pretty good value for an amplifier. It plugs into the loudspeaker sockets, leaving the edge connector free. It has volume control and an on/off switch and the power is from a battery. It might have been a better idea to take the power from the computer to avoid buying batteries. £7 from **Relewood**.

■ The **Sound Synthesiser** for the Spectrum is a plug-in module for three channel sound with a volume control, amplifier and speaker at plus two input-output ports. Unleashed. £26 from **Signpoint**.

Utilities

Home computing started as a hobby for many years and is viewed in electronics and who probably built their own computer. The wheel has to some extent come full circle and more and more computer owners are dealing with electronics in some form. The response to our hardware into their project has been surprising and more companies are making equipment available to the home computer market.

Comel Products, Cambridge Microelectronics Ltd, 7 Milton Rd, Cambridge CB4 1UF have a range of EPROM related products such as the **PRO-MER SP** which allows programming and checking of 16, 32, or 128 EPROMs. The price £29.95.

The **ROM-SP** loads and runs programs up to 16K of program from an EPROM and two EPROM erases, the **DM-8116-2**. Also from Comel is a Power Buffer used to protect against more power failure and some more references. 2091 and Spectrum versions are available.

The world of Modems and communication networks may be slightly different, but have a lot in common with the

dedicated hacker. **MODEMS** or **MO-DUL-ER** (MO-DUL-ERS are a fast growing part of the computer industry.

There are the units which enable you to connect up to the phone line and communicate with another computer. The main computer which is accessed by the home computer user is **BT's Prestel system** and **Mersey 800**. To do this you must have a BT approved Modem. There are two I know of, **Pratel's VTX 8000** which connects directly into the modem telephone socket and **Pratel's 1200 Modem** which is automatically coupled to the phone line when it is connected to the Spectrum.

In the last issue I described how I joined the Microprocessors and got only realize that first is a fascinating and enjoyable pursuit.

Software will give you with a **PC 128 ROM** for your Spectrum or 2881. This is a sophisticated version of the language and is ideal for control applications.

It cost you £15.00 + VAT from **Skyways Software 79**



In Brief

◆ **The Time Controller** from Glanville Electronics is a battery-backed real time clock. The Time Controller has eight program mode inputs and eight programmable outputs.

With its own built-in program, it PROM, offers a simple interface to a microcontroller to read or write the status, day, date, hours, minutes or seconds. There is also an extension connector should you wish to add other peripherals onto the board.

Applications for this device include electronic diary with alarm, home control, burglar alarm, sound effects and process control.

The price of the device are £24.50 for the CMOS version and £28.50 for the Spectrum model.

◆ **The USP232D card** is a dual channel serial interface using RS232C DART protocol. Includes software for LU627 and LAP627 and dumb terminal computer and a 56 page manual. USP-10, a general purpose parallel interface, provides 16 output or input lines for use with such as printers, mass synthesizers, digital-analogue digital converters, cameras. Further cards are available, using both 8088 or 8086 bus. USP232D £24.50 USP-10 £29.95 from *Microcomputers*.

◆ **The Onne Electronics EPROM Card** for the ZX Spectrum can be used to provide more hard file for BASIC programs. With the EPROM total in the Spectrum's ROM space you have 16 words (suitable for re-numbering, editing character transposing and variable dumping). Designed EPROM 1, the device is priced at £2.95.

◆ **The RAMLOCK kit** from Adapt Electronics is a high quality, gold plated male connector which replaces the computer connector, and a mechanical detaching device. The RAM lock is designed to the computer security. Monitoring, scanning or special tools are required to carry out this modification. Suitable for connection to most popular RAM packs, the RAMLOCK kit is priced at £7.50.

There are also a series of RAMLOCK II adapters which wrap the RAM lock 'waffle' systems and provide an improved quality edge connector for the computer. This kit is available for the Spectrum and the ZX11 and is priced between £2.95 and £5.00, depending on the machine and what modifications you wish to make.

◆ **The MURBLES chips** plug into the rear edge connector to give a flexible method to use the range of Microbit interfaces, including a prototyping card. A power supply powers the MURBLES Card Power System together with interfaces: Spectrum and two micro floppy disc drives. Cards include floppy disc, RS232C/centronics, 80 column video, 84K page mapped memory and ten code reader interfaces. Unbuffered MURBLES Card frame £29.95. Power supply £29.95 from *Microbit*.

◆ **The High Resolution Graphics Pack** for the ZX11 contains a ZX EPROM holding the 16-bit 8450C monitor to control a 200 by 100 pixel screen with every pixel accessible. Commands like PAGE, FLIGHT and SCROLL, can be used to define characters, draw and plot. There is also a complete lower-case character set for word processing — but you will be well advised to buy an expansion keyboard to use this feature. Comes with ZX Printer. Suitable discount £19.95 from *Digital Integration*.

◆ **Monitor** from MacQuilan Electronics has been designed to meet users by providing a convenient, convenient means of loading and saving programs on tape, the Monitor is priced at £19.95.

The Spectrum model has a built-in amplifier, while both ZX11 and ZX2 model feature a power-on/off switch. All functions are performed via about the need to reconnect or swap plugs. The internal, high quality component is contained in a pop-up built-in injection moulded case to form a small, compact unit.

Also available is an enhanced Spectrum model containing a 2 Watt amplifier and external speaker for connecting a larger, audio type speaker. The price for the enhanced model is £19.75.

For further information contact MacQuilan Electronics.

Storage and display

Lately some of the more sophisticated suppliers have realised the potential of the Spectrum and how it is possible to make use of some of the high quality products via a suitable interface.

As a general rule it is always worth buying the best you can afford especially if it is included unit. The benefit becomes obvious if and when you upgrade to another computer. A disc drive system may cost £200.00 — but it will also work on a BBC or Amstrad, whereas a microdrive — no, wait.

The Discworld was designed to work on a domestic TV. This is fine for relatively short sessions, arcade games etc. but if you do any lengthy computing an effort to see if you can find a 24 character per line format for any length of time, for ready for the headliner!

Some TVs are better than others of course, but most seem to wander off channel at times and the colour scale can be irritating.

ADAPT ELECTRONICS are a company who work heavily on producing clever devices aimed at the amateur user and it is reasonable price. One of their earlier inventions was the RAMLOCK kit for the ZX11, now I've never seen one but a reader informed me and it sounded very effective.

Next they set to bring us a video adaptor to convert Spectrum TV output to a composite signal suitable for a BW monitor. This came in the form of a leadplug which plugged in to the TV socket of the Spec from. A-Z 75 this was a great boon for business users on the display, normally, as far as costs, costs less myrghans and over 24 characters per line each reasonable.

And now they have produced a FULL RGB colour monitor interface. This unit is a little larger and fits into the port of the Spec in the usual fashion.

At the time of writing Adapt have not yet finalized the

packaging of the unit. The one we they sent was a dust-enclosed unit with a full guard enclosure, but they are considering a ZX11 type (semi-rigid) enclosure which would be more compatible with interface 0 and for adding a through connector. Only time will tell how it ends up, but whatever they do I'm sure it'll come as well as the sample supplied!

It is actually starting to see the quality of the output of a Spectrum on a monitor I mentioned. Dope who supply JVC monitors at the cheapest price I've seen, they were ahead of the CR 95, we've seen it, very impressive. So are their monitors £129.95 for the medium resolution version which is more than adequate for the Spectrum of £199.95 for the high resolution monitor that is specially adapted to run the Q1.95 also offer per line output. Both these are very good value for money and so I will advise you later details to upgrade.

All I can say is that for clarity, colour separation and definition, when you've seen the display on a monitor you'll never go back to a TV. The RGB interface costs £29.95 for Adapt Electronics and Dope Supplies can be contacted at 155 Commercial Rd, London SE15 8BB. 01 781 4888.

Take things a still by for the most popular form of program storage and there are many variations on the market which bear the cryptic message "Com





outer computer. The fact that the smaller computers were designed to be compatible with the ordinary range of tape readers makes you wonder.

However, there are a couple of interesting ones worth a closer look. The **CHALLENGE SPENT** plus into the Spectrum's port and not the strange socket Challenge Research claim replaced loading and saving and a four-fold increase in speed. They quote "a full 49K program will load in about 175 secs instead of 670 secs." They also claim you are as soon as they have enough in stock, at the time of writing it hasn't appeared and their latest is dated 20 0 84. It is priced at £24.95.

The **Morewood Datacenter** is a dedicated recorder compact and lightweight. Disk cards are used and a monitor switch. The recorder can be used with the PSU supplied or operated by batteries, a few power warning lights it provides if batteries are used. It costs £24.95 but if you want to use it with a ZX81 it's a booster attachment is available for a further £3.00.

I have tried it and it worked perfectly. Obviously from above, Micro II, Newhaven Close, Bourne, Beds, CM7 2PR.

In time for Christmas is Senter's own 'Spectrum On pattern System' the contents of the increasingly popular format, can Microdrive, leads and a reader containing four microfiche tapes. The tapes contain Teasard I and Microfile one, probably the best

wordprocessor and card tapes (gets on the market, and Games Designer and 3D Art Attack) on another, a very impressive game and utility. One tape is taken and the fourth from the usual demo program plus a tape for Microdrive utility. This is useful but does not transfer all programs.

The reliability of these units seems to be OK, I must admit I having some doubts as the first one I was failed to work. However this problem performed perfectly with constant use for nearly a month now. Obviously it will take a period of many months before I can say with conviction that this is a reliable storage medium.

In my opinion this package represents good value for money at £80.00.

Transform Ltd. 41 Kenton House, Pondersley Road, Beckenham, Kent, can provide you with a very nice little case in which to keep those elusive microfiche tapes. A very good idea as they're too expensive to keep needing on. A box will hold ten, little and safely. A good idea.

The **WAFABRIVE** from Solonics looks very interesting at £150.00. A similar unit (therefore it is two microdrive units) can be used in a similar way and cost around £185.00. It is an all in one tape load tape drive with Centronics and RS232 ports. Its appearance is very neat but it also has the advantage of being less expensive tape to the Microdrive ones, £3.95 compared to £4.95 an inch (288K capacity). Plus a wordprocessor equipped on tape with each unit. The success of Microfile depends on how easy it is to transfer programs to tape and how many companies can

be persuaded to provide software in this form. Meanwhile I'll get a full review of it for the next issue.

And so on to their next achievement of the storage systems, floppy disks.

Although turnout of such controlling techniques have been around for a while it has only been recently that I have been able to actually see one for any length of time. This, of course, the interface from Technology Research Ltd of Stroud, having used it for around two months now it will function perfectly and I would think to go back to a cassette based system.

The **Viglen Drive** I am using with it has also performed like a dream and I wholeheartedly recommend the system to anyone who wants safe, efficient, fast and reliable storage. For full details see my article which should be lurking around in this issue elsewhere.

Instead that Optus are selling a disk drive system for the Spectrum and I'll try and get them to supply me with one for full assessment in a future issue. They are a respected company with a lot of experience so it should be worth considering.

Thames Data developed a disk drive I wish to give a complete write-up later in the next issue for £190.00. This unit, one for review but it has just arrived and I wish to be able to present updates it in time for that next deadline.

So, it may be worth looking out more about it if you are looking for such a system and they are at Thames Electronics Ltd, Prospect, Oldfield, Manchester, M20 6LQ. In the meanwhile I'll get a review to give it a good try out and report in the next issue.



Addresses Addresses

A

Advanced Digital Systems 9
Northchurch Road, Pottersdown
Hants RG2 8LA

A&F Hardware 28 Van Sugh
Place, Bognor Regis West
Sussex PO22 9HF

Adapt Electronics 22 Hedley
Street East, Tewkesbury
Worcestershire MK1 2 9AP

Adaptors and Simulators 14
Thomas Street, Leam Union
Aston, Birmingham B14 7JL

Aerial (UK) Electronics, Railway
Terrace, Slough, Berks SL3 5BG

Arcom Systems 1 Leavel Road,
London NW11 7NL

Arde Computers 87
Bournehouse Park Road,
Southend Essex

B

Bassors 13 Market Street,
London SW8 1BU
W Park, P.O. Box 4, Wem, Shrop

C

Camel (Cambridge
Microelectronics), 1 Milton
Road Cambridge CB4 1UF

Cobra Technology, 378
Colindale Road, London N1
1DY

Computercock, 2 Wycholey
Road, Wycholey Heath, West
Sussex BN18 1BU

Computer Keyboards, Glendon
Park, Wykepark Road, Ayles, Berks

Computer Electronics,
Hollworth, Manchester M20
6HS

Color Electronics, 1 Siskin
Road, Twickenham, Middx TW1 4LL

Computer Cases, 4A Waters
100g, 148 Hillside Road,
Barnet, London

Curtis (see also Industrial
Retail Hardware), Cleveland
1525 30F

Chester Marketing 255 The
Strand London WC2

Compusound, 22 Langley
Close, Redhill, West Sussex RG2
8BT

Conky Caplan 87 Garsfield Park,
Levensham, London SW13 7DW
& R. Cameron & Son H.O.3 The
Verde, Infield, Middx EN1
3SD

D

de'Tronics 23 Sussex Road,
Gorleston, Great Yarmouth
Norfolk

Deen Electronics, Glendale
Park, Purton Road, Assot,
Berks SL5 5JH

Digital Instruments 22 Ash
Church Road, Abingdon, Hants
GU12 8JK

Delta Research 18 Church
Street, Basingstoke, Hants
RG21 1QZ

Data-easy 44 Stronon
Street London NW1

DEP Microdevelopment, 2
Station Close, Lingwood,
Preston PR13 4JH

E

E & C, Whitehouse Close,
Clifton St Peter Bucks SL3
0DA

Euroelectronics, Monitor
Lane, Boreas, Chesham
Bucks HP84 3JH

Electronics, 2 Heath Close,
Winton Hill, Luton, Beds
LU1 1LH

East London Electronics, Gate 11,
Royal Albert Dock, London
E16

Elma Products, Lion Works,
Capel Street, Sheffield, South
Yorks

EPROM Services, 3
Widewood Drive, Leeds LS9
1RF

F

Fountain Computers, Gurnell
Road, Ryeley, Abingdon, Hants
RG1 3TR

F & Tronics Ltd 2, Park Road
Industrial Estate Park Street
Lye, Stourbridge, West
Midlands DY8 3BB

Flewley, 28 Colingham
Mews, London W8 2JW

F. Finch 2 Station Road,
Trillick, Chester

Foster Systems, Unit 55, South
Coast Road, Industrial Estate,
Rushmore, West Sussex BN8
8NA

Fulcrum Systems, 71 Dale
Street, Luton LU2 2
FV

Fur Electronics, 1413 Abbey
Road Basingstoke, Hants

G

Glanville Electronics, Wexley
Park, Trinity Avenue, Rushhill
Park, Infield, Middx EN1 1PH

H

David Hubbard, 2 Berkeley
Road, Basingstoke, Hants, GOSW
612 1HW

Hypotronics 2 West Vale
Newson, South West LU4 9SL
H & R Supplies 222 Guildford
Road, Basing, Surrey GU24 5AD

I

Indosigma P Castellon 173,
1 Madrid 28 (phone 016 24
278 31 05)

J

JRS Software 18 Worside
Avenue, Workington SO34 8BW

K

Kelma Wood Products 48
Auckland Street, Basildon,
Essex-on-Tyre SS7 2AA

Keleford Computer Cases,
Dunelm Row, Moorings
Business Park, South Yorks YO8
2HG

Kempson Micro Electronics,
Unit 20, Silver Way, Midway
Road, Industrial Estate,
Kempston, Bedford MK42 7AF

M

Mam 2, P.O. Box 83, Bester,
Devon EX4 7AJ

Manchester Station Lane,
Winton, Devon EX8 8DC

Microtek UK, Highland House,
18-24 John Street, Luton
Luton LU1 2JH

Miles Peripherals 2 Belford
Road, Caversham, Reading,
Berks

MacGillivray Electronics 72
Main Road, Wigton, Mairns,
Leith EH1 1BL

Mira Aids, Distribution Centre,
Beech House, Hob Hay Lane,
Culham, Warrington, Cheshire
WA2 4LN

Mirco Power, 3 RA Regent
Square, Chapel Allerton, Leeds
LS7 4PE

Mitford 889, Slinger Court,
100 Farmington Road, London
SE17 8AD

Minteltek, Station Lane,
Wenny, Devon CO8 6 0Q

Mitouch Computer Co,
Roughall House, Roughall,
South PO22 1HH

O

Ome Electronics, 2 Sanger
Road, Coudbourne, Cambridgeshire
TR14 7QM

P

Park of Patten Products, 18
Brough High Street, London
W1 10R

Patten Computing 1A Young
Square, Bradford Industrial
Estate, Livingston, West
Luton

PP Electronics, 124 Bettle
Close, Concorde, South Yorks
DN4 8EL

Passion Careers, Middlegreen

Road, Lough, South Yorks
YO3 8DT

PH Scientific Products 8
Southfield, Welwyn Garden
City, Herts

POS, 412 Storey Station Road,
Coveley CV8 5DD

Prom Electronics, Courtdale
Road, Newton Abbot, Devon
TQ12 3JA

R

RD Labs 20 Court Road Estate
Cromley, Great
Ran Electronics, 108 Fleet
Road Fleet Hants GU13 8PA

S

William Sgarl Systems,
Quintilly, Gosport Road,
Chichester, Salisbury Wilt
SP4 8DD

Sigpoint, 188A Glyn Road
London E9

Sonic Insulators, Hagley
Haven, Hagley Road,
Birmingham B16 6DW

Softex, 10 Richmond Lane,
Ramsay, Hants RG8 8LA

Softwalk, 25 College Road,
Reading Berks RG2 1DC

Suamico Services, 144 High
Street, Slough, West,
Midlands WS12 3UT

Starburst Electronics Unit 9,
Brook Trading Estate,
Beechbrook Lane, Aldenham
Herts SG12 4BB

Stevens Research, Stanhope
Road, Canterbury Surrey GU15
3PB

Ston Instruments, Haybridge
Milton Essex

T

Tamedata 18, Hamble
London, Essex SS15 8JG

Techline Works 31
Roughwood Road, RT8 2 8B

Terra Technology, PO Box 3,
Wormsley Wilt BA 2 70Q

Teslate Design, 81 Millers
Road, Bromley Kent
Technology Research, 87
Brookley Park London SE23

U

U Microcomputers, Winesale
Industrial Estate, Long Lane,
Warrington, Cheshire WA2 8 9F

V

Voltmax Park Drive, Sale, Lancs
Hants SO7 68W

Z

Zed Marketing, Vanguard
Trading Estate, Slough Lane,
Chesham Bucks HP8 3 7J

More logic games are probably among the easiest of arcade games to write in BASIC and they are often the starting point in the programming career of many a Spectrum owner. However, no one wants to play yet another version of PAC MAN, so the art of construction is not so much in the code itself... but in giving the game some type of variation on the standard maze idea.

Here there are three examples which give a twist to the maze theme. They are all reasonably short programs, written entirely in BASIC and so they may be considered modified tests upon your attention - given the advice by Bland from earlier.

So how about the virtual maze called maze a pyramid, the maze which has invaders with an invader more dangerous than a peaceful looking blobby of acid? The choice is yours... read on.



Maze One: Pharaoh's Tomb

The great Pyramid of Cheops was built in Lower Egypt by the Pharaoh Khufu at around 2570 BC during the time of the 19 Dynasty of the Egyptians. Ruled by Amenhotep he is known as Great Pyramid and was first entered by one Abdulla Al Mansur in AD 820 and he found the King's Chamber to be an unbroken and locked to most important possessions. The name of the pharaoh Khufu is said. The main chamber and its chamber and galleries were repaired to be completely devoid of murals, statuary or any human remains whatsoever.

Such is the mystery of the Pyramid of King Cheops and there must be more to a good computer

game that can be modelled on a similar real world mystery. The events of 2020 BC. While Egyptologists argue over the date of the missing murals, you might like to try the program which should not be so excited to throw any light on the subject whatsoever!

The screen is laid out to represent some of the pyramid's two and a half million limestone blocks and has an entrance, the King's Chamber (Tomb), the astronomical observation shaft and numerous galleries. You, the player, are a delayed post-beam who wishes to see the pyramid before the robots (invaders) take the computer into the gallery with you. A race against time, a simple display showing how many you of gallery have been blocked by sand blocks of your program as you fly. The game ends either when you have not used time or when all the galleries have been blocked through. Egyptian ball bearings with supposed to step with their mummified King. As far as the program is concerned the code are in favour of the player, and you find yourself frustrated. Make your slow reaction time! Your movement is by keys 0, 1, 2, 3, the cursor keys.

The screen shows a simple simple method. PRINT ATing the resolution (200x200) to the screen colour lines 410, 430, 1000. Place the pyramid on it according to the horizontal lines line 80000 and the sun is at course a series of coordinate lines line 800. The pyramid gallery is a parallel reference to their row column as a series of 0, DATA line 7000 7004. These are compressed together with the coordinates of the stone mason's oriented course are worked out on graph paper before the program is written, and to have a better view, this is quite fun to do. You can have a program of maze shapes with your game) simply by writing new DATA lines and adding END them onto the main program.

The stone mason is stepped onto the screen by code at line 8000, his intended path being

read from line 7001. He is slow, so down in two ways and you may wish to change the code to speed him up a bit. A simple forward PAUSE in line 7000 checks his speed and the slow stop in line 2017 determines whether he should move at all on the current pass of the program loop.

The post-beam is moved by updating the systems line 2040, 2104-2108 and PAUSE ATing by line 2044. A good look ahead for the mummified king post invaders is better than a solid space with ATIR code 83 or so would you with ATIR code 87. Run 2001. Happy post-beaming!

```
800 PEEK 23541,2355: REM hold in
  no time
```

```
801 PEEK 23542,2355: REM repeat
  time
```

```
802 LET a=0: LET v=0: REM speed
  advantage for player
```

```
803 BORDER 7: PAPER 7: CLS : PR
  INT AT 17,0: INK 0:"PHARAOH'S TO
  MB"
```

```
804 PRINT AT 10,0: INK 0:"Choose
  a number 1 - 3"
```

```
805 PRINT AT 10,0: INK 0:"The 1
  00 numbers give high speeds"
```

```
806 PAUSE 0: LET a=a+v
```

```
807 IF CODE 0=0:OR OR CODE 0=
  1:27 THEN GO TO 900
```

```
808 LET v=v+CODE 0=0:OR 0=1:OR
  0
```

```
809 PRINT AT 21,0: INK 0:"Press
  a key"
```

```
810 REM draw sky
```

```
811 FOR r=0 TO 0
```

```
812 FOR c=0 TO 31
```

```
813 PRINT AT r,0: PAPER 0:" "
```

```
814 NEXT c: REM r
```

```
815 REM draw sand
```

```
816 FOR r=0 TO 15
```

```
817 FOR c=0 TO 31
```

```
818 PRINT AT r,0: PAPER 0:" "
```

```
819 NEXT c
```

```
820 REM r
```

```
821 FOR r=1 TO 12
```

```
822 INK 4: CIRCLE 210,150,r
```

```
823 NEXT r
```

```
824 END
```

```
825 REM Set up our charr
```

```
826 FOR a=144 TO 144
```

```
827 FOR a=0 TO 7
```

```

700 READ r: POKE 1000 CHR$(INT(r))
710 NEXT r
720 NEXT a
730 NEXT s
740 RESTORE 7000
1000 REM draw pyramid
1004 FOR c=20 TO 16 STEP -1
1005 FOR ch=0 TO 31
1006 PRINT AT r,c:INK $;"#";
1007 NEXT c
1008 NEXT r
1009 LET x=0:LET y=40:LET L=20
50 LET s=170
1010 GO SUB 8000
1011 LET s=0:LET y=60:LET L=32
5 LET s=130 GO SUB 8000
1012 LET x=204:LET y=60:LET L
=141 LET s=131 GO SUB 8000
1020 REM draw tomb
1021 PRINT AT 10,10:INK $;"*";
INK $;"#";140:INK $;"*";
1022 PRINT AT 11,10:INK $;"*";
INK $;"#";140:INK $;"*";
1024 REM
1026 REM plot main gallery
1028 FOR l=1 TO 72
1029 READ r,c
1030 PRINT AT r,c:INK $;"*";
1034 NEXT l

```

```

1035 READ r:REM dummy
1036 REM plot escape gallery
1038 FOR l=1 TO 31
1040 READ r,c
1042 PRINT AT r,c:INK $;"*";
1044 NEXT l
1046 REM call db main
1048 FOR l=1 TO 10
1050 READ r,c:PRINT AT r,c:INK
$;"*";
1052 NEXT l
1054 PRINT AT 11,10:CHR$(16)
1056 PRINT AT 10,31:CHR$(16)
2000 LET s=11:LET b=10:REM man
s=0 ordinate
2002 PRINT AT 21,0:INK $;"Galle
ry is now blocked --"
2003 PRINT AT 21,20:INK $;"you"
2004 LET s=0
2005 RESTORE 2000
2010 READ r,c
2015 RESTORE 7000
2016 STOP 3,6
2017 LET s=1:IF s=0 THEN LE
T s=2000
2018 IF s=1-INT(10/100) THEN GO
TO 2040
2020 PRINT AT r,c:INK $;"#";
2021 LET s=0
2022 PRINT AT 21,20:INK $;"
2024 READ r,c
2025 IF s=0 THEN GO TO 1000
2026 PRINT AT r,c:INK $;"#";14
0
2028 LET s=INKEY$
2029 IF s=CHR$(16) THEN GO TO 2000
2030 PAUSE 1
2031 GO TO 2020
2100 LET s=1:LET s=0:REM save
position
2102 IF s=0 THEN GO TO 2000
2104 IF s=1 THEN LET s=0
2106 IF s=2 THEN LET s=1
2108 IF s=3 THEN LET s=2
2110 IF s=4 THEN LET s=3
2112 IF s=5 THEN GO TO 2020
2114 IF s=6 THEN GO TO 2020
2200 REM test for valid move
2202 IF ATN(10,1) < 0 THEN GO
TO 2200
2204 PRINT AT d,c:INK $;"*";
2206 PRINT AT s,b:INK $;"#";14
0
2208 IF s=1 THEN GO TO 2000:RE
M you've won
2210 GO TO 2017
2208 LET s=0:LET s=0
2210 GO TO 2017
2200 PRINT AT s,b:"You've won":

```

```

GOTO 3,6: GO TO WEND
4000 PRINT AT 1,10: PAPER @: INK @:
        @:CHRG 144
4001 PRINT AT 8,8:"You've lost!":
        @:GOTO 3,6: GO TO WEND
7000 DATA 8,8,24,48,120,120,120,
120,120,48,48,48,24,24,8,8,24
,120,24,24,36,180,81: REM DATA for
F user where ---Mean Traj Table 1
is over
7001 DATA 15,31,15,39,15,39,39,3
9,15,39,15,39,15,39,15,39,15,39
,19,19,19,19,19,19,19,19,19,19
,39,17,19,17,31,17,19,17,13,14,1
3,15,13,14,13,13,13,13,14,13,13,
13,14,13,17,13,18,13,19,13,19,11
,19,18,17,9,17,8,17,8,18,8,17,8,
14,8,19,8,14,8,13,8,12,7,12,6,12
,6,13,6,14,6,15,6,16,6,16,5,17,6
,17,3,17,3,16,3,15,3,14,3,14,1,1
4,9,9
7002 REM escape table
7003 DATA 17,9,17,9,17,7,17,4,17
,9,17,9,18,4,15,4,15,4,14,4
,13,4,12,4,12,7,12,8,12,9,12,10,
12,11,11,11,11,12,11,13,11,14,11
,13,11,11,11,11,12,11,12,11,11,12
,5,12,12,12,12,14,12
7004 REM col de sac table
7005 DATA 19,25,19,4,19,4,11,9,1
9,9,19,9,9,9,9,18,9,18,20,20,9,2
2,9,21,9,21,7,21,7,20,4,20,4,19,
3,19
7006 REM
7007 GO TO 7000
7008 STOP
8000 PLOT x,y: DRAW @-L,@
8010 LET x=x+1: LET y=y+1: LET L
=@-2
8020 IF y=8 THEN RETURN
8030 GO TO 8000
9000 PAUSE @: PAPER ?: CLG : FOR
E 235@:1,35: POKE 336@,2: STOP

```



Maze Two: The Invisible Maze

This maze looks like the plan view of a hedge maze that you often find in the grounds of stately homes. The trouble is that by mazes far and foul the

hedges have been made invisible, and you can only see the entrance and exit points. There is a treasure at the centre of the maze and a guardian who guards the pathways. Naturally, it is your task to start a small party towards the treasure without causing him to be annoyed by the wandering guard. Which that guardian usually you might be able to reposition the lights and turn in the pathways that lead to the treasure.

The player's robot starts out

plotted in a manner similar to the Lucas's MARSHAL'S HOME by the maze is constructed in a different manner. Lines 818, 819 & 820 PLOT down col y and row line 144 @ 100 PLOT down row y. A DATA statement is still used but not every single row-column is coordinated as specified. Can you walk out from the PLOTS as made!

The question follows a set pattern of down but does not follow row-by-column coordinates. Instead, the player moves in a straight path and turns right

whenever he meets a wall. By a careful design of the maze he is made to follow about 90% of the pathways and never gets trapped in a cul-de-sac.

The games end when your man reaches the treasure or when he is trapped by the guardian. A record of his moves around the maze tells you how efficiently you are getting on.

The maze-print that is achieved by pressing C for about which makes the maze walk visible. Slow coaches like myself (I only play the games) the maze anyway!

```

5 REM THE INVISIBLE MAZE
10 LET A=col: LET B=row: LET P=1:
LET M=0
12 POKE 336@,39@: POKE 336@,
255
30 BORDER @: PAPER ?: INK ?: CLG
40
100 DATA 8,8,31,3,18,19,3,21,24
,3,3,4,3,24,25,4,16,17,3,3,4,3,9,
,14,9,17,19,8,24,25,7,3,4,7,7,11
,7,17,10,7,20,22,7,24,25,8,10,19
,9,4,5,12,16,22,12,24,25,14,18,1
3,14,16,20,14,20,30,14,9,14,14,1
4,20,17,3,4,17,9,14,17,17,19,19
,3,14,13,13,14,11,17,20,14,24,25
,8,9,9
104 DATA 8,4,17,2,2,5,7,2,11,13
,2,18,3,4,14,2,7,5,14,7,17,12,9,
13,13,18,14,9,11,13,7,10,8,6,19,
9,9,21,11,7,22,11,1,27,3,7,27,18
,14,27,18,1,29,3,4,29,8,19,29,17
,1,31,18,12,4,13,16,22,17,19,24,
14,16,25,17,8,24,7,8,8,9,9
106 DATA 2,4,4,4,11,4,14,4,17
,4,21,5,26,5,22,7,13,8,9,8,12,9,
19,9,23,18,3,14,9,11,13,12,12,
27,14,22,15,4,14,22,2,8,13,3,14,
14,11,25,8,9,9
107 DATA 8,24,124,24,24,34,187,
4,200,231,175,175,175,231,175,25
5
200 PRINT I: INK @:AT 29,3:"Welcome
to the invisible maze":AT 21
,31:"Please quit."
201 LET I=0: LET M=251: GO 210: G
O 25
202 PRINT AT 28,25: INK @:"M":AT
21,25:"M":AT 29,8:"M":AT 28,11
: INK @:CHRG 144
203 FOR C=144 TO 145
204 FOR W=0 TO 7: READ M: POKE
205:CHRG (C+W):NEXT W: NEXT C
401 PRINT PAPER ?: INK @:AT 9,
140:"M":AT 9,144:"M":AT 20,130:"M":
AT 19,141:"M":AT 13,146:"M":AT 11

```




Maze three: Yacht Race

In the final version of the maze (have the 'walls') are represented by wave patterns and buoys and to change their course your yacht (to enter) the start of the game is found your yacht around the sea key screen and berth in the harbour before the computer's yacht manages to do Malaga. There are a few small problems - the computer's yacht never hits a wall or a buoy (well, it usually should hit) and there are two other points in the vicinity which are able to get in your way. It is a simple maze game and there is no need for a story.

Player movement is by the usual sort of standard keys 7,8,9,0 representing North, South, West and East and in most other keys 1,2,3,4,6 are available for NE, NW, SE, SW.

The course of waves is generated randomly in this program line 121 so that there is a little bit different for every game you play and it is within the bounds of possibility that you will probably be completely stranded by waves. If that is the case you must concede that game! The computer's yacht follows a set point in the same manner as the player from 114,82,44,6,10,80 and the reason why the yacht always avoids obstacles is that are random waves in the pathway are quickly removed at the start of the game. Now that I write I am thinking!

A few changes can easily be made to this type of game. For example, a wave can be plotted behind the computer's yacht (just as wind was plotted behind the player's) and the course (DATA line 98) altered so that the yacht and its water line to float off the glass a yacht. Alternatively, the computer's yacht could be replaced by a computer player's yacht - and so on. Many games are fun to make but a good way of tracking your BASIC.

```

1 REM YACHT RACE 144-WYVES
  145-YACHT 144-BOUY
2 LET P=0: FOKS=23544,253: PD
  FE=23543,255
3 BORDR=4: PAPER=1: DAK=PI: C
  LB
4 FOR C=144 TO 146
5 FOR N=8 TO 7: READ R: FOKS
  USR DHR=CEI+R: NEXT R: HENF=C
6 FOR N=1 TO 7a
7 PRINT AT 3+ENT (BRDR200,3+
  NT (INDR200): DAK 7:CHR 144:CHR
  144: NEXT N
8 LET R2=17: LET C2=29: LET R
  3=2: LET C3=C: LET R4=18: LET C4
  =3
9 FOR N=1 TO 8
10 PRINT AT 3+ENT (BRDR200,3+
  NT (INDR200): DAK 7:CHR 144: NEXT
  T N
11 LET U=8: LET V=800
12 READ R,C: IF C=V THEN PD
  NT AT R,C: 7: GO TO 14
13 READ R,C: IF C=V THEN PD
  NT AT R,C: DAK 7:CHR 144: GO TO
  14
14 PRINT AT 2,29: DAK 4:CHR 1
  45: PRINT AT R2,E2: DAK 3:CHR 1
  45: DAK 7:AT R3,C3:CHR 147:AT R

```

```

4,C4:CHR 145
46 FOR C=8 TO 31
47 PRINT DAK 4:AT R,C:CHR 147
21,C:CHR NEXT C
42 FOR R=1 TO 28
43 PRINT DAK 4:AT R,R:CHR 147
R,21:CHR NEXT R
44 PRINT 3: DAK 3:AT R,R:CHR 1
  47: R,R:CHR 147: R,R:CHR 147:AT
  R,R:CHR 147: R,R:CHR 147:AT
  12,R,R:CHR 147: R,R:CHR 147:
  21:CHR 147: R,R:CHR 147:AT
  2,29: 7: DAK 4:AT
  9,11:CHR 146:AT 12,11:CHR 146
  46 PRINT 3: PAPER 4:AT R,12:CHR
  47: RACE:AT 21,9:CHR 147
  7: DAK 3:R: PRINT 3: PAPER 4: F
  LASH 7:CHR
  95 DATA 8,20,24,173,8,8,8,8,16
  24,28,38,31,14,255,124,54,14,14
  16,56,128,125,144
  99 DATA 3,28,4,27,5,26,5,25,4,
  24,3,23,7,22,8,21,7,20,4,19,7,18
  4,17,4,16,7,16,8,15,7,15,8,12,7
  11,7,10,18,7,18,8,11,7,18,4,18,
  5,7,4,7,3,7,2,7,7,7
  180 DATA 9,21,7,28,8,18,8,17,8,
  13,9,12,7,9,9,8,9,7,7,7,7,7
  110 RESTORE W
  111 LET W=0: LET C=29
  112 LET W=W+1: IF W=8 THEN LE
  T W=2000
  121 IF W=ENT (WVDR) THEN GO
  TO 127
  122 PRINT AT R,C: DAK 7:CHR 147
  45: R,C: IF R=77 THEN GO TO 240:
  REM COMP WIND
  123 IF ATTR (R,C)=15 THEN LET
  Y=R: LET X=C: GO TO 218
  124 PRINT AT R,C: DAK 4:CHR 14
  7
  127 LET Y=22: LET X=31: GO 240
  2400: REM MOVE RANDOM YACHT1
  129 LET R2=Y: LET C2=X
  130 LET Y=8: LET X=24: GO 240
  2400: REM MOVE RANDOM YACHT2
  142 LET W=7: LET C=3
  143 LET W=INVE(Y) IF W="7" THE

```




```

N PAUSE P: GO TO 128
128 IF W=127 THEN GO TO 9999
129 IF [X*11" OR W=127" OR W=1"
" THEN GO TO 128
130 LET M=Y*W, X+1 LET X=C2: LET
Y=R2: LET SR=R2: LET SC=C2: GO
SUB 4000
131 IF X=1 AND (Y=9 OR Y=12) TH
EN GO TO 370: REM W=9
132 IF ATX (Y,X)=9 THEN PRINT
AT Y,X: INK BROWN 140: PRINT A
T SR,SC: INK 84 " ": LET R2=Y: LE
T C2=X: GO TO 128
218 PRINT AT SR,SC1 " "
220 PRINT AT Y,Y: FLASH 1: INK
719: BEEP 3,5
222 PRINT : PAPER 41AT 21,12"TO
U'VE LOST. "AT 2,23 PAPER 1: IN
K 41000 145
224 PRINT : PAPER 41AT 21,141"4
number try? YX": GO TO 9999
278 PRINT : PAPER 41AT 21,11"Y0
U'VE WON. " : GO TO 278
424 REM
427 REM
429 REM
430 REM
432 REM
433 REM REM HOW RANDOM TACT?

```

```

5000 LET M=Y: LET SC=X: LET N=1
+INT (RAND1) GO SUB 4000
5002 IF ATX (Y,X)=9 THEN PRINT
AT Y,X: INK PINK8 140: PRINT A
T SR,SC: INK 84 " ": RETURN
5003 IF ATX (Y,X)=13 THEN GO T
O 238
5004 LET N=SC: LET Y=SR: RETURN
4000 REM ADJUST COORDINATES
4001 IF N=4 THEN LET Y=Y-1: LET
X=X+1
4002 IF N=2 THEN LET Y=Y+1: LET
X=X+1
4003 IF N=1 THEN LET Y=Y+1: LET
X=X-1
4004 IF N=3 THEN LET Y=Y-1: LET
X=X-1
4005 IF N=5 THEN LET X=X-1
4006 IF N=6 THEN LET Y=Y+1
4007 IF N=8 THEN LET X=X+1
4008 IF N=7 THEN LET Y=Y-1
4009 RETURN
9990 PAUSE 1: PAUSE R: IF 1MKEYS
="Y" OR 1MKEYS="Y" THEN RESTORE
R2: GO TO 1
9999 POK 20041,204 POK 20042,5
: PAUSE R: BORDER 7: PAPER 7: IN
K R: CLR

```

It's easy to complain about advertisements. But which ones?

Every week millions of advertisements appear in print, on posters or in the cinema.

Most of them comply with the rules contained in the British Code of Advertising Practice.

But some of them break the rules and warrant your complaints.

If you're not sure about which ones they are, however, drop us a line and we'll send you an abridged copy of the Advertising Code.

Then, if an advertisement bothers you, you'll be justified in bothering us.

The Advertising Standards Authority ✓
If an advertisement is wrong, we're here to put it right.

ASA Ltd Dept 2 Brook House, Thornton Place London WC1E 7HN

The space is donated to media agencies of high standards of advertising.

software that's hard to beat...

48K
SPECTRUM

TASWORD TWO

The Word Processor

"If you have been looking for a word processor, then look no further!"

CRASH June 1984

"The number of correction proofs, together with the keyboard routines, make it ideal - even for an absolute beginner."

PERSONAL COMPUTER WORLD
September 1983

"Without doubt, the best utility I have reviewed for the Spectrum."

HOME COMPUTING WEEKLY
April 1984

Your Spectrum benefits a professional standard word processor with **TASWORD TWO**. Sixty-four characters per line on the screen is just one of the many features of this versatile program. The cassette also contains **TASWORD TWO TUTOR**. This teaches you word processing using **TASWORD TWO**. Whether you have various applications or simply want to learn about word processing, **TASWORD TWO** and **TASWORD TWO TUTOR** make it easy and enjoyable. **TASWORD TWO** is readily adapted for the microdrive to give super fast saving and loading of both programs and text.

PRICE £11.90

TASCOPY

The Screen Copier

Screen-copy software for ZX interface 1. Produces high resolution screen copies in a choice of two sizes, and also large "thicked" copies with different dot densities for the various screen colours. Tascopy supports all eight pin dot matrix printers with Epson type control

codes (e.g. Epson RM-60 and RM-60 Series CP-80, Memorex Tally 60, 80, Blue Dot 510/515, Brother 145)

PRICE £10.90

TASMERGE

The Mail Merge

Transfer data from **MASTERFILE** to **TASWORD TWO**. Letters and forms typed on **TASWORD** can be printed with addresses and data taken from **MASTERFILE**. The mail merge facility allows, for instance, multiple copies of a letter to be printed, each containing a different name and address taken from your **MASTERFILE** data. To use **TASMERGE** you first load one or more records into as well as **TASWORD** and **MASTERFILE** by Computer Systems (within 9-9-14min)

PRICE £10.90

TASPRINT

The Page Wrecker

A must for dot-matrix printer owners! Print your programs output and layout in a choice of five impressive print styles. **TASPRINT** uses the graphics capabilities of dot-matrix printers to form with a double size of the printed-out text in a range of five fonts varying from the futuristic GATD, BUL to the hand-writing style of **PALACE SCRIPT**. **TASPRINT** allows all dot-matrix printers with bit image graphics capabilities and can be used to

print **MASTERFILE TWO** and files. **TASPRINT** gives your output originality and style!

PRICE £10.90

TASWORD

The Screen Master

With this machine code utility you can view your own basic programs, that will, with normal MSBII statements, print data to the screen in the compact lettering used by **TASWORD TWO**. With **TASWORD** you can delete the information shown on the screen!

PRICE £10.90

TASMAN PRINTER INTERFACE

Print into your Speech and draw any printed files with the Contonico standard parallel interface. Supplied complete with driver cables and linking software. The user changeable interface software makes it easy to use as normal controls to your printer using the method so successfully pioneered with **TASWORD TWO**. The interface also contains fast variable size high resolution full width 80x14 COMB SOFTWARE for Epson, Memorex Tally 60/80, Memorex Star, and Tandy Colour Graphics 80 colour D printers. Compatible with microdrives and ZX interface 1.

PRICE £20.90

TASMAN SOFTWARE

All our software will save you and produce. Tasman Computer Systems, Leeds LS2 9JW Tel: 0532 438301

• Available from major branches of books

Tasman

SOFTWARE

Spring and House, Hyde Terrace, Leeds LS2 9JW Tel: 0532 438301

If you do not want to cut this magazine, just write your order and post to:

TASMAN SOFTWARE Dept. 151 Springfield House, Hyde Terrace, Leeds LS2 9JW

I enclose a cheque/PO, made payable to Tasman Software Ltd. OR charge my account number

NAME _____

ADDRESS _____

1. TASWORD TWO	2. TASMERGE	3. TASPRINT	4. TASWORD	5. TASMAN PRINTER INTERFACE	6. TASMAN SOFTWARE
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

Send me the FREE Tasman software directory and products list (free)

I would like to know more about your programs for:

ZX Spectrum MSBII Microsoft CPC disk



Readers Reviews

Taking pen in hand, you tell us what the public really think about the goods on sale.



Phoenix Megadodo Software Mark Sarguslingh

Phoenix for the 16 or 48K Spectrum is a reproduction of the arcade favourite Phoenix.

Phoenix is a space invader type of game which occurred during the time to enter the next phase of the game. You control your spaceship which is equipped with left, right, fire and launch controls.

The three controls you ship from (incoming) birds of steel fly like the arcade game, but later only attacks about ship for 3 seconds, you must then wait a further 3 seconds before using your launch again.

I found the launch most useful in the first and last phases of the game.

In each phase you will have to destroy:

- PHASE 1 Purple birds worth 25 points
- PHASE 2 Green birds worth 25 points
- PHASE 3 Large blue birds worth 100 to 250 points
- PHASE 4 Large purple birds worth 100 to 250 points
- PHASE 5 Alien spaceship worth 4000 to 8000

You are awarded 100 points on phase 4 and 2 of you destroy a bird while it is still an egg, but you score 150 to 200 points if you destroy it, or it has hatched. At 1 0,000 points you gain a life and if you clear all 5 phases the game returns to the beginning.

The graphics were very good and similar to the arcade version and were moving smoothly across the screen. Sound was also good but not enough sound was present when your ship was destroyed.

Phoenix is written in Machine

Code and costs £6.50 from Megadodo Software. It is undoubtedly the best Phoenix game available for the ZX Spectrum.

Chuckie Egg A & F Software Ltd. Neil Wheatley

Since Chuckie Egg's release at the time that Mavis later was toppling the software charts it has been a firm favourite for my friends and myself. This entry will read and inform you as to what it is, with instructions and a brief description of game play.

Once loaded via LOAD², ideal for a newcomer to the intricacies of the Spectrum hardware and all those things, you are presented with a high score table and instructions on which keys to press moving along the bottom of screen, a la Mavis Miss. This tells you to press "R" for repeating the current level, "I" for instructions and "Q" to quit.

If "R" is pressed, then you are presented with three options: delete the current level, save the level, or exit another set of five keys. This helpful colour advice can be of particular other software houses please note.

If "I" is pressed then the instructions are printed on the screen explaining that you, playing the part of little 'a' farmer boy, must collect a dozen eggs on each screen and doing so will take you onto the next screen. This may appear easy but there a number of little obstacles on the screen that will kill you if they touch you. Also there is a bonus that takes away until it reaches zero, meaning death for you.

Pressing "Q" takes you into the game, there a few keys set for left right up down and jump, two keys are pre set Shift A for hints, which takes you back to the high score table and Shift H for help, which tem-

porarily suspends actions.

The only subtlety there is that having released a multi player option up to four people can play action switching from one player to another in a single hit. The high score table is only updated at the very end of the game — all lives having been lost, meaning that players have to remember which player number they were.

The graphics are superb and the animation of your figure is very cartoonish. This if it had been bought out before Mavis Miss could easily have been number 1, so it is a shame to A & F for a superb piece of software.

GEOGRAPHY 1 ICL

Jim Lock

Early returns to the Spectrum educational software scene were ICL with a series of programs called Fun to Learn with the notable exception of Geography 1, the area was then for Geography 1 and it still stands out as one of the very few worthwhile educational packages for the smaller Spectrum.

The cassette is attractively presented with a colorful intro card giving clear learning instructions but very little information as to the programs contents. It does, however, contain a useful facility to test the program with GO TO 1 and produces the unfortunate effect of using RUN.

Two separate programs are installed on one side of the cassette. Towns in England and Wales and Countries and Capitals of Europe. Loading a program produces a screen of well laid out instructions on how to use the program. A question wheel. Up to 4 players can take part in what is best described as an educational race. Each player

is asked, in turn, to enter their name and then choose a colour. With the participants sorted out, the program begins.

In the first program, a map of England and Wales is printed on the screen as a grid and the users first resolution graphic. The screen also shows a vertical eye of scale for each player, in that player's chosen colour. These rows on the screen are — cannot always going upwards by the combination of two selected levels for data in the player's box. The player whose line reaches the top of the screen first is the winner.

The name of the town given is shown, followed by the first question. There are two types of question in the program — with one, a word is printed on the map and a numbered list of towns shown. You choose the location on the list which you think is closest to the site of the word and press the corresponding number key. The score of questions shows the name of one town only and prints several numbered crosses on the map. You decide which cross is closest to the location of the given town and press the number key as before.

Having an asked questions in turn, until one succeeds in reaching the top with his score line. A flashing "Victory" message is then displayed, followed by a "New game or quit" option.

The programs have been well designed and are genuinely challenging. The questions can vary considerably in difficulty levels and in this sense and. A difficult question is the one to which you don't know the answer. Occasionally the program's random selection of names to fill the missing word result in a really unhelpful question. I

was once faced with having to decide whether to cross on the West Coast of England (east-west) or Scotland (east-south), and I was wrong! So you think you know about Geography?? It is clearly reasonable that type of quiz with thousands of people asking questions requiring so carefully accurate answers. You just have to show a few answers after each game, but you will be pleasantly surprised at the amount of knowledge gained.

The inclusion of a computerized (and automated) voice patient clinic adding greatly to the enjoyment of the game. You might think that it would be all back for a while before you completely lose your ability to communicate in English, and up to a point you would be right — but not for the obvious reason. Get two daughters regularly beat my wife and I hollow! It is not all of the reason for this is their intellectual engagement with a greatly unfair headlocking system — the girls are an Affair!

The maps are fairly accurate, which is important with the type of program, but being composed of graphics blocks, have a somewhat crude appearance. This is far more apparent on the map of Europe, the scale and clarity are greatly giving some very obvious inaccuracies — the Great Britain for example. It is a pity of an abbreviation of the program than a reduced clarity for interest though. Considering the limited amount of memory available on the TRS machines, the programmers have done a good job in a humanly (and Spiritually) possible.

Educationally, these two games are excellent being informative without being boring, and successful in imparting a great deal of geographical knowledge without the recipient being aware of any learning process going on at all.

Software productions have tended to develop the subject of geography preferring to build a comprehensive reference work to produce programs for teaching maps and languages. The nearest a reference and one respect outstriking — can you think of a better use for a sophisticated computer than providing beautiful reads?

Circle no. 10, where is Geography 3/77.

The Birds and the Bees Bug-Byte Software Peter Craven

Although experts often praise it

be very annoying — the instant star of the next game quickly changed his mind (although he tends to be frustrated just then). You play the part of Barn the Bee — one of the fastest bees we've seen leading the game the literature (as composed by the music of The Flight Of The Bumblebee) appears. Pressing a key again launches you into the game — the stage of which is to do what a bee does best — collect nectar and then take it back to your hive (of course it is not easy — there are various hazards such as a nearby wasp, flying insects or a hawk, and various things to avoid in order to progress — the usually very nice of helpful neighbours).



Naturally you will need something to help you avoid those pesky wasps — see note in present at the bottom of the screen showing your's and the hawk's positions. There are relatively few controls to master — four direction keys and for emergencies pressing any key from 1 to Space releases any killer. Some may try to make them to make a quick getaway. The program also seems for most people as much as joystick interface — Navigator who I pressing the left or right key and holding, a down motion from an alternate making it harder to reverse. Also the more nectar you are carrying the slower you fly — stay close to the hive.

The graphics are excellent being by Matthew South of Miami (Miami based and one will though not — a bright yellow sun shining clouds and bright blue sky, flowers opening when bees land on them) but it is even a small game flying the Bug-Byte Hive. You'll see, as a side-line bit of graphics design — someone working with light and wings being something

Miami is already, while about efforts are negligible — but how much sound is required — certainly not a top end one. There is also a speech option if you have a C-64 with speech module attached to your Speech. Although this game is not quite as good as Miami (other time amounts game) it is highly recommended at \$9.95. Available on original game — bound to see shortly (and I would like to see shortly) lowest cost for Bay.

Lords Of Midnight Beyond Software Stephen Komer

The game is on the side any more than an adventure, it comes in a colorful but rather flimsy package and is supplied with a thin plastic cover and a book which, besides containing the instructions, outlines the events leading up to the beginning of the game. The story, although only a few pages long, makes fascinating reading and sets the scene a little.

The game begins on the day of the Winter Solstice. Doomdark, Wielding of Midnight (played by the computer) is making his last foray out of their stronghold in the North in a bid to subdue the forces of the King. He takes the part of Lord of the Mountains, and this is his final opportunity. You move only by day and the distance a character may move in one day depends on his strength, the terrain, and whether he is on foot or on horseback. When all your moves have been made, pressing NIGHT signals the start of so called for Doomdark's forces.

To win the game, you must achieve at least one of two objectives.

Seize the Citadel of Delagarak, the Wielding's headquarters — this is a real strategy game.

Destroy the Ice Crown in the Tower of Exom. Only Morka is protected against its terrible powers, but other characters you may bring along will also be able to undertake this hazardous quest.

Doomdark must achieve two objectives to win.

He must eliminate Morka, Lord's son.

He must subdue the armies of the King, either by killing Lullaby, or by taking the Citadel of Xaorath.

Unlike other adventure games, only four commands are used (and four characters

You must move through the land of the King, looking for Lords who will support you as you have no armies of your own. A rudimentary map gives you some idea of the locations of the main Castles where help may be sought. There are naturally many other Castles, keepers and other locations where you may also find help, but these are not on the map.

It is the unique Landscaping feature of the game which sets it apart from any other. Standing in any location, you can look in eight directions and see a different view in each direction. As you get closer to a building or other object, its size increases until it almost fills the screen. The programmers seem to have provided 32 000 different views, each one different.

To sum up, this really is an epic game not to be missed by any adventure or wargame of fantasy fan. Although at \$9.95, it represents excellent value for money.

The Complete Spectrum ROM Disassembly Melbourne House

CTC 0340

For those of you interested in assembling yourself with the joys of Spectrum machine code, then before you go further, may I highly recommend both of these books.

The first of these two titles, Spectrum Machine Language (and the would-be programmer split from the fundamental use of machine code, though to some of the refinements of the computer's native language. The reader is not dropped in at the deep end and from the very start, but a lot of gentle with clear explanations, but this is where one of my few criticisms comes in, in the beginning is an attempt to do too much in too little time, the author tries to pack, and in some places he succeeds in his aim of putting the reader at ease, but after a while, some people might find Tang's humor a little patronizing. I suppose the idea however, depends on whether you have a similar sense of humor or not.

The book deals with most aspects of machine code, with the advantage of being generally available, of being especially well written, and is therefore able to go into some detail on how dealing with about half the display (and at the end there is an exciting original code game).

— the publisher's inevitable price, not that — full as given in its stages in the preceding pages, and although not very original, as it appears to be just another version of *Prolog*. It forms an important part of the book, because it shows how your newly acquired knowledge can be brought together to create a machine code program.

As I said, I deal with most aspects, but contain only a few paragraphs on some 250 instructions on those dealing with strings and reports (RTS), probably because the book is only meant to act as a reference. But if this is the case, then why did the author single out these sections? Well, I.C.D. Library added several comments I found not very clearly explained, the only area where this criticism is justified.

After I had read through most of the book, I sometimes found it frustratingly difficult to look up a certain subject, mainly due to the very poor index — a feature still very common in micro books — and also the fact that each instruction was usually split slowly introduced — a good idea when learning, but it means a lot of searching when returning to a subject which sometimes had already been introduced. Included in the book are eight useful appendices and two unexplained monitor programs written in BASIC (perhaps a useful inclusion would have been a summary of the functions of each instruction and the effect on the flag, which would have been handy for reference).

Spectrum Machine Language For The Absolute Beginner

McBourne House

As the title of the book says, the "Complete Spectrum ROM Decompile" is indeed a must for all serious programmers, but also a tempting treat for the average home user. It is what the title says, the whole being in assembly language or the machine code format program in ROM which makes the Spectrum as it is. The introduction as that it seems to be an interesting book, but one which does not really serve any useful purpose, a suggestion which is totally wrong. All the routines are very fully and clearly explained by the author, and when short comments are read the reason a particular routine has been used and when part of

plays in the routine should be clear to anyone with some knowledge of assembly.

While it is not meant to be read from cover to cover like a novel, it does help the programmer to improve his skills of the ROM's routines in their own microprocessors, and hopefully learn from the techniques employed. For example, rather than store memory by using CBI routines, a quick table into the book reveals that this routine is called at 0085 (h) and so can be called.

The second section, very often not dealt with by other machine code books, although tables are very useful, are of course explained in detail, so, in particular, are the arithmetic routines which are handled so expertly, clearly and concisely with several example BASIC programs.

The book is split into 10 logical sections each handling one particular area of the ROM, so that the programmer and the screen and pointer handling routines, all of which are preceded by a short introduction before the actual assembly begins. A complete list of the bits of the routines is given at the end of the book. At £15.95, it is expensive, but if you have the money, it is well worth buying.

To sum up (though repeats), these two books form a readable combination, as long as you have mastered most of machine code with Spectrum Machine Language. The ROM disassembly should enhance your programming techniques and, perhaps, however, bought separately they remain to be the best of their kind in their respective field, very highly recommended.

Dictator

DK Tronics
Edward Davey

Dictator is a simulation game which places you in the dictatorial role of Britain, a small (some might say tiny) island republic in Africa. Starting at your border in Lartoo, an even smaller country with slightly hostile inhabitants. According to the instructions to the game, which are in fairly good (or two sides of the covers) form, the country will never invade if you do, but this is not so.

Your population is divided into three sections — the city, landowners and peasants. Their interests rarely overlap (except such as that I discuss in the next section) so opposing the rival problems of each is a rather straightforward job which are supposed to



protect you from assassination. The other groups include the guerrillas based in Lartoo, who are without fail out to get you, and the two Superpowers, Russia and America, from whom money can be borrowed.

The object of the game is to stay alive and prosper for as long as possible, (but this is measured in months, which appearing as nearly money as possible from the state treasury into your bank bank account). Your final score takes into account your final population, length of rule and money in your bank account. Inevitably you are still alive at the end of the game!

Every month one of the three factions will make a request to merge or otherwise the country. Glancing the request will usually mean a decision to or submission from the treasury (you start off with \$100,000) and will alter your popularity with various factions and their strength.

By paying \$100,000 the latest faction will give you a report of your popularity with all the other sides and their strength. They will also warn of an assassination attempt or revolution. An assassination attempt can be avoided by army, presents or bribes, and if one occurs, your health depends on the strength of the other factions.

A revolution occurs when your popularity is very low with one or more factions. If this strength is at a reasonable level, in the past, you can either stay and hope the revolution passing with a local faction, or make an escape attempt. When on hold as a fugitive, you have the opportunity of buying one that you like. If you reach Lartoo, you will find refuge there, then ever, occasionally the

helicopter does not start, and you have to travel on foot, which gives the guerrilla a chance of catching and killing you. If you are behind a light, you will be killed if the combined strength of the revolutionaries exceeds yours and your life is different as you will live. Your strength can be built up during your run, but at a considerable cost in dollars.

During your rule, the treasury will fluctuate (though due to monthly costs of running the country) and various events will occur. The only way to replenish the treasury is to borrow from the two Superpowers. You can do this once and the amount you are given depends on your popularity with them. Once the treasury is bankrupt, your popularity and strength will decrease, and you will receive no more money unless reports. After a while in this condition, you will either be assassinated or a revolution will occur.

Due to the limited amount of money available, it is impossible for you to last indefinitely — a maximum of three years is estimated.

At £4.95, Dictator is a very good buy with its attractive graphics, decorated text and superb sound effects.

Brother HRS Printer

William Redman

This printer is available from most of the larger stores of books which sell computers and software.

The printer is good value for the money but I can only see one disadvantage is that it does not print graphics.

The Brother HRS can be worked by battery or mains. It uses a dot-matrix 10 column, 6 line printer. It weighs 4.5 lb and costs £120.

With this printer you get a lot of paper, 4 cartridges and 2 spare tapes.

This printer will also work on the BBC and other popular makes of microcomputers.

This printer will print on normal typing paper as well as on thermal paper. You have to remove the ribbon cassette to print on thermal paper.

The largest paper that the printer will print on is A4 paper. The Brother HRS also has a built-in function key which you press on the line button and switch on at the same time.

You also get a customer service booklet with the printer which explains everything in detail.

GAMES 1

POWAT, HORSE-BACK, TEAMS OF FIANAL

POWAT A classic board chess game which features an available AI program and allows you to do for 1 team.

HORSE-BACK A role game for up to 4 players, and allowing talking and email accounts.

TEAMS OF FIANAL The ancient game of moving pieces features a 100-400 level system, single player mode and automatic difficulty level 100 increments requiring both 10 to 100 plus moves.

20.01

Spectrum 486

4.95

2.95



GAMES 1

ADAM BROTHER'S ADAM BROS

BROTHER'S ADAM BROS

ADAM BROTHERS You're in the kitchen at the moment of the morning alarm. The only way to stop them is to destroy each other about.

ADAM BROS You are a commander of a military. Your mission is to go up and stop enemy factories from getting past you and attacking your base.

BROTHER'S ADAM BROS There are 3 real time 100 to 100 by 100 1000 the mission from leading to the world. Destroy the 10 million with your team get with some to study on the on the way to get.

20.02

4.95



GAMES 2

SAFE, MASTER MIND, SOLITAIRE

SAFE A suspenseful simple looking game where the 10 letters have to be arranged in the correct order.

MASTER-MIND Based on the famous Code Crackers the player has to choose 4 numbers to match the secret numbers. Features constant display of previous results.

SOLITAIRE The classic game features 32 different variants and can be played from routine. Single-player game number of passes allowed.

20.01

4.95



PRINCE · PRINCESS

and the WICKED WITCH

A novel adventure learning game for the young readers of the 1980s.

The story we guide according to age, and the 10 the 1000 the 1000 the 1000.

1 and 1 the 1000 the 1000 the 1000.

20.01

4.95

Spectrum 486

2.95



ANDROMEDA TROPHY

Many fight your way to the star system door for the planet 100.

You are one of many space travelers need to fly to the planet.

You should be on the ANDROMEDA TROPHY.

20.01

Spectrum 486

4.95

2.95



ASTROCODE

A shooting game with a high score and a high score.

Thrilling and fast-paced, not for the easily discouraged.

20.01

4.95



SLOT MACHINE

A real Machine game that's fun to play. The player can play the game on a computer or a real machine. The game is a real machine game that's fun to play.

20.01

4.95



BOX FILE

A simple game that's fun to play. The player can play the game on a computer or a real machine. The game is a simple game that's fun to play.

20.01

4.95



We stock all makes of Home Computers and peripherals and software. Please telephone for prices.

Please send off the coupon or order by phone quoting your Access/Backyard No. Phone 01-263 0084/4481 immediate despatch on receipt of order or cheque cleared.

FINBURY COMPUTERS LIMITED
25/27 STROUD GREEN ROAD, LONDON N 4

We open Monday, Tuesday, Thursday, Friday and Saturday from 10.00 to 6.00
Wednesday 9.00 to 5.00

To: **FINBURY COMPUTERS LTD**
25/27 Stroud Green Road, London N4

Please supply:

Please add 10p for p&p to cost

I enclose my cheque for £

or charge my

Access/Backyard No

NAME

ADDRESS

Signature

Light Screen Designer

Part 4

Toni Baker defines some of the keys for use with the program and suggests some modifications to the existing package

Some mistakes...

Just two mistakes in Part Three — these were:

The byte at address D868 should be 07, not 05 as printed
The byte at address D870 should be 06, not 05 as printed

Right, that over with, let's proceed to the next grouping part in which we add some of the keys. In Part One (and as mentioned in Part Two) we gave a clearing of a keyboard overlay for the Spectrum, in which each key had a separate function. This was done because the word will represent an as follows: **UNDO** (key 0), **PLOT** (key 0), **GROUP LINE** (key W), **CURSOR LINE TYPE** (key O), **MARK** (key A), **MARK KEY** (S), **CARCEL**, **MARK** (key D), **MARK** (key M), and **SOCARE** (key C).

Before we get down to pushing any buttons though I suppose I ought to tell you what each of these keys will actually do in the finished program. As you press the cursor keys (and remember that SHIFT with a cursor key produces an alternate REPORT) you'll take care CURSOR moves about the screen as you direct it, either smaller cursor keys (i.e. the moving cursor is called the MARK cursor, for just "the cursor"), whereas the up/down keys is called the GROUP cursor. Whenever you press the key PLOT then one single screen print at the locations of the initial screen will be PLOTTed.

GROUP... takes care of what you'd expect it to do: it moves the MARK cursor to the MARK center. The GROUP cursor is in effect, it moves the first point PLOTTed, and both PLOT and GROUP... take

move the origin cursor to the new position. Another way of moving the origin cursor is with the MOVE Line, which simply moves the cursor without changing the screen.

If you find the appearance of the cursor on the screen unappealing, you can do one of two things. **CURSOR_TYPE** will change the appearance of the cursor from the existing procedure to a single dot (and vice versa). Also **HIDE** will render the cursor completely invisible, or make them visible again.

MARK simply marks a point on the screen for later reference. All points it will be of use to us when we plot but its substitute is included anyway: **CARCEL_MARK**, of course nullifies the effect of **MARK**.

Finally we have **UNDO** — a curious little function which will undo any mistake — should you happen to make one (i.e. for instance you draw a line in the wrong place, then **UNDO** will erase it. Simple, but effective

draw CURSOR but for now we shall only need to update address D868 (address). Nothing around this article you should find a table of addresses between D868 and D887, and the byte you will need to FORCE into them in order to make LSD Part Four workable.

There is another alteration we can make to the program, and that is an alternative program in the MAIN LOGOP screen given in Part Three. In the flow diagram in Part Three there was a key marked "COPY THE SCREEN IN BACKGROUND". This copies the entire screen, including the 60000 bytes, into



Alterations

These are some alterations which require to be made to the program as it exists so far. Specifically the table of program addresses must be updated so that each key we define has a substitute address associated with it. The full table sums from address D647 to 650

21ADDE	ML...TEST	ORG D650	LD HL,GRAB_POINT_TABLE	BC = length of real table
011100		LD BC,0011		
00		ROP		
00		ROP		
00		ROP		
00		ROP		
00		ROP		
00		ROP		
00		CPS		Is key pressed in full table? Jump if so
7081		LD HL,ML_ACTION		
205A		LD HL,FLAGS_high		
2141 00		BT 4,HL		
C5A8		CALL 2,CCCB_COPY_SCREEN		Copy screen if allowed
0CC3 0E	ML...ACTION	4		

ML...ver

```

D000 D0 0F
D001 D1 00
D002 D2 00
D003 D3 00
D004 D4 00
D005 D5 00
D006 D6 00
D007 D7 00
D008 D8 00
D009 D9 00
D00A DA 00
D00B DB 00
D00C DC 00
D00D DD 00
D00E DE 00
D00F DF 00
    
```

Bad Table

```

D0F0 F0 0E CANCEL__MARK
D0F1 F1 0E
D0F2 F2 0E BRIGHT
D0F3 F3 0E
D0F4 F4 0E CURSOR__TYPE
D0F5 F5 0E
D0F6 F6 0E
D0F7 F7 0E
D0F8 F8 0E
D0F9 F9 0E
D0FA FA 0E
D0FB FB 0E
D0FC FC 0E
D0FD FD 0E
D0FE FE 0E
D0FF FF 0E
    
```

an area of RAM between addresses D000 and D0FF — this is so that the UNDO procedure works correctly — all the UNDO routine needs to do is to adjust the memory copy back on to the screen. This UNDOing is

therefore a complementary function to the COPY__SCREEN routine itself, and it would be much more efficient if the two were handled by a single subroutine. We may also make further tests of the 'B'

NECESSARY part of the screen, but not all of the procedures will need to be UNDO'ed. To this end I have revised the process and come up with the routine **NULL_TABLE** which directly overwrites the original data which appeared in that Table.

And onto the new lists.

Many parts of the program will now be given covering ad dresses DEAD to DFD the first seven most bytes are a table called **NULL_TABLE** which lists those keys which do not require UNDOing and directly following this is the UNDO__COPY__SCREEN routine which you talked about earlier. At DEAD however we have other to do a meaningless subroutine which is a full procedure in itself it is called **ADJUST__BD** since it prepares the B and D registers for the DRAW, PLOT and DRAW routines. Calling

from the label **ADJUST__B** alters the B register only. From then on follow the procedures for DRAW, PLOT, DRAW__LINE, DRAW__TYPE, HIDE, MARK and CANCEL__MARK.

Although the program is far from complete, it can still do some useful things at present. You can see a screen copy, and you can rub them out. In part Five of Light Screen Computer I'll define some more of the keys for you — and put a little closer of it to things. See you then.



```

D0 D1 D2 D3
D4 D5 D6 D7
D8 D9 DA DB
DC DD DE DF
    
```

NULL_TABLE (the keys for which the screen is not copied)

	NULL_TABLE	DFD	DEAD
	BRIGHT, INVERSE, CLEAR, DIMM		
	CANCEL, MARK, TAB, BRIGHT, CURSOR__TYPE		
	MARK, ESCAPE, HIDE, UNDO		
	MOVE		

<pre> D000 D0 0E UNDO D0 D000 D0 0E D0 D7 D0 D100 D0 D100 D0 D100 D0 D0 D0 D000 CSC_1 D100 D0 D100 D0 D0 D001 D0 D000 CSC_2 D0 D0 </pre>	<p>DFD DEFE</p> <pre> INT A, L, FLAG, HIGH RPT NZ OUT A, L, FLAG, HIGH RPT NZ AND A PUSH HL LD HL, C, FILE LD DE, D, FILE, COPY LD BC, 1, 000 JR Z, CSC_1 EX DE, HL LDH LD HL, DEFC DFCDEM LD DE, DFCO DFCOEM_COPY MRC S JR Z, CSC_2 EX DE, HL LDH POP HL RST </pre>	<p>DFD COPY__SCREEN</p> <p>Returns if the memory is being used for some other purpose</p> <p>Returns if screen copy has been corrupted</p> <p>Reset the zero flag</p> <p>HL points to start of screen</p> <p>DE points to start of copy</p> <p>BC: length of screen memory</p> <p>Jump if making copy of screen</p> <p>Make required copy</p> <p>HL points to source data</p> <p>DE points to duplicate source info</p> <p>BC: DEFC = length of copy memory</p> <p>Jump if making copy of screen</p> <p>Make required copy</p>
----------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

COPY SCREEN subroutines

<pre> D1AF ADJUST__BC D2 D3 D3AF ADJUST__B D4 D5 D6 D7 </pre>	<p>DFD D00E</p> <pre> LD A, AF SUB D LD D, A LD A, AF SUB B LD B, A RST </pre>	<p>A = adjusted coordinate</p> <p>D = now adjusted</p> <p>A = adjusted coordinate</p> <p>B = now adjusted</p>
-------------------------------------------------------------------	-------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------

Routine to prepare B and D registers for the DRAW, PLOT routines

32000	ORIGIN_MOVE_X	ORG DEFP	DEI
32000B	MOVE	LD DE, ORIGIN + 20	DEI pixel position of origin cursor pair to move
32000DB	LD	LD D, ORIGIN_H	Change origin cursor (vertical position)
	ORIGIN + 20 BC		
CS	RET		

Move cursor

CD000	PL0T	ORG DEFP	Move origin cursor to new position
CD000B		CALL DEFP_MOVE	Adjust the S register ready to PLOT
CD000C		CALL DEFP_ADJUST_B	Plot the point
		JP DEFP_PL0T_BWB	

PL0T extension

CD0F0	DRAW_LINE	ORG DEFP	Move origin cursor to new position
CD0F0B		CALL DEFP_MOVE_X	DE = previous coordinates
CD0F0C		CALL DEFP_ADJUST_BD	Adjust B and D registers
CD0F0D		DE DE H	DE = previous coordinates
11010		LD D, ORIGIN_H	Start origin cursor coordinates as last point PLOTted
78		LD DE, IYI	
84		LD A, B	A = y coord of main cursor
3003		SUB H	A = vertical DRAW parameter
2F		JR NC, DL_1	Jump if positive or zero
16FF		DPL	A = ABS vertical parameter
47	DL_1	LD D, H	D indicates vertical parameter is negative
78		LD B, A	B = ABS horizontal parameter
86		LD A, C	A = X coord of main cursor
3003		SUB L	A = horizontal parameter
2F		JR NC, DL_2	Jump if positive or zero
16FF		DPL	A = ABS horizontal parameter
47	DL_2	LD D, H	D indicates horizontal parameter is negative
CD0A24		LD C, A	C = ABS horizontal parameter
		JP D4B4_DRAW_B	Draw line on screen

The DRAW_LINE procedure

3E40	CURSOR_TYPE	ORG DEFP	A has bit six set
3E42		LD A, B	
3E43		JR C, H	A has bit seven set
3E44	HEX	LD B, B	
3E45	CT_H	LD HL, CT_FLAGS high	
68		ROR HL	Complement the required flag
77		LD HL, A	
CS		RET	

Subroutine to alter the shape of the cursor on the screen

32100	MARK	ORG DEFP	Move marker cursor
32100B		LD (MARKER) HL	
CS		LD (MARKER + 2) BC	
		RET	
32100E	CANCEL_MARK	LD H, MARKER + 3	Signal marker cursor pair to end
3210F		LD (HL), 0	
CS		RET	

These two routines MARK and CANCEL_MARK also remove the MARK cursor to from the main cursor position

TWO GREATS FOR THE SINCLAIR QL



Tim Hartnell's QL Games Compendium

From Tim Hartnell (the author PCW magazine called "Mr Sinclair") comes this superb paper book for the QL.

Not only does it contain software for more than 20 complete games, but the detailed instructions and advice will help you develop your own games, rather than copying your programming as you do so. There is even a complete tutorial to teach you how to create moving graphics games on your QL.

The Program includes:

- BLAZER** — a full size QL war & adventure and title to win
- OFFSHOOT** — challenge your QL in a world of Super-Ordnite
- MAGNIFICENT MACE** — sophisticated exploring maze, often wild
- INTROVIVE Q** — all in the number 1 differs each time a new
- DISCOVERED** — a 40-stage computer quiz to test as you
- TRAVEL WITH MACHINISTOPHILUS** — search for the missing
- ADVENTURE**
- QL RACER** — real time moving graphics — a game for real use

Exploring the Sinclair QL: An Introduction to SuperBASIC

Harvest your chance to explore the potential of SuperBASIC, the sophisticated language supplied with the Sinclair QL.

Designed to help you write better, clearer programs, Sinclair SuperBASIC is a state-of-the-art programming language in a language which helps you with the hardware intricacies of the computer.

Andrew Nelson, author of several popular computer books, explains all the important concepts, key words, commands and instructions of SuperBASIC. In this book, he explains (in many of the programming skills you have to learn the Specialist can be directly transferred to the QL, and above that — as you learn the new words in the QL vocabulary — your programs can gradually be made more complex, and sophisticated, by using powerful new commands and statements.

Interface Publications, Department Q16
9-11, Bevington Road, London, W6 1NY

Please send me the following books
I enclose a cheque of _____

- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00
- The Sinclair QL: A Complete Guide to the QL £10.00

- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00
- Exploring the Sinclair QL: An Introduction to SuperBASIC £10.00

Interface Publications, Department Q16
9-11, Bevington Road, London, W6 1NY

Name _____
Address _____

INTERFACE
PUBLICATIONS

We're in the expert!

MICROSPHERE

Skoolzone - the game that has everything - excitement, drama, comedy, tragedy, suspense... Join our hero as a misadventure with your favourite characters - the wicked headmaster, the ruffian professor, the evilest history master (the history's quite old, too!) and, not forgetting the school and the school bully. Speech bubbles, amazing animation, great graphics.

£5.95

Skyranger - patrol the air between the skyscrapers and make the city a safer place to live. 3D like you've never seen before, showing what a Spectrum is really capable of with the right programmer.

£5.95

Wheeler - In February the C&EG magazine reviewers thought this was one of the most addictive games ever. At a rough guess I'd say they were addicted to this game.

£5.95

All for the 48K Spectrum.
Available from all good computer shops,
or direct from: **MICROSPHERE COMPUTER SERVICES LTD,**
72 Rosebery Road, London N10 2LA

SNAP!

Eric Waters' simulation of the card game takes a weight off your mind, a sort of Brighton Rock?

Your future hangs over your head in this game in the shape of a one ton weight! This is the eventual fate of the loser in this two player heads-up game from Dr Waters.

Although not a particularly long listing, this game provides hours of challenging fun for all, so type it in and give it a try!

Once you have typed in the game and RUN it, the screen goes blank for a short while as the ZX81 sets feet mode to set up the game. When the machine returns to flow mode you will see a table, two chairs and a window.


The players are asked in turn to enter their names. When they do so they each appear sitting on their stools with their names above them, 30 cards in their hands and instructions as to which key each player is to use to call cards.

Overturning the game cards is debuffed from the first player's hand, thus giving him 19 cards. The number one appears on the cards of the table. Incidentally there is one card so far on the table. The number of the card the first player led is shown on front of him. The sequence of

cards until the number of two each led by the players match. Whichever player passes his card says it then gains the number of the cards in the centre of the table and the game continues. If both players pass their snap keys at the same time then the programme, in effect, tosses a coin to decide who has won. Whoever wins a "snap" is indicated by the flashing of the word "snap" over their head.

If either player tries to cheat by keeping their snap button depressed when it isn't to stop the game stops. The word "cheat", together with the name of the one cheating, appears on the screen so do watch carefully but that they have been caught cheating five cards are then taken from their hand and given to the other player.

When one player runs out of cards the game stops and it is shown on the screen who has run out of cards together with instructions that the person must now pass their snap key. When they do so a one ton weight crashes down upon them from the ceiling and crushes them to the floor!



```

10 PRINT AT 10,9;"A PROGRAMME
BY"
20 PRINT AT 11,9;"ERIC R. WATE
RD"
30 PRINT AT 12,14;"1984"
40 PRINT AT 13,14;"-----"
50 FOR P=0 TO 20
60 NEXT P
70 CLS
80 LET D#="SNAP"
90 LET C#="123456789"
100 FOR J=0 TO 29 STEP 4
110 PRINT AT 0,J;C#;AT 2,J;D#;A
T 4,J;C#;AT 6,J;D#;AT 8,J;C#;AT
12,J;D#;AT 12,J;C#;AT 14,J;D#;AT
16,J;C#;AT 18,J;D#;AT 20,J;C#
120 NEXT J
130 FOR P=0 TO 20
140 NEXT P

```

ZXB1 GAME

```

158 CLS
168 PRINT AT 8,2;D1;D2;D3;D4;D5;D6;D7;D8;D9
178 PRINT
188 PRINT "AFTER ENTERING THE P'
LAYERS NAMESPRESS THE FUNCTION K
EY"
198 PRINT "THE PLAYERS WILL APP
EAR SITTING ON THEIR CHAIRS"
208 PRINT "WHEN THE GAME STARTS
YOU WILL SEE:"
218 PRINT "A-THE AMOUNT OF CARD
S IN EACH PLAYERS HAND"
228 PRINT "B-THE NUMBERS ON THE
CARDS THEY HAVE LEFT"
238 PRINT "C-THE AMOUNT OF CARD
S IN THE POT"
248 PRINT
258 PRINT "XXXXXXXXXXXXXXXXXXXXX"
"
348 PRINT "WHEN THE TWO CARDS H
ATCH PRESS YOUR SNAP KEY"
378 PRINT
388 PRINT "PLEASE PRESS ANY KEY
TO CONTINUE"
398 IF INKEY="" THEN GOTO 398
388 CLS
318 FOR P=8 TO 15
328 PRINT AT 9,9;"HEALTH WARRIN
G"
338 PRINT AT 9,9;"XXXXXXXXXXXXXXXX
X"
348 NEXT P
358 PRINT AT 11,4;"PLAYING THIS
GAME COULD"
368 PRINT AT 12,4;"DAMAGE YOUR
HEALTH"
378 PRINT AT 13,4;"XXXXXXXXXXXXX"
"
388 PRINT AT 20,4;"PRESS ANY KE
Y IF YOU DARE"
398 PRINT AT 21,10;"XXXXXXXXXXXXX"
"
488 IF INKEY="" THEN GOTO 488
418 CLS
428 REM [REDACTED]
438 LET C=8
448 LET C1=28
458 LET C2=28
468 LET C3=8
478 LET E="CHEAT"
488 LET F="HEAVEN"
498 LET G="8"
508 LET H="10"
518 LET J="8-"
528 LET K="8-"
538 LET L="8"
548 LET M="1"
558 LET N="L"

```

```

568 LET O="8"
578 LET P="10"
588 LET Q="10"
598 LET R="8"
"
595 LET T="XXXXXXXXXXXX"
608 LET W="CARD 157+"XXXXXXXX"
618 REM [REDACTED]
628 PRINT
638 PRINT AT 2,12;"XXXXXXXXXXXX"
"XXXXXXXXXXXX"
"XXXXXXXXXXXX"
"
648 FOR Y=8 TO 14
658 PRINT AT Y,8;M;AT Y,11;L
668 NEXT Y
678 PRINT AT 8,8;"XXXXXXXXXXXX"
"XXXXXXXXXXXX"
"XXXXXXXXXXXX"
"
698 FOR A=11 TO 13
708 PRINT AT 10,11;T;AT A,13;M
;AT A,17;L
718 NEXT A
728 PRINT AT 11,7;B;AT 11,23;B
;AT 12,7;"1";AT 13,7;"1";AT 12,
23;"1";AT 13,23;"1"
738 SLOW
748 PRINT AT 21,8;"NAME OF FIR
ST PLAYER PLEASE"
758 INPUT A$
768 PRINT AT 21,8;A$
778 PRINT AT 7,1;A$
788 PRINT AT 15,8;"USE""Q"" AT
16,8;"TO SNAP"
798 PRINT AT 9,7;H;AT 10,7;J;
AT 11,8;M;AT 12,9;N
808 PRINT AT 21,2;"NAME OF SECO
ND PLAYER PLEASE"
818 INPUT B$
828 PRINT AT 21,8;B$
838 PRINT AT 7,23;B$
848 PRINT AT 15,25;"USE""P"" AT
16,25;"TO SNAP"
858 PRINT AT 9,23;H;AT 10,22;K
;AT 11,22;L;AT 12,22;O
868 PRINT AT 10,9;C1;AT 10,20;C
2
878 PRINT AT 21,8;"PLEASE PRESS
ANY KEY TO START"
888 IF INKEY="" THEN GOTO 888
898 PRINT AT 21,8;R
9088 REM [REDACTED]
9188 IF C1=8 OR C2=8 THEN GOTO 3
888
9288 LET C=C+1
9388 LET C1=C1-1
9488 LET C3=C3+1
9588 LET N=[INT (RND*4)+1

```

ZX81 GAME

```

1000 PRINT AT 10,9;C1;AT 9,11;"
      "AT 9,11;R1;AT 9,13;C3
1070 IF C4=0 THEN PRINT AT 10,1
      0;"
1080 IF C42 THEN GOTO 1110
1090 IF N1=N2 THEN GOSUB 2000
1100 IF N1<N2 THEN GOSUB 2000
1110 IF C1=0 OR C2=0 THEN GOTO 2
      000
1120 LET C=C+1
1130 LET C2=C2-1
1140 LET C3=C3+1
1150 LET N2=INT (RND*4)+1
1160 PRINT AT 10,20;C2;AT 9,19;"
      "AT 9,19;N2;AT 9,15;C3
1170 IF C2=0 THEN PRINT AT 10,2
      1;"
1180 IF C42 THEN GOTO 1010
1190 IF N1=N2 THEN GOSUB 2000
1200 IF N1<N2 THEN GOSUB 2000
1210 GOTO 1010
2000 REM XXXXXXXXXXXXXXXXXXXX
2010 IF C1=0 THEN PRINT AT 10,9;"
      "AT 19,0;A#
2020 IF C2=0 THEN PRINT AT 10,20
      "AT 19,0;B#
2030 PRINT AT 20,0;"YOU HAVE RUN
      OUT OF CARDS-----NOW YOU MUST
      PRESS YOUR SNAP KEY"
2040 IF INKEY="" THEN GOTO 2040

2050 PRINT AT 7,1;"
      "

2060 FOR W=2 TO 13
2070 IF C1=0 THEN PRINT AT W,6;W
      0;AT W-1,6;"
2080 IF C2=0 THEN PRINT AT W,20;"
      W;AT W-1,20;"
2090 NEXT W
2100 IF C1=0 THEN PRINT AT 13,6;"
      F#
2110 IF C2=0 THEN PRINT AT 13,20;"
      J#
2120 IF C1=0 THEN PRINT AT 0,23;"
      "HA HA"
2130 IF C2=0 THEN PRINT AT 0,5;"
      "HA HA"
2140 FOR P=0 TO 50
2150 NEXT P
2160 CLS
2170 PRINT AT 11,0;"PLEASE PRESS
      A KEY TO PLAY AGAIN"
2180 IF INKEY="" THEN GOTO 2170

2190 CLS
2200 GOTO 420
2200 REM XXXXXXXXXXXX
2210 IF INKEY="" THEN RETURN
2220 IF INKEY="P" THEN PRINT AT
      19,0;D#
2230 IF INKEY="O" THEN PRINT AT
      19,0;A#
2240 IF INKEY="P" THEN LET C2=C
      2-5
2250 IF INKEY="P" THEN LET C1=C
      1+5
2260 IF INKEY="O" THEN LET C2=C
      2+5
2270 IF INKEY="O" THEN LET C1=C
      1-5
2280 FOR P=0 TO 10
2290 PRINT AT 10,14;C1;AT 10,14;"
      F#
2300 NEXT P
2310 PRINT AT 20,0;"IT WASN'T B
      RAP,NOW YOU WILL LOOSE 3 CAR
      DS---DON'T DO IT AGAIN"
2320 IF C1<0 THEN LET C1=0
2330 IF C2<0 THEN LET C2=0
2340 FOR P=0 TO 50
2350 NEXT P
2360 PRINT AT 10,9;"AT 10,9;"
      C1;AT 10,20;"AT 10,20;C2
2370 FOR P=0 TO 25
2380 NEXT P
2390 PRINT AT 10,0;R1;AT 17,0;R#
      ;AT 20,0;R#;AT 23,0;R#
2400 RETURN
3000 REM XXXXXXXXXXXX
3010 IF C42 THEN RETURN
3020 IF INKEY="O" THEN GOTO 305
      0
3030 IF INKEY="P" THEN GOTO 312
      0
3040 LET A=INT (RND*2)
3050 IF A=1 THEN GOTO 3120
3060 FOR Q=0 TO 15
3070 PRINT AT 0,5;Q;AT 0,5;"
      "
3080 NEXT Q
3090 LET C1=C1+C3
3100 PRINT AT 10,9;"AT 10,9;"
      C1
3110 GOTO 3170
3120 FOR P=0 TO 10
3130 PRINT AT 0,23;D#;AT 0,23;"
      "
3140 NEXT P
3150 LET C2=C2+C3
3160 PRINT AT 10,20;"AT 10,2
      0;C2
3170 LET C3=0
3180 LET C=0
3190 PRINT AT 9,11;"
      "
3200 NEXT P
3210 RETURN
4000 SAVE "SNAP"
5000 RUN

```

770-544-8888

SPECTRUM DISK INTERFACE

The Ultimate for the Spectrum owner!

Spectrum owner! Now you can approach your machine to take full advantage of the sheer speed and convenience of floppy disk operation.

Greater storage! Faster access! More portability! Reliability!

Disk drives were specifically designed for use with computers to program and data can be saved, retrieved, accessed quickly and safely. Also, a disk drive provides the source to get programs and data when you need them. It's not the speed! Only a few seconds!

Upgrade now with the most advanced disk interface from technology that leads the way. The 7700 Series! It's an exciting "new" disk interface offering portability with low cost, reliability, speed, ease of use!

Backbone drive comes complete with fully featured software program allowing you to store and retrieve data on a daily basis. Perfect for students, home files, and the professional. In addition, a greater storage capacity. The 7700 Series is there with you, portable, 3.5" disk, compact size. Low cost. 2.56 megabyte capacity with 128 tracks per sector.

More features! Disk driver, program, rapid load, power off and hold time as well as a 7700 Series. The 7700 Series is the only disk interface that can be used in a Spectrum!

The Beta disk interface, the Beta disk drive, only from Technology Research. There's every reason, the answer will be saying, all the benefits of a disk drive!

Features

- 100% IBM compatible, Spectrum 7700 Series
- Supports 5.25" floppy disk, 3.5" disks
- Easy to use, easy to learn
- Compact size, 4.5" x 7" x 1.5" (with 3.5" disk)
- 2.56 megabyte capacity
- 128 tracks per sector, 128 tracks per disk
- 3000 RPM, 5000 RPM, 7200 RPM
- 100% IBM compatible
- 100% IBM compatible
- 100% IBM compatible
- 100% IBM compatible
- 100% IBM compatible
- 100% IBM compatible
- 100% IBM compatible
- 100% IBM compatible



TR Technology Research Ltd.

1000 Hill Street, Toronto, Ontario
M6P 1A1, Canada
Tel: (416) 593-1111
Telex: 5200-1111

CONTACT THIS COMPANY FOR A DEMONSTRATION OF POSSIBLE GAINS TO THE ABOVE ABOVE

PLEASE SEND ME:

	QTY	TOTAL
100% IBM COMPATIBLE INTERFACE	1	100.00
100% IBM COMPATIBLE DISK DRIVE	1	100.00
100% IBM COMPATIBLE	1	100.00
TOTAL		300.00

*Amount paid (not including post and packing) for other disks and software items.

Name _____

Address _____

Postcode _____



NEW
BETA INTERFACE PLUS
BETA DRIVE!
The complete package
from £249.75!

Designs For Living



Colin Christmas turns turtle with Sinclair's package



There are certain people for whom the usual standards of communication, such as a cheerful "Hi, how are you?", "Your place or mine?", "Leave it out John", and so on, are virtually useless. In this category I put all aliens. Chiefly because I've met or met any of at least one who would admit to having come from another world.

Also in this category, anyone from another country who has not learned English, or any other globetrotter that I can't understand.

And most mathematicians. That's my experience for what it's worth. This particular genre is language-independent since even if you don't read and since my only consistent

success in that field is to have failed every time and sometimes they'd tried to eat me, we never seem to have anything to talk about.

Imagine, then, a poor mad lad in the right and/or time zone in conversation with a mathematician. One is talking about computers, the other is talking about languages — a computer language. Her enthusiasm for one in particular cannot be ignored. It was called LOGO and all this took place two years ago. She was one of a mathematician, one of a maths teacher...

I hope the relevance of that little episode to this article will soon be obvious. Regular readers of ZX Computing will at least be familiar with LOGO through reading excellent articles by Tim Hartwell and the series 'Logo by David Newell', who has written a BASIC program which gives us quite a powerful and readable version of LOGO for the 48K Spectrum.

Readers will also I hope be well aware of the increasing number of utilities and tools being made available to Spectrum users for work in graphics and areas like computer-aided design, consisting of a special interest of mine, so regular readers might have noticed

Get Computers into School

LOGO is probably the best known as a graphics language. Many children today will be familiar with 'buggies' or 'turtles' which many schools bought as part of the package in the great "Let's get computers into schools" campaign which in fact is still going strong.

These little robots receive LOGO commands from a computer and move about on sheets of paper on the floor creating drawings and shapes. Needless to say, Seymour Papert, the four-

thirty father of LOGO, had more than just graphics in mind when designing the language which would teach learning.

It is certainly had young children in mind however, and furthermore he had the world of mathematics in mind too. The common denominator was the computer used as a tool to obtain the language would need to be able to develop logical thinking, introduce children to computer programming and at the same time prepare them for future programming and languages other than the cumbersome BASIC.

That was Papert's task. LOGO the result.

It was the only computer in the field of languages for education. There's PASCAL, also 'procedure orientated' and Cascal which is used educationally in Sweden and Norway.

But it's not my brief to discuss LOGO in detail — there's neither time nor space here — nor to offer comparisons with other languages. Rather, it is to give a condensed welcome to Sinclair's LOGO package for the 48K Spectrum.

The package comprises two books, and a software cassette by LOGO-500. The first book, Sinclair LOGO 1, deals exclusively with turtle graphics. The 'turtle' is essentially a red robot keyboard a graphical character which appears as a small triangle on the screen.

The graphics screen is broken as the TURTLE'S FIELD, and this, apart from the screen box line of your TV screen, is your drawing board.

The size of the field can be changed using a very simple command (ALL commands, operations and procedures in LOGO are extremely easy to grasp — almost literally child's play). The particular command setting the aspect ratio is (RT) which changes the scales to reflect your images have been drawn.

Primitives

LOGO understands a number of words called PRIMITIVE PROCEDURES, known as PRIMITIVES, and many of these have a shortened form. So that to make the turtle appear on the screen you type SHOWTURTLE or ST (its own form) and to make it disappear you type HIDETURTLE or HT.

The shape of the turtle gives you its POSITION and its HEADING. This is known as the turtle's STATE, its STATE, BACKSPACING as well, all movement BACK, FORWARD, LEFT, RIGHT, PRINCIPALITY

turtle is imagined as carrying a pen which it drags with it. In fact however, you can instruct the turtle to fill in areas, in which case it does not draw as it moves; the boundaries of its movement, all of these can be changed with abbreviated commands.

Once you have used primitive procedures to draw a square or some other geometrical shape then LOGO can be taught to understand all of these procedures as one procedure by simply giving it a name.

In this way, by building new procedures you are continually expanding LOGO's vocabulary. And you can master it in minutes.

Documentation

The first book goes on to show how you can write programs which can manipulate words and lists, known as OBJECTS in LOGO.

When the software package is loaded, the Spectrum is in TEXTSCREEN mode. There are 22 lines available for text.

Every time you use a primitive related to the movement of the turtle, you go into the graphics mode again with

22 lines for graphics and the two already mentioned which are for your conversation or communications with LOGO. So get back into TEXTSCREEN by giving your TS. You cannot of course see the turtle in this mode.

The last part of the first book introduces the user on using VARIABLES, carrying out arithmetic operations, assigning values to variables, exploring the potential of LOGO for producing beautiful designs based on colour polygons and spirals, exploring the capability of LOGO of procedures being able to call or be called by any other procedure including itself (known as recursive procedural), and finally the printing of a game using LOGO.

I can't truthfully imagine many people finding this first book difficult to use and for that matter, finding LOGO anything but fascinating and challenging to use.

The second book in the package describes itself as "a reference manual for experienced LOGO users, rather than a guide for newcomers."

All I can say here is that working through the first book is

and enjoyable and having done that, by its own definition, the BASIC/LOGO package welcomes you to the second book as "an experienced LOGO user".

The reference manual is extremely comprehensive and so far has not let me down once. It is an excellent and it is very easy to use for reference. Fourteen chapters and two Appendices take you through first the basic rules for writing and combining procedures, the grammar of the language and from there the usage of that grammar to make LOGO understand what you want it to do. Each of the procedures is then defined and their use explained in considerable detail. It is the only manual of this nature for an interpreted LOGO user, not its degree of difficulty in being understood or used.

Good News

Like any new message, the good news of LOGO has been widely spreading since it was first announced in the stores. Sector have at last made private Spectrum users with their own title in the shape of the package.

This means more desktop and I think the package will find its first converts among those who left in any way "instructed".

It is another language, to many of us unfortunately different from BASIC. It is widely recognized that you tend to prefer the language you first learned to program with and so the package will only appeal at first to the most open minded micro users. But none that it is here in this form (without above ways of programming and a wider use of LOGO in the vocabulary of children and teachers) in particular.

LOGO is something new to Spectrum users but potential for early learning should still be ignored. Unless again you have at our fingertips a tool which will become commonplace to future generations (or at least act as a stepping stone on the journey toward new horizons for the home computer).



PHOTOCOPIES



To take advantage of this simple service just fill in the requested information and send it for a photocopy to:

**ZX Computing Photocopies,
No. 1 Golden Square,
London W1R 3AB.**

together with your money and we'll do the rest.



Lost and can't be replaced? Well, if you've lost one of the many issues that cannot be replaced from our stocks of backnumbers - it's not quite lost.

If you know the article name and the issue it appeared in, we can supply you with a photocopy for the merely sum of £1.50 including postage and packing.

ZX PHOTOCOPIES

NAME _____
ADDRESS _____

POSTCODE _____

Please send me Photocopies of the following issues:

ISSUE	ARTICLE	PAGES

At £1.50 each I enclose £ _____
Cheques and Postal Orders should be made payable to: ZX Ltd

ONLY
£129.95
FREE DELIVERY

How much would you expect to pay for a dual 128K byte access storage system for your Spectrum that included Centronics and RS232 interfaces and free word processing software as standard?

Chances are it's a lot more than £129.95. But this is what will buy you the incredible Electronics Worldwide unit. There are no extras - this price includes VAT and postage.



ROBBOGUY IMAGINE

A fast reliable dual-drive storage system

Integrated System

The Worldrive is a complete system which contains the micro interface, two 128K drives, RS232 and Centronics ports, all in one attractively styled, compact unit. There is a minimum of connecting leads and no extra boxes to clutter the desk top. Like the majority of professional systems, the unit is a dual drive. This offers the optimum balance between system flexibility and cost. Built-in serial and parallel interfaces allow the direct connection of just about any popular printer.

Fast and Reliable

The Worldrive utilises very fast loading and saving but not at the expense of reliability. Electronic materials and the use of high-grade components ensure that the Worldrive will give years of dependable operation. Data

integrity is on a par with floppy disk. The fully interchangeable software available in three sizes - 128K, 64K and 16K. Low capacity software give faster access. They are therefore most suitable for program development applications. The high capacity systems are suitable for more general data storage. Loading rate is well over 1000 bytes per second.

Time-effective cassette

Software

As well as the comprehensive user manual, disk writer and word processor supplied, you can use your Worldrive straight away. There is also a rapidly growing range of software to enable the programmer and

games player to exploit the Worldrive system to the full. Software for the 16:9600 Spectrum is available now. Software for other popular home computers are under development.

Send a 10p stamp for a full colour brochure and information on software and accessories.

FOR USE WITH THE SINCLAIR SPECTRUM

Price and delivery information

— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95
— 128K/64K/16K drive (standard)	£129.95	— 128K/64K/16K drive (standard)	£129.95

in your own country only

- Includes exchange PC* made payable to SMT
 Delivery Address (Banking Card)* also suitable

(Circle 15 on card)

Name _____
Address _____
Postcode _____

Send to: Electronics Worldwide, SMT, 2500 SPOTT, Boreham, Essex, SSO 6 6JH



SMT

Quicksoft

Clive Smith gives a brief appraisal of the latest Spectrum software



Simple Business Accounts by Flowchart

They say the simple things in life are the best, and the Simple Business Accounts 1128 Flowchart certainly proves it. In U.S.A. terms, it's a plain wallet strip with the very simple chart for layout, 8 pages and about 50 words to the page. In fact it wouldn't matter if you put them in the program as they're obvious and very easy to use. Your accounts are kept on a weekly basis and will keep all your information in a well-structured set of your expenditures and instead of the programmes being about 100-200 instructions which cannot be changed, Flowchart is about 300 which you can change to suit yourself. You also have control over all the parameters, including password, name of company and account headings.

All reports can be made to hard copy and it will list all your expenditures separately for easy analysis. Reports can be

made on the ZX printer or any printer using the ZX Interface 1 1622-20 port. Both types print a 32 column report.

Date and when to start on accounts about 13 weeks will fit onto a CR8, so 2 tapes will hold a year's figures. You can also store data in increments or days if you wish. Everything in this program is made as simple as possible but nothing is left out. If you use a Simple book you would find them very similar.

In fact, I found this program so good I have dropped the account program in favour of this one for running business on.

Well done Flowchart. A very well thought out program.

Astrocode By Finbury Computers Ltd

By the look of the cover I thought this was going to be less than on the money, but nothing less than exciting, not for the easily discouraged. In fact I doubt that I'll ever play the game again

money from the finance company to pay down your wage, as well as paying for about five wages and the resulting cheque has just a hair of other charges which crop up in the game.

As well as facing the financial side there is, of course, the sailing side as it, you don't actually sail or steer the ship on screen, you just have to your destination and be clever enough to reach your ship without the help of the harbour. You sail so easy as it sounds because in reality you may think you're in control but whether you are or not is up to you.

You have a choice of ranges which you can carry and prices are different at each port. So if you bought some in Lurelle and sailed to Liverpool you may find they are cheaper when you get there and so you will lose money if you sold them.

The graphics are well drawn but are only there for your amusement. Great game this, one I can recommend to anyone 16B. The editor is a shame below. After I wrote this thinking it was a full page game he tells me one of the new cheap range saved in the past if it weren't a value for money.

Garden Plant Directory By Practical Software

One of my biggest grames about utility programs is that some are a pain to use and to fix things are often things to replace. Such as definitely when it is open to



writes in the book than how the program really runs.

Well, as last time, I found the review far more interesting than the book itself. If you're not a *Flower* (like me) who'd rather do garden design, the directory lists 300 flowers and shrubs and are listed in their common and Latin names and gives details of each one.

You can use the program in two ways: either to identify a flower you have by inputting all its characteristics or to help you choose a particular flower that you want but don't know the name. For instance, say you wanted to plant some flowers but didn't know what type to get. You simply type in the characteristics you want to add: color, height, spread, annual, biennial, when you want it to flower, etc. etc., and it will look through its catalog and try and find you a flower to match your needs. (and if you are not quite sure just what you garden, there is also good advice for increasing plant through.)

First, the program runs very slowly (but garden's slow!) so you may want either, and especially if it's a picnic and it's a really introductory course to the number of plants there are. Quite often it will find nothing is like what you're giving it the simplest of requests. I think they should have divided the shrubs and plants into different tapes or made a larger directory. Still, a very useful program and worth a look at. — *NE* *4.9K version only*

Stock Control by Kemp

You may or may not have noticed that the Kemp Stock Control program has been about for some time. Well, Kemp have improved their existing program and now have one compatible with ZX microcode and an improved screen layout. The main features of this program are automatic entries, receipts, retail, merchandise search and it is made driven with 8 menu options. These include display orders, correct stock list, total stock value, orders, receipts and recorder display.

The program has a capacity of 999 records per file and between 240 and 640 records per file, which means the sensitive storage can hold 792 to 1008 records.

Each microcode will save both program and data and will only file again about 50 records unless a Microcode is activated when loading or saving, to ensure accuracy. The program and data can still be transferred into

concrete but it takes about three and a half minutes to load Microcode in concrete.

I liked the improved screen display which is well laid out and has a green screen effect.

On entering data you first enter the stock number, up to 10 characters. Next is the supplier name which has only four characters but allowing 30 for description of goods. Next, your order level, current figures, and finally unit cost. There is also a lot number which has only four figures. I wish they gave more to hold long invoice numbers.

The search facility is fast, almost like a database, an will search either by supplier or stock number.

With a printer permanently attached it will keep a full audit trail. The beauty of this program is that it will operate on the ZX printer and all Spectrum Computers and 640 KB printer interfaces to provide output on a 60 column printer. You can also select 32 of 64 alternative printing.

With ease, you can print out any stock record, keep a daily list of all updates, corrections, deletions etc. A stock list of all records with their balances plus anything found in the search, and when you stop doing for an order will give an instant list of all stock that needs re-ordering.

The only fault I found was you have to enter the date every time you enter a record. As you have to enter the date at the start it would have been better to have the option of pressing one key to repeat the date when updating records or the option of changing it if needed.

The program also has an access code to data temporarily, but this cannot be used to store data.

The software comes with a book to be used as the program can be followed on the screen with ease. Recommended retail price is £13.95, including VAT which is a fraction of the price you would have to pay for a similar program used on a business computer. All warranties are also guaranteed for one year and Kemp will answer any queries you have.

Omnicalc By Microsphere

In the beginning there was Omnicalc, but now, fresh from Microsphere at the top of Omnicalc, you get yourself a Omnicalc 2. It's difficult to review spreadsheets as it's not what they do, it's more what they will let you do. If you have never used a spreadsheet before and you are

in business it's worth looking at one, especially if you have lots of a lot of calculations. The best way of explaining it to you is by seeing you to integrate a large sheet of paper with columns running vertically and horizontally across it to form hundreds of small boxes.

Across the top of the page they are numbered from 1 to 100 and down the side from A to Z. So each box has a coordinate in A1 or H4. Now, let's imagine that you were say, buying and selling. You can enter your sales in one box (A1), then your cost in another box (A2) and have your profit appear in another box (A3). The cost in it will take data stored in one box and use it to perform calculations with data stored in another box and give you the answer in yet another box.

Your screen acts as a small window which can be moved up and down the spreadsheet to cover all the boxes available.

Imagine several of these boxes holding data and all in talking with each other, it would take hours to write a program in BASIC to handle things like spreadsheet calculation up to do in minutes. Now this can be used in all sorts of applications from manufacturing to sales figures.

The Omnicalc 2 program is one of the better spreadsheets I have seen, for it has the ability of giving you a histogram and can also be used with microcode and interface 1. It has 60 columns across and 240 rows deep and will use all the mathematical functions that the Spectrum can offer. One of it's features that I can repeat numerous times are columns instead of having to key them in one by one.

All the actions on the spreadsheet are carried out by a series of one letter actions, such as *F* (input) which then gives the opportunity to figure, graphics, edit, or blank and so forth.

Other programs include *Graphic Artist*, *Graphic Artist*, *Graphic Artist*, *Graphic Artist*, *Graphic Artist* and a host of others which the 31 page instruction manual can best explain. In fact Omnicalc 2 has 4 programs, *OMC2*, *OMC4*, *OMC6*, *OMC8* and *OMC10*, *OMC12*, *OMC14*, *OMC16*, *OMC18*, *OMC20*, *OMC22*, *OMC24*, *OMC26*, *OMC28*, *OMC30*, *OMC32*, *OMC34*, *OMC36*, *OMC38*, *OMC40*, *OMC42*, *OMC44*, *OMC46*, *OMC48*, *OMC50*, *OMC52*, *OMC54*, *OMC56*, *OMC58*, *OMC60*, *OMC62*, *OMC64*, *OMC66*, *OMC68*, *OMC70*, *OMC72*, *OMC74*, *OMC76*, *OMC78*, *OMC80*, *OMC82*, *OMC84*, *OMC86*, *OMC88*, *OMC90*, *OMC92*, *OMC94*, *OMC96*, *OMC98*, *OMC100*.

Results can be printed out on a ZX printer and to a full size printer connected to a suitable interface.

If you think you need a spreadsheet for your business needs then I think you won't go far wrong with this one.

Garden Birds By Natsoft

My apology to Natsoft. I had said *Garden Birds* didn't suit the Natsoft. Well, it does. I also said that you were offered three choices of bird to write in but there are seven. After the success of the program Natsoft are to release two more programs, *Country Birds* and *Coastal Birds*. This gives a total of over 250 species in all, covering all the birds commonly seen in Britain.

Computer your next step! — *Ed*



ZX81 and Spectrum Software to be Won!

be tempted by these programs from Temptation Software



Temptation Software are based in Harrogate. You can have just announced the addition of "The Journey" to their range of programs.

The journey is a full blown adventure game with graphics and well written interactive characters. What makes it especially interesting is ZX Computing magazine is that it was written by Alan Davis who is a ZX Computing contributor. In our last issue we published the first part of an article and you and we have been enjoying them from instant replay for the future!

Temptation have a varied range of programs on the market for both machines, Adventure/God of Siam, Baron and Challenge, Las Vegas and all others. The Journey for the Spectrum only.

The Prizes

Temptation are offering 50 parts of these programs — 30 sets of ZX81 and 20 Spectrum — for the lucky winners of our competition. The ZX81 parts consist of their three programs in the machine and the Spectrum parts consist of Baron Challenge, Las Vegas and The Journey.

Please take which prize you would like when you return the form and who knows, the winner may even be calling on you!

The Competition

In line with the theme of Temptation's new programs all we want you to do is identify the adventures by their famous journey.

The Rules

The competition is open to all UK and Northern Ireland residents of ZX Computing, student employees of Active Specialist

Publishers Ltd. Their prizes and distribution, employees of Temptation Software, or anyone associated with the competition.

As long as the correct answer is sent in postmarked this case there is no limit to the number of entries from each individual.

All entries must be postmarked before January 31st 1985. They will be awarded to the first 50 entries placed in envelopes which bear the correct answers, the deadline is made by the Editor of ZX Computing. No correspondence will be entered into with regard to the results and it is a condition of entry that the winner's decision is accepted as final.

The winners will be notified by post and the results will be published in a future issue of ZX Computing.

Unique competition results

There was a moderate response to the unique "vegetarian" competition ZX Computing (last August/September). But perhaps we'll put that down to the fact that it was the holiday season. Good weather that sort of thing. Anyway, the lucky winners were:

- Mr M Bradley of Coventry
- Mr G D Harwood of Leicester
- Lincolnshire Mills of Liverpool
- Mr R G Turner of Scarborough
- Simon Turner of West Yorkshire
- Mr R G Turner of West Yorkshire
- Mr M J Graham of Devon
- Mr Gail Taylor of Devon
- Sudhvir Singh of Middlesex
- Your club intension is on it's way. Sudhvir — Jai
- Alan Houghton of Wigan
- Mr L Owen of Harlewell in Scotland
- and
- Mr J Davies of Cardiff, Wales

Each of the above should have received their prizes by the time they have read this.

Thanks to all of you who entered our competition.

The entries have been sent in to the Postal Competition Ltd. Company. October/November direct mailing I enter the office and see that they reached competition.

ZX Computing Temptation Competition,
1 Station Square,
Leeds W1R 3AR

judging it to be a! I'll have a wonderful time operating the (I signed) However, that's not of the reason that I'm here, as if you want to keep quite young than happy, after the Temptation competition and we yourself some free software. After all, WHAT HAVE YOU GOT TO LOSE?

Jenki Clay

Name The Adventurer

- On his Journey he discovered America
- A. _____
- This person took elephants over the Alps when journeying
- A. _____
- An entire journey ended in disappointment and tragedy for this man
- A. _____
- A man famous for his journeys, has a child named after him
- A. _____
- This only muslim had took wife and children on his journeys
- A. _____
- An African journey was necessary before this man could meet St. Livingston
- A. _____

NAME

ADDRESS

*My machine is a Spectrum ZX81 (please delete as applicable)

The ultimate development from

agf

NEW
PROTOCOL 4
THE LATEST
PROGRAMMABLE
JOYSTICK INTERFACE
ONLY £29.95

Designed exclusively for the ZX Spectrum, Protocol 4 brings you game control customising in a way that no other interface does. It can accept all commercially standard joysticks, including the Quakeball II with rapid fire, or Tractor controllers, and is compatible with ALL Spectrum software. PROGRAMS LIKE FRODO OPTION INTERFACES CAN BE FULLY HARBANING PROGRAMMED

The flexibility of Protocol 4 control is achieved by a specially designed CustomCard system. CustomCards are easily programmed to suit all types of games.

Simply slip in a programmed card for immediate customised control. With preset cards supplied Protocol 4 can emulate the following control schemes: AGF/Protels, Kampeon and ZX Interface 2 — both players. You can change or reprogramme blank cards (1 supplied) to give the responses you want — even in games without joystick options.

Utilising Hardware Programming technology you have the benefit of additional night mode control, no power down programming time, guaranteed conflict-free operation with other peripherals including microdrives, and no extra software to load or selected joystick movements used key presses to make a choice

time you load another game. The keyboard returns fully operative at all times.

It is also perfectly accessible concerning to five Protocol 4's on one Spectrum, each programmed separately for multiple player control — only possible with the hardware programmed design.

Incorporated into the design is a computer flash button for clearing the computer memory between games without pulling the power plug out.

Fully guaranteed for 18 months, Protocol 4 comes supplied with five CustomCards, see Custom Reference Programming Cards and complete instructions.





PROGRAMMABLE INTERFACE

As the first fully hardware-programmed joystick/interface, this product has become well established over the past year (it will accept ALL standard joystick protocols, including QuickShot II) and is fast becoming the only joystick with ALL Spectrum or DOS software — not just those with a joystick option.

- 1 No Software programming required
- 2 Programming is notified when power is disconnected between games
- 3 A light ray sensor — not an infra red — for button pressure — only requires setting of the four main directions
- 4 Compatibility is guaranteed with ALL key mapping techniques — machine code or BASIC

Several interfaces can be separately programmed and linked to one computer for multiple player games. Keyboard assignments totally unaffected by a joystick as well as AGF add-ons, and will never conflict with any other device used at the same time.

Ten to months guarantee, key programming information and a pack of QuickReference Cards, in Spanish setting of the steps, are supplied with full instructions.

INTERFACE II

The AGF control implements the best available interface to joystick games.

- 1 The AGF control standard is now offered in 80 games or later programs for joystick systems or modified
- 2 My game wheel is controlled by the cursor movement keys S & T. For use in a game, opt on or also Control for with interface II
- 3 In our connection allows other joystick controls to be connected to the same time

This product is available for either the Spectrum or DOS is supplied with full instructions in 10 month guarantee and a 10% discount voucher upon further AGF mail order purchases.



ROMSLOT

The new AGF RomSlot is designed for anyone who already owns a programmable joystick/interface, or prefers it to the key-based control games, and would like to add the facility of ROM cartridge software to their system.

RomSlot will accept the single range of native loading games and will also be compatible with the new release four player software — existing new games only to be available in ROM format.

This system allows existing play. Your computer memory plan, card expansion and you will be able to play games that simultaneously require more RAM.

RomSlot incorporates an architecture called RomSlot. This allows you to easily restore ROM games.

RomSlot is guaranteed for 10 months and has a full width expansion connector to accommodate interfaces, special units and printers etc.

QUICKSHOT

The QuickShot joystick is an excellent value game controller. It's designed to be used by one hand, but comes with a comfortably contoured handle offering a consistent top grip position as well as one on the base.

QUICKSHOT II

QuickShot II has improved styling with a trigger type firing button as well as the top firing action, with a broader base for greater support stability.

Based on a unique Auto Fire technology which is the basis of a switch-procedure a constant firing action, simulating a fast trigger finger.

	PRICE	
AGF Protocol 1	£29.95 + £1.00 p&p	<input type="checkbox"/>
AGF Programmable Interface	£94.95 + £1.00 p&p	<input type="checkbox"/>
AGF RomSlot	£ 100 + £0.50 p&p	<input type="checkbox"/>
AGF Interface II	£ 100 + £0.50 p&p	<input type="checkbox"/>
QuickShot II joystick	£79.95 + £2.00 p&p	<input type="checkbox"/>
QuickShot joystick	£ 79.95 + £0.50 p&p	<input type="checkbox"/>
Five QuickReference Cards	£ 1.00 inc. p&p	<input type="checkbox"/>
1000 ROM		<input type="checkbox"/>
Extra QuickReference	£ 1.00 inc. p&p	<input type="checkbox"/>
Programming Guide/1000 ROM		<input type="checkbox"/>
Keycode Computer	2001 Spectrum	<input type="checkbox"/>

FOR INFORMATION REQUEST

Enclose cheque/Pound Order for
Please bring my Account/Visa/Debit Card
Account No.
Signature
My Name
Address

Send to: AGF Hardware Dept. Freeport, Bognor Regis,
West Sussex, PO22 9BT
Trade & Engineering (0424) 422227

There's nowhere else to go

agf

The next step



Ray Elder gives hints on developing your program with the aid of a program by Steven Bridge of Bristol.

OK, so you've done the really hard work. In spite of something to write, well done and produced a working, debugged program. You are pleased. The rest of the family make approving sounds and you decide that you will send your brain child to be published. Some weeks later an envelope drops through the door and you rush to open it to find out just how many of those blue inks they are offering.

Good! Wonderful! There are as many as real talent that they have rejected your masterpiece. Downside they're pretty stupid at you cancel your subscription

and look for another more up to date magazine.

Probably 70% of codes at the programs submitted to ZX Computing are rejected because I already have a similar program awaiting publication. The new one may have different features or be incorporated differently, but since I have accepted it in the previous editor had so accepted a program then sooner or later we will publish it.

Most of the other rejections are because the program has been left in an unfinished state when it is sent by mail.

Steven Bridge has very generously given me permission

to use his program to try and demonstrate how you can refine a program. I do appreciate how difficult it is to accept criteria and to allow your work to be criticised or even used to be better as best as the most harmful. Thanks to him for leaving the ball open!

Steve's Program

Take a look at Program 1. This is Steve's original program, it has no errors (oops, there is one very minor one that is not fatal - can you spot it?) and works fine, performing the less interest-

ing. So what's wrong with it? Always nothing! But let's take what I call "the next step".

The first thing I noticed was the system of producing the report menu. Obviously Steve had developed this menu code in the Data treatment and used a system where 000 was the "legal" value which signaled the end of that section.

However now that the menu was completely developed it was a large effort. Also it seems a shame to only use it once. With this in mind I created a subroutine of 8000-8020 in my program (Program 2).

The **RESTORE** allows me to set a menu item once and find the correct starting point of the Data each time, knowing the actual length allowed a FORTRAN loopover usual, variables and I can then use **READ** to print up and the whole lot in its one line.

The next thing I noticed was the frequent use of **PAUSE 100 CLS** and so I thought another subroutine would be in order. On my listing I created this subroutine of line 8100.

Notice I used an empty loop instead of **PAUSE**. This is purely a leftover technique from the ZX81 days when **PAUSE** caused a serious flicker when in a personal crash. However I still use it on the Spectrum because on occasions a page may be able to remain the finger from a key and cause the screen to be ignored. Remember that because it will start by using being processed. Variable **q** is intended to drive a program but never used. He was probably going to use it as a question counter then developed his program in another way. As it is redundant we ought to remove it for neatness sake.

Steve wrote a **YES** **NO** **QUIT**, etc, for the sake of memory saving, I replaced variable "index" to "in". It would have been even better to have used "y" (but I wanted to keep a balance between brevity and legibility. For the better Steve's name is the ideal.

The Big Step

So much for the simple red pink, red and yellow. To get a good overall view of the program, and in fact any program, it is essential to get a print out of the listing. For the purpose the only defined ZX printer of the Spectrum 12 is ideal.

With a listing available the pattern of the program emerged and I issued it through listing for non-time editors. Simply in order to obtain listings was lost soon I became aware that it

can also be programmed in a single form as follows:

- 1 Print at the same position the question number.
- 2 Print at the same position the question and 3 options.
- 3 Get an input.
- 4 Test.
- 5 Check answer: if wrong print the at the correct position and give correct answer.
- 6 Check answer: if correct print this, add 10 to score.
- 7 Next question.

The only things that changed were the questions, the options and the position the correct answer was in.

As an output we installed a loop for a very fast and a format and use Data for the different questions each time.

The input was the one I used. Each question was set up as a DATA line starting from line 1000, and each line consists of:

- The question — a string variable
- The 3 options — numeric variables
- The position of the answer in the console — a numeric variable

The reason of simplicity itself is aimed when I have to replace any of the questions as they all follow the same layout. To store the three options I used a DIMENSIONED array. This would prove easier to find when printing the correct answer. Also while I was about it I thought it might be nice to give the correct answer even if the player had chosen correctly, a confirmation of his choice. Finally I used variables to store the answers to hold the position in the options of the correct answer.

The Final Step

Line 160 RESTORED the Data pointer to the start of the questions and line 200 set up a loop counter.

I decided that as we know how many questions were to be asked a main loop was suitable. Using the value of I it was straightforward to print up the question number as I have had in the program. The only new READ line of each statement of a) and "a" then the game, the answers was called A in the one line.

Line 210 prints out all the information (except the loop) to print each statement, and here I added the value to provide

variable spacing and the numbering. This was found by trial and error. Quite often a lot of lines needs to be spent on just formatting the screen to give a balanced, effective display. Of course, each person has his own preferences for the way answers/choices, already happens to be more.

Line 213 gets the input. Here I used INPUT. My reason was that the less key-pressing the user did the more he could concentrate on the questions. The fact that only a single number from one to three was required made it most appropriate. I also introduced a simple but effective check that a suitable key was pressed, all other keys (except BREAK or control are ignored).

Line 215 provides the GOTO form gone on to check for the correct answer by comparing the VALUE of the input A to variable "a" read from the Data. The variable "a" is also used to identify the correct element of a) for printing a "bad" "wrong" and "wrong" messages.

The line then increases the score and jumps over line 218 to line 230. Line 218 is the "wrong" message and is only reached if A is not equal to "a" when checked by line 215.

Lines 200 to 201 follow. Shows a format of printing the message and the GOTO PAUSE 3 is a wait for line. At this stage there has been a lengthy gap since the last required key press as there should not be much chance of inquiring fingers.

Further Steps

Well, there agreed with me that this program was much more efficient and more complete than before and we talked about other modifications. It was now possible to finish with the extra memory available.

Most of these we'll leave for you to experiment with. The first one was that, for the sake of user friendliness, a prompt to "Press 1, 2 or 3" would be nice after each question the prompt removed on a valid input.

Then we thought that we could increase the number of questions. A possible idea — especially with a 48K machine — would have to be to reduce the number of questions in memory as were required to be asked and stored in the memory. This would mean for a random number series each time the game was played. A system of displaying that a question wasn't repeated would need devising for that.

Here's a typical program:

```

2 LET score=0: LET qua=1
100 BORDER 0: PAPER 0: INK 7: C
LG
110 PRINT AT 4,7: "Q U I Z M A S
T G R"
12 PRINT AT 4,4: INK 4: BRIGHT
13 FLASH 1: "Press any to sta
rt"
14 PAUSE 0: CLS
15 PRINT AT 0,13: "QUESTION 1"
16 READ a: IF a=999 THEN GO T
O 200
17 READ b: BEEP a/10,b: GO TO
110
18 DATA 2,7,2,7,1,9,1,13,1,11,
1,9,2,14,2,14
19 DATA 1,14,1,16,1,11,1,12,2,
9,2,9,1,7,1,12,1,11,1,9,2,7
200 DATA 999
201 CLS
210 PRINT AT 2,0: "In what year
did Captain Scott reach the sou
th pole."
215 PRINT AT 0,0: "1.1912 2.1911
3.1910"
214 INPUT LINE a#
216 IF a#="1" THEN BEEP .1,1:
PRINT AT 10,3: "WRONG THE ANSWER
WAS 1912"
216 IF a#="13" THEN BEEP .1,2:
PRINT AT 10,13: "FLASH 1: "CORRECT
": LET score=score+10
217 PAUSE 100: CLS
218 PRINT AT 0,13: "QUESTION 2":
PAUSE 100
220 CLS
225 PRINT AT 2,0: "In what year
did London Airport open."
224 PRINT AT 0,0: "1.1945 2.194
6 3.1943"
225 INPUT LINE a#
226 IF a#<"2" THEN BEEP .1,1:
PRINT AT 10,3: "WRONG THE ANSWER
WAS 1946"
227 IF a#="2" THEN BEEP .1,1:
PRINT AT 10,13: "CORRECT": LET sc
ore=score+10
228 PAUSE 100: CLS
230 PRINT AT 0,13: "QUESTION 3":
PAUSE 100: CLS
231 PRINT AT 2,0: "In what year
was the first London Marath
on."
232 PRINT AT 0,0: "1.1902 2.190
1 3.1908"
233 INPUT LINE a#

```

```

274 IF a#>"2" THEN BEEP .1,1:
PRINT AT 10,3:"WRONG THE ANSWER
WAS 1901"
275 IF a#="2" THEN BEEP .1,1:
PRINT AT 10,13:"CORRECT": LET sc
ore+score+10
280 PAUSE 100: CLS
276 PRINT AT 9,13:"QUESTION 4"
277 PAUSE 100: CLS
278 PRINT AT 2,0:"In what year
were the cats eyes first manufac-
tured."
279 PRINT AT 5,0:"1.1934 2.193
6 3.1938"
276 INPUT LINE a#
277 IF a#="3" THEN BEEP .1,1:
PRINT AT 10,3:"WRONG THE ANSWER
WAS 1935"
278 IF a#="3" THEN BEEP .1,1:
PRINT AT 10,13:"CORRECT": LET sc
ore+score+10
279 PAUSE 100: CLS : PRINT AT 9
,13:"QUESTION 5": PAUSE 100: CLS
281 PRINT AT 2,0:"In what year
was Hallelu a comet first s-
ighted."
282 PRINT AT 5,0:"1.1910 2.191
1 3.1920"
280 INPUT LINE a#
281 IF a#>"3" THEN BEEP .1,1:
PRINT AT 10,3:"WRONG THE ANSWER
WAS 1910": PAUSE 100: CLS
282 IF a#="1" THEN PRINT AT 10
,13:"CORRECT": LET score+score+1
0: PAUSE 100: CLS
283 PRINT AT 9,13:"QUESTION 7":
PAUSE 100: CLS
284 PRINT AT 2,0:"In what year
was the opening of the forth br-
idge."
285 PRINT AT 5,0:"1.1964 2.196
1 3.1963": INPUT LINE a#
286 IF a#="2" THEN BEEP .1,1:
PRINT AT 10,3:"WRONG THE ANSWER
WAS 1963": PAUSE 100: CLS
287 IF a#="3" THEN BEEP .1,1:
PRINT AT 10,13:"CORRECT": LET sc
ore+score+10: PAUSE 100: CLS
288 PRINT AT 9,13:"QUESTION 8":
PAUSE 100: CLS
289 PRINT AT 2,0:"In what year
did England win the world cup."
290 PRINT AT 5,0:"1.1966 2.196
7 3.1968": INPUT LINE a#
291 IF a#>"3" THEN BEEP .1,1:
PRINT AT 10,3:"WRONG THE ANSWER
WAS 1966": PAUSE 100: CLS
292 IF a#="1" THEN BEEP .1,1:

```

```

PRINT AT 10,13:"CORRECT": LET sc
ore+score+10: PAUSE 100: CLS
293 PRINT AT 9,13:"QUESTION 9":
PAUSE 100: CLS
294 PRINT AT 2,0:"In what year
was oil discovered in the north
sea by B.P."
295 PRINT AT 5,0:"1.1970 2.196
9 3.1973": INPUT LINE a#
296 IF a#>"1" THEN BEEP .1,1:
PRINT AT 10,3:"WRONG THE ANSWER
WAS 1970"
297 IF a#="1" THEN BEEP .1,1:
PRINT AT 10,13:"CORRECT": LET sc
ore+score+10
298 PAUSE 100: CLS
299 PRINT AT 10,14:"Game over":
PAUSE 100: CLS
300 PRINT AT 4,0:"Y O U R S C
O R E = "score
301 PRINT AT 7,0: BRIGHT 1: INK
2: FLASH 1:"Press any key to pl-
ay again"
302 INPUT LINE a#: IF a#="y" T
HEN RUN
303 STOP
304 FOR a#0 TO 3: GAVE "Guesses
left" LINE 1: NEXT a

```

We even found an easy way to green the options in different order so that the data had to be remembered and not the position in the options. For this one we created three lists

```

305 FOR j=1 TO 4
306 LET x=INT(RND *3)+1
LET y=INT(RND *3)+1 IF
any THEN GO TO 306
307 IF x<y THEN LET y=GO
TO 306
308 IF y=x THEN LET x=x+
309 LET c=GO: LET
310 LET c=LET c+1: NEXT j

```

The output looks like this:

The "new improved" version of Quizmaster

```

100 LET sc=0: DIM c(13): BORDER
0: PAPER 0: INK 7: CLS
120 PRINT AT 4,7:"Q U I Z M A S
T E R"AT 4,0: INK 4: BRIGHT 1:
FLASH 1:"Press a key to start."
150 PAUSE 5: GO SUB 6000: CLS +
RESTORE 9000
200 FOR i=1 TO 9: PRINT AT 9,13
:"QUESTION "i": READ a#,c(1),c(2
),c(3),a# GO SUB 6100
210 PRINT AT 2,0,a#: FOR j=1 TO
3: PRINT AT 4+j*2,13,c(j) "c(j)

```

300) 300) key track of the position of the correct answer.

Another idea was that the option data could be made into strings so that some answers could be words as well as numbers and open up a whole new range of options. All that would be necessary would be to substitute c(1),4 and c(10) instead of 0,1 and the number 4 would be attached to the length of the longest word in the answers. As it was now getting to 1:30am and I had to write the list up, we started

And so, here is the new version...

```

10: NEXT J
210 LET A#=INKEY$: IF A#="" OR
A#<"1" OR A#>"3" THEN GO TO 210
215 BEEP :1,1: IF VAL, A#>=9 THEN
PRINT AT 14,9:1A1: " IS CORREC
T": LET A#<=9: GO TO 220
216 PRINT AT 14,3:"WRONG, THE A
NUMBER WAS "9:1A1
220 GO SUB B100: NEXT A
400 PRINT AT 10,14:"Game over":
GO SUB B100
700 PRINT AT 4,6:"Y D U S B C
D R E = "9:1A1: GO SUB B000
701 PRINT AT 7,4: BRIGHT 1: INK
2: FLASH 1:"Press any key to pl
ay again": PAUSE 8: RIM
8000 RESTORE B010: FOR I=1 TO 19
: READ A,B: BEEP A/10,B: NEXT I
: RETURN
8010 DATA 2,7,2,7,1,9,1,12,1,11,
1,9,2,14,2,14
8020 DATA 1,14,1,16,1,11,1,12,2,
7,2,9,1,9,1,12,1,11,1,9,2,7
8100 FOR J=1 TO 300: NEXT J: CLS
: RETURN

```

```

9000 DATA "In what year did Capt
ain Scott reach the south pole.",
1912,1911,1910,1

```

```

9010 DATA "In what year did Lond
on Airport open.",1945,1946,1943
,2

```

```

9020 DATA "In what year was the
first London Marathon.",199
2,1901,1900,2

```

```

9030 DATA "In what year were the
cars first manufactured.",
1934,1936,1933,3

```

```

9040 DATA "In what year was Hall
ey's comet first sighted.",
1910,1911,1909,1

```

```

9050 DATA "In what year was the
opening of the North bridge.",19
64,1961,1963,3

```

```

9060 DATA "In what year did Engl
and win the World Cup.",1966,1967
,1964,3

```

```

9070 DATA "In what year was oil
discovered in the north sea by B
.P.",1978,1969,1973,1

```

Keypanel Kits



for High Flyers...

Two styles of Keypanel Keypanel Kit are available in Keypanel and Keypanel Plus Keypanel Kit. Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Kits



and Early Learners.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

Keypanel Plus Keypanel Kit is available in Keypanel Plus Keypanel Kit.

A brilliant version of Chinese Checkers from A N Morton in W. Germany — can YOU beat the computer?

Chin

If you enjoy playing board games and are fascinated by their hidden logic, then this program is for you!

Getting used to the Chinese format of "knights and crosses" although somewhat less suitable at first would expect from an oriental game.

The aim of the game is to make a line of five "crosses" diagonally, vertically or horizontally. The boxes of white stones are placed on the intersections of the board. The rules of the game are fully explained in the BASIC program. This program combines machine-code and BASIC, so

that computer responses are very rapid, considering the lengthy calculations involved in generating a single move. The

game can be played at three levels of rising difficulty. Level three should present a challenge to even the most experienced of players.

Program structure

The ROM statement numbers in the machine code routines which are explained in the following sections.

Lines 10 to 33 set out the rules of the game, which are displayed for as long as it takes to set up the variables between

lines 34 and 132, corresponding to the board boardtable.

The game level is established between lines 33 and 38, then lines 88 to 93.3 print a 6 x 9 board with coordinates.

Lines 113 to 118 play the first move, (computer always starts) by printing all 'X' at board center and noting the move in the map "internal board", A1x,2, and the machine code routine pointed above WARPup. The A1x,2 routine is for generating and checking allowed moves and the machine code routine is for establishing lines of stones.

Lines 120 to 124 then ask for the player's move, checking whether it is valid, then rotate the board on A1x,2 and in the map line code matrix, where the move is added for a computer's stone to 'L' for a player's to 'R'. Line 124 finally prints an 'R' at the position chosen by the player.

From here on the work starts! Lines 137 to 143 route the program to various subroutines depending on the number of moves 'M' played. Lines 656 to 666 produce the first three opening moves. After the sixth move, the program is sent on a long and tortuous journey through subroutines 18... These subroutines finally end up at line 145 when the move is then printed on screen.

After the sixth move and each move thereafter, lines 113 and 140 route the program to subroutines 902 and 941 to

Table 1 Machine code routines for Chin

Lines 1000 to 1074	search for 4 stone lines (computer)
Lines 998 to 999	search for 4 stone lines (player)
Lines 110 to 113	generate winning or blocking moves
Lines 800 to 807	search for 3 stone lines (level 3 computer)
Lines 700 to 737	search for 3 stone lines (level 3 player)
Lines 732 to 737	generate appropriate moves for a '3 line'
Lines 480 to 508	search for 2 stone lines (level 2, computer)
Lines 400 to 407	search for 2 stone lines (level 2, player)
Lines 418 to 446	generate appropriate moves
Lines 300 to 339	deal with the 2 stone lines

check for a possible win, in which case the result of the game is printed. Continue with the number of moves played (lines 634 and 635) and add values for machine-side moves, then an option to replay is given. The rest of the program generates appropriate moves after identification of 4, 3 or 2 stone-tiles in the machine code matrix. Thereafter, the program operates as described in table 1.

Variables used in program

(L)R (M) (L)S (W)J (P)E (S)T: relevant board coordinates (line, column), at different points of the program.
AUX,C: represents the edge assigned to a particular point (L)R on the board.

A = 3 for board boundaries
A = - 1 for computer stone

A = 3 for player stone "O"
A = 0 for unoccupied position

M represents number of moves placed in the game-tile at given vertices as for coordinates.

Machine code routines

(L)R(145)14, (L)S(146)10, (L)R(146)27

The machine code routines are the "heart" of the program, without which the game would be much too slow. Essentially, these routines search through a block of memory (started above RAMTOP, for values corresponding to stone patterns, which are P(46)10 into the memory matrix) after each move. When a "tile" is taken off, the routine returns to B(46)C, where the contents of row (line) BC are discarded to make the appropriate result to be generated. The value of B gives the position of the first stone in the line. The C value corresponds to the type of line: vertical, horizontal or diagonal. If no line is found, then BC = Q, i.e. (L)S(145)14 or (L)R(146)27 = 0. If the move generated by (L)S(145)14 or (L)R(146)27 can happen at board

boundaries then the program is sent back to search for whether (L)S(145)14 or (L)R(146)27 values from RAMTOP to (L)S(145)14 or (L)R(146)27 addresses. 32000 to 32005 are reserved for stone value (3 or 7); line length and line code. (L)S(145)14 and (L)R(146)27 store addresses 32017 to 32149 corresponding to the machine code matrix.

Getting it all together

Before doing anything, RAMTOP must be loaded to address 31985, by typing in

```
POKE 31985,241
++NEWLINE
POKE 31986,124
NEW
```

To check that RAMTOP is at 31985 enter

```
PRINT POKE 31986 + 255
P:POKE 31986
```

The next step is to type in the first loader program. Making sure that the BASIC statement continues at line 148 characters and that the first address is adjusted if a longer address has loaded a 16514 New-PLUS loader program, load type in the hex code at the same order as listed in "Machine code routines", pressing NEWLINE after each line of code entered. After entering the last line of code type in ST to enter program. Now delete each line of the loader program leaving the RAM free. Then type in POKE 15510,0 or NEWLINE to give an unerasable RAM line. As a precaution, SAVE the RAM line in type. You are now ready to GO B(46)C.

With the RAM free all in memory type in B(46)C program as listed. Type NEWLINE to NEWLINE to save the completed program on tape. The program will then start, asking you for a game. You might need a break after all the typing you will have done up to this point by entering S after the board has been printed. You can get out input from exiting out the game. Remember to lower RAMTOP to 31985 before loading the program from tape.

```
3204 JMC + 4
33 INC HL
34 DJNZ - 8
35 RET
36 PUSH BC
37 PUSH HL
38 LD BC,(32011)
39 INC HL
40 ADD A,HL
41 S,BC - 4
42 AND A
43 CP C
44 JRST + 6
45 POP HL
46 POP BC
47 LD C,1
48 LD C,1
49 RET
50 POP HL
51 PUSH HL
52 LD A,(32000)
53 LD BC,(32001)
54 LD DE,15
55 ADD HL,DE
56 ADD A,HL
57 DJNZ - 7
58 AND A
59 CP C
60 JRST + 6
61 POP HL
62 POP BC
63 LD C,16
64 RET
65 POP HL
66 PUSH HL
67 LD A,(32000)
68 LD BC,(32001)
69 LD DE,15
70 ADD HL,DE
71 AND A,HL
72 DJNZ - 7
73 AND A
74 CP C
75 JRST + 5
76 POP HL
77 POP BC
78 LD C,16
79 RET
80 POP HL
81 PUSH HL
82 LD DE,29
83 ADD HL,DE
84 LD A,HL
85 LD BC,(32001)
86 AND A
87 LD DE,14
88 INC HL,DE
89 ADD A,HL
90 DJNZ - 5
91 CP C
92 JRST + 5
93 POP HL
94 POP BC
95 LD C,14
96 RET
97 POP HL
98 POP BC
99 LD A,(32000)
100 JR - 100
```

```
101 LD B,129
102 LD HL,(32017)
103 LD HL,DE
104 INC HL
105 DJNZ - 8
106 RET
107 LD HL,(31985)
108 LD BC,(31987)
109 JR - 29
```

Jump if found
Load address
Jump back to search
Return to B(46)C (C = Q)
Save count
Save address of first stone
B = (32004) C = (32001)
Load address from line
Line summing
Jump to next address
Clear C flag
Line found?
Jump if not found
B = start of line
C = 1 horizontal
Return to B(46)C
First stone address
Save address
A = 3 or 7
B = line length C = line sum
Vertical line case
Next address on line
Line summing
Jump to next address
Clear C flag
Line found?
Jump if not

C = 15 for vertical line
To B(46)C

B diagonal line case
Next address on line
Line sum

Line found?

C = 16 for B-diag line
To B(46)C

1 diagonal of top
last address on line
Line sum
Next address
Line found?
Jump if not

C = 14 for L-diag line
To B(46)C

Jump back to search?

Set counter to 129
First address of moves
Set counter to zero
Next address
Jump back to set

Jump back to search

Table 1. Machine code routines for Gobling. Hex loader for Gobling machine code. B(46)C (bring for Gobling)

Hex	Hexadecimal	Comment
3000	LD C,0	
3A007D	LD A,(32000)	A = 3 or 7
311745	LD HL,(32017)	First address of moves.
0001	LD B,129	Count 129
00	CP (A-L)	Search for first stone

ZX81 BOARD GAME

Hex loader for Gobang machine code

```

1 REM .....
.....THERE ARE 146 CHARACTERS IN
.....THIS LINE.....
.....
10 LET X=1&S14
20 INPUT A$
25 IF A$="BT" THEN STOP
30 PRINT AT 21,0;" "
AT 21,1;A$
40 SCROLL
50 POKE X,16+CODE A$+CODE A$(2
)-47&
60 LET X=X+1
70 LET A$=A$(3 TO 1)
80 IF A$(">" THEN GOTO 50
90 GOTO 20

```

BASIC listing for Gobang

```

0 REM THIS LINE CONTAINS THE
MACHINE CODE AND IS 146
CHARACTERS LONG
1 PRINT "PRESS ANY KEY TO SEE
IN"
2 IF INKEY$="" THEN GOTO 2
3 REM (RANDOM)
4 RAND USR 16&37
5 CLS
10 CLEAR
11 PRINT AT 0,1;"*GOBANG OR 3
HINGSE CHECKERS*
12 PRINT AT 1,1;"*****
*****"
13 PRINT AT 3,13;"O X O"
14 PRINT AT 4,13;" O X "
15 PRINT AT 5,13;"XOXO"
16 PRINT AT 6,13;" O X "
17 PRINT AT 7,13;"O X O"
18 PRINT AT 9,1;"THE GAME IS P
LAYED BY PLACING "
19 PRINT AT 9,1;"(BLACK) AND
WHITE (O) STONES "
20 PRINT AT 10,1;"ON THE INTER
SECTIONS OF THE "
21 PRINT AT 11,1;"BOARD, UNTIL
ONE PLAYER HAS "
22 PRINT AT 12,1;"SUCCEEDED IN
MAKING A LINE WITH"
23 PRINT AT 13,1;"FIVE OF HIS
STONES, EITHER ALONG"
24 PRINT AT 14,1;"A LINE OR DI
AGONALLY ACROSS ."
25 PRINT AT 15,1;"1, "CHING TH
E MASTER* ,ALWAYS "

```

```

26 PRINT AT 16,1;"PLAY BLACK. A
ND ALWAYS START."
27 PRINT AT 17,13;"O X O"
28 PRINT AT 18,13;" O X "
29 PRINT AT 19,13;"XOXO";AT 1
9,19;"(WAIT)"
30 PRINT AT 20,13;" O X "
31 PRINT AT 21,13;"O X O"
32 GOTO 94
33 CLS
34 PRINT AT 10,11;"CHOOSE LEVE
L 1,2,3"
35 PRINT AT 11,11;"*+*****"
36 INPUT Z$
37 IF Z$="1" OR Z$="3" THEN GO
TO 34
38 LET H=VAL Z$
39 CLS
40 FOR K=4 TO 20 STEP 2
41 FOR Z=4 TO 20
42 PRINT AT Z,K;"#
43 NEXT Z
44 NEXT K
45 FOR Z=4 TO 20 STEP 2
46 FOR K=4 TO 20
47 PRINT AT Z,K;"#
48 NEXT K
49 NEXT Z
50 FOR L=4 TO 20 STEP 2
51 PRINT AT 21,L;L/2
52 PRINT AT 21,3;"B"
53 NEXT L
54 FOR N=4 TO 20 STEP 2
55 PRINT AT N,21;N/2
56 PRINT AT 3,21;"B"
57 NEXT N
58 GOTO 110
59 DIM A(12,12)
60 FOR P=2 TO 10
61 FOR Q=1 TO 12
62 LET A(Q,1)=3
63 LET A(Q,12)=3
64 LET M=0
65 LET A(11,P)=3
66 LET A(11,P)=3
67 LET A(12,P)=3
68 NEXT Q
69 NEXT P
70 GOTO 33
71 LET Z=6
72 LET K=6
73 POKE (31*60+(10*2)+6),3
74 LET A(2,1)=-1
75 PRINT AT 2,2;2+K;"X"
76 LET P=+1
77 IF P>9 THEN GO SUB 600
78 PRINT AT 19,23;" ENTER";AT
20,23;" 27,3";AT 21,23;" IS/STOP

```

ZX81 BOARD GAME

```

10
121 INPUT A#
122 IF A#="0" THEN GOTO 804
123 INPUT B#
124 IF B#="0" THEN GOTO 804
125 IF CODE A#<29 OR CODE A#>37
OR CODE B#<29 OR CODE B#>37 THE
N GOTO 120
127 LET Z1=WAL A#
128 LET K1=WAL B#
130 IF Z1<1 OR Z1>10 OR K1<1 OR
K1>10 THEN GOTO 120
131 IF A1Z1,K1<>0 THEN GOTO 12
0
132 LET A(Z1,K1)=2
133 POKE (31985+(Z1+Z1)*K1),7
134 PRINT AT 2+Z1,2+K1;"0"
135 LET R#H+1
136 PRINT AT 19,Z1;" "
AT 20,Z1;" " AT 21,Z1;"H
AIT
137 IF R#2 THEN GOTO 200
139 IF R#4 THEN GOTO 300
140 IF R#6 THEN GOSUB 441
143 IF R#8 THEN GOTO 1000
145 LET Z#R
146 LET K#C
149 GOTO 115
190 LET Z#6
195 LET K#6
200 LET R#Z+1
201 LET C#K
202 IF A(R,C)=0 THEN GOTO 145
203 LET R#Z
204 LET C#K+1
208 IF A(R,C)=0 THEN GOTO 145
206 LET R#Z-1
207 LET C#K-1
209 IF A(R,C)=0 THEN GOTO 145
207 LET R#Z+1
210 LET C#K+1
211 IF A(R,C)=0 THEN GOTO 145
212 LET R#Z+1
213 LET C#K+1
214 IF A(R,C)=0 THEN GOTO 145
215 LET R#Z+1
216 LET C#K+1
217 IF A(R,C)=0 THEN GOTO 145
200 LET R#Z+1
201 LET C#K
202 IF A(R,C)=0 THEN GOTO 145
203 LET R#Z+1
204 LET C#K+1
205 IF A(R,C)=0 THEN GOTO 145
206 LET C#K+1
207 LET R#Z
208 IF A(R,C)=0 THEN GOTO 145
209 LET V2=1
310 POKE 32000,3
311 POKE 32000,2
312 POKE 32001,6
313 RAND USR 16314
314 LET J1=USR 16314
315 IF J1=0 THEN GOTO 350
316 LET S2=INT (J1/256)
317 LET C2=J1-256*S2
318 LET J=INT ((C161-62)/130)
319 LET P=1641-15*S2-92
320 IF C2=1 THEN GOTO 332
321 IF C2=10 THEN GOTO 340
322 IF C2=16 THEN GOTO 348
323 IF C2=24 THEN GOTO 370
324 POKE 31985,(146-R2)
325 POKE 31986,120
326 POKE 31987,8
327 POKE 31988,32
328 RAND USR 16450
329 LET J1=USR 16450
330 IF V2=1 THEN GOTO 315
331 GOTO 356
332 LET R#J
333 LET C#I+2
334 IF A(R,C)=0 THEN GOTO 145
335 LET C#I+1
336 IF A(R,C)=0 THEN GOTO 145
337 LET C#I-1
338 IF A(R,C)=0 THEN GOTO 145
339 GOTO 324
340 LET R#J+2
341 LET C#I
342 IF A(R,C)=0 THEN GOTO 145
343 LET R#J+1
344 IF A(R,C)=0 THEN GOTO 145
345 LET R#J-1
346 IF A(R,C)=0 THEN GOTO 145
347 GOTO 324
350 LET V2=0
351 POKE 32000,7
352 POKE 32001,2
353 POKE 32001,14
354 RAND USR 16314
355 LET J1=USR 16314
356 IF J1=0 THEN GOTO 190
357 GOTO 316
360 LET R#J+2
361 LET C#I+2
362 IF A(R,C)=0 THEN GOTO 145
363 LET R#J+1
364 LET C#I+1
365 IF A(R,C)=0 THEN GOTO 145
366 LET R#J+1
367 LET C#I+1
368 IF A(R,C)=0 THEN GOTO 145
369 GOTO 324
370 LET R#J+2
371 LET C#I-2
372 IF A(R,C)=0 THEN GOTO 145
373 LET R#J+1

```

ZX81 BOARD GAME

```

374 LET C=I-1
375 IF A OR C=0 THEN GOTO 145
376 LET B=J-1
377 LET C=J+1
378 IF A OR C=0 THEN GOTO 145
379 GOTO 324
400 LET U=0
401 POKE 32000,7
402 POKE 32002,2
403 POKE 32001,21
404 RAND USR 16514
405 LET W1=USR 16514
406 IF W1=0 THEN GOTO 389
407 GOTO 407
410 LET R=W-1
411 LET C=L
420 IF A OR C=0 THEN GOTO 145
421 LET R=W+3
422 IF A OR C=0 THEN GOTO 145
423 GOTO 500
425 LET R=W
426 LET C=L-1
427 IF A OR C=0 THEN GOTO 145
428 LET C=L+3
429 IF A OR C=0 THEN GOTO 145
430 GOTO 500
432 LET R=W-1
433 LET C=L+1
434 IF A OR C=0 THEN GOTO 145
435 LET R=W+3
436 LET C=L-3
437 IF A OR C=0 THEN GOTO 145
438 GOTO 500
440 LET R=W-1
441 LET C=L-1
442 IF A OR C=0 THEN GOTO 145
443 LET R=W+3
444 LET C=L+3
445 IF A OR C=0 THEN GOTO 145
446 GOTO 500
400 LET U=1
401 POKE 32000,3
402 POKE 32002,2
403 POKE 32001,9
404 RAND USR 16514
405 LET W1=USR 16514
406 IF W1=0 THEN GOTO 406
407 LET B=INT (W1/256)
408 LET C=W1-256*B
409 LET W=INT ((1161-37/15))
410 LET L=(1161-15*W1)-B
411 IF C=15 THEN GOTO 410
412 IF C=1 THEN GOTO 425
413 IF C=14 THEN GOTO 433
414 IF C=16 THEN GOTO 448
500 POKE 31999,1148-0
501 POKE 31998,125
502 POKE 31997,0
503 POKE 31999,0
504 RAND USR 16650
505 LET W1=USR 16650
506 IF W1=1 THEN GOTO 406
507 GOTO 406
510 STOP
400 POKE 32000,3
401 POKE 32002,4
410 POKE 32001,15
420 RAND USR 16514
430 LET L1=USR 16514
440 IF L1<0 THEN GOTO 430
450 RETURN
430 RAND USR 16657
460 PRINT AT 21,23;" "
470 PRINT AT 10,23;"1 WIN"
480 PRINT AT 11,23;"1N"1R1"MOVE
0"
490 PRINT AT 0,1;"PRESS ANY KEY
FOR REPLAY"
499 IF INKEY#="" THEN GOTO 497
500 GOTO 470
401 POKE 32000,7
402 POKE 32002,4
403 POKE 32001,35
404 RAND USR 16514
405 LET B=USR 16514
406 IF B<0 THEN GOTO 406
407 RETURN
400 RAND USR 16637
409 PRINT AT 21,23;" "
410 PRINT AT 10,23;"YOU WIN"
411 PRINT AT 11,23;"1N"1R1"MOVE
0"
412 PRINT AT 0,1;"PRESS ANY KEY
FOR REPLAY"
416 IF INKEY#="" THEN GOTO 412
417 GOTO 473
470 CLS
471 PRINT AT 10,1;"TRY AGAIN AT
LEVEL"1H
472 GOTO 479
473 CLS
474 IF H=3 THEN PRINT AT 10,1;"
MASTER CHINO IS IMPRESSED"
475 IF H=1 THEN PRINT AT 10,1;"
THAT WAS EASY,TRY NEXT LEVEL"
476 IF H=2 THEN PRINT AT 10,1;"
WELL PLAYED--GO TO LEVEL"
479 PRINT AT 11,1;"RESTART THIS
GAME IS ADDICTIVE"
480 PRINT AT 12,1;"SHALL WE DON
TINUE?1DRA"0"
481 IF CODE INKEY#>01 THEN GOTO
484
482 IF CODE INKEY#>42 THEN GOTO
0
483 IF CODE INKEY#>51 OR CODE
INKEY#>42 THEN GOTO 480
484 CLS

```


ZX81 BOARD GAME

```

485 PRINT AT 28,811:"THANK YOU F
OR PLAYING"AT 21,81:"PRESS [ON]
[ON] TO RESTART "
486 STOP
788 LET G1=8
781 POKE 32888,7
782 POKE 32882,3
783 POKE 32881,21
784 RAND USR 16514
785 LET F1=USR 16514
786 IF F1=8 THEN GOTO 488
787 LET G3=INT (F1/256)
788 LET C3=F1-256*G3
789 LET F=INT ((164-G3)/15)
710 LET E=164-15*F-G3
711 IF G3=1 THEN GOTO 738
712 IF G3=15 THEN GOTO 742
713 IF G3=16 THEN GOTO 754
714 IF C3=14 THEN GOTO 766
738 IF A1F,E=13<>-1 AND A1F,E=4
1<>-1 THEN GOTO 732
731 GOTO 828
732 LET R=F
733 LET C=C+1
734 IF A1R,C1=2 THEN GOTO 145
735 LET R=F
736 LET C=C+2
737 IF A1R,C1=2 THEN GOTO 145
738 LET R=F
739 LET C=C+3
740 IF A1R,C1=2 THEN GOTO 145
741 GOTO 828
742 IF A1F=3,E><>-1 AND A1F=4,E
1<>-1 THEN GOTO 744
743 GOTO 828
744 LET R=F+1
745 LET C=C
746 IF A1R,C1=2 THEN GOTO 145
747 LET R=F+2
748 LET C=C
749 IF A1R,C1=2 THEN GOTO 145
750 LET R=F+3
751 LET C=C
752 IF A1R,C1=2 THEN GOTO 145
753 GOTO 828
754 IF A1F=3,E=11<>-1 AND A1F=4
,E=41<>-1 THEN GOTO 756
755 GOTO 828
756 LET R=F+1
757 LET C=C+1
758 IF A1R,C1=2 THEN GOTO 145
759 LET R=F+2
760 LET C=C+2
761 IF A1R,C1=2 THEN GOTO 145
762 LET R=F+3
763 LET C=C+3
764 IF A1R,C1=2 THEN GOTO 145
765 GOTO 828
766 IF A1F=1,E=11<>-1 AND A1F=3

```

```

,E=31<>-1 THEN GOTO 768
767 GOTO 828
768 LET R=F+1
769 LET C=C+1
770 IF A1R,C1=2 THEN GOTO 145
771 LET R=F+1
772 LET C=C+1
773 IF A1R,C1=2 THEN GOTO 145
774 LET R=F+2
775 LET C=C+2
776 IF A1R,C1=2 THEN GOTO 145
777 GOTO 828
800 LET G1=1
801 POKE 32888,3
802 POKE 32882,3
803 POKE 32881,9
804 RAND USR 16514
805 LET F1=USR 16514
806 IF F1=8 THEN GOTO 788
807 LET G3=INT (F1/256)
808 LET C3=F1-256*G3
809 LET F=INT ((164-G3)/15)
810 LET E=164-15*F-G3
811 IF C3=1 THEN GOTO 838
812 IF C3=15 THEN GOTO 842
813 IF C3=16 THEN GOTO 854
814 IF C3=14 THEN GOTO 866
838 POKE 31985,(144-G3)
839 POKE 31986,125
840 POKE 31987,2
841 POKE 31988,93
842 RAND USR 16658
843 LET F1=USR 16658
844 IF G1=1 THEN GOTO 885
845 GOTO 788
846 IF A1F,E=11<>2 AND A1F,E=4)
<2 THEN GOTO 732
847 GOTO 828
848 IF A1F=1,E1<>2 AND A1F=4,E)
<2 THEN GOTO 744
849 GOTO 828
854 IF A1F=1,E=11<>2 AND A1F=4,
E=41<>2 THEN GOTO 756
855 GOTO 828
856 IF A1F=1,E=11<>2 AND A1F=3,
E=31<>2 THEN GOTO 768
867 GOTO 828
899 LET G1=8
900 POKE 32888,7
901 POKE 32882,3
902 POKE 32881,28
903 RAND USR 16514
904 LET G1=USR 16514
905 IF G1=8 AND H=3 AND R'18 TH
EN GOTO 788
906 IF G1=8 AND H=3 THEN GOTO 0
88
907 IF G1=8 AND H=2 THEN GOTO 4
88

```

```

900 IF S1=0 AND H=1 THEN GOTO 3
901
909 GOTO 1000
910 LET R=5
911 LET C=T+4
912 IF A(R,C)=0 THEN GOTO 145
913 LET R=0
914 LET C=T-1
915 IF A(R,C)=0 THEN GOTO 145
916 GOTO 1000
917 LET R=0-1
918 LET C=T
919 IF A(R,C)=0 THEN GOTO 145
920 LET R=0+4
921 IF A(R,C)=0 THEN GOTO 145
922 GOTO 1000
923 LET R=0-1
924 LET C=T-1
925 IF A(R,C)=0 THEN GOTO 145
926 LET R=0+4
927 LET C=T+4
928 IF A(R,C)=0 THEN GOTO 145
929 GOTO 1000
930 LET R=0-2
931 LET C=T+2
932 IF A(R,C)=0 THEN GOTO 145
933 LET R=0+3
934 LET C=T-3

```

```

935 IF A(R,C)=0 THEN GOTO 145
937 GOTO 1000
1000 LET U=1
1005 POKE 32000,3
1010 POKE 32001,3
1015 POKE 32002,12
1020 RAND USR 16514
1025 LET S1=USR 16514
1030 IF S1=0 THEN GOTO 0999
1035 LET S1=INT (S1/256)
1040 LET C1=S1-256+01
1045 LET S1=INT ((161-S1)/15)
1050 LET T=(161-15*S1)-01
1055 IF C1=1 THEN GOTO 910
1060 IF C1=15 THEN GOTO 917
1065 IF C1=16 THEN GOTO 924
1070 IF C1=14 THEN GOTO 931
1075 POKE 31900,(146-S1)
1080 POKE 31901,125
1085 POKE 31902,0
1090 POKE 31903,01
1095 RAND USR 16518
1100 LET S1=USR 16500
1105 IF U=1 THEN GOTO 1000
1110 GOTO 900
1115 SAVE "BOGARD"
1120 RUN
1125 RSH (R21200)

```

campbell systems

for spectrum 48k

Can YOUR Database Handle This?

PROFESSIONAL FILE MANAGEMENT, DATA RETRIEVAL AND PRESENTATION
ANY ADDRESS LISTS, INVENTORY, CUSTOMER OR PERSONNEL RECORDS...

MASTERFILE can!

Microdrive commands included, 32, 42 or 51 characters per line!, 26 fields per record. Unrestricted number of records, 36 user defined Display/Print formats; Fast search & sort facilities. Around 32K of RAM available for data!

Now with **MF-PRINT** and MASTERFILE version 09, you can format your data for a full width printer!

Works with most popular printer interfaces. Fully variable report widths (over 100 columns) and lengths. Powerful numeric editing and column totals. Almost no restriction in space available for data.

Many more products available. Send SAE for details!

MASTERFILE version 09	£15.00
MF-PRINT	£ 6.95
MASTERFILE with MF-PRINT	£19.95

All prices quoted include by air
Post. Delivery 1 day and postage within Europe.
New address: Campbell Systems
Dept. 174, 17 The Park, Lincoln
Surrey, BA2 1TD England 01522 8199

THE MICRODRIVE
is not a new
type of computer



The ZX81 soft selection

Nick Pearce, our ZX81 expert, passes judgement on the latest batch of releases.

Rocketman Software Farm

As a regular reader of this column, you'll recall, I was very favourably impressed with *Purdy Miner*, the first 81-resolution game from Software Farm.

Rocketman is their follow-up, in my opinion, and it is even better. Does your bit and running there can be the doubt that you will be rewarded for hours. The game takes time to master, but that doesn't seem to matter at all.

Rocketman is a slightly mis-leading title. This is not a "new wave" type game. The object is to collect five diamonds which return jewels on the left of the screen. Your man starts on the right-hand side of the screen, and a system of platforms and ledges. You have to hurry round these collecting fuel jets which appear to random positions

Once you have sufficient fuel you can fly around and with this strapped to your back fly off across the expanse of sea to the ledges to get these diamonds.

Of course it is not that easy. Any slight misalignment as you jump from platform to platform and simply go and down the ledge, and you're out on the drink. There's a "bullet" — whose name I don't remember at the moment. This is not deadly at very good indeed even down to the main display as you follow your death in the sea.

If you can get through this first easy 10 sections, you are faced with more difficult stages in which you have to collect enough legs of lamb to feed your volume in order to fly over to the diamonds. I don't think I've seen a better game for the ZX81.

Rocketman costs £5.95 from 81 Software Farm, 388 Woodlands Road, Gillingham, Kent ME8 2JQ.

ZOR J. TH Canada

I really am being exact this time. Another bit set game to review and a very good one too. It's the traditional invaders type game, but the graphics are excellent.

The game can be played with either one or two players and you have five lives per game. The editor entered a little slow at the start of the game, but it speeds up as you progress. The main theme is particularly off-put to let as they stay above the top of the screen. The only time I successfully destroyed one was while three others were dropping off an alien to reinforce the attack on my defences. There are five alien worth four 10 up to 50 points each. *Mothership* are a good watching job 100 or more points.

As I have already mentioned the graphics display is very good indeed. Not only are the aliens nicely designed but the movement and response are good too. Your defences last some months of each thing based to good effect.

ZOR is an excellent programme and must rank very high in the ZX81 hall of fame. ZOR's name / TEL: 905-658-4418, Stratford, Ontario, Canada N5A 6T2.

Codescan Codran Software

Codescan offers a quick and easy method of entering and checking machine code, and will be of interest to those ZX81 users who write complete programs, or subroutines, in machine code.

During use the screen displays the Codescan operating commands, together with a window showing 24 octa-digits and their hexadecimal equivalents, with a cursor pointing to one of the addresses and the contents of the A, BC, DE, and H, registers. The window can

be scrolled up or down, and the cursor pointed quickly to any desired address, to enable machine code to be readily seen, changed and edited. The display and handling methods are excellent in this respect and make Codescan a very easy-to-use program.

The program throughout, is on user friendliness. It comes complete with a clearly written instruction booklet, which not only forms an example program, through which the reader is taken, step by step, as an introduction to the facilities offered by Codescan. The program enables a user to NAME TOP in the Z80 L, and so before loading the program, NAME TOP must be loaded.

Apparently Codescan was developed by Ceran Software as an aid to their own program editor, as mentioned in the very extensive to my ZX81 programmer writing in machine code.

A useful and well-presented package. *Codescan* is at 81 Software Farm, 388 Woodlands Road, Gillingham, Kent ME8 2JQ.

Poolster Treble Chance Niagara Software

Poolster Treble Chance is a football pools forecasting program for the ZX81.

It does not rely on team form to make predictions, but operates on affinity between numbers, the theory being that some pairs of numbers are more compatible than others.

The program incorporates a data base of score sheet results from 810 league seasons in 1982/84. Programmers claim that weekly updating of the data is not likely to enhance the overall predictive ability of the program. Therefore you do not have to enter any weekly goal results.

The program aims to produce the 18 most likely score sheets, using two sets of data: a priority table of numbers ranked in ascending order (which can either be random, or according to the program's built-in table, or your own, customised table) and the data base of score sheet results.

In operation, the program scans the data base for combinations requested and builds up an array of "selected" score sheet numbers, with the between numbers being resolved by the priority listing.

The program works well, and is straightforward to use, coming as it does, with a well-written instruction sheet. It has



STATACOM

Statacom Distribution Ltd,
sole UK Distributors of Datafax Hitachi 3" Disc Drives,
proudly announce their Special Christmas Offer...
The New Datafax Spectrum Disc Interface.

The Spectrum Disc Interface fits neatly into the rear expansion slot on the Spectrum 86 & High quality, gold plated, card edge D-sub connector, and will allow you full usage of the peripheral units in printers, graphics etc. It also provides a much needed update to your Spectrum 86.

The interface supports 3", 3 1/2" and 5 1/4" disc drives, HEAD FILE FILE drives, and the most advanced graphics drives.

It is capable of random access & file errors and programmes (Full 4MB).

Statacom Price £75 + VAT

As a special Christmas package Statacom offer the Hitachi 3" Single Disc Drive, complete with Power Supply Unit, Utility Disc, leads and cables plus the new interface at only **£240 + VAT**

SAKATA SCP 800 4 COLOUR PRINTERS LETTER

at £180 + VAT

Prints and Plots using 4 colour pens on PLAIN PAPER. It takes also all any thickness of paper, 14" x 22" 10 - 120" or continuous paper, Area 4" x 6 1/2" - 14" x 14" size.

Standard Operation, as well as a special interface (I.T.L. level) with the option of a 2571 JC adapter.

Business the
Complete the
order by the
Christmas Eve



Name _____

Address _____

Tel _____

Please tick requirements as follows

- Full Brochure Pack
- Dealer Information
- 3" Tech Details
- Interface Details

*Have a Happy Christmas
with Statacom*

GENEROUS DEALER TERMS AVAILABLE

STATACOM

18 GROVE ROAD, SUTTON,
SURREY Telephone 01 661-2266

Haunted House

Play P Chauhan's game — if you can — and really give yourself the shivers.

OK, So I did say there was no such thing as a ghost!

OK, So I do agree to spend the night in the infamous Brown Manor

OK, Saying HELLO!

I'm stuck in the middle of rooms with no way of seeing where I go, all I have is a room that they will illuminate the whole house briefly and two ghosts which I must get past

The damn ghosts will chase me as soon as they catch me and are in the way of the exit, perhaps I can lure them out of the way... If only I can remember the right way to go!

Oh I got all the the old codes will only stand 5 minutes before I join the ranks of the undead so what else can I say but HELPPPPPP!

```

1 REM *****
  WUNDERLICH: CHARACTERS
  Here entered in
  GRAPHICS mode:
  *****
2 GO SUB 3000
30 BORDER 0: PAPER 0: INK 2: C
  0
30 PRINT AT 3,10: INK 0: PAPER
  0: "HAUNTED HOUSE" AT 5,10: PAPER
  0: "BY P. CHAUHAN": BEEP (2,0)
  BEEP (3,12): BEEP (3,14): BEEP (2,
  12): BEEP (3,10): BEEP (2,12)
30 PRINT AT 17,4: FLASH 1: "Pre
  ss any key"
40 PAUSE 0: BEEP (2,20) CLR
50 PRINT IN: 0: FLASH 1: AT 0,
  0: "INSTRUCTIONS"
60 PRINT 1: PRINT IN: 0: "You
  are in a haunted house": PRINT
  IN: 0: "and you have to get to 1
  to get it."
70 PRINT IN: 4: "There are 2 g
  hosts lurking about": PRINT IN:
  4: "and if you see you they will
  chase 0"
80 PRINT IN: 0: "If they catch
  me then you will": PRINT IN:
  0: "lose a life."
90 PRINT IN: 0: "To make it ha
  rder the maze will be invisible
  at times."
90 PRINT AT 10,0: "NEXT BOTH
  E START'S PRINT AT 18,0: INK 0:
  0: "NEXT"
100 PRINT AT 21,1: INK 0: FLAS
  H 1: "Press any key"
110 PAUSE 0: BEEP (2,20) CLR
120 PRINT AT 3,11: INK 0: FLASH
  1: "HELPPPPPP"

```



```

260 PRINT AT 14,0, "Be 11-14 he
  1 3 is pressed then you can't PR
IMP" 210 GOTO 260 above you are in
the maze."

```

```

270 PRINT "Are 21 you can only
press key 0 or 1 PRINT Ine 0:
lines go don't waste it."

```

```

280 PRINT AT 20,24, "FLAG is 1"
  290 GOTO 260

```

```

300 PAUSE 0: BEEP -3,20: GOTO
  310 DIM A$(20,20)

```

```

320 LET A$(1,1)=" "

```

```

330 LET A$(1,2)=" "

```

```

340 LET A$(1,3)=" "

```

```

350 LET A$(1,4)=" "

```

```

360 LET A$(1,5)=" "

```

```

370 LET A$(1,6)=" "

```

```

380 LET A$(1,7)=" "

```

```

390 LET A$(1,8)=" "

```

```

400 LET A$(1,9)=" "

```

```

410 LET A$(1,10)=" "

```

```

420 LET A$(1,11)=" "

```

```

430 LET A$(1,12)=" "

```

```

440 LET A$(1,13)=" "

```

```

450 LET A$(1,14)=" "

```

```

460 LET A$(1,15)=" "

```

```

470 LET A$(1,16)=" "

```

```

480 LET A$(1,17)=" "

```

```

490 LET A$(1,18)=" "

```

```

500 LET A$(1,19)=" "

```

```

510 LET A$(1,20)=" "

```

```

520 LET A$(2,1)=" "

```

```

530 LET A$(2,2)=" "

```

```

540 LET A$(2,3)=" "

```

```

550 LET A$(2,4)=" "

```

```

560 LET A$(2,5)=" "

```

```

570 PRINT "Are 21 14ARITEL MEAT
  1: PRINT AT 0,260"THEISAT 9,270"
  1ACE"1 PRINT AT 0,01"Q"1 POP T=0
  TO 250" NEXT T: GOTO 1 PRINT "
  ARE T=0 TO 260 PRINT "Ine 0" "
  ARE"1 NEXT T

```

```

580 PRINT AT 0,260: BEEP"1AT 0,0
  0"1"NEXT"1AT 10,00"1AT 10,20"1"
  1"1"

```

```

590 PRINT AT 1,0"1"1 PRINT AT
  10,24"1"

```

```

600 PRINT AT 0,20"1"1"1"1AT 1,
  20"1"

```

```

610 LET A$(0,0)

```

```

620 LET A$(0,1)

```

```

630 IF INKEY$="0" THEN GOTO 640

```

```

640 IF INKEY$="0" AND A$(0,1)=0
  0 THEN LET A$(0,1)=BEEP -0.5,
  10: IF A$(0,1) AND A$(0,2) THEN GOTO 1
  640

```

```

640 IF INKEY$="0" AND A$(0,1)=0
  0 THEN LET A$(0,1)=BEEP -0.5,
  10

```

```

650 IF INKEY$="1" AND A$(0,1)=0
  0 THEN LET A$(0,1)=BEEP -0.5,
  10

```

```

660 IF INKEY$="0" AND A$(0,1)=0
  0 THEN LET A$(0,1)=BEEP -0.5,
  10

```

```

670 PRINT "Are 21 14ARITEL MEAT
  1: PRINT AT 0,260"THEISAT 9,270"
  1ACE"1 PRINT AT 0,01"Q"1 POP T=0
  TO 250" NEXT T: GOTO 1 PRINT "
  ARE T=0 TO 260 PRINT "Ine 0" "
  ARE"1 NEXT T

```

```

680 PRINT AT 0,260: BEEP"1AT 0,0
  0"1"NEXT"1AT 10,00"1AT 10,20"1"
  1"1"

```

```

690 PRINT AT 1,0"1"1 PRINT AT
  10,24"1"

```

```

700 PRINT AT 0,20"1"1"1"1AT 1,
  20"1"

```

```

710 LET A$(0,0)

```

```

720 LET A$(0,1)

```

```

730 IF INKEY$="0" THEN GOTO 740

```

```

740 IF INKEY$="0" AND A$(0,1)=0
  0 THEN LET A$(0,1)=BEEP -0.5,
  10: IF A$(0,1) AND A$(0,2) THEN GOTO 1
  740

```

```

740 IF INKEY$="0" AND A$(0,1)=0
  0 THEN LET A$(0,1)=BEEP -0.5,
  10

```

```

750 IF INKEY$="1" AND A$(0,1)=0
  0 THEN LET A$(0,1)=BEEP -0.5,
  10

```

```

760 IF INKEY$="0" AND A$(0,1)=0
  0 THEN LET A$(0,1)=BEEP -0.5,
  10

```

```

770 PRINT "Are 21 14ARITEL MEAT
  1: PRINT AT 0,260"THEISAT 9,270"
  1ACE"1 PRINT AT 0,01"Q"1 POP T=0
  TO 250" NEXT T: GOTO 1 PRINT "
  ARE T=0 TO 260 PRINT "Ine 0" "
  ARE"1 NEXT T

```

```

780 PRINT AT 0,260: BEEP"1AT 0,0
  0"1"NEXT"1AT 10,00"1AT 10,20"1"
  1"1"

```

```

790 PRINT AT 1,0"1"1 PRINT AT
  10,24"1"

```

```

800 PRINT AT 0,20"1"1"1"1AT 1,
  20"1"

```

```

810 LET A$(0,0)

```

```

820 LET A$(0,1)

```

```

830 IF INKEY$="0" THEN GOTO 840

```

```

1410 IF " " THEN LET x=0
1420 IF INT (RND*(20-1)+1) AND 50
<0.5) THEN LET y=1
1430 IF INT (RND*(20-1)+1) AND 50
<0.5) THEN LET y=0
1440 PRINT AT 0,0:INK 0;" "
1450 IF x=0 AND y=0 THEN LET x=
0-1:LET y=0:LET x=0:LET y=0
<1:LET x=0:LET y=0:LET x=0:LET y=0
1460 GO TO 1410
1470 CLR : PRINT AT 1,10:INK 0
PAPER 1:FLASH 1:"WELL DONE!"
1480 FOR P=0 TO 20:REPEAT 2,PI NEXT P
1490 PRINT : PRINT INK 0;"READY?"
1500 IF NOT NOW I GET YOU":PP
END : PRINT INK 0;"END" SO IT
AGAIN,PROVE HE WPMO"
1510 PRINT : PRINT INK 0;"1,5
1"Round Another Game"
1520 PRINT AT 0,10:"(Y/N)"
1530 IF INKEY="" OR INKEY="Y"
THEN CLR : GO TO 1410
1540 IF INKEY="N" OR INKEY="M"
THEN CLR : PRINT AT 10,21:INK
0:"HOPE YOU ENJOYED THE GAME"
FOR P=0 TO 5:STEP -1:REPEAT 4,P
:PRINT " "
NEXT P TO 1540

```

```

1550 CLR : PRINT AT 0,1:INK 0:
PAPER 0:"ROPP, YOU LOST ALL YOUR
LIFE!"
1560 REPEAT 5,14:REPEAT 5,14:REPE
T 5,14:REPEAT 5,14:REPEAT 5,14
1570 PRINT AT 0,0:"BUT YOU COULD
STILL HAVE ANOTHER".PRINT : PR
INT " " SO IF YOU WANT TO."
1580 PRINT INK 0;"10,100"
1590 IF INKEY="" THEN GO TO 15
40
1600 IF INKEY="" OR INKEY="Y"
THEN CLR : GO TO 1550
1610 IF INKEY="N" OR INKEY="M"
THEN GO TO 1520
1620 GO TO 1540
1630 FOR N=0 TO 7
1640 READ A:POKE 160+N,A: N
END M
1650 DATA 60,126,124,219,250,250
,250,219
1660 FOR N=0 TO 7
1670 READ C:POKE 160+N,C: N
END M
1680 DATA 24,24,126,90,24,60,30,
100
1690 RETURN

```

Paint pictures on your television screen

WITH THE

The RD Digital

TRACER



- CREATE LIQUID GRAPHIC DESIGNS QUICKLY AND ACCURATELY
- TRANSFER MAPS, NEWSPAPERS OR TEXT BOOK ILLUSTRATIONS
- USE COMPUTER GRAPHICS IN YOUR PROJECTS, REPORTS, LECTURES AND PRESENTATIONS



Sure-Mat Limited
FREEPOST
Weyfax Garden City
Weymouth, Dorset DT98 3JH
Telephone (01305) 36651

Convert your Sanyo Microsystem own digital penfont

Without complicated programming you can paint anything quickly onto your TV screen. You can draw lines of varying thickness. People of colour or shading at a stroke and give text emphasis. Then you can enlarge or reduce your picture. Text is spaced down or underlined at three stages. You convert it to B&W or cassette or microfilm. The Tracer contains complete with software cassette. Record your end modified compatible with 286 Spectrum, BBC B, Modelm are also compatible.

Sure-Mat Limited FREEPOST

Weyfax Garden City Weymouth, Dorset DT98 3JH

I wish to buy:

1 PC Digit Tracer (FREEPOST)

2) 100 50000 + 100 50000 + 100 50000 + 100 50000

3) 100 50000 + 100 50000 + 100 50000 + 100 50000

4) 100 50000 + 100 50000 + 100 50000 + 100 50000

5) 100 50000 + 100 50000 + 100 50000 + 100 50000

6) 100 50000 + 100 50000 + 100 50000 + 100 50000

7) 100 50000 + 100 50000 + 100 50000 + 100 50000

8) 100 50000 + 100 50000 + 100 50000 + 100 50000

9) 100 50000 + 100 50000 + 100 50000 + 100 50000

10) 100 50000 + 100 50000 + 100 50000 + 100 50000

Name _____

Address _____

Postcode _____

Portability 3

Peter Moore in conjunction with Newtech (Micro) Developments Ltd. describes the design and construction of an RS232 interface for the Spectrum/ZX81

In this issue we bring you an RS232 serial input port and a 16 pin parallel output port. The RS232 port has a range of baud rates which can be selected for data transmission and reception. It can be used to drive a printer with an RS232 input or to enable your computer to communicate with other computers etc.

An eight bit output which can be used to drive a Centronics parallel printer is also provided on the board.

The problem — TTL signal levels

The TTL standard requires a signal of at least 3.5 volts for logic 1 and not more than 0.7 volts for logic 0 at the point of origin. This is fine where signals are only taken over short distances, but when a signal is to be taken over any distance (by cable) a drop in voltage will be experienced. In addition the inherent capacitance of a length of cable can be sufficient to impede the very rapid cycling of a high frequency signal. Connector pinouts with a serial input generally expect a logic 0 signal of less than -12 volts and a logic 1 signal of at least +12 volts. When driven by a TTL signal they will tend to make printing errors.

The answer — RS232 signal levels

The RS232 standard specifies that at the point of origin, a logic 1 signal will be +12 volts and a logic 0 signal will be -12 volts. A printer receiving an RS232 signal, however, does not look for + and - 12 volts. It responds to the Greater Half (GND) pinout as logic 1 voltage of -0.5 volts or less as logic 0 and +3 volts or more as logic 1. So long as, by the time the signal reaches the printer, these principles with these requirements, the printer will receive and print the data

without corruption (ie printing errors). The RS232 standard enables larger printer cables to be used, since a much greater voltage drop is allowable with an RS232 signal than with a TTL signal. In addition the higher voltages used by the RS232 standard diminish the effect of interlead capacitance.

Unlike many other commercially available RS232 interfaces for the ZX81 and Spectrum, the important attempt to meet the RS232 standard by supplying -0.5 volts for logic 0 and +0.5 volts for logic 1. The actual signal levels for similar voltages to be catered for

Construction

All the components used in this project are mounted on a single-sided Printed Circuit Board (PCB). Look at Fig 2, this is the PCB overlay which shows what each component is doing.

NOTE: First there are three links under IC1. You will probably find it easier to solder

these onto the copper side of the PCB using insulated wire. You should also use insulated wire where there is any possibility that a link may short to another component. The two links next to IC4 are used to set the baud rate (ie number of bits per second) of the RS232 input and output ports. **Do not solder these on yet, they are dealt with later on.**

Take care when soldering the flying leads (links between IC1, IC3 and IC6) use insulated wire as they carry +12 volts which must not be allowed to come in to contact with any other components leads or PCB tracks.

Apart from the four links next to IC4, there are three links to be soldered, solder these in first.

Next solder in the IC sockets, and after that, subsequently they too solder in the boards to bridge across any of the tracks on the PCB. Be very careful when carrying the 40 pin socket for IC1, making sure that all 40 pins have come through their holes before soldering any of them.

Solder the voltage regulator

reg 1 in position. The large metal and plastic cover components for these leads. It must be soldered the right way round. Mount it so the flat silvered side faces SW (See Fig 2).

IC1 and IC2 are miniature electrolytic capacitors. These small, round block components must be mounted the right way round. Their leads will be marked + and - as shown in a sketch (Fig 1) to make sure you have them the right way round before soldering them in. IC3 and IC4 are 16 pin micro capacitors. These flat, dark brown components can be mounted either way round.

IC5 is a 220 pF electrolytic capacitor. It must be mounted the right way round. Use IC1 and IC2 as leads will be marked the positive (+) lead is the one nearest IC1.

Capacitors IC6, IC7 and IC8 are 1 uF components (the ones marked in the list are bright orange) solder them in the positions shown in Fig 1. They can be mounted either way round.

Resistor R1 is a small 10k resistor component with coloured bands




Fig 1 PCB overlay

Brown, Black, Blue, RD has red copper bands. Brown, Black, Red, RD is marked Orange, Orange, Brown. Solder these wires to the three correct positions on the PCB. They can be resoldered either way round.

Diodes D1 and D2 are tiny, green disc components with a black band near one lead, the band marks the Cathode (or anode) — (lead D1 is located at the top of IC, the Cathode is the lead furthest away from IC). D2 is located near to IC8, its Cathode is the lead furthest away from IC8. Solder in these two diodes making sure you have them the right way round.

Transistor TR1 is a small three-terminal component in a black plastic case (See Fig 1). Its leads are labelled E (Emitter), B (Base) and C (Collector). Fig 2 shows the connections to TR1. You must make sure that you mount this component the right way round. Take care not to allow TR1's leads to short against each other.

New solder in crystal K1. This is a larger component with two leads which can be resoldered either way round.

Finally, solder in the three, five-way 0.1" PC plugs PL1, PL2 and PL3.

Setting the Baud Rate

There are pairs for four links on IC4. These are used to select



Fig 2

Baud rate	B0	B1	B2	B3
30	0	1	0	0
75	0	1	0	1
150	0	1	1	1
300	0	1	1	0
600	1	0	1	1
1200	1	0	1	0
2400	1	1	1	0
4800	1	1	0	1
9600	0	0	0	1

Table 1

the baud rate at which the RS232 interface will receive and transmit data. By covering the BE, B1, B2 and B3 outputs of IC4 to logic 0 (GND) or logic 1 (in the case of 000 = 9600).

In Fig 1, three four links are shown connected to give a rate of 1200 Baud. Table 1 gives the connections for alternative Baud rates. Compare Fig 2 and Table 1 to see how the different Baud rates are achieved. 2400 Baud is quite fast enough for most purposes. Select the rate you require (this might entail checking your printer's manual) and solder four links accordingly.

Programming the RS232 Board

The RS232 Board connects to the main interface board (specified in the Aug/Sept issue of ZX Computing) via a 14 way DIP jumper block. This main interface board allows up to four peripheral boards to be added to your computer and used at the same time.

Depending on which of the four DIP switches on the main board is used, each of the pins on the RS232 Board (Serial input and output, UART status and 8 bit parallel output) will have a number to identify it. (See table 2).

It is very important to ensure that the DIP jumper plugs are in the same way round on each board, the way at the top end of the socket on the main interface board must be the way at the top end of 96A on the RS232 board.

We will assume that the DIP jumper block connects the parallel interface board to main interface DIP socket 1.

There are two status flags associated with IC3. These are UART Data Available (DAM) (Transceiver Buffer Empty) and GAV is connected to computer data bus line D0 and DAM is connected to D7. These are tri-state lines which are only enabled when a status read is made by the computer. If GAV=1, new data has been received by the UART and it will be 1. If the UART transmitter buffer is empty, otherwise if the UART is in the process of transmitting, the transmitter sent to 0. DAM will be 0.

In the following program, the numbers 200 and 204 refer to main interface DIP socket 1. For DIP sockets 2, 3 and 4, refer to table 2 since these numbers will have to be changed.

Main Interface Socket	Device No. Serial Port	Status/Parallel Port
1	204	200
2	201	203
3	101	107
4	200	202

Table 2

Spectrum programming

Transmitting data

- ```

10 OUT 96467:200:00M
 select UART status 0 for
 output port
20 LET A=965475:IF A
 204 THEN GO TO 30
 REM:log of the UART has
 been obtained transmitting a
 previous byte of data
30 OUT 96477:204:00M
 select RS232 input pins
40 OUT 96471:1:data to be
 output

```

If A in line 16 equals 204 or 200, then the UART is ready to transmit a further byte of data (204 if GAV=1, 204 if DAM=1).

### Receiving data

- ```

20 OUT 96467:200:00M
   select UART status 0 for
   parallel output port
30 LET A=0:GOTO 40:IF NOT
   (A=0)=A: THEN GO TO
   30: REM go to 30 if
   DAM=0 = no new data
   has been received
40 OUT 96477:200:LET
   A:=96471:00M:A
   holds the data received by
   the UART

```

8 Bit Parallel Output Port

- ```

10 OUT 96477:200:OUT
 96471:1:data to be
 output

```

## ZX81 programming

Because the ZX81 has no IN and OUT commands, the short hexadecimal machine code in article 1 should be used in conjunction with the following:

### Transmitting data

- ```

10 POKE 16516:200
10 LET A=USR16516:LA
   returns loading UART
   status
20 IF A:204 THEN GOTO 10
20 POKE 16520:204
20 POKE 16520:1:data to be
   output
20 LET A=USR16520

```

Lines 10 and 20 check that the UART is not still transmitting any previous data.

Receiving data

- ```

40 POKE 16516:200
40 LET A=USR16516:LA
 returns loading UART
 status
60 IF NOT (A=0)=A: THEN
 GOTO 40: no new data
 received yet
60 POKE 16516:204
60 LET A=USR16516:LA
 holds the data just
 received

```

### 8 Bit Parallel Output Port

- ```

10 POKE 16520:200
10 POKE 16520:1:data to be
   output
20 LET A=USR16520

```

Connecting the RS232 interface to other equipment

PL2 is the connector used for serial data input and output signals. To check that your RS232 board is working properly, connect it up to your computer (with the computer switched OFF) using the RS-Serial (D0) and D1 Serial to RS-232 (D0) directly together. If you now output data to the serial output port you should find that it appears on the serial input port.

Remove the link between D0 and D1.

An RS232 serial output line is generally referred to as TX (Transmitted data) while an input line is RX (Received data). If you wish to connect your RS232 board to a printer, you should connect D0 on your board to the RX connection on your printer. D0 (D0) must also be connected (D0) is taken to PL2 along with D0 and D1.

You must bear in mind that your computer use output data through the RS232 interface usually faster than your printer can print it. Thus, computer printers incorporate a buffer which stores the characters sent to the printer. If your printer is a white line at a time, rather than one character at a




Fig. 6a




Fig. 6b




Fig. 7




Fig. 6c

Buylines

A complete kit of parts for the PIC032 board is available from Newtek (Retail) Development for £29.95 (all inclusive). DIP jumper cables are not included in the kit and must be purchased separately. They cost £3.95. Newtek also supply kits for the main interface board (40p base level) for £11.95, the parallel input/output board (30p base level), £14.95, LED board for use with the parallel input/output board (£2.50) and the relay board, also for use with the parallel input board (£11.95).

Further details are available from them at 1, Courtenay Road, Newton Abbot, Devon TQ12 2JA. Tel: (08284) 62929.




Fig. 8

Datapen**A QUALITY LIGHTPEN
for the SPECTRUM computer**

...the Datapen lightpen is a high quality, precision instrument which is designed to be used with the Spectrum computer. It is a unique design which allows you to interact with the computer in a natural and intuitive way. The Datapen is made of high quality materials and is built to last. It is a must-have accessory for any Spectrum computer owner.

PLUS 3 SOFTWARE PROGRAMS

- Simulation: Simulate your own program (BASIC games made etc.)
- User defined graphics and drawing program
- Super Robot, an our drawing program on frustrated! (Free school cartoon photographs)

Send cheque for £2 for 10% order form to:
DATAPEN MICROTECHNOLOGY LIMITED,
 100, Kingswood Road, Gillingham, Kent, ME13 9JN.
 Please include SAE for Datapen and 3 software programs.
 Lightpen and software are also available for the Dragon 64 and Commodore 64.

LIGHT TO THE POINT

DRAGON TANDY
£11.50
SPECTRUM
COMMODORE 64
£17.25
 Includes
 60 DAY STORAGE GUARANTEE

Discover the exciting world of creating your own graphics on screen. The Trojan Light Pen will draw basic, complex lines, freehand pictures, semi-circles, ellipses, arcs, full screen freely.

Also H. P. Perseus in any of 4 colours for the Dragon/Tandy, Spectrum for the Spectrum and 11 colours for the Commodore 64.

For educational or business use
TROJAN
 Micro Computer Software & Accessories
 Send cheque to:
TROJAN PRODUCTS
 160 Denby, Gainsborough, Lincolnshire LN4 1PF
 Tel: 05223 205491
 TRAVEL INQUIRIES WELCOME

University Software**UNISTAT****STATISTICAL PACKAGE**

UNISTAT is a powerful statistical package which can be used on a wide range of computers. It is a unique design which allows you to interact with the computer in a natural and intuitive way. The package includes a wide range of statistical tests and procedures, and is easy to use and understand. It is a must-have software package for any university or research institution.

UNISTAT is available on a wide range of computers, including the Spectrum, Dragon, and Commodore 64. It is a powerful and flexible package which can be used for a wide range of statistical analyses. It is a must-have software package for any university or research institution.

UNISTAT is a powerful and flexible package which can be used for a wide range of statistical analyses. It is a must-have software package for any university or research institution.

For more information, contact the University Software Department, University of Gillingham, Kent, ME13 9JN. Tel: 05223 205491.

UNIMAX**LINEAR PROGRAMMING PACKAGE**

UNIMAX is a powerful linear programming package which can be used on a wide range of computers. It is a unique design which allows you to interact with the computer in a natural and intuitive way. The package includes a wide range of linear programming problems and procedures, and is easy to use and understand. It is a must-have software package for any university or research institution.

UNIMAX is available on a wide range of computers, including the Spectrum, Dragon, and Commodore 64. It is a powerful and flexible package which can be used for a wide range of linear programming analyses. It is a must-have software package for any university or research institution.

For more information, contact the University Software Department, University of Gillingham, Kent, ME13 9JN. Tel: 05223 205491.

UNIMAX is a powerful and flexible package which can be used for a wide range of linear programming analyses. It is a must-have software package for any university or research institution.

For more information, contact the University Software Department, University of Gillingham, Kent, ME13 9JN. Tel: 05223 205491.

COMMODORE 64, BBC-B, 48K SPECTRUM

© Copyright by user named. All rights reserved for the writer, printer, designer, user & reader.
 All rights reserved printed out.

The Easy Way To Program Your New Computer

Tim Hartnell

There was a time I was naive enough to think people write books only because they had something worthwhile to say. Perhaps a later time in life I will understand why people write books only for other reasons, but I am grateful to say that Tim Hartnell has released "The Easy Way to Program Your New Computer," Interface Publications, for which I'm less willing to say that he hasn't already said more effectively many times before.

As the title suggests the book is not intended for any computer in particular rather it is a general approach to the BASIC language, or part of it for although many of BASIC's commands are covered some are generally written which makes it rather surprising to find out later that their use is highly recommended. The approach of the text to each command explained can be said to be faulted: the method of description and example is sound and the use of the language well. To make complex subjects easy to understand, games or though, I think that there is more logic in programs than "THE US OF A, No. 1" to explain a FOR...NEXT loop. It confused me too.

Instead of being close to two hundred pages of useful advice on understanding programming the book is half of that with a further one hundred pages of interesting but mostly useless info on computers. The lack of an index makes finding the worthy parts even harder. And that is the real pity for with over 30 books already in his credit the author has many useful things to say about computers and programming I only wish he had written one he had enough to write one book.

"The Easy Way To Program Your New Computer" is written by Tim Hartnell and published by Interface.

ISBN 0 907043 02 0

Understanding Computer Graphics

Judy Tatchell
Les Howarth

There can be few areas, if any, of computer development which applications are so widespread as computer graphics. Yet, perhaps it is because of the advancement in

Bookshelf

Patrick Cain settles down a good (?) read.

the area that we consider are unaware of many of the applications. As everybody knows, the Walt Disney studios used computer graphics extensively in the film "Tron". Computer graphics are used more and more in film production, as they are in television, cartoons, painting, sculpture and other art forms, but their applications extend far beyond these. Readers of "Understanding Computer Graphics" by Judy Tatchell and Les Howarth can readily see in the picture about a variety of applications.

As with the rest of the books in the series the publishers have gone to some length to support the text with many bright illustrations. Indeed the format resembles a comic book with illustrations and text being freely mixed and the inclusion of line art being worth a thousand words in several places. Also many, many complicated notions are explained in a fashion that is equally suitable for younger and older users. The discussion throughout the book is very technical being more concerned with an analysis of computer graphics than with programming the visual application. By the time the reader has gone through the 48 pages he will be aware of a number of everyday uses and the principles behind them.

The book is a worthwhile read at a number of levels. It should first be viewed as just the ever recurring question: "what do computers really do?" It will give computer users an appreciation of other computing areas and it may serve to whet the appetite for further knowledge gained only slightly by the few program examples at the back.

What the book did for me was to quickly show me a picture of a lot of areas of application. I may have missed altogether because I would never have been sufficiently naive to spend sufficient time to look. And for that alone I owe a valuable nod.

"Understanding Computer Graphics" is written by J. Tatchell and L. Howarth.

ISBN 0 90820 730 0



Programming With Graphics

Garry Marshall

"For my money the graphics capability of a microcomputer is usually its most attractive feature" — Garry Marshall. I would put my money with Mr Marshall as far as the most attractive features of a microcomputer goes. Most people — I would guess — are inclined to have something to be graphics oriented. It would follow that a book dedicated to graphics programming is likely to be of interest to many, perhaps too many for the text is not specific to any one machine, though given that there is almost total lack of standardisation in the way that graphics facilities are provided by microcomputers, it then the "great advantage over most books on this subject of being machine independent" an advantage again to Mr Marshall.

than the reader?

A strange contradiction, but also being an old cynic. Can't get inside further and see what the book is about.

Chapters 1 and 2 introduce and explain how the three graphics display types — block, pixel and bitgraphics — are produced and what their requirements on the computer system are. These chapters are dedicated to such topics of display, graphics, and video. Chapters 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, 101, 102, 103, 104, 105, 106, 107, 108, 109, 110, 111, 112, 113, 114, 115, 116, 117, 118, 119, 120, 121, 122, 123, 124, 125, 126, 127, 128, 129, 130, 131, 132, 133, 134, 135, 136, 137, 138, 139, 140, 141, 142, 143, 144, 145, 146, 147, 148, 149, 150, 151, 152, 153, 154, 155, 156, 157, 158, 159, 160, 161, 162, 163, 164, 165, 166, 167, 168, 169, 170, 171, 172, 173, 174, 175, 176, 177, 178, 179, 180, 181, 182, 183, 184, 185, 186, 187, 188, 189, 190, 191, 192, 193, 194, 195, 196, 197, 198, 199, 200, 201, 202, 203, 204, 205, 206, 207, 208, 209, 210, 211, 212, 213, 214, 215, 216, 217, 218, 219, 220, 221, 222, 223, 224, 225, 226, 227, 228, 229, 230, 231, 232, 233, 234, 235, 236, 237, 238, 239, 240, 241, 242, 243, 244, 245, 246, 247, 248, 249, 250, 251, 252, 253, 254, 255, 256, 257, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268, 269, 270, 271, 272, 273, 274, 275, 276, 277, 278, 279, 280, 281, 282, 283, 284, 285, 286, 287, 288, 289, 290, 291, 292, 293, 294, 295, 296, 297, 298, 299, 300, 301, 302, 303, 304, 305, 306, 307, 308, 309, 310, 311, 312, 313, 314, 315, 316, 317, 318, 319, 320, 321, 322, 323, 324, 325, 326, 327, 328, 329, 330, 331, 332, 333, 334, 335, 336, 337, 338, 339, 340, 341, 342, 343, 344, 345, 346, 347, 348, 349, 350, 351, 352, 353, 354, 355, 356, 357, 358, 359, 360, 361, 362, 363, 364, 365, 366, 367, 368, 369, 370, 371, 372, 373, 374, 375, 376, 377, 378, 379, 380, 381, 382, 383, 384, 385, 386, 387, 388, 389, 390, 391, 392, 393, 394, 395, 396, 397, 398, 399, 400, 401, 402, 403, 404, 405, 406, 407, 408, 409, 410, 411, 412, 413, 414, 415, 416, 417, 418, 419, 420, 421, 422, 423, 424, 425, 426, 427, 428, 429, 430, 431, 432, 433, 434, 435, 436, 437, 438, 439, 440, 441, 442, 443, 444, 445, 446, 447, 448, 449, 450, 451, 452, 453, 454, 455, 456, 457, 458, 459, 460, 461, 462, 463, 464, 465, 466, 467, 468, 469, 470, 471, 472, 473, 474, 475, 476, 477, 478, 479, 480, 481, 482, 483, 484, 485, 486, 487, 488, 489, 490, 491, 492, 493, 494, 495, 496, 497, 498, 499, 500, 501, 502, 503, 504, 505, 506, 507, 508, 509, 510, 511, 512, 513, 514, 515, 516, 517, 518, 519, 520, 521, 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 534, 535, 536, 537, 538, 539, 540, 541, 542, 543, 544, 545, 546, 547, 548, 549, 550, 551, 552, 553, 554, 555, 556, 557, 558, 559, 560, 561, 562, 563, 564, 565, 566, 567, 568, 569, 570, 571, 572, 573, 574, 575, 576, 577, 578, 579, 580, 581, 582, 583, 584, 585, 586, 587, 588, 589, 590, 591, 592, 593, 594, 595, 596, 597, 598, 599, 600, 601, 602, 603, 604, 605, 606, 607, 608, 609, 610, 611, 612, 613, 614, 615, 616, 617, 618, 619, 620, 621, 622, 623, 624, 625, 626, 627, 628, 629, 630, 631, 632, 633, 634, 635, 636, 637, 638, 639, 640, 641, 642, 643, 644, 645, 646, 647, 648, 649, 650, 651, 652, 653, 654, 655, 656, 657, 658, 659, 660, 661, 662, 663, 664, 665, 666, 667, 668, 669, 670, 671, 672, 673, 674, 675, 676, 677, 678, 679, 680, 681, 682, 683, 684, 685, 686, 687, 688, 689, 690, 691, 692, 693, 694, 695, 696, 697, 698, 699, 700, 701, 702, 703, 704, 705, 706, 707, 708, 709, 710, 711, 712, 713, 714, 715, 716, 717, 718, 719, 720, 721, 722, 723, 724, 725, 726, 727, 728, 729, 730, 731, 732, 733, 734, 735, 736, 737, 738, 739, 740, 741, 742, 743, 744, 745, 746, 747, 748, 749, 750, 751, 752, 753, 754, 755, 756, 757, 758, 759, 760, 761, 762, 763, 764, 765, 766, 767, 768, 769, 770, 771, 772, 773, 774, 775, 776, 777, 778, 779, 780, 781, 782, 783, 784, 785, 786, 787, 788, 789, 790, 791, 792, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 804, 805, 806, 807, 808, 809, 810, 811, 812, 813, 814, 815, 816, 817, 818, 819, 820, 821, 822, 823, 824, 825, 826, 827, 828, 829, 830, 831, 832, 833, 834, 835, 836, 837, 838, 839, 840, 841, 842, 843, 844, 845, 846, 847, 848, 849, 850, 851, 852, 853, 854, 855, 856, 857, 858, 859, 860, 861, 862, 863, 864, 865, 866, 867, 868, 869, 870, 871, 872, 873, 874, 875, 876, 877, 878, 879, 880, 881, 882, 883, 884, 885, 886, 887, 888, 889, 890, 891, 892, 893, 894, 895, 896, 897, 898, 899, 900, 901, 902, 903, 904, 905, 906, 907, 908, 909, 910, 911, 912, 913, 914, 915, 916, 917, 918, 919, 920, 921, 922, 923, 924, 925, 926, 927, 928, 929, 930, 931, 932, 933, 934, 935, 936, 937, 938, 939, 940, 941, 942, 943, 944, 945, 946, 947, 948, 949, 950, 951, 952, 953, 954, 955, 956, 957, 958, 959, 960, 961, 962, 963, 964, 965, 966, 967, 968, 969, 970, 971, 972, 973, 974, 975, 976, 977, 978, 979, 980, 981, 982, 983, 984, 985, 986, 987, 988, 989, 990, 991, 992, 993, 994, 995, 996, 997, 998, 999, 1000.

I found the read through the 180 or so pages enjoyable and enjoyable and a lot of light was shed on things I had never before really questioned. The text was slightly written and should offer little problems to the

reader. Each chapter was concluded by a summary. The author has been aware of the subjective nature of the subject and has made suggestions on what readers in a familiar way might be saved technical level necessary.

Unfortunately, in some of an example that lets the graphics facilities present an image that potential readers might best be served by a book aimed at their own machine.

Programming With Graphics is published by Osborne written by Gary Marshall and costs \$8.95.

Osborne Series

From Osborne Computer Books, a reader interested in a detailed

look at a particular machine and its use will find a guide in the world of home computing.

Each of the books cost \$1.95 is printed from paper cover to paper cover with illustrations that clearly explain more otherwise complicated concepts.

The series ranges from a "Guide to Computers" to "Write Your Own Computer Program". Here is an in-depth look at three of the others.

100 Programs For The ZX Spectrum, Ian McLean and John Gordon

There was a time when virtually all computer books had titles like 100 Games For... The same thing or other I wonder what has happened to them. Has the editor decided to keep these sorts for himself now?

If he has then thank for the favour! Now that one has stepped through his net it is interesting to look at one of the more recent types like the absolute made by hand heart any reader!

"Personal Computer Weekly" said of the tape version of the book "100 programs for just over £10 means that some of the programs are remarkable". This is no less the book cost of \$8.95 (original list price). Obviously the programs haven't improved the experience of the above one still is true, but if there is an advantage to buying programs separately from the keyboard rather than from tape it is that in new users there must be some occasional step off an exception others programs. The programs are not marvelous — free, but they are interesting and they will act as building blocks or inspiration for

other programs.

Several illustrations can be given to bear 100 technically sound programs? There are ten typical sized sections: sorting games, recursion, business arithmetic, currency, maths and school, date handling, home use and an introduction to Spectrum's features. Some I thought were particularly worthwhile. Maths and that sort are standards that can be used by themselves or as part of other programs. Simpson's rule and others in the maths section are more like as much-use to most new Spectrum users as degree in mathematics. The home section turned up my pet hats, if I ever use a program for a Christmas Card I will be in no doubt.

If your need is for a large number of programs the 100 Programs for The ZX Spectrum might probably do you quite nicely. It certainly will prompt on many earlier books of that ilk. The programs are all quite short — all suitable for the ZX — but high on technique and application. Even a longer game made up other of them about once! Honestly I think that the programs some are more worthwhile than others. But as the authors point out, these are sample programs to show what a home computer can be used for.

As a guide to better programming, some I think "100 Programs for The ZX Spectrum" is good value, with the added bonus of some useful programs too.

"100 Programs for The ZX Spectrum" is written by Ian McLean and John Gordon, published by Penguin Hill International and costs \$8.95.

ISBN 0 13 434788 8

Inside The Chip M. Davies M. Wharton

An understanding of a microchip is not necessary to use a computer, but it should ensure that most computer programs have a reasonable chance of being a bit of magic takes place between most and usual. It is that the phenomenon which takes up so much of our time. Some will naturally enough have investigated the subject further than this will properly have thought the investigation too involved and commented themselves with a tagging curiosity. It is to these people that "Inside The Chip" by M. Davies and M. Wharton really reads well.

Like the other books in the series "Inside The Chip" is not intended for those who want to be a real book. As the others do it focuses on the main concepts of its subject without becoming entangled in an analysis of the practical and. The book is a course made the chip containing on the way what the chip is how it works and describing some of the amazing things it can do. The guide on the points are a technical vocabulary that may draw the readers attention to the different types of chip or whatever type is used for and what many of the programs associated with chips mean. The concept is well used.

27 pages on and the reader will have been introduced, in a simplified way, to the electronic theory, discovered how areas are designed, how they are made, the different types of chips are and requires control circuits of address and. This microprocessor's book as all dealt with in the same way. The book is concise, informative and is fun to read. Little effort is required as a result to get the far and many of those reading quite likely to be by now discovering or maybe perhaps becoming an engineer in looking to explore class.

For two is less colourful but nevertheless as interesting as it comes to terms with slightly more involved topics: Input and Output, Inside the ALU, a simple program to build, how the ALU is implemented, bits on building outputs, such as handling with the term of complicated ease as the earlier topics. Certainly not Cambridge research level yet, but sufficient information within the 48 pages to either what an engineer or satisfy a less inquisitive mind.

Given that you can't read every book, some are too long concerning, some are mostly irrelevant, some are too complex "Inside The Chip" is a type one you should read. Written by M. Davies and M. Wharton "Inside The Chip" is a book that is probably worthy of a glimpse from most people.

ISBN 0 86400 728 0

Machine Code For Beginners L. Watts M. Wharton

I wish every book on machine code that I have ever read had only 90 pages. And in the number of L. Watts and M. Wharton's "Machine Code For Beginners" another of the

Osborne computer books series. Too often these others have gone as lengthy about how numbers and binary data language and registers and so on. This book makes all of these things too, but the discussions of each are more standard and that is perhaps why it doesn't work as well as the others in the series. Machine code by its nature may require more pattern examination and a more thoughtful text. Maybe those other machine code books were longer for good reason!

Each of the other two books I have looked at in the series have dealt with topics of general interest, these subjects — the machine code and computer graphics — required a deeper look but not too specific analysis therefore the books look appropriate with the title. However, in all such complexity that any other book has made an attempt to do in an education. Machine code is being done and the level of discussion required to teach someone how to do something is far greater than that required to merely describe a subject. This has been overlooked I should think if a text that amounts to a mere description of machine code is sufficient.

The book covers a huge range through the principles of machine code, showing how to write simple programs — such as adding two numbers — to how to load and run a machine code program. Both the Z80 and the 8080 processors are covered. The designer used to describe the memory supported by the clever suggestions that are the trademark of the series are part of the material. I understand I have some ideas. The sections on PEEKING and POKEING transferring the programs, carry flags, jumping and branching, no registers and are essential to any discussion of the topic. I feel that this is just too dense to effectively explain to computers.

A study of machine code requires more than clever descriptions. Fortunately books have claimed with the help of diagrams of details giving explanations to explain to this audience and reinforced the discussion with examples. "Machine Code For Beginners" may be a fun book to read, its colourful pages may help to fill in some background, but it does not have the content of a successful Machine Code text.

"Machine Code For Beginners" is written by L. Watts and M. Wharton.

ISBN 0 86400 735 8



Blackboard

Use your TV screen as a
blackboard with
this program
from Wiltshire's
Ian Rodgers

It has produced a neat and comprehensive video on the drawing program in which the screen is treated and you check your picture as it

develops into a long program. It needs 11K because the whole screen is used.

Notes how all eight directions are provided plus clearing for the screen edge all in TWO lines — 181,170

Instructions are provided in the program and it is well worth typing in. No more messy sheets just drifting up your road!

175 FOR A=1 TO 22

180 PRINT "

145 NEXT A

150 GLOW

155 LET A=B

160 LET B=B

165 LET A=A+(A<>B AND (INKEY=B
"2" OR INKEY="3" OR INKEY="8")
)-(A<>B AND (INKEY="1" OR INKEY
="4" OR INKEY="5"))

170 LET B=B+(B<>A3 AND (INKEY=
"1" OR INKEY="2" OR INKEY="7")
)-(B<>B AND (INKEY="3" OR INKEY
="4" OR INKEY="6"))

225 IF INKEY="0" THEN LET A="

B"

230 IF INKEY="0" THEN LET A="

L"

235 IF INKEY="C" THEN GOTO 125

240 IF A="B" THEN GOTO 245

245 PLOT A,B

250 UNPLOT A,B

255 IF INKEY="2" THEN GOTO 265

260 GOTO 145

265 UNPLOT A,B

270 PLOT A,B

275 IF INKEY="2" THEN GOTO 285

280 GOTO 145

285 IF INKEY="0" THEN GOTO 300

290 IF INKEY="R" THEN GOTO 145

295 GOTO 285

5 CLR

10 PRINT "DO YOU WANT THE INST
RUCTIONS? (Y OR N)"

15 IF INKEY="Y" THEN GOTO 30

20 IF INKEY="N" THEN GOTO 120

25 GOTO 15

30 CLR

35 PRINT "1 TOP LEFT"

40 PRINT "2 TOP RIGHT"

45 PRINT "3 BOTTOM RIGHT"

50 PRINT "4 BOTTOM LEFT"

55 PRINT "5 LEFT"

60 PRINT "6 DOWN"

65 PRINT "7 UP"

70 PRINT "8 RIGHT"

75 PRINT "0 RUBOUT-FOLLOWED BY

DIRECTION KEY(0)

80 PRINT "C TO STOP RUBOUT"

85 PRINT "L TO START AGAIN"

90 PRINT "2 TO STOP CURSOR FLI

CKING... FOLLOWED BY:"

95 PRINT "5 TO STOP "

100 PRINT "R TO CONTINUE"

105 PRINT

110 PRINT "ARE YOU READY?"

115 INPUT A\$

120 LET A="L"

125 CLR

130 PAUSE

Great Games of '84

Zap-freak Jim Watson looks back at some of the best arcade games of 1984.

Well Wisher (Atari)

First a few words about the system I'm using to run these programs: an IBM Spectrum is linked to a Kempton interface with a Gemini Speech unit — How does it run beat at times, I hear you cry. Well, I got a three-way battle from Coloraid Product Services Ltd. (Shire Hall The Bards, Appleby in Westmorland, Cumbria CA10 6AN) for £12.50 and they printed & led money at the bank, but I'm too busy watching the screen to notice.

To get a good grip I use a Suncom Tac 2 to make you three more some stock (30sec — 50).

Sabra Wolf 40K

This has 8027 to be the program of the issue, why? Well what practical 40K, so fit the name left of (there is also Atari) but with 2000 locations instead of usual 1800 and it's set in a single instead of a board.

Some of these boards are really something! I loved the Hippo and the De-orientation (it's really really funny, but I could never figure them for changing £9.95 for it).

Jumping options for Kempton interface (it's done) are as possible as well as using the keyboard. Keys (28887) control left, right, down and fight. A 250000 location and a one-man controller, but every way is get used to (although I won a joystick at a small for this game). So what's it all about? You, an intrepid explorer, have to wander the forest in search of the four parts of an ancient trident emerging from the missing jungle. Many other items such as a choice game and magic rings are involved about the place and these are collected by passing over them.

The forest is filled with walls which run across the screen. Frequently all the members of the semi-illiterate maintenance to add to your problems. To defend yourself you have a bomb which gives you

your nickname (before Mrs. and your most potent enemies are the snakes).

Based on usual jumping but effectively — I liked the intro game, but it only plays once each time you get back to the main screen.

Scoring is in five bars, the standard numerical score and also a percentage of the game completed. A high score chart is not used, only the highest score of the session is kept, and no name allowed! The high score is initially set at 102278, so it takes a few plays to establish you're an A player for one player or two players playing alternately is also provided.

Attention (or should I say attention) it's a trap. Watch how you are thrown across the screen when a snake gets you! Not a game for those who play up daily.

So get it, load up and be ready to lose. Juggle, fight and certainly have a humbly great time!

TLL (Tornado Low Level)

Nice and started!

A nice flying game, but not a flight simulator. I must add, where you control which wing using Tornado fighter plane. You take the pilot on screen and the screen level dips and you is down in a sort of 3D perspective, the view to be in 3D, clearly but a little bit off-focus.

A great effect is the plane's shadow on the ground below.



to the plane's height and as your main threat of enemies when estimating your height above ground!

Your mission (biggie) is to destroy targets by flying low past them, not too close — (before you lose — danger).

I didn't really find that the joystick made the game appreciably easier, and the keys were easy to use for effective control. It is not easy, in fact quite frequently I found myself going round and round the target, but I finally got lined up and then failed to get low enough in time, so I ended up ground and round again.

A surprising game which would be fun to play, but I'm not sure I'm a fan of the looking something. Perhaps if you could have shot or bomb (the target) would have helped. (I'm serious I have not got)

Rapscallion

A nice game, this would have been called in a masterpiece. Now it is only a very good, clever game.

At the start of the game you take the role of the hero, the graphics are well done, but not outstanding. Sound is good and animation is effective, but sometimes a bit slow.

Actually it is quite addictive. You can get started quite then discover the subtleties as you progress. Found myself trying again and again, perhaps that is the result of an addictive game, may it look so easy that you know you can do better next time.

The plot is very simple. Rapscallion the hero is your enemy and he snatched your car, so and left you stranded up in the danger. The good fairy (I mean!) turns you into a bit of feathered variety and has given you a rocket. By combining a key you may transform yourself into a fly. This is needed if you get caught in the net (for instance), and changing back lets you escape a life. This is a superb touch.

Another impressive idea is that when you die — a frequent

happening at first — you are changed into a ghost and in the form to explore your former things with invisibility. To can find your quest (perhaps you have to get back to your family and press the character change key).

The game is long, and often does take a long time to play and is, I suppose for the type of game a three game action is provided. However, there is a possibility if you play for a small game then should you want you only can a handful for the cash and not the full board!

As I said, a beautiful game with many facets and I can guarantee Bug Bats for the thought which has gone into the game. Although perhaps not as graphically exciting as some other games, the many variations in play and the planning a player has to do makes it one which will last for many many seasons.

The usual keyboard or stick control of joystick options (including the usually forgotten — Pull in provided) and I found that using a joystick helped to play this game.

Highly recommended!

Jet Set Willy

Wang Miner — The Sequel

Wang Miner most certainly as good as any other, but I think, better than the original!

For anyone who has been by me in the Games department for the last year at a time, Wang Miner was written by Matthew Smith and was the first of a whole new style of game in which the player progressed through several sections of varied and wonderful characters by making carefully timed jumps from level to level, avoiding all but vicious objects.

JSW is the same in outline and again produced from the nightmare mind of Matthew. This time however, the story is a masterpiece and JSW has to put out all the greatest hits and best bits of the original to be polished.

Software Project ran a competition for the best puns to add them, how many puns had to be collected, but this has now been won — so no more puns please! For those of you who don't want to know, close your eyes when reading the next bit — there are 83 puns!

The game has many more rooms to visit (60 in all) and the same sense of humour runs through them all accompanied by a brandy version of "It was a mild man" guaranteed to drive you bonkers!



The Flucs are much harder in JMW and living is very critical indeed. Personally I found it easier to play from the keyboard rather than joystick — all the usual options for these are included.

I loved the stinky clips of other programs, the set of "Hushhush" type screens for instance. Definitely a classic threeway Bowditch character who enjoys playing games should have!

I hope that Matthew's friends find games like these used now as if it's sure they can create another whole new genre alien of games, even the alien.

LES FLUCS — PSS

More confusion for my overwhelmed keyboard!

PSS left you the aim of the game, to find and finish the Purple Pans (diamond) by controlling the "pink character". I seem to recall a similar theme in a series of films.

The problems they don't tell you how!

First you start driving a pink motor around a set of streets weaving the color cars, these are rich different buildings which you control. Once you enter one of these buildings then you become a large animated character, a cartoon.

There are eight color items to collect and use, each has a purpose but you only find out by trial and error. Also in these buildings are various characters like PC Kooler (disguised as a thief) and Inspector Claudius.

The intro is amusing but the gameplay is quite tedious — Peter Sellers would have been quite quiet not having a better idea to get on!

Great graphics, fast sound and an enjoyable and challenging game. I found no appreciable advantage by using a joystick, only convenience is provided although the keyboard game will operate with the cursor keypad variety — JDF/Protek etc. Additionally, they provide two recordings, one on each side of the tape, for keyboard or Keong soon rather than an option tape within the program.

Jack and the Beanstalk Thor

Superb cartoon graphics, the old Supercom really sends some impressive shivers.

Crash Speech saved quite a lot and very effective in this game. Some words need a lot of electronic translation, but it's an added comic dimension.

Joystick control is provided

although I admit I find a jump feature while using it — it's probably there, but the instructions don't give any clue and without it the game is near impossible. The keyboard layout is very good and I preferred to use the system.

Great presentation of the story in a scrolling redefined character set.

Colour and sound are used well and the action is fast and furious, again you have to feel your way around by experimenting, and I found this a little logical. For instance on the last screen there is an axe. If you swing by the story, the axe is used in the end to stop about the beanstalk so shouldn't be required just yet. In fact you cannot successfully climb the beanstalk until you have picked it up! Still this is a minor quibble about what is an excellent game. I also found that more than needed edge of practice to get used to as Jack is very sensitive to the keys and software and therefore I was wondering him to visit!

USA users!!!

A quick bit of info, you can now use all the US Spectrum software on your TSD2000!

By buying a Spectrum Translator cartridge from the Trouble Shooter Users Group c/o Douglas Drury 208 James St, Durham NC 27610 for \$60.00.

Meanwhile I have a good authority that JMW and Silver Mirror will work if you simply locate the code part of the tape and MANCOMB LDR "start". "start" is a number which can be found by MIRC2 on the first list of the program and writing down the number which they use in the same comment.

Review Preview

Just to be on the ball as this, yes, Daniel Bellows should be nice. First released COMBAT LYNX, I saw some screens from the new production tape and headed out.

You fly an on-screen chopper over a forest which reveals the most detailed landscape produced on the Spectrum so far. Lots of object scoring, music, weapons etc. This reworked the stuffies of the Lora with co-operation from the makers!

I trusted that this will be another number one for them and look forward to reviewing the final opinion. This batch of tapes has been low on the old Top-Ten list!

Reviews

Just a soft entry in my system. I can't do most things with it, but it is the only 300k model alternative there and so it's worth a look.

1. Precision in which covers a wide range, great choice of...
2. Capability which makes the software more and more...
3. Overall which is the final overall assessment. 100 to 5 +!

Simon Watt
Adrian, Play the game
The Green
Andy in La Zodi
Lore MS 240
03.20

PERFORMANCE 80%
CAPABILITY 100%
OVERALL ★★★★★

Bill
Vortex Software
2100 Brookside Rd
Mechanics Bldg 240
03.10

PERFORMANCE 80%
CAPABILITY 85%
OVERALL ★★★★★

Supposition
Big Boy Ltd
Muller House
Canning Place
London
E1 3B

PERFORMANCE 80%
CAPABILITY 80%
OVERALL ★★★★★

Jack and the Beanstalk
The Computer Software Co. Ltd

Crash Inc, 84
Lambert Ln, 11A
E1 3B

PERFORMANCE 80%
CAPABILITY 80%
OVERALL ★★★★★

Jon Ben Willy
Software 71, Gents Ln
East Street, Chichester
A100 1RL
Wiltshire

Liveed at LBS, 11A
E1 3B

PERFORMANCE 80%
CAPABILITY 100%
OVERALL ★★★★★

Lee Phipps
MS
155, Brandy, Brandy Rd
Newbury, G18 1DD
01356

PERFORMANCE 80%
CAPABILITY 80%
OVERALL ★★★★★



SPECTRUM BUSINESS GRAPHICS AND OTHER SOFTWARE FROM MCGRAW-HILL

PROJECTOR 1

Business Graphics, Presenting, and Presentation System
Just enter your data from a spreadsheet application and let Projector do all the heavy lifting. You control text size, font, background, and border formation. It's an entire font system. Even border formation.

You select on a built-in graphics screen, or insert it any time with graph commands. For presentation, set up and set backgrounds or color bar and many other features.

Doesn't matter what an excellent screen or monitor.

\$19.95 incl. VAT

SPECTEXT

The Spectrum Word Processor

All the features of a professional word processor — INSERT, CUT, MOVE, SEARCH AND REPLACE, SAVE, and WORD HELP, etc. with a screen editor and border formation. It's an entire font system. Even border formation. You select on a built-in graphics screen, or insert it any time with graph commands. For presentation, set up and set backgrounds or color bar and many other features.

The SPECTEXT suite consists of SPECTEXT, a word processor for individual or other users, and SPECTEXTJOB, a program for example presentation and page with a standard editor.

Complete system in a single or compatible.

\$19.95 incl. VAT

PROFILE 3

Spreadsheet File Handling System

A file handling system that allows you to create, modify, and delete files in a spreadsheet. It's a great tool for creating, modifying, and deleting files in a spreadsheet. It's a great tool for creating, modifying, and deleting files in a spreadsheet. It's a great tool for creating, modifying, and deleting files in a spreadsheet.

\$19.95 incl. VAT

THE SPECTRUM GRAPHICS MACHINE

An Advanced Machine (with Plotter)

The Spectrum Graphics Machine is a high resolution plotter/printer system designed to draw 256x256 dots per inch (dpi).

The plot of the machine is a 100% full page plotter. It's a great tool for creating, modifying, and deleting files in a spreadsheet. It's a great tool for creating, modifying, and deleting files in a spreadsheet.

\$19.95 incl. VAT

Includes full software for file handling, graphics, and other applications.

Please send me

PROJECTOR 1 £7.98/118.7 £19.95

SPECTEXT £7.98/118.7 £19.95

PROFILE 3 £7.98/118.7 £19.95

SPECTRUM GRAPHICS MACHINE £19.95/118.7 £19.95

NAME _____

ADDRESS _____

POST CODE _____

DATE _____

hobbyboard

The Complete Printed Circuit Workshop

Early 1000 series for ZX Spectrum & ACE

NEW

12 months warranty on all components and work on components

■ LIGHT BURN
■ PERFECT COMPONENTS
■ FULL KIT
■ BUILT IN CONTROLS

■ BUILT IN TEST STATION
■ 100% BUILT IN TEST STATION
■ BUILT IN TEST STATION

Now available in paperback for £9.95. Also available in hardcover for £19.95. Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

Includes a free 100 page manual and a free 100 page manual.

hobbyboard

complete P C B workshop

a division of
SHELL ENGINEERING LTD
Rushmore Park
Maregate, Hants



Overcomes those problems of a printed circuit board that is not suitable for use as a prototype. Also available in single ended version of 1000 series. £19.95/118.7

Prints inclusive of VAT. Also available in U.K. Over 1000 series version of 1000 series. £19.95/118.7. Also available in single ended version of 1000 series. £19.95/118.7.

Prints inclusive of VAT. Also available in U.K. Over 1000 series version of 1000 series. £19.95/118.7. Also available in single ended version of 1000 series. £19.95/118.7.

Prints inclusive of VAT. Also available in U.K. Over 1000 series version of 1000 series. £19.95/118.7. Also available in single ended version of 1000 series. £19.95/118.7.

Prints inclusive of VAT. Also available in U.K. Over 1000 series version of 1000 series. £19.95/118.7. Also available in single ended version of 1000 series. £19.95/118.7.

De-bugger

Getting a program typed in is often only the start of your problems. Ed to the rescue.

Typing in a program is a useful exercise. Apart from the patience required, techniques learned and the end program to be used, probably the most educational part of it is tracking down the bugs introduced by yourself or occasionally by our publication system.

In debugging you gain a much deeper insight and understanding on how the program actually works than by merely typing it in. Not tracking down these errors is an art in itself and needs some skill. So here are some tips to help you in your efforts when faced with that cryptic error report.

1 NEXT without FOR

Look back through the program, within the loop has not been set up — so missed FOR later — No! TO No! less, or the loop has been set up as an ordinary variable within the loop with a LET later — No.

2 Variable not found

This is one of the most common errors. Again, the problem may not be in the line where the error was detected and reported. If there is only one variable, which may be one of those letters or a string (A) variable, then that is the problem. There may be more than one variable in the line, so take a closer look and you will have to identify the offending one. In a line like `PRINT AT X Y Z`, all the colors could be Y or Z or A. The first out which of them or assign the problem to may be more than one type is not as a direct command.

```
PRINT Y (not the line)
PRINT X (not the line)
PRINT A (Directing)
```

Note what produces the error report. Now look back through the program printed for the line which sets it up — usually a LET or FOR statement. Did you leave it out? Does the program get there or has a GOTO/GOSUB been wrongly addressed?



3 Bracketed wrong

Connected with GOTO Address or DIM A(B) or (B) if the number in the brackets on the line where the error is reported is greater than the value in the original DIM statement was set at startup or is less than 1, then this report is generated. If the subscript — number in brackets — is a number then check and change. However, if it is a variable then follow the procedure for tracing variables. It has probably not created the letter. Look for lines with the variable being altered with `++` or `--` (if necessary add limiting code. For example,

```
IF X DID THEN LET X = 10
```

4 Out of memory

As well as for programs which are too big, it may happen if the previous program or RAMlog before debugging, under CLEAR USER" (I) on the Spectrum or the X001 BAWT the program, turn the machine off and on, then retype the program.

5 RETURN without GOSUB

Determine the computer has reached a RETURN command other than via a GOSUB without one. Check a GOTO has a loop entered in place of a GOSUB. Check for a missing GOSUB.

6 Integer out of range

An integer (whole number) either as a number or variable is too big or small and you are attempting to do something like `PRINT AT 0 0 0` — not allowed. Check the variables involved in the report. If and trace it back through the program looking for adjustments to it by `++` or `--`. Add limiting code if needed — see report 3.

7 Out of DATA

A Spectrum problem. Check the number of DATA lines match the number of READs, usually one for each has been marked out. Adapting to read a DATA list without first an empty READ/DRAW command will cause

the end it can happen an empty data program (saved with a file number). Good programming usually READ/DRAW to the correct line number before using READ.

8 FOR without NEXT

See report 1 but this time the NEXT is missing.

Note that the text will have said for examples could be ANY letters not just A-Z. These include print on the parameter chosen at the programming.

There is no means a computer-aided (I) have tried to cover many of the most common error reports. Presumably I get along to make a collection from debugging similar to programming. I do assure you, however, that there is definitely no doubt in the number that we definitely report bugs into our listings in order to introduce you to the glorious delights of debugging!

SINCLAIR CLINIC

COMPLETE REPAIR SERVICE

For advice and help ring or visit us at our Microcomputer centre. Contact **JOHN WOOD**

- **HARDWARE**
- **SOFTWARE**
- **UPGRADES**
- **KEYBOARDS**
- **MICRODRIVES**
- **BLANK TAPE**

Spectrum 48K
Prob. the largest sale in Lancs
Memory issue 2 and 3
Diskettes (lots) from £25.00
- Inflight II
C10 C15 C25

- **MONITORS**
- **BOOKS**
- **JOYSTICKS**
- **MODEMS**
- **PRINTERS**
- **RD**

Macintosh to Spectrum
100 Tapes
Kempston - Sunsoft
Prism VT2000
Apluscom
Digital Tracer

JUST A PHONE CALL AWAY

For sales, service and repairs. All postal charges at cost.

P. V. TUBES

Dept 23, 104 Abbey Street,
Accrington, Lancs BB5 1EE.
Tele: 035993 Griffin for PV



Telephone
(0254) 36521
(0254) 36611

ACORN — BBC — SANYO — COMMODORE — Authorized Dealers

Rainbow's Spectrum Programmable Joystick Interface

This interface allows any joystick position to represent any key or keys on the board without keys, hardware or software. All joystick positions are programmable simply by selecting the joystick position number (the decimal key(s) on the Spectrum) relating the joystick and then the key(s).

It is flexible, allowing diagonal positions to be programmed with any key. Also enables an joystick position to be stored.

The original Amplifier boards the Spectrum was designed with a simple connection to the car on any vehicle.

With optional through port



Only
£24
Through port £2 extra
plus V.P.C.
Over 1000's available

Send Order to P.O. Box
Rainbow Electronics
200 Globe House
Southleigh, Wilbury
Oxfordshire OX24 6XJ
Tel: Wilbury (0994) 3000

With Sound.

Conversion tips

A guide to ZX81/Spectrum program conversions from David Nowotnik.

The variety of BASIC offered by the two ZX computers are so similar that many programs for one can be used by the other. The ZX81 has only two commands which are not present in the Spectrum, SCROLL, and UNPLOT, and these should cause you few problems when converting ZX81 programs to the Spec-

trum (see Table 1).

There are quite a lot of commands and functions on the Spectrum which are not available on the ZX81. A list of these appears in Table 4. The stars indicate those commands and functions for which there is no single translation to ZX81 BASIC. Those for colour and sound can be omitted,

but you will have to find some alternatives for the high resolution and file I/O commands.

The command PLOT appears on both computers, but the effect is quite different so perhaps another top PEEK and POKE should be used with caution in conversion; address as well as value certainly have to be changed. Some of those

changes appear in the tables. A command such as FORK USER "A" on the Spectrum indicator User Defined Output on ZX81 users don't have this facility so you'll have to omit this and use a standard character instead.

ZX81	Spectrum	Comments
SCROLL	RANDOMISE USR 3560 or LET I=USR 3562	If the program uses random numbers, they could become rather predictable with the first option. If so, use the second, using a variable in this case (I) which is otherwise not used.
PLOT Y,X	PRINT AT 21-Y/2, X/2	Print the appropriate quarter screen graphics character.
UNPLOT Y,X	PRINT AT 21-Y/2, X/2	Print a space or the appropriate quarter screen graphics character.

Table 1 ZX81 to Spectrum conversions

Spectrum	ZX81	Comments
BIN eg LET Y=BIN 10010101	LET Y=(decimal to 1) Conversion to decimal 10010101=149 128 64 32 16 8 4 2 1 Add these numbers together when a 1 appears at the appropriate position in binary.	BIN shows the representation of a number in binary. On the ZX81 use the decimal equivalent, but beware. BIN is often used with User Defined Outputs, which are not available on the ZX81.
READ/DATA eg READ X,Y DATA 50,60	LET LET X=50 LET Y=60	READ and DATA are used to store a lot of information in a program. Use LET instead.
DEF FN and FN eg DEF FN=SQR A LET Y=FN A	LET X1="SQR A" LET X=1 LET Y=VAL X1	The defined function can appear in a string. Use the keyboard for built-in functions (eg SQRT). The equivalent of FN may need 2 lines, as shown.
PLOT	no equivalent	
SCREEN# eg LET A=SCREEN# X,Y	LET A=PEEK(PEEK 16386 +256*PIEK 16387+1+Y+32*X)	Used in Interoffice games to detect characters in the display file. Note - this formula only works when a RAM pack is fitted.

Table 2 Spectrum to ZX81 conversions

PROGRAMMING TIPS

2881

1 FRAMES
POKE 16436:255
POKE 16437:254

LET T = 255:258 - PEEK
26426 - 255:PEEK 26427
:GO

2 Line number zero

POKE 16915:0

3 RAMTOP

POKE 16388:0 - 255:INT
:X:750
POKE 16388, INT :X:255

Table 2 shows instructions for MIB.

Spectrum

POKE 23678:0:POKE 23679:0
LET T = PEEK 23678 + 255*
PEEK 23679:GO

For times greater than 10 minutes, you can use byte 23679 as well.

POKE 23756:0

(At the start of BASIC run mode, i.e. with macrodefined use with caution.

CLEAR :

Comments

Both computers have a counter which accurately times by 50 every second. In the example, use the first line to start the clock. The variable T will have its time in seconds after the start. The counter can only be used for 10 minutes.

Converts the first line of a program to line number zero which cannot be edited and so is protected.

Creating a safe area at the top of RAM starting at address x, for storing data, in these code bits.



DEP	=	FORMAT	=	ATTR	*
FORGET	=	PAE	=	DEF	*
RIGHT	=	INVERSE	=	PM	*
OUT	=	MERGE	=	IN	*
ORCLE	=	MOVE	=	OVER	*
CLASH	=	OPEN	=	POINT	*
DATA	=	CUT	=	SCREEN	*
DEFIN	=	PAUSE	=	WALL	*
DRYW	=	READ	=		
ERASE	=	RESTORE	=		
FLASH	=	VERIFY	=		

Table 4 Spectrum functions not available on the 2881

System Variables Conversion Table.

Variable	Z8011/ T/S:1000	Spectrum/ T/S:060	LAST & MAGNET	16401	20060
BREG	16414	20886	MEMBOT	16426	20060
EDFLAG	16443	No Equivalent	MEM	16410	20050
CH ADD	16600	23646	MEMBOT	16477	20060
FOCUS	16436	23677	MODE	16390	23017
EXCISE (Byte 2)	16438	23678	MXFLW	16428	20037
DEST	16402	23620	CLDFCD	16427	23662
DF CC	16388	23684	PPC	16381	23621
D FILE	16388	No Equivalent	PRDEF	16444	23296
DF SC	16418	23629	PR CC	16440	23460
E LINE	16404	23641	RAMTOP	16388	23730
EMR WR	16384	23610	REQ	16434	23610
EPFC	16284	23626	S PMS	16441	23666
EMR SP	16388	23673	S POSN (Byte 2)	16442	23689
FLAG	16388	23671	STBOT	16416	23651
FLAG	16420	23669	STREQ	16413	23680
FRAMES	16438	23670	S TOP	16419	23660
			STLEN	16430	23686
			T ADDR	16432	23688
			VARS	16430	23437
			VERIN	16393	No Equivalent
			X PTR	16436	23447

UTILITIES

GL UTILITIES

A complete set of utilities for Spectrum GL, in person Collection, transferring the system program simply by a telephone call. You will also receive 100000 ring of notes when you take an ordering, or when you put in the order card.

W O SOFTWARE

100 Post St. West, Suite 201
Tel. 524-7700

48K SPECTRUM

1989 SALE

Starting at 1/2 the original retail price, available with 1/2 off program or stored contents and for your free choice (see list) included is a complete system transfer system. All items to be shipped by a special shipper for the "Spectrum" brand. All items are for the Spectrum 48K and are priced very low. Call for details. **1989 SALE** in Great Britain, see Special Post 1989.

FOR SALE

1989 SALE
1989 SALE
1989 SALE

1989 SALE
1989 SALE
1989 SALE

1989 SALE
1989 SALE
1989 SALE

1989 SALE
1989 SALE
1989 SALE

1989 SALE
1989 SALE
1989 SALE

1989 SALE
1989 SALE
1989 SALE

UNIQUE 1989 SALE New wonder
Performance enhanced software
Look for the **1989 SALE**
Complete Price 2000 1/2

MODEM 1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

WANTED

SECOND HAND SPECTRUM GAMES wanted - 1/2 price only
on all items, up to 100000
Specialist in 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

U.S.A. needs Spectrum software
1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

ALARMS

BURGLAR ALARM Equipment
Price 1000 1/2 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

SOFTWARE EDUCATIONAL

HAPPY CHRISTMAS AND A HAPPY NEW YEAR TO ALL OUR READERS.

FOR ADVICE ON HOW TO REACH SINCLAIR ENTHUSIASTS IN 1.35 WITH YOUR PRODUCTS

RING 01 - 437 9666

ASTRA

SOFTWARE FOR 48 SPECTRUM

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

REPAIRS

BURGLAR ALARM Equipment
Price 1000 1/2 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

SPECTRUM REPAIRS
1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

LIBRARIES

LOOK at 1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

KILSOFT

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

NEW SOFTWARE for 48K Spectrum
1989 SALE 1989 SALE
1989 SALE 1989 SALE

ELECTRONICS IS FUN

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

ACCESSORIES

SPECTRUM RGB OUTPUT

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE



1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

SPECTRUM ZX01

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

SERVICES

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

DATA COMPUTATION

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

COURSES

PRACTICE COMPUTING

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

COMPUTER WORKSHOP

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

LIBRARIES

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

SPECTRUM-STICK

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

CAMBRIDGE COMPUTER DESKS

1989 SALE 1989 SALE
1989 SALE 1989 SALE
1989 SALE 1989 SALE

STARCADE SAVAGE POND



Awesome in its conception

Brilliant in its depiction

Dynamic in its execution

The world has not about to enter from its remoteness in any area you've encountered before. Weapons are all so vital in this world below.

The only source of protection in your disposal are quick wits and fast reflexes. The only reward is to survive against masses of unbelievable insects and animals, and to avoid hazards every previous and deadly than any you might find on a trip through the outer universe. That is the real world, populated by the monsters of our own inner universe, where nature is not as tooth and claw. Basic survival game... and come with Starcade and the still more real and deceptive colors of the SAVAGE POND.

COMMODORE, ATARI, BBC ELECTRON (2x 95 each)

On disc for COMMODORE, ATARI, BBC ELECTRON (2x 95 each)

Non-disk for COMMODORE, ATARI, BBC ELECTRON (2x 95 each)



Up Up and Away

COMMODORE, ATARI, BBC
(2x 95 each)

On disc for COMMODORE, ATARI,
BBC (2x 95 each)

STARCADE



produced by

ANGUS PRESS SOFTWARE

No 1 Golden Square, London W1R 3AA
Telephone: 01 437 0626

POPEYE



© 1984 King Features Syndicate, Inc.

dk'tronics
The games name